


reflected upward. The reflected waves combine with the direct waves (those radiated at angles above the horizontal) in various ways, depending on the height of the antenna, the frequency, and the electrical characteristics of the ground under and around the antenna.

At some vertical angles above the horizon, the direct and reflected waves may be exactly in phase—that is, the maximum signal or field strengths of both waves are reached at the same instant at some distant point. In this case the resultant field strength is equal to the sum of the two components. At other vertical angles the two waves may be completely out of phase at some distant point—that is, the fields are maximum at the same instant but the phase directions are opposite. The resultant field strength in this case is the difference between the two. At still other angles the resultant field will have intermediate values. Thus, the effect of the ground is to increase the intensity of radiation at some vertical angles and to decrease it at others. The elevation angles at which the maxima and minima occur depend primarily on the antenna height above ground. (The electrical characteristics of the ground have some slight effect too.)

For simplicity here, we consider the ground to be a perfectly conducting, perfectly flat reflector, so that straightforward trigonometric calculations can be made to determine the relative amount of radiation intensity at any vertical angle for any dipole height. Graphs from such calculations are often plotted on rectangular axes to show best resolution over particularly useful ranges of elevation angles, although they are also shown on polar plots so that both the front and back of the response can be examined easily. **Fig 3** shows an overlay of the polar elevation-pattern responses of two dipoles at different heights over perfectly conducting flat ground. The lower dipole is located a half wavelength above ground, while the higher dipole is located one wavelength above ground. The pattern of the lower antenna peaks at an elevation angle of about 30° , while the higher antenna has two main lobes, one peaking at 15° and the other at about 50° elevation angle.

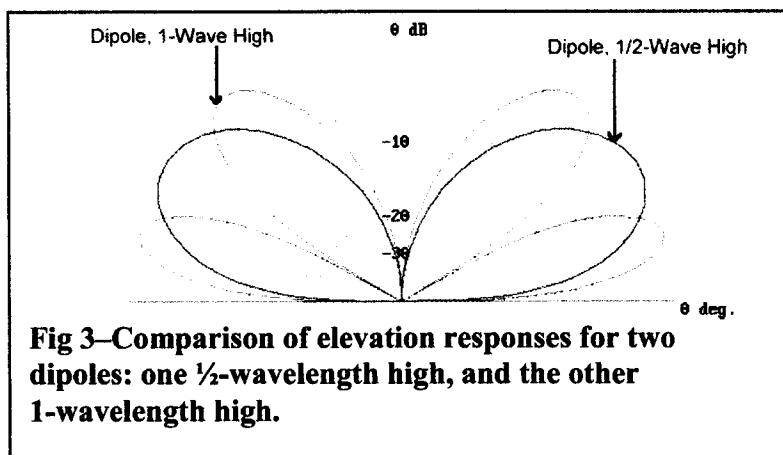

In the plots shown in Fig 3, the elevation angle above the horizon is represented in the same fashion that angles are measured on a protractor. The concentric circles are calibrated to represent ratios of field strengths, referenced to the strength represented by the outer circle. The circles are calibrated in decibels. Diminishing strengths are plotted toward the center.