





-SITE PLAN-

BOYD, H & J
321 State Street
Bay St Louis, MS

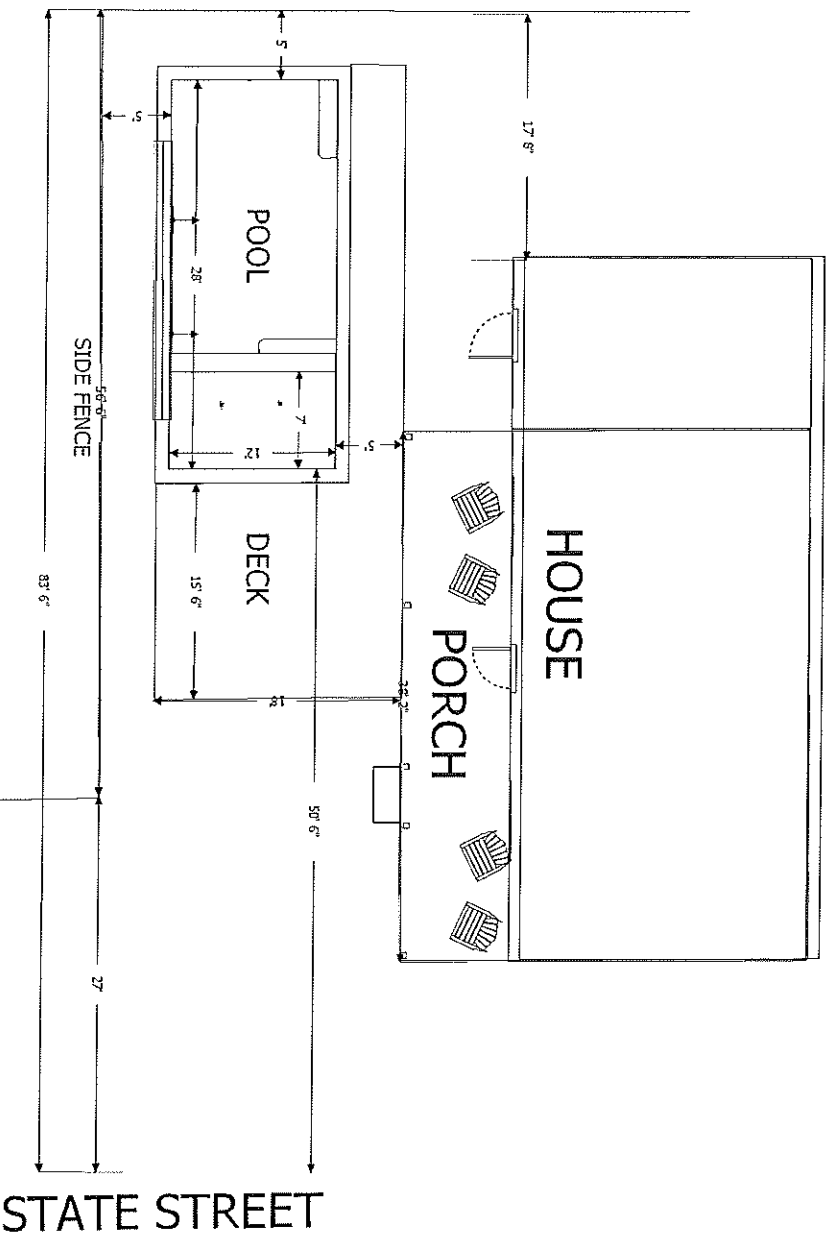

POOL WATER'S EDGE (PWE)
PWE 5' From Existing Porch
PWE 5' From Rear Fence
PWE 5' From Side Fence
PWE 50' 6" From Prop. Line/ State Street

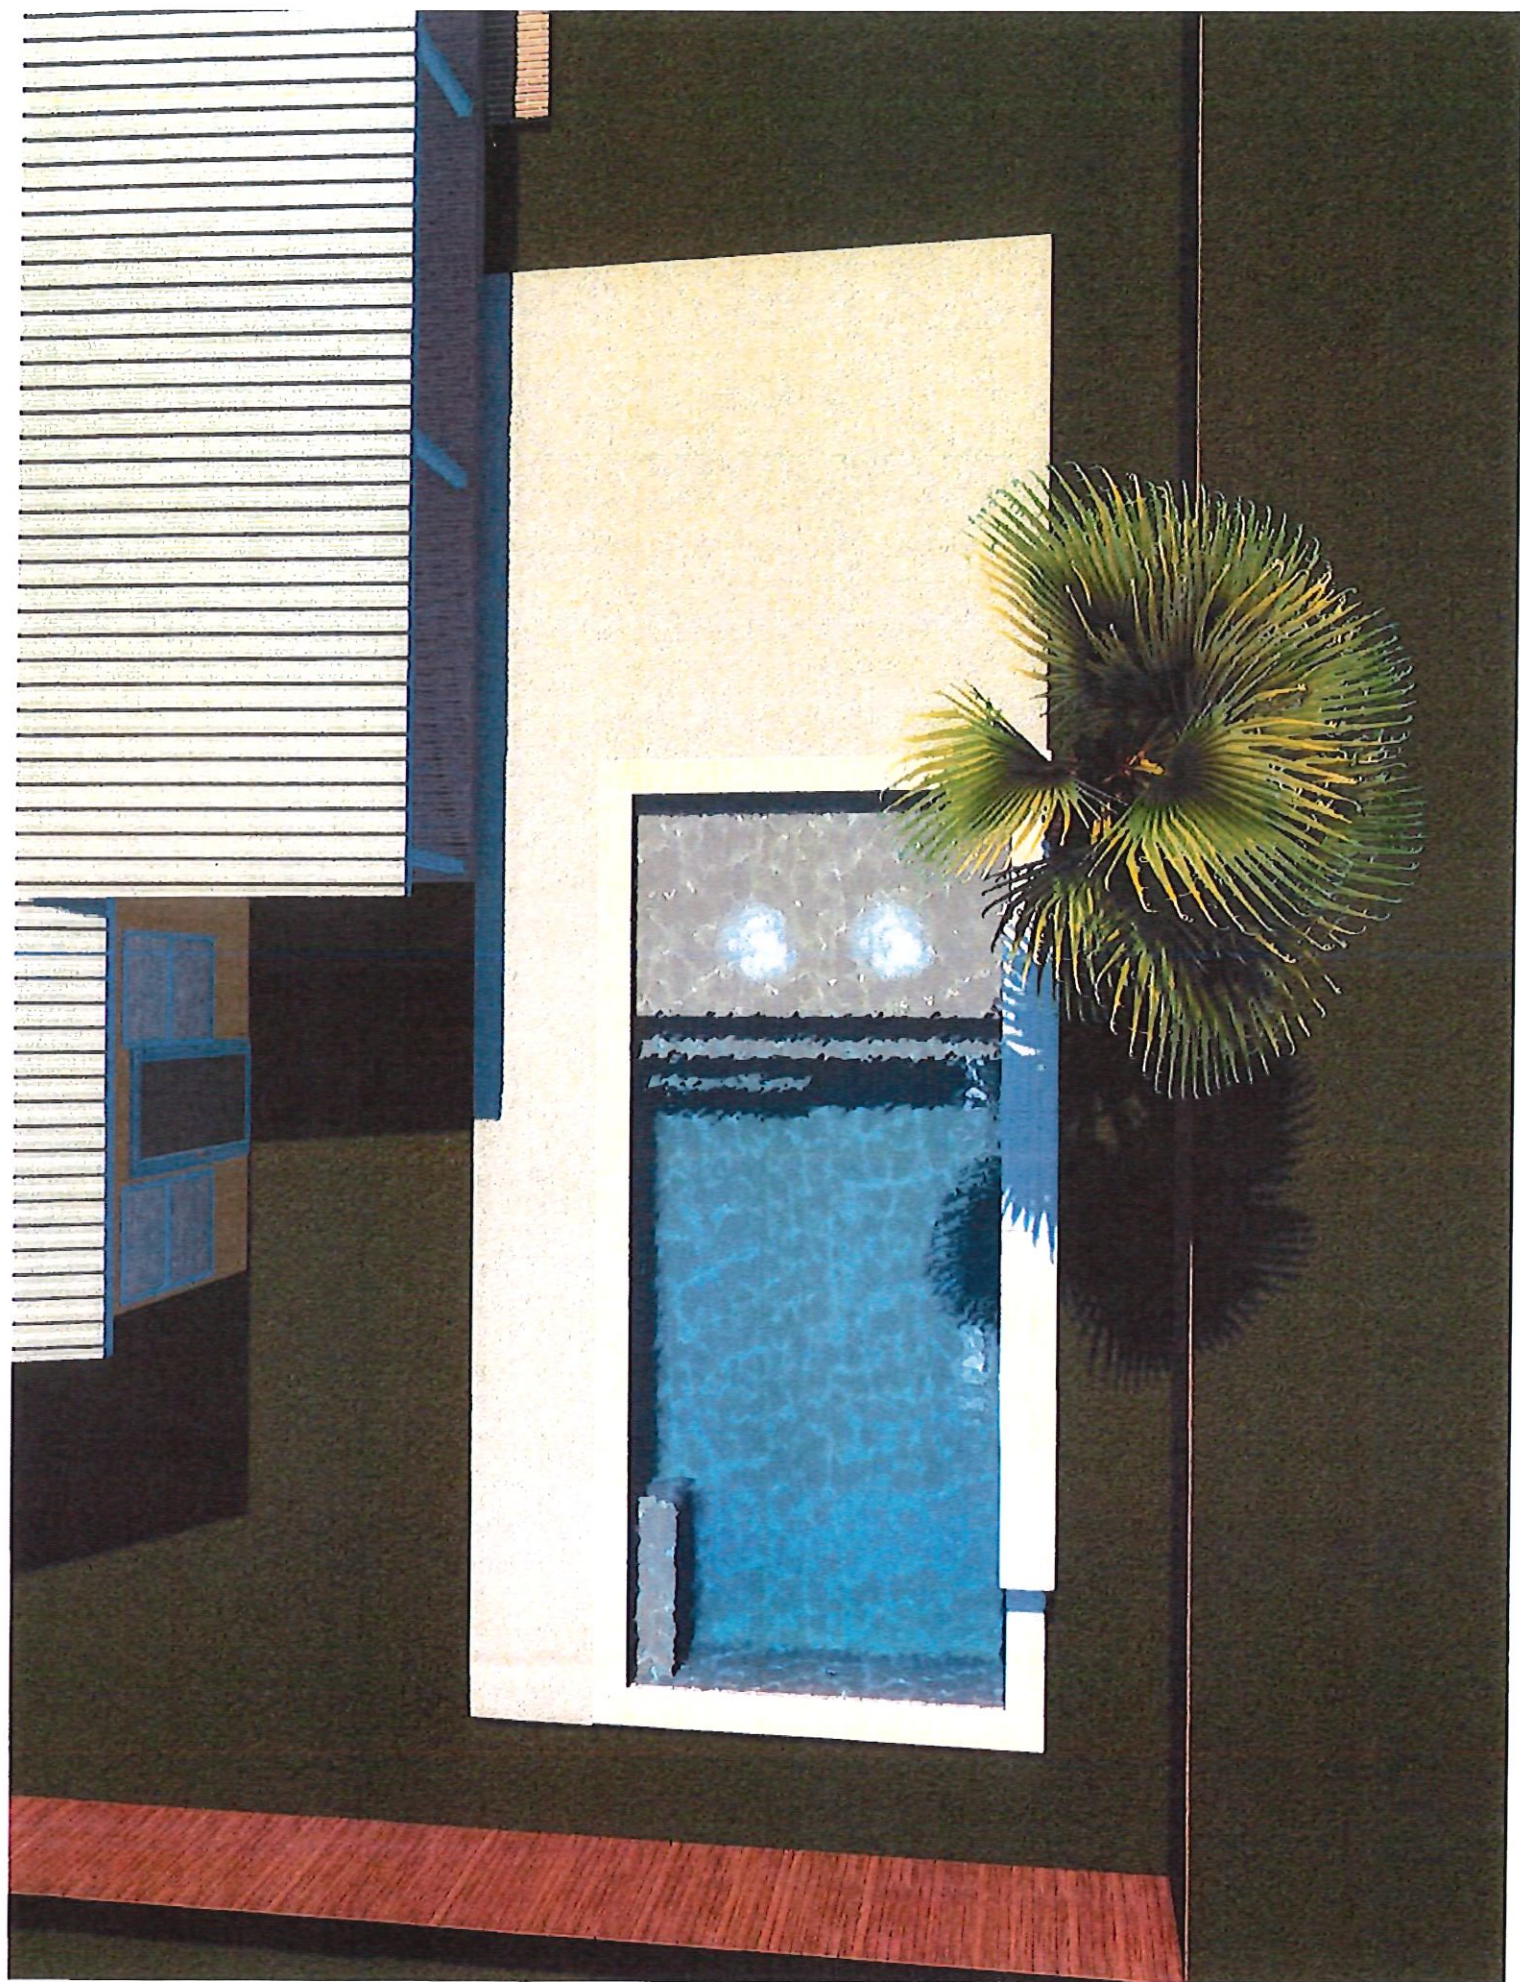

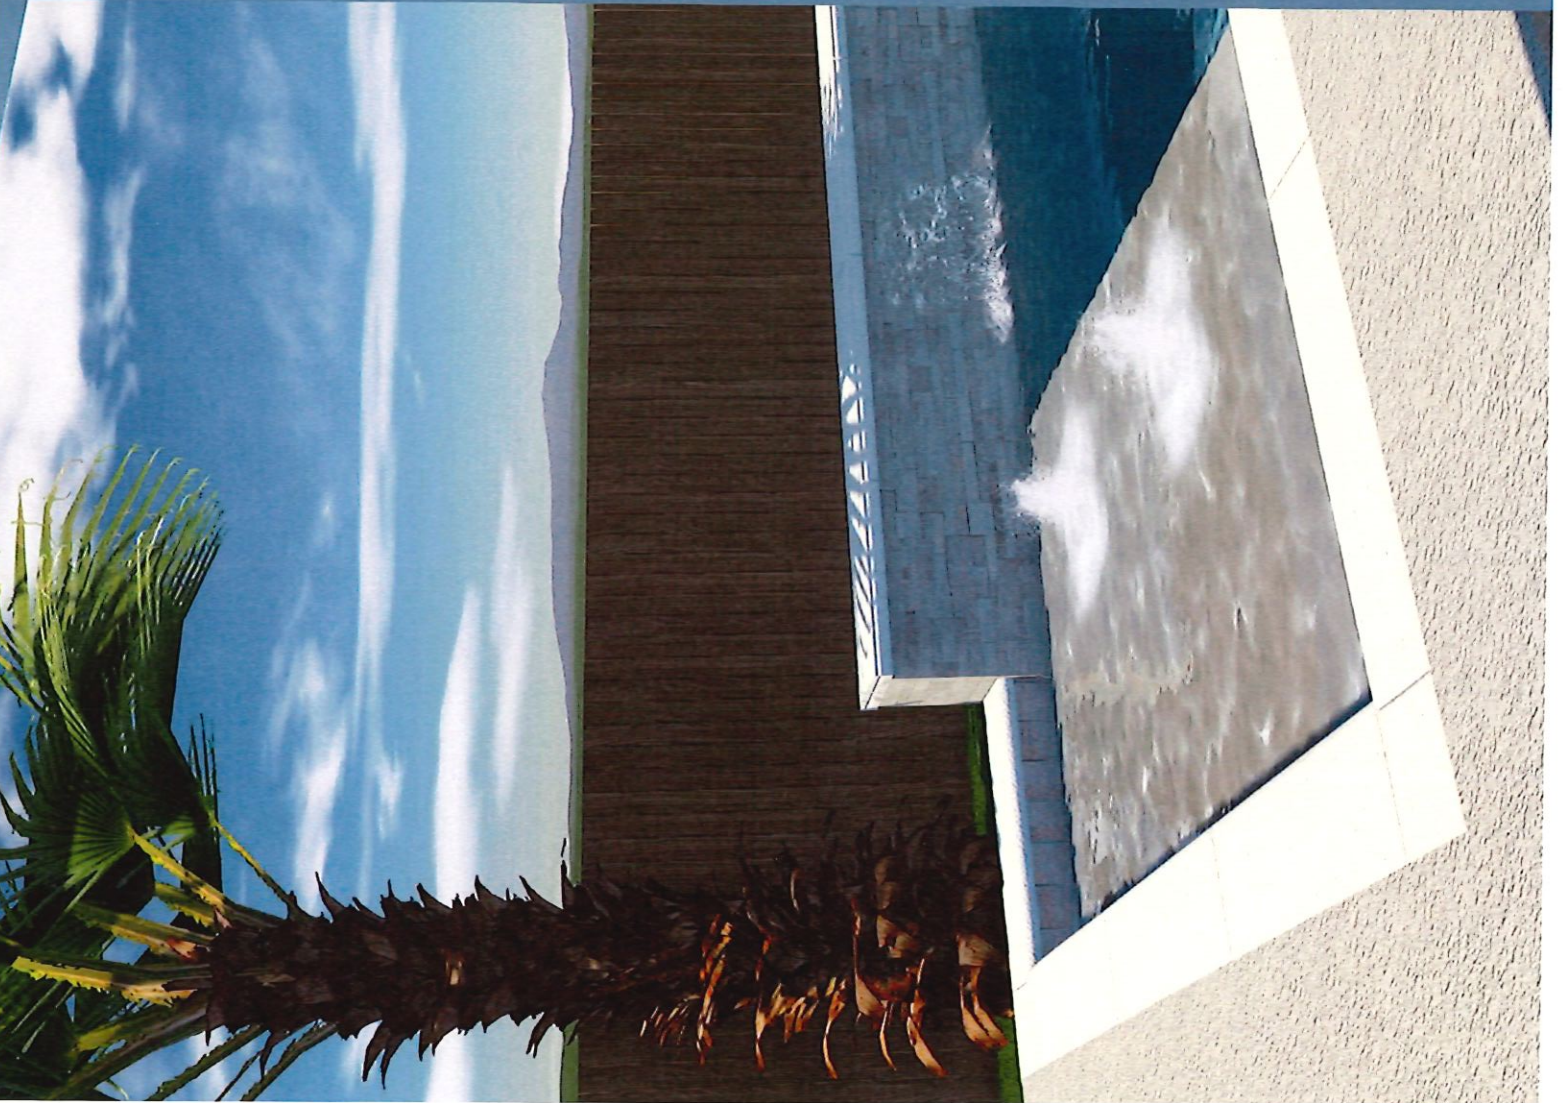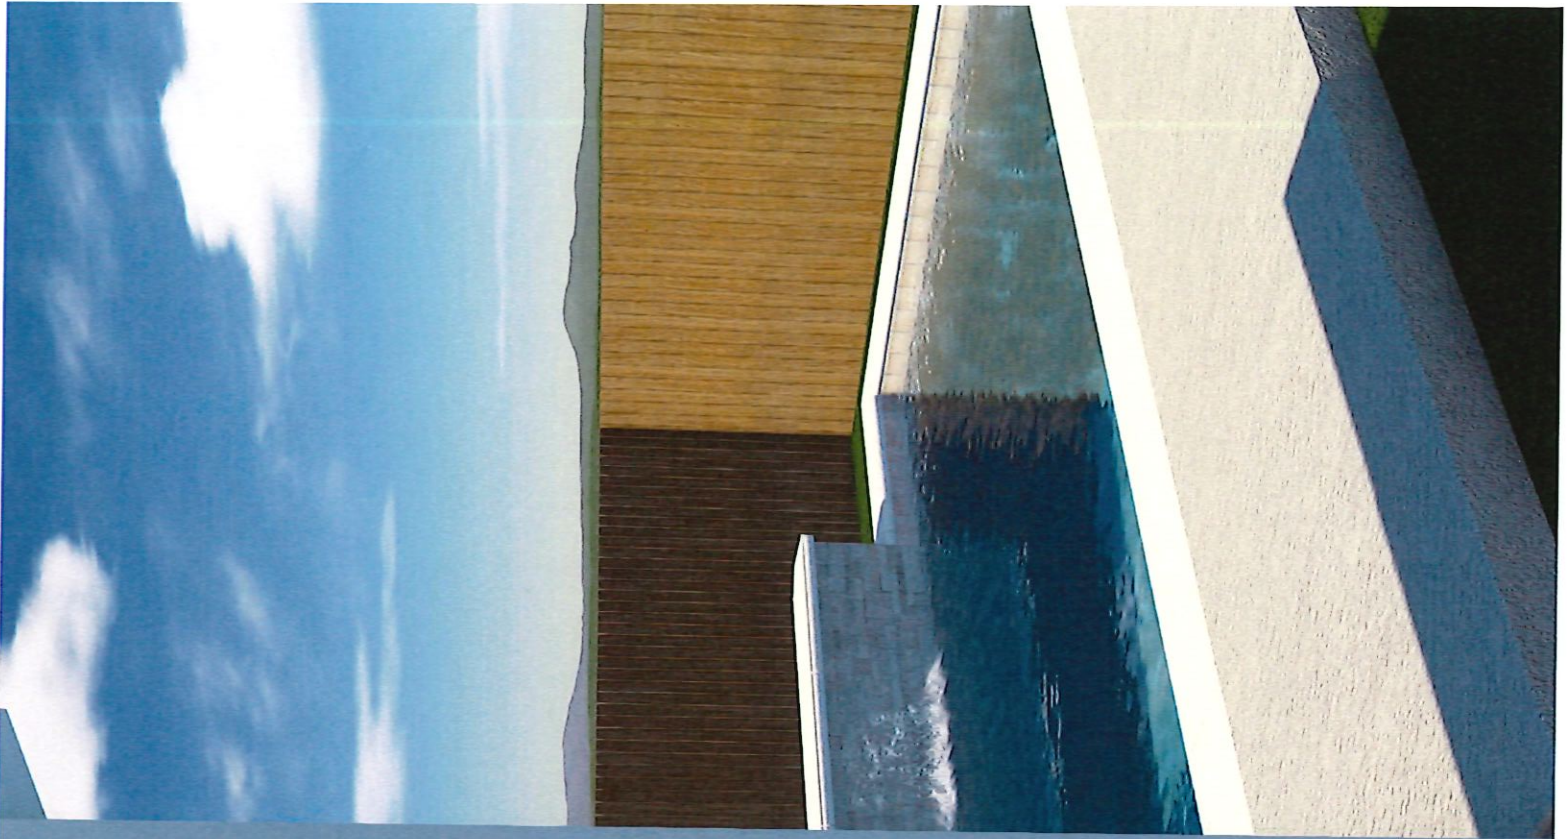

GULF GUNITE POOLS, LLC.

Water, Plaster and Deck Paint Information Sheet

Water Chemistry

Maintaining a pool's water chemistry is easy and important. Water test kits, chlorine and other pool chemicals are readily available at most home stores. It is the customer's responsibility to maintain proper pH and chemical levels.

Pool Plaster

We offer Light Grey or White Plaster as our standard pool interior finishes. We install colored plasters per request and at an additional cost. If you properly maintain your pool and its water chemistry, you can expect your plaster to last 10-15 years before resurfacing is needed. Plaster is applied over the gunite shell and is the last step in the pool construction process before water is added. The plaster seals the porous gunite shell and keeps the water from leaking out. It is important to note that plaster is a cementitious product and is subject to mottling or slightly uneven color distribution. Plaster feels smooth against your feet and hands. And in the normal daylight, a pool's plaster surface appears smooth. Turn on the pool light at night, and you will realize the surface is not perfectly smooth. You might be surprised to see dips and bumps along the surface, that are made to look worse by the pool light and the angle at which it shines. It is normal for pool plaster to not be perfectly smooth and to have slight imperfections in color and texture. It was applied by human hands; this will be evident if you look for the signs. Some things you can do to keep your plaster beautiful for years to come are to test and keep your water chemistry right, brush regularly, keep non-pool-specific furniture and metal objects out of your pool, don't let fertilizer fall into your pool, remove grass clippings, mulch or any other debris which might make its way in there during the regular course of life and address algae as soon as you see it appear. For more information, we suggest visiting the website for the National Plasterers Council.

* Beginning day of plaster: Do not enter pool while it is filling/full of water for first two weeks.

No Swimming for first two weeks while plaster is curing and start-up chemicals dissipate.

*Filling: Customer must turn hose off when pool, then spa are full of water—1/2 way up the tile waterline.

* Brushing is important for a smooth plaster finish. Customer must gently brush pool and spa walls, steps, benches, ledges, and floor twice daily for first two weeks after plaster is installed (as soon as pool is full of water and pumps are started).

Spray Deck Acrylic Top Coat

We offer a Spray Deck Acrylic Top Coat as our standard concrete pool deck top coat. We will install any deck surface, such as flagstone or travertine pavers per request and at additional cost. The Spray Deck will be installed in two parts. First we apply a non-skid surface with a hopper and then hand trowel it to "knock it down" and smooth it out. Once this is dry, we apply the acrylic top coat by painting it on. There are several colors from which to choose. The finished surface is very pretty and practical. In order to keep it beautiful for years to come, we recommend not dragging furniture or other items which might chip or scratch it across your deck, and not letting rusted items sit atop it either. It holds up to extended use very well. Another nice thing about Spray Deck, is that if you do happen to chip it or end up with spots where rusty furniture sat, you can touch it up yourself with a bit of Spray Deck paint.

*Do not walk on freshly painted deck. Light traffic after 24 hrs. Normal (not heavy) traffic after 72 hrs.