



10' WEST
EXTENSION THIS
SIDE OF BUILDING

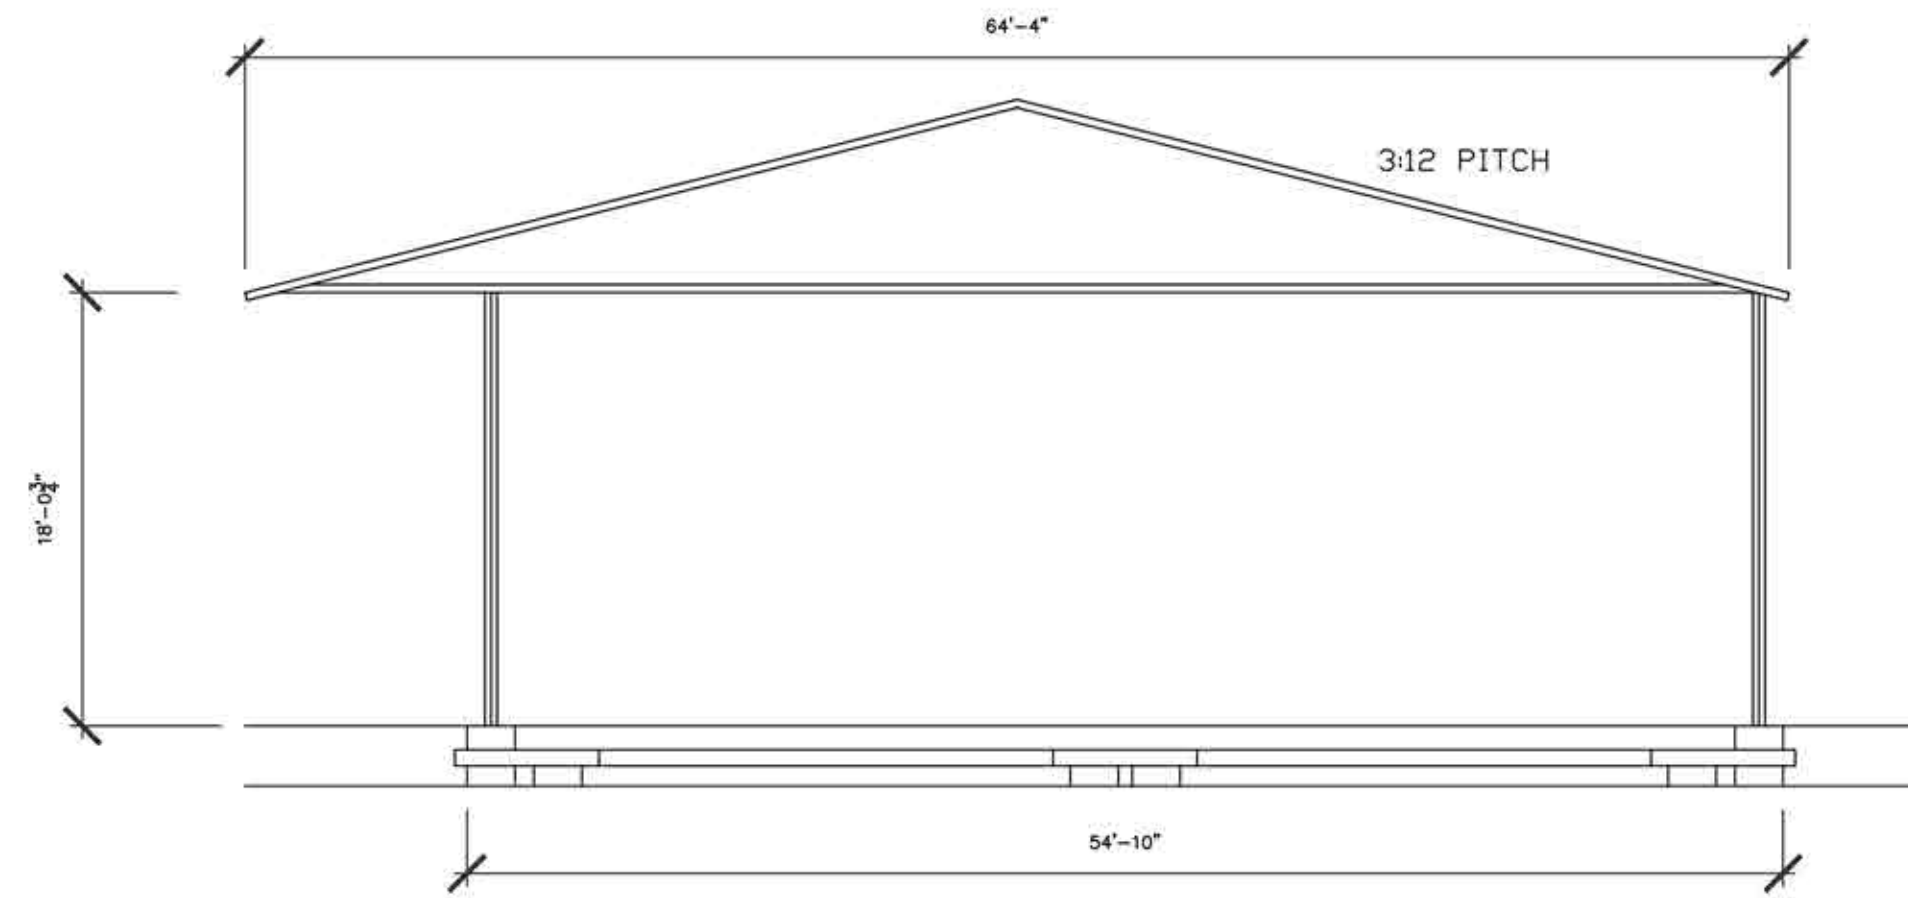

SOUTH ELEVATION

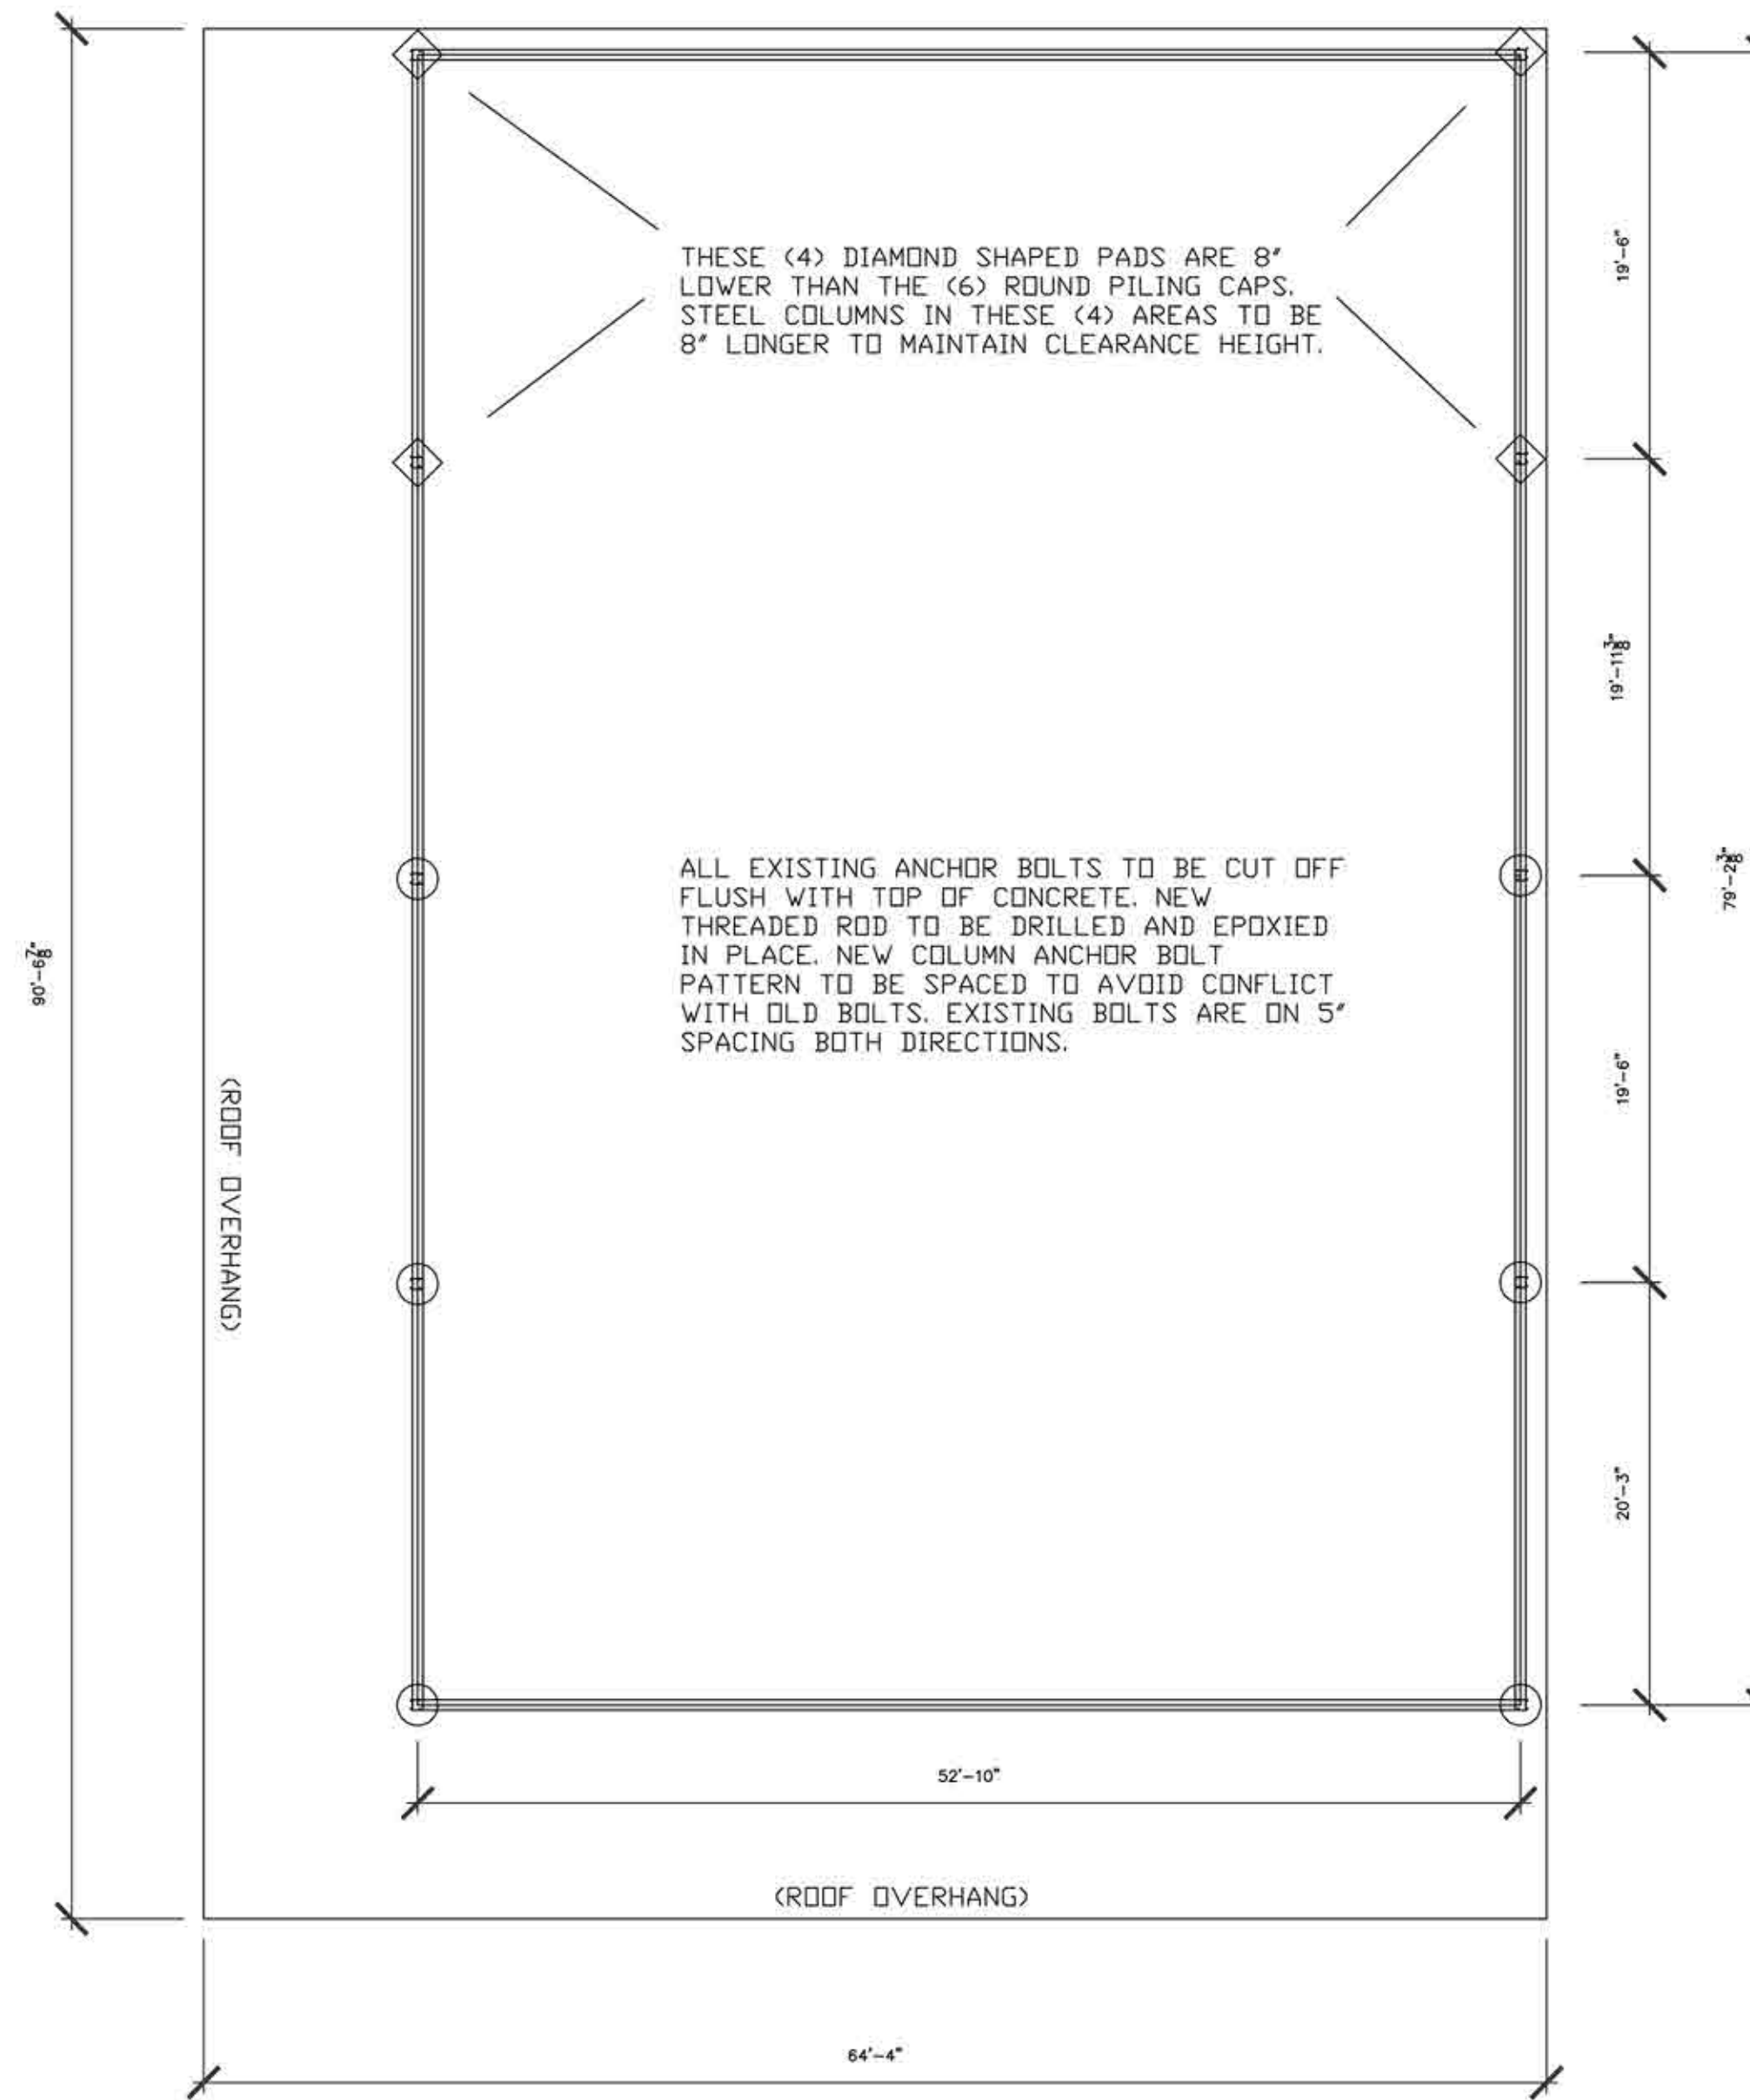

PLAN VIEW

ERECT NEW STEEL CANOPY
COLUMNS AND ROOF STRUCTURE
ON TOP OF EXISTING
CONCRETE PILINGS (TYPICAL)

ALL DIMENSIONS ARE TO THE
CENTERLINE OF THE
FOUNDATION PAD / PILING CAP


TOP OF PILING FOOTER IS
16'-0" FROM PILING CAP

POND DEPTH FROM TOP OF
PILING CAP (SOUTH TO NORTH):
14'-1" / 14'-7" / 13'-6"

THESE (4) DIAMOND SHAPED PADS ARE 8"
LOWER THAN THE (6) ROUND PILING CAPS.
STEEL COLUMNS IN THESE (4) AREAS TO BE
8" LONGER TO MAINTAIN CLEARANCE HEIGHT.

ALL EXISTING ANCHOR BOLTS TO BE CUT OFF
FLUSH WITH TOP OF CONCRETE. NEW
THREADED ROD TO BE DRILLED AND EPOXIED
IN PLACE. NEW COLUMN ANCHOR BOLT
PATTERN TO BE SPACED TO AVOID CONFLICT
WITH OLD BOLTS. EXISTING BOLTS ARE ON 5'
SPACING BOTH DIRECTIONS.

10' SOUTH
EXTENSION THIS
SIDE OF BUILDING

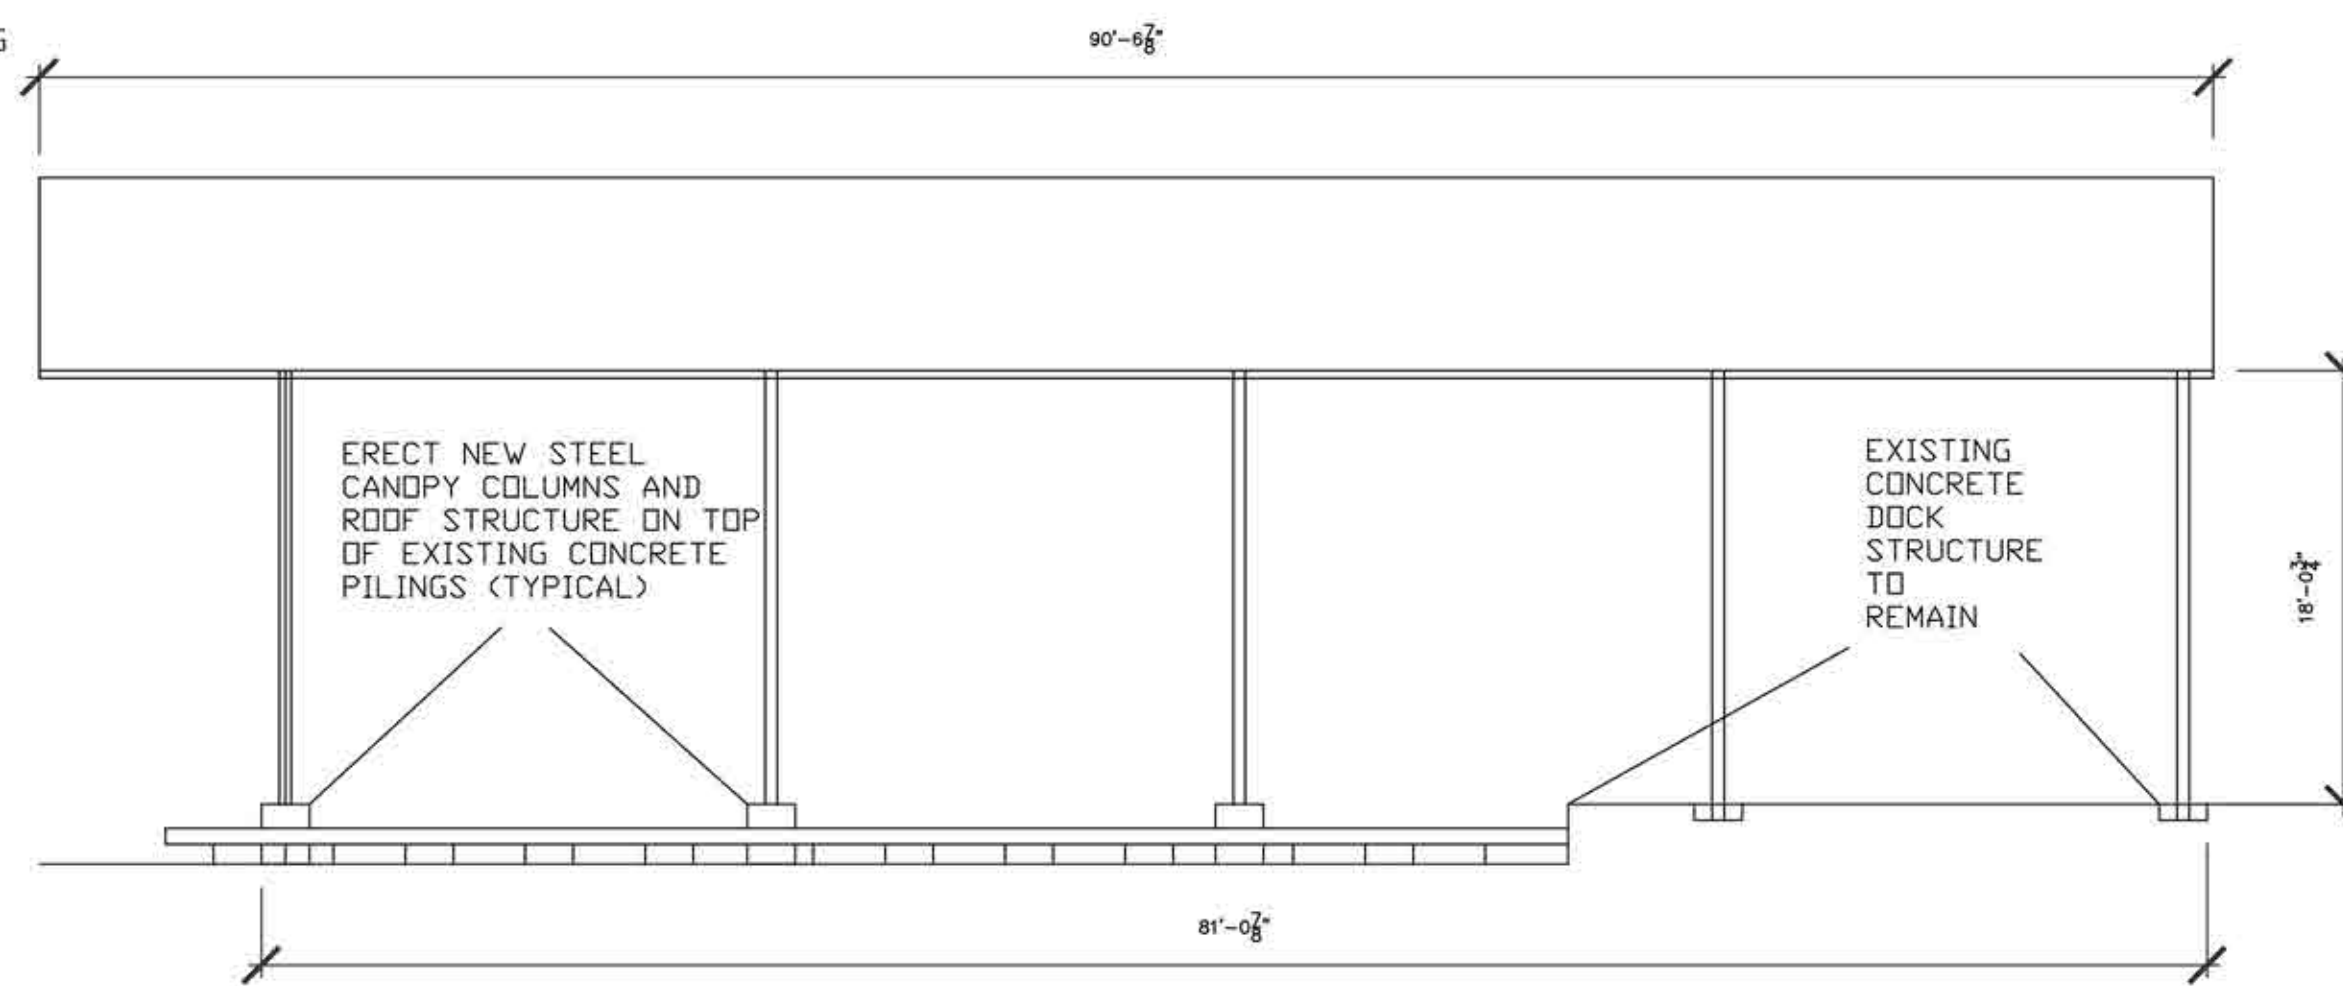

EAST ELEVATION

REGAL MARINE INDUSTRIES
2300 JETPORT DRIVE, ORLANDO, FLORIDA 32809

CONSTRUCT NEW STEEL ROOF OVER EXISTING CONCRETE DOCK STRUCTURE