

Statistics							
Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min	
SITE (BLDG A) - FC @ GRADE	+	1.0 fc	6.2 fc	0.0 fc	N/A	N/A	
SITE (BLDG B) - FC @ GRADE	+	1.2 fc	5.6 fc	0.0 fc	N/A	N/A	
PROPERTY LINE - FC @ GRADE	X	0.1 fc	0.5 fc	0.0 fc	N/A	N/A	

Schedule							
Symbol	Label	Quantity	Manufacturer	Catalog Number	Description	Lamp	File Name
	SA	1	LITHONIA LIGHTING	DSX0 LED P4 30K 80CRI TFFM TFFM SPA (FINISH) / SSS 12.5" W/2.5" BASE	D-Series Size 0 Area Luminaire P4 Performance Package 3000K CCT 80 CRI Forward Throw	LED - 3000K	DSX0_LED_P4_30K_80CRI_TFFM_HS
	SA-HS	3	LITHONIA LIGHTING	DSX0 LED P4 30K 80CRI TFFM TFFM SPA HS (FINISH) / SSS 12.5" W/2.5" BASE	D-Series Size 0 Area Luminaire P4 Performance Package 3000K CCT 80 CRI Forward Throw House Side Shield	LED - 3000K	DSX0_LED_P4_30K_80CRI_TFFM_HS
	SB	58	LITHONIA LIGHTING	WPX0 LED AL0-1 SW2/2 30K MVOLT PE DDBX0	WPX0 LED, 850 Lumen setting, 3000K Setting, 120-277V	LED - 3000K	WPX0_LED_AL0-1_30K_MVOLT_JES
	SBE	7	LITHONIA LIGHTING	WPX0 LED AL0-1 SW2/2 30K MVOLT PE DDBX0	WPX0 LED, 850 Lumen setting, 3000K Setting, 120-277V, EM W/INVERTER	LED - 3000K	WPX0_LED_AL0-1_30K_MVOLT_JES



## D-Series Size 0 LED Area Luminaire




Catalog Number	
Notes	
Type	

Use the tab key or mouse over the page to view all interactive elements.

### Specifications

EPA: 0.44 f<sup>2</sup> (0.04 m<sup>2</sup>)  
Length: 26.18" (661 mm)  
Width: 14.06" (357 mm)  
Height H1: 2.26" (57 mm)  
Height H2: 7.46" (189 mm)  
Weight: 23 lbs (10.4 kg)

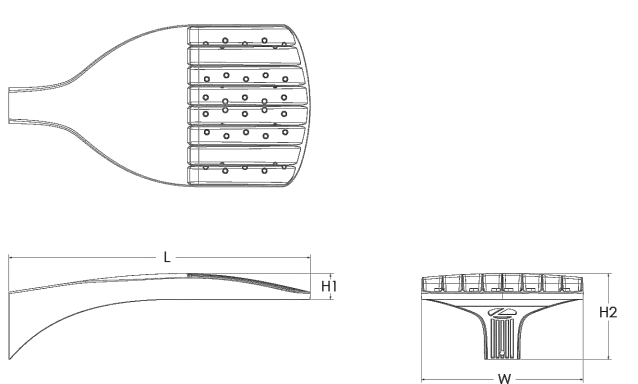

### Introduction

The modern styling of the D-Series features a highly refined aesthetic that blends seamlessly with its environment. The D-Series offers the benefits of the latest in LED technology into a high performance, high efficacy, long-life luminaire.

The photometric performance results in sites with excellent uniformity, greater pole spacing and lower power density. D-Series outstanding photometry aids in reducing the number of poles required in area lighting applications, with typical energy savings of 70% and expected service life of over 100,000 hours.

### Ordering Information

EXAMPLE: DSX0 LED P6 40K 70CRI T3M MVOLT SPA NLTAIR2 PIRHN DDBX0

Series	LEDs	Color temperature	Color Rendering Index	Distribution	Voltage	Mounting
DSX0 LED	Forward optics P1 P5 P2 P6 P3 P7 P4 Rotated optics P10 P12 P11 P13	(this section 70CRI only) 30K 3000K 40K 4000K 50K 5000K (this section 80CRI only, extended lead times apply) 27K 2700K 30K 3000K 35K 3500K 40K 4000K 50K 5000K	70CRI 70CRI 70CRI 80CRI 80CRI 80CRI 80CRI	AFR Automotive front row T1S Type I short T2M Type II medium T3M Type III medium T3LG Type III low glare T4M Type IV medium T4LG Type IV low glare T5M Type V medium T5LG Type V low glare BLCK Type II backlight control LCCO Left corner cutout RCCO Right corner cutout	MVOLT (120V-277V) MVOLT (247V-480V) 120V ~ 208V ~ 240V ~ 277V ~ 347V ~ 480V ~	Shipped included SPA Square pole mounting (8" drilling, 3" min. 50 pole) RPA Round pole mounting (8" drilling, 3" min. 90 pole) SPMS Square pole mounting (8" drilling, 3" min. 50 pole) RPA5 Round pole mounting (8" drilling, 3" min. 90 pole) SPAN8 Square narrow pole mounting (8" drilling, 3" min. 50 pole) WBA Wall bracket MA Mast arm adapter (mounts on 3.0" ID horizontal beam)

Control options	Other options	Finish options
Shipped installed NLTAIR2 PIRHN Night All right 2 enabled with bi-level motion / ambient sensor; 8-40' mounting height; ambient sensor enabled at 26" ~ 11.5" ~ High low, motion/ambient sensor; 8-40' mounting height; ambient sensor enabled at 26" ~ 11.5" ~ NEMA twist-lock receptacle only (controls ordered separately) Five-pin receptacle only (controls ordered separately) **	PER7 Seven-pin receptacle only (controls ordered separately) ** FAO Field adjustable output ** BL30 Bi-level switched dimming, 30% ~ 99% DMG 0-10v dimming wires paired outside fixture (for use with an external control, ordered separately) ** SF Single size (120, 277, 347V) ** DF Double size (208, 240, 480V) ** Shipped separately EGRS External Case Shield (reversible, field install required, matches housing finish) RDSB Bird Spikes (field install required)	DDX0 Dark Bronze DL00 Black DNAXD Natural Aluminum DWDX0 White DDBX0 Textured dark bronze DLBXX0 Textured black DNATX0 Textured natural aluminum DWDG0 Textured white



One Lithonia Way • Cary, Georgia 30012 • Phone: 1-800-705-SERV (7378) • [www.lithonia.com](http://www.lithonia.com)  
© 2011-2023 Acuity Brands Lighting, Inc. All rights reserved.

DSX0 LED  
Rev. 05/02/23  
Page 1 of 9

### CANYON EW38807 WALL

#### PROJECT

DESCRIPTION  
Architectural exterior wall sconce, die-cast square aluminum body with four adjustable slots to change beam angle.



#### SPECIFICATION DETAILS

Fixture Dimensions	W6-3/4" x H6-3/4" x D2-3/8"
Light Source	LED with DC Driver
Wattage	12W
Total Lumens	1260lm
Delivered Lumens	8K-515lm
Voltage	120-277V
Color Temperature	3000K
CRI (Ra)	80CRI
Optional Color Temps	2700K - 5000K Available; Minimum Order Quantities Apply
LED Rated Life	50,000 hours
Dimming	Non-Dimming
Diffuser Details	Clear PC
ADA Compliant	Yes
Location	Wet, IP65
Illumination Direction	4 Direction
Mounting Style	All Orientation; Wall
Finish Option(s)	Black

\* For custom options, consult factory for details.  
\*\* For warranty information, please visit [www.buzzlighting.com/warranty](http://www.buzzlighting.com/warranty)

#### COMMENT

KUZZCO

CANADA: 19054 28TH AVENUE - SURREY, BC V3Z 6M3  
USA: 3035 E. LONE MOUNTAIN ROAD - LAS VEGAS, NV 89081

[WWW.KUZZCOLIGHTING.COM](http://WWW.KUZZCOLIGHTING.COM)  
© 2019 KUZZCO LIGHTING, ALL RIGHTS RESERVED.



### FEATURES & SPECIFICATIONS

**INTENDED USE** — Ideal for applications requiring low-profile, attractive emergency lighting with optional normally-off or normally-on with photo-cell control. Provides a minimum of 90 minutes of illumination both indoors and outdoors upon loss of AC power. **Certain airborne contaminants can diminish the integrity of acrylic and/or polycarbonate. Click here for Acrylic/Polycarbonate Compatibility table for suitable uses.**

**CONSTRUCTION** — Compact, low-profile, architectural design with die-cast aluminum housing. Finishes are textured powder coat paint for dark bronze, white, black and non-textured for natural aluminum. Test switch indicator light and remote enabled are located on the bottom of the housing and are easily accessible and visible from the floor.

**OPTICS** — LEDs with L70 of 55,000 hours. Delivers 635 lumens in Normal-On and Emergency operation. Optional field-configurable for wide and forward throw distribution (U.S. Patent No. #5,162,972 B2). Outdoor wide throw distribution: 70' (7' path of egress) at a 7.5' mounting height with 1 FC Average. 4,000K correlated color temperature (CCT).

**ELECTRICAL** — UL20 (120 thru 347V, 50/60Hz). Current-limiting charger maximizes battery life and minimizes energy consumption to provide low operating costs. Small battery chargers Certified in the CA Title 20 Appliance Efficiency Database.

Short-circuit protection — current-limiting charger circuitry protects printed circuit board from shorts. Regulated charge voltage maintains a stable charge voltage over a wide range of line voltages.

Prevents overvoltage charging that shortens battery life and reduces capacity. Filtered charger input minimizes charge voltage ripple and extends battery life.

Photo-cell option (PEL) for normally on product in order to discontinue illumination during periods when ambient light is present. Photo-cell option (PEL) for normally on products allow the user to force lamp illumination by user control (external switch). When power is lost connected switch/lamp. Illumination will respond to internal daylight sensor. For switched line applications, no other types of products shall be connected on the switched leg.

Remote units (RELs) are normally off. Emergency only functionality with DC power from an external battery.

**BATTERY:** Sealed, maintenance-free Lithium Iron Phosphate battery.

**SELF-DIAGNOSTICS AND REMOTE TEST (SORT OPTION):** Automatic 24-hour recharge after a 90-minute discharge. Advanced electrical design provides constant light output throughout the entire discharge period for non-CW batteries. (For cold weather and cold temperature applications, the light may diminish through the discharge cycle). Brownout protection is automatically inhibited to emergency mode when supply voltage drops below approximately 80 percent nominal of 120, 208, 277 or 347. Other input voltages may vary. AC/DC use - set allows battery connection before AC power is applied and prevents battery damage from deep discharge.

Self-Diagnostics: Continuously monitors AC functionality. Standard deactivation monitoring will indicate disconnected battery, charger failure and displays green flashing indicator light while in emergency mode. Single multi-chromatic LED indicator to display two-stage charging, test activation and three-state self-diagnostics.

Self-diagnostic testing: Five minutes every 30 days and 90 minutes annually. Diagnostic evaluation of lamps, AC to DC transfer, battery charging and condition of microprocessor. Automatic test is easily postponed for eight hours by activating manual test switch (RTMT accessory).

Manual testing: Test switch and remote tester (RTMT accessory) provides manual activation of 60-second diagnostic testing for on-demand visual inspection. 90 minute manual testing can be enabled by pressing the test switch again while in test mode.

**LISTINGS** — UL wet location listed standard at 12-122°F (°C) 50°C. Unit with CW battery (cold weather) listed for 22°F to 122°F (°C) 30° to 50°C. Remote listed for -40°F to 122°F (°C) -40° to 50°C. Meets or exceeds all applicable requirements for UL 924, NFPA 101 (Current Life Safety code), NFPA 70 (NEC), NOM (Norma Oficial Mexicana), California Energy Commission Title 20 section 1605.1 (07/04), FCC Title 47, Part 15, Subpart B and OSHA. List and labeled to comply with Canadian Standards C22.2 No. 141-10, Meets City of Chicago Code.

**BUY AMERICAN ACT** — Product with the BAA option is assembled in the USA and meets the Buy American(s) government procurement requirements under FAR, DFARS and DOT regulations.

Please refer to [www.aflighting.com/buy-american](http://www.aflighting.com/buy-american) for additional information.

**WARRANTY** — 5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: [www.aflighting.com/support/warranty/](http://www.aflighting.com/support/warranty/) terms and conditions.

**Note:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

### AFF Affinity® Premium Die-Cast Architectural Emergency Light

#### SELF-POWERED MODELS

For the shortest lead times, configure product using **bolded options**.

Example: AFF PEL DWHGX0 UVOLT LTP SORT WT

Series	Unit Type <sup>1</sup>	Housing Color	Voltage	Battery Type	Automatic Testing	Optics	Options
AFF AFFINITY Premium	PEL Photo-cell: Normally-On with internal battery OEL Normally-Off with internal battery	DWHGX0 White textured DLBXX0 Black textured DNAXD Natural aluminum DDBTX0 Dark bronze textured	UVOLT 120-347VAC, 50/60Hz	LTP Lithium Iron Phosphate	SORT Self-diagnostics remote test	WT Wide Throw FCT Field configurable throw <sup>1</sup>	CW Cold Weather (-30 - 50°C) BAA Buy American(s) Act Compliant

Notes  
1 AFF with internal battery is not remote capable.

#### REMOTE MODELS listed for -40°F to 122°F (-40° to 50°C)

For the shortest lead times, configure product using **bolded options**.

Example: AFF OELR DWHGX0 WT



Series	Unit Type	Housing Color	Voltage	Optics	Options
AFF AFFINITY Premium	OELR Remote future, Normally-Off (requires external battery source)	DWHGX0 White textured DLBXX0 Black textured DNAXD Natural aluminum DDBTX0 Dark bronze textured	(blank) Universal DC voltage (8-30VDC)	WT Wide Throw FCT Field configurable throw <sup>1</sup>	BAA Buy American(s) Act Compliant

Notes  
1 FCT optics ships standard in the WT (wide throw) mode. Upon installation, configuration can be changed to the FCT mode.

Accessories: Order as separate catalog number.

RTMT Remote test kit, up to 40' away (includes goggles, laser and battery)

#### AFF SPACING GUIDELINES

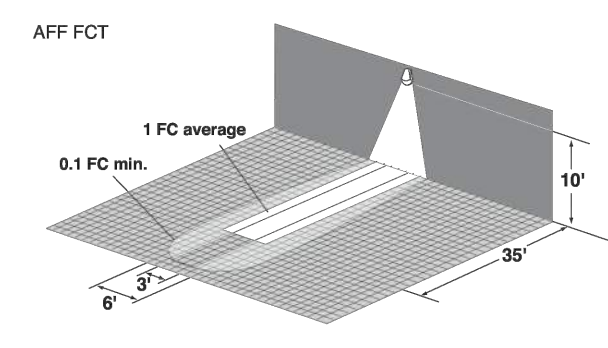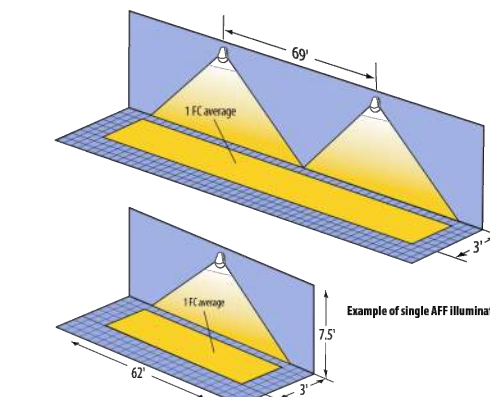

#### Maximum Spacing Guidelines - AFF (WT)

Mounting Height	Illumination Level	Single Luminaire 3' Path of Egress	Multiple Luminaire 3' Path of Egress	Multiple Luminaire 6' Path of Egress	Application Notes *
7.5'		62'	46'	69'	53'
10'	1FC Avg	48'	34'	55'	46'
12'		28'	22'	46'	41'
14'		6'	N/A	38'	36'

\* Also meets the additional illumination requirements of NFPA 101: 1FC minimum and max/min ratio of 40:1.

#### Maximum Spacing Guidelines - AFF (FCT)


Mounting Height	Illumination Level	Single Luminaire 3' Path of Egress	Multiple Luminaire 3' Path of Egress	Application Notes *
7.5'		24'	23'	
10'	1FC Avg	35'	35'	200' Open Space 80/50/20 reflectances
12'		37'	31'	
14'		31'	N/A	

\* Also meets the additional illumination requirements of NFPA 101: 1FC minimum and max/min ratio of 40:1.





EMERGENCY: One Lithonia Way, Cary, GA 30012 Phone: 800-705-SERV (7378) [techsupport-emergency@acuitybrands.com](mailto:techsupport-emergency@acuitybrands.com) [www.lithonia.com](http://www.lithonia.com)

© 2019-2023 Acuity Brands Lighting, Inc. All rights reserved. Rev. 03/08/23

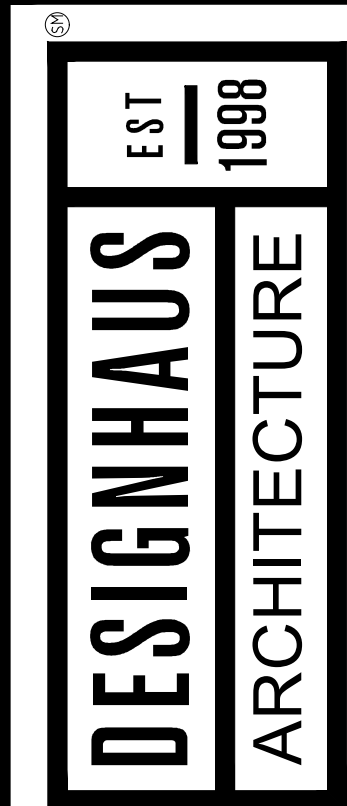

3300 AUBURN RD, SUITE 300  
AUBURN HILLS, MI 48326  
T: 248.601.4422 F: 248.453.5894  
WWW.DESIGNHAUS.COM  
INFO@DESIGNHAUS.COM

SPA Resubmittal #4	24.05.24
SPA Resubmittal	24.04.29
SPA Resubmittal	24.03.01
SPA Resubmittal	24.01.23
SPA Submittal	23.01.23
ISSUANCE	DATE

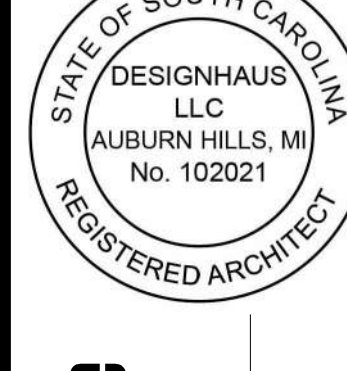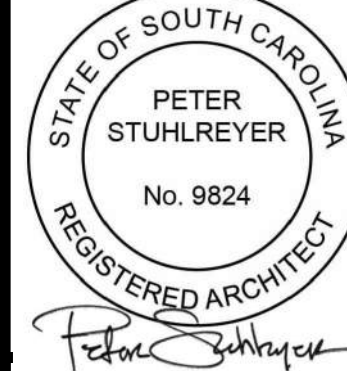

Compass Self Storage  
315 Gibbet Road and 20 Cane Dr  
Bluffton, SC 29910  
Lighting Plan

022129

L1.11



# ATTACHMENT 4

CANYON  
EW38807

WALL

PROJECT



## DESCRIPTION

Architectural exterior wall sconce, die-cast square aluminum body with four adjustable slits to change beam angle.


## SPECIFICATION DETAILS

Fixture Dimensions	W6-3/4" x H6-3/4" x E2-3/8"
Light Source	LED with DC Driver
Wattage	12W
Total Lumens	1260lm
Delivered Lumens	BK-515lm
Voltage	120-277V
Color Temperature	3000K
CRI (Ra)	80CRI
Optional Color Temps	2700K - 5000K Available, Minimum Order Quantities Apply
LED Rated Life	50,000 hours
Dimming	Non-Dimming
Diffuser Details	Clear PC
ADA Compliant	Yes
Location	Wet, IP65
Illumination Direction	4 Direction
Mounting Style	All Orientation; Wall;
Finish Option(s)	Black


\* For custom options, consult factory for details.

\* For warranty information, please visit [www.kuzcolighting.com/warranty](http://www.kuzcolighting.com/warranty)

0° to 90° Tool-less  
Beam Re-shaping



Aluminum Finish  
BK - Black

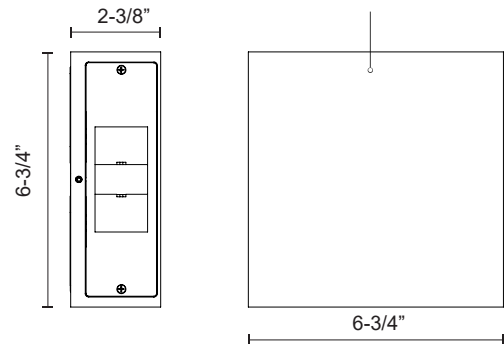

KUZCO

CANADA: 19054 28TH AVENUE - SURREY, BC V3Z 6M3

USA: 3035 E. LONE MOUNTAIN ROAD - LAS VEGAS, NV 89081

[WWW.KUZCOLIGHTING.COM](http://WWW.KUZCOLIGHTING.COM)

© 2019 KUZCO LIGHTING. ALL RIGHTS RESERVED.

## COMMENT

# ATTACHMENT 4

## D-Series Size 0

### LED Area Luminaire



d<sup>series</sup>



Catalog  
Number



Notes

Type

Hit the Tab key or mouse over the page to see all interactive elements.

### Specifications

EPA:	0.44 ft <sup>2</sup> (0.04 m <sup>2</sup> )
Length:	26.18" (66.5 cm)
Width:	14.06" (35.7 cm)
Height H1:	2.26" (5.7 cm)
Height H2:	7.46" (18.9 cm)
Weight:	23 lbs (10.4 kg)



### Introduction

The modern styling of the D-Series features a highly refined aesthetic that blends seamlessly with its environment. The D-Series offers the benefits of the latest in LED technology into a high performance, high efficacy, long-life luminaire.

The photometric performance results in sites with excellent uniformity, greater pole spacing and lower power density. D-Series outstanding photometry aids in reducing the number of poles required in area lighting applications, with typical energy savings of 70% and expected service life of over 100,000 hours.

### Ordering Information

**EXAMPLE:** DSX0 LED P6 40K 70CRI T3M MVOLT SPA NLTAIR2 PIRHN DDBXD

DSX0 LED								
Series	LEDs	Color temperature <sup>2</sup>	Color Rendering Index <sup>2</sup>	Distribution		Voltage	Mounting	
DSX0 LED	<b>Forward optics</b>	(this section 70CRI only)		AFR Automotive front row	T5M Type V medium	MVOLT (120V-277V) <sup>4</sup>	<b>Shipped included</b>	
	P1 P5	30K 3000K	70CRI	T1S Type I short	T5LG Type V low glare	HVOLT (347V-480V) <sup>5,6</sup>		
	P2 P6	40K 4000K	70CRI	T2M Type II medium	T5W Type V wide	XVOLT (277V-480V) <sup>7,8</sup>		
	P3 P7	50K 5000K	70CRI	T3M Type III medium	BLC3 Type III backlight control <sup>3</sup>	120 <sup>16, 24</sup>		
	P4	(this section 80CRI only, extended lead times apply)		T3LG Type III low glare <sup>3</sup>	BLC4 Type IV backlight control <sup>3</sup>	208 <sup>16, 24</sup>		
	<b>Rotated optics</b>			T4M Type IV medium		240 <sup>16, 24</sup>		
	P10 <sup>1</sup> P12 <sup>1</sup>		27K 2700K	80CRI	T4LG Type IV low glare <sup>3</sup>	LCCO Left corner cutoff <sup>3</sup>		277 <sup>16, 24</sup>
	P11 <sup>1</sup> P13 <sup>1</sup>		30K 3000K	80CRI	TFTM Forward throw medium	RCCO Right corner cutoff <sup>3</sup>		347 <sup>16, 24</sup>
			35K 3500K	80CRI				480 <sup>16, 24</sup>
		40K 4000K	80CRI					
	50K 5000K	80CRI						
		</						

Control options	Other options	Finish (required)
<b>Shipped installed</b>	<b>Shipped installed</b>	<b>DDBXD</b> Dark Bronze
NLTAIR2 PIRHN nLight AIR gen 2 enabled with bi-level motion / ambient sensor, 8-40' mounting height, ambient sensor enabled at 2fc. <sup>11,12,18,19</sup>	HS Houseside shield (black finish standard) <sup>20</sup>	<b>DBLXD</b> Black
PIR High/low, motion/ambient sensor, 8-40' mounting height, ambient sensor enabled at 2fc. <sup>13,18,19</sup>	L90 Left rotated optics <sup>1</sup>	<b>DNAXD</b> Natural Aluminum
PER NEMA twist-lock receptacle only (controls ordered separate) <sup>14</sup>	R90 Right rotated optics <sup>1</sup>	<b>DWHXD</b> White
PER5 Five-pin receptacle only (controls ordered separate) <sup>14,19</sup>	CCE Coastal Construction <sup>21</sup>	<b>DDBTXD</b> Textured dark bronze
	HA 50°C ambient operation <sup>22</sup>	<b>DBLBD</b> Textured black
	BAA Buy America(n) Act Compliant	<b>DNATXD</b> Textured natural aluminum
	SF Single fuse (120, 277, 347V) <sup>24</sup>	<b>DWHGXD</b> Textured white
	DF Double fuse (208, 240, 480V) <sup>24</sup>	
	<b>Shipped separately</b>	
	EGSR External Glare Shield (reversible, field install required, matches housing finish)	
	BSDB Bird Spikes (field install required)	



One Lithonia Way • Conyers, Georgia 30012 • Phone: 1-800-705-SERV (7378) • [www.lithonia.com](http://www.lithonia.com)  
© 2011-2023 Acuity Brands Lighting, Inc. All rights reserved.

DSX0-LED  
Rev. 09/05/23  
Page 1 of 9

# ATTACHMENT 4

## Ordering Information

### Accessories


Ordered and shipped separately.

DLL127F 1.5 JU	Photocell - SSL twist-lock (120-277V) <sup>23</sup>
DLL347F 1.5 CUL JU	Photocell - SSL twist-lock (347V) <sup>23</sup>
DLL480F 1.5 CUL JU	Photocell - SSL twist-lock (480V) <sup>23</sup>
DSHORT SBK	Shorting cap <sup>23</sup>
DSX0HS P#	House-side shield (enter package number P1-7, P10-13 in place of #)
DSXRPA (FINISH)	Round pole adapter (#8 drilling, specify finish)
DSXSPA5 (FINISH)	Round pole adapter #5 drilling (specify finish)
DSXSPA5 (FINISH)	Square pole adapter #5 drilling (specify finish)
DSX0EGSR (FINISH)	External glare shield (specify finish)
DSX0SDB (FINISH)	Bird spike deterrent bracket (specify finish)


### NOTES

- 1 Rotated optics available with packages P10, P11, P12 and P13. Must be combined with option L90 or R90.
- 2 30K, 40K, and 50K available in 70CRI and 80CRI. 27K and 35K only available with 80CRI. Contact Technical Support for other possible combinations.
- 3 T3LG, T4LG, BLC3, BLC4, LCCO, RCCO not available with option HS.
- 4 MVOLT driver operates on any line voltage from 120-277V (50/60 Hz).
- 5 HVOLT driver operates on any line voltage from 347-480V (50/60 Hz).
- 6 HVOLT not available with package P1, P2 and P10 when combined with option NLTAIR2 PIRHN or option PIR.
- 7 XVOLT operates with any voltage between 277V and 480V (50/60 Hz).
- 8 XVOLT not available in packages P1, P2 or P10. XVOLT not available with fusing (SF or DF).
- 9 SPAS and RPA5 for use with #5 drilling only (Not for use with #8 drilling).
- 10 WBA cannot be combined with Type 5 distributions plus photocell (PER).
- 11 NLTAIR2 and PIRHN must be ordered together. For more information on nLight Air 2.
- 12 NLTAIR2 PIRHN not available with other controls including PIR, PER, PER5, PER7, FAO, BL30, BL50 and DMG. NLTAIR2 PIRHN not available with P1, P2 and P10 using HVOLT. NLTAIR2 PIRHN not available with P1, P2 and P10 using XVOLT. NLTAIR2 PIRHN not available with P1 using MVOLT.
- 13 PIR not available with NLTAIR2, PER, PER5, PER7, FAO BL30, BL50 and DMG. PIR not available with P1, P2 and P10 using HVOLT. PIR not available with P1, P2 and P10 using XVOLT. PIR not available with P1 using MVOLT.
- 14 PER/PER5/PER7 not available with NLTAIR2, PIR, BL30, BL50. Photocell ordered and shipped as a separate line item from Acuity Brands Controls. See accessories. Shorting Cap included.
- 15 FAO not available with other dimming control options NLTAIR2 PIRHN, PIR, PER5, PER7, BL30, BL50, or DMG.
- 16 BL30 and BL50 are not available with NLTAIR2 PIRHN, PIR, PER, PER5, PER7, FAO and DMG. BL30 or BL50 must specify 120, 277 or 347V. Consult tech support for 208, 240 or 480V.
- 17 DMG not available with NLTAIR2 PIRHN, PIR, PER, PER5, PER7, BL30, BL50 and FAO.
- 18 Reference Motion Sensor Default Settings table on page 4 to see functionality.
- 19 Reference Controls Options table on page 4.
- 20 Option HS not available with T3LG, T4LG, BLC3, BLC4, LCCO and RCCO distribution. Also available as a separate accessory; see Accessories information.
- 21 CCE option not available with option BS and EGSR. Contact Technical Support for availability.
- 22 Option HA not available with performance packages P6, P7, P12 and P13.
- 23 Requires luminaire to be specified with PER, PER5 or PER7 option. See Controls Table on page 4.
- 24 Single fuse (SF) requires 120V, 277V, or 347V. Double fuse (DF) requires 208V, 240V or 480V. XVOLT not available with fusing (SF or DF).

## Shield Accessories





External Glare Shield (EGSR)



House Side Shield (HS)

## Drilling

### HANDHOLE ORIENTATION (from top of pole)

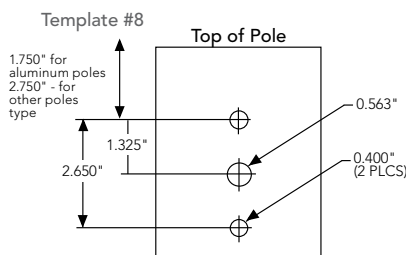

### Tenon Mounting Slipfitter

Tenon O.D.	Mounting	Single Unit	2 @ 180	2 @ 90	3 @ 90	3 @ 120	4 @ 90
2-3/8"	RPA	AS3-5 190	AS3-5 280	AS3-5 290	AS3-5 390	AS3-5 320	AS3-5 490
2-7/8"	RPA	AST25-190	AST25-280	AST25-290	AST25-390	AST25-320	AST25-490
4"	RPA	AST35-190	AST35-280	AST35-290	AST35-390	AST35-320	AST35-490

Mounting Option	Drilling Template	Single	2 @ 180	2 @ 90	3 @ 90	3 @ 120	4 @ 90
Head Location		Side B	Side B & D	Side B & C	Side B, C & D	Round Pole Only	Side A, B, C & D
Drill Nomenclature	#8	DM19AS	DM28AS	DM29AS	DM39AS	DM32AS	DM49AS
Minimum Acceptable Outside Pole Dimension							
SPA	#8	3.5"	3.5"	3.5"	3.5"		3.5"
RPA	#8	3"	3"	3"	3"	3"	3"
SPA5	#5	3"	3"	3"	3"		3"
RPA5	#5	3"	3"	3"	3"	3"	3"
SPA8N	#8	3"	3"	3"	3"		3"

### DSX0 Area Luminaire - EPA

\*Includes luminaire and integral mounting arm. Other tenons, arms, brackets or other accessories are not included in this EPA data.

Fixture Quantity & Mounting Configuration	Single DM19	2 @ 180 DM28	2 @ 90 DM29	3 @ 90 DM39	3 @ 120 DM32	4 @ 90 DM49
Mounting Type						
DSX0 with SPA	0.44	0.88	0.96	1.18	---	1.16
DSX0 with SPA5, SPA8N	0.51	1.02	1.06	1.26	---	1.29
DSX0 with RPA, RPA5	0.51	1.02	1.06	1.26	1.24	1.29
DSX0 with MA	0.64	1.28	1.24	1.67	1.70	1.93
















# ATTACHMENT 4

## Photometric Diagrams

To see complete photometric reports or download .ies files for this product, visit Lithonia Lighting's [homepage](https://www.lithonia.com).

Isofootcandle plots for the DSX0 LED P7 40K 70CRI. Distances are in units of mounting height (20').

### LEGEND



# ATTACHMENT 4

## Performance Data

### Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient		Lumen Multiplier
0°C	32°F	1.04
5°C	41°F	1.04
10°C	50°F	1.03
15°C	59°F	1.02
20°C	68°F	1.01
25°C	77°C	1.00
30°C	86°F	0.99
35°C	95°F	0.98
40°C	104°F	0.97

### Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the platforms noted in a **25°C ambient**, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	Lumen Maintenance Factor
0	1.00
25,000	0.94
50,000	0.89
100,000	0.80

### FAO Dimming Settings

FAO Position	% Wattage	% Lumen Output
8	100%	100%
7	93%	95%
6	80%	85%
5	66%	73%
4	54%	61%
3	41%	49%
2	29%	36%
1	15%	20%

\*Note: Calculated values are based on original performance package data. When calculating new values for given FAO position, use published values for each package based on input watts and lumens by optic type.

### Motion Sensor Default Settings

Option	Unoccupied Dimmed Level	High Level (when occupied)	Photocell Operation	Dwell Time	Ramp-up Time	Dimming Fade Rate
PIR	30%	100%	Enabled @ 2FC	7.5 min	3 sec	5 min
NLTAIR2 PIRHN	30%	100%	Enabled @ 2FC	7.5 min	3 sec	5 min

### Controls Options

Nomenclature	Description	Functionality	Primary control device	Notes
FAO	Field adjustable output device installed inside the luminaire; wired to the driver dimming leads.	Allows the luminaire to be manually dimmed, effectively trimming the light output.	FAO device	Cannot be used with other controls options that need the 0-10V leads
DS (not available on DSX0)	Drivers wired independently for 50/50 luminaire operation	The luminaire is wired to two separate circuits, allowing for 50/50 operation.	Independently wired drivers	Requires two separately switched circuits. Consider nLight AIR as a more cost effective alternative.
PERS or PER7	Twist-lock photocell receptacle	Compatible with standard twist-lock photocells for dusk to dawn operation, or advanced control nodes that provide 0-10V dimming signals.	Twist-lock photocells such as DLL Elite or advanced control nodes such as ROAM.	Pins 4 & 5 to dimming leads on driver, Pins 6 & 7 are capped inside luminaire. Cannot be used with other controls options that need the 0-10V leads.
PIR	Motion sensor with integral photocell. Sensor suitable for 8' to 40' mounting height.	Luminaires dim when no occupancy is detected.	Acuity Controls rSBG	Cannot be used with other controls options that need the 0-10V leads.
NLTAIR2 PIRHN	nLight AIR enabled luminaire for motion sensing, photocell and wireless communication.	Motion and ambient light sensing with group response. Scheduled dimming with motion sensor over-ride when wirelessly connected to the nLight Eclipse.	nLight Air rSBG	nLight AIR sensors can be programmed and commissioned from the ground using the CIAIRity Pro app. Cannot be used with other controls options that need the 0-10V leads.
BL30 or BL50	Integrated bi-level device that allows a second control circuit to switch all light engines to either 30% or 50% light output	BLC device provides input to 0-10V dimming leads on all drivers providing either 100% or dimmed (30% or 50%) control by a secondary circuit	BLC UVOLT1	BLC device is powered off the 0-10V dimming leads, thus can be used with any input voltage from 120 to 480V

### Electrical Load

					Current (A)					
	Performance Package	LED Count	Drive Current (mA)	Wattage	120V	208V	240V	277V	347V	480V
Forward Optics (Non-Rotated)	P1	20	530	34	0.28	0.16	0.14	0.12	0.10	0.07
	P2	20	700	45	0.38	0.22	0.19	0.16	0.13	0.09
	P3	20	1050	69	0.57	0.33	0.29	0.25	0.20	0.14
	P4	20	1400	94	0.78	0.45	0.39	0.34	0.27	0.19
	P5	40	700	89	0.75	0.43	0.38	0.33	0.26	0.19
	P6	40	1050	136	1.14	0.66	0.57	0.49	0.39	0.29
	P7	40	1300	170	1.42	0.82	0.71	0.62	0.49	0.36
Rotated Optics (Requires L90 or R90)	P10	30	530	51	0.42	0.24	0.21	0.18	0.15	0.11
	P11	30	700	67	0.57	0.33	0.28	0.25	0.20	0.14
	P12	30	1050	103	0.86	0.50	0.43	0.37	0.30	0.22
	P13	30	1300	129	1.07	0.62	0.54	0.46	0.37	0.27

### LED Color Temperature / Color Rendering Multipliers

	70 CRI		80CRI		90CRI	
	Lumen Multiplier	Availability	Lumen Multiplier	Availability	Lumen Multiplier	Availability
5000K	102%	Standard	92%	Extended lead-time	71%	(see note)
4000K	100%	Standard	92%	Extended lead-time	67%	(see note)
3500K	100%	(see note)	90%	Extended lead-time	63%	(see note)
3000K	96%	Standard	87%	Extended lead-time	61%	(see note)
2700K	94%	(see note)	85%	Extended lead-time	57%	(see note)

Note: Some LED types are available as per special request. Contact Technical Support for more information.

# ATTACHMENT 4

## Performance Data

### Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.

Forward Optics																							
Performance Package	System Watts	LED Count	Drive Current (mA)	Distribution Type	30K					40K					50K								
					(3000K, 70 CRI)					(4000K, 70 CRI)					(5000K, 70 CRI)								
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW				
P1	33W	20	530	T1S	4,906	1	0	1	148	5,113	1	0	1	154	5,213	1	0	1	157				
				T2M	4,545	1	0	2	137	4,736	1	0	2	143	4,829	1	0	2	145				
				T3M	4,597	1	0	2	138	4,791	1	0	2	144	4,885	1	0	2	147				
				T3LG	4,107	1	0	1	124	4,280	1	0	1	129	4,363	1	0	1	131				
				T4M	4,666	1	0	2	141	4,863	1	0	2	146	4,957	1	0	2	149				
				T4LG	4,244	1	0	1	128	4,423	1	0	1	133	4,509	1	0	1	136				
				TFTM	4,698	1	0	2	141	4,896	1	0	2	147	4,992	1	0	2	150				
				T5M	4,801	3	0	1	145	5,003	3	0	1	151	5,101	3	0	1	154				
				T5W	4,878	3	0	1	147	5,084	3	0	2	153	5,183	3	0	2	156				
				T5LG	4,814	2	0	1	145	5,018	2	0	1	151	5,115	2	0	1	154				
				BLC3	3,344	0	0	1	101	3,485	0	0	1	105	3,553	0	0	1	107				
				BLC4	3,454	0	0	2	104	3,599	0	0	2	108	3,670	0	0	2	111				
				RCCO	3,374	0	0	1	102	3,517	0	0	1	106	3,585	0	0	1	108				
				LCCO	3,374	0	0	1	102	3,517	0	0	1	106	3,585	0	0	1	108				
				AFR	4,906	1	0	1	148	5,113	1	0	1	154	5,213	1	0	1	157				
				P2	45W	20	700	T1S	6,328	1	0	1	140	6,595	1	0	1	146	6,724	1	0	1	149
								T2M	5,862	1	0	2	130	6,109	1	0	2	135	6,228	1	0	2	138
								T3M	5,930	1	0	3	131	6,180	1	0	3	137	6,301	1	0	3	140
T3LG	5,297	1	0					1	117	5,521	1	0	1	122	5,628	1	0	1	125				
T4M	6,018	1	0					3	133	6,272	1	0	3	139	6,395	1	0	3	142				
T4LG	5,474	1	0					1	121	5,705	1	0	1	126	5,816	1	0	1	129				
TFTM	6,060	1	0					3	134	6,316	1	0	3	140	6,439	1	0	3	143				
T5M	6,192	3	0					1	137	6,453	3	0	2	143	6,579	3	0	2	146				
T5W	6,293	3	0					2	139	6,558	3	0	2	145	6,686	3	0	2	148				
T5LG	6,210	2	0					1	138	6,472	3	0	1	143	6,598	3	0	1	146				
BLC3	4,313	0	0					2	96	4,495	0	0	2	100	4,583	0	0	2	102				
BLC4	4,455	0	0					2	99	4,643	0	0	2	103	4,733	0	0	2	105				
RCCO	4,352	0	0					2	96	4,536	0	0	2	100	4,624	0	0	2	102				
LCCO	4,352	0	0					2	96	4,536	0	0	2	100	4,624	0	0	2	102				
AFR	6,328	1	0					1	140	6,595	1	0	1	146	6,724	1	0	1	149				
P3	69W	20	1050					T1S	9,006	1	0	2	131	9,386	1	0	2	136	9,569	1	0	2	139
								T2M	8,343	2	0	3	121	8,694	2	0	3	126	8,864	2	0	3	129
								T3M	8,439	2	0	3	122	8,795	2	0	3	128	8,967	2	0	3	130
				T3LG	7,539	1	0	2	109	7,857	1	0	2	114	8,010	1	0	2	116				
				T4M	8,565	2	0	3	124	8,926	2	0	3	129	9,100	2	0	3	132				
				T4LG	7,790	1	0	2	113	8,119	1	0	2	118	8,277	1	0	2	120				
				TFTM	8,624	1	0	3	125	8,988	1	0	3	130	9,163	2	0	3	133				
				T5M	8,812	3	0	2	128	9,184	4	0	2	133	9,363	4	0	2	136				
				T5W	8,955	4	0	2	130	9,333	4	0	2	135	9,515	4	0	2	138				
				T5LG	8,838	3	0	1	128	9,211	3	0	1	134	9,390	3	0	1	136				
				BLC3	6,139	0	0	2	89	6,398	0	0	2	93	6,522	0	0	2	95				
				BLC4	6,340	0	0	3	92	6,607	0	0	3	96	6,736	0	0	3	98				
				RCCO	6,194	1	0	2	90	6,455	1	0	2	94	6,581	1	0	2	95				
				LCCO	6,194	1	0	2	90	6,455	1	0	2	94	6,581	1	0	2	95				
				AFR	9,006	1	0	2	131	9,386	1	0	2	136	9,569	1	0	2	139				
				P4	93W	20	1400	T1S	11,396	1	0	2	122	11,877	1	0	2	128	12,109	2	0	2	130
								T2M	10,557	2	0	3	113	11,003	2	0	3	118	11,217	2	0	3	121
								T3M	10,680	2	0	3	115	11,130	2	0	3	120	11,347	2	0	3	122
T3LG	9,540	1	0					2	103	9,942	1	0	2	107	10,136	1	0	2	109				
T4M	10,839	2	0					3	117	11,296	2	0	3	121	11,516	2	0	4	124				
T4LG	9,858	1	0					2	106	10,274	1	0	2	110	10,474	1	0	2	113				
TFTM	10,914	2	0					3	117	11,374	2	0	3	122	11,596	2	0	3	125				
T5M	11,152	4	0					2	120	11,622	4	0	2	125	11,849	4	0	2	127				
T5W	11,332	4	0					3	122	11,811	4	0	3	127	12,041	4	0	3	129				
T5LG	11,184	3	0					1	120	11,656	3	0	2	125	11,883	3	0	2	128				
BLC3	7,768	0	0					2	83	8,096	0	0	2	87	8,254	0	0	2	89				
BLC4	8,023	0	0					3	86	8,362	0	0	3	90	8,524	0	0	3	92				
RCCO	7,838	1	0					2	84	8,169	1	0	2	88	8,328	1	0	2	90				
LCCO	7,838	1	0					2	84	8,169	1	0	2	88	8,328	1	0	2	90				
AFR	11,396	1	0					2	122	11,877	1	0	2	128	12,109	2	0	2	130				

# ATTACHMENT 4

## Performance Data

### Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.

Forward Optics																			
Performance Package	System Watts	LED Count	Drive Current (mA)	Distribution Type	30K					40K					50K				
					(3000K, 70 CRI)					(4000K, 70 CRI)					(5000K, 70 CRI)				
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
P5	90W	40	700	T1S	12,380	2	0	2	137	12,902	2	0	2	143	13,154	2	0	2	146
				T2M	11,468	2	0	3	127	11,952	2	0	3	133	12,185	2	0	3	135
				T3M	11,601	2	0	3	129	12,091	2	0	3	134	12,326	2	0	4	137
				T3LG	10,363	2	0	2	115	10,800	2	0	2	120	11,011	2	0	2	122
				T4M	11,774	2	0	4	131	12,271	2	0	4	136	12,510	2	0	4	139
				T4LG	10,709	1	0	2	119	11,160	2	0	2	124	11,378	2	0	2	126
				TFTM	11,856	2	0	3	132	12,356	2	0	4	137	12,596	2	0	4	140
				T5M	12,114	4	0	2	134	12,625	4	0	2	140	12,871	4	0	2	143
				T5W	12,310	4	0	3	137	12,830	4	0	3	142	13,080	4	0	3	145
				T5LG	12,149	3	0	2	135	12,662	3	0	2	141	12,908	3	0	2	143
				BLC3	8,438	0	0	2	94	8,794	0	0	2	98	8,966	0	0	2	99
				BLC4	8,715	0	0	3	97	9,083	0	0	3	101	9,260	0	0	3	103
				RCCO	8,515	1	0	2	94	8,874	1	0	2	98	9,047	1	0	2	100
				LCCO	8,515	1	0	2	94	8,874	1	0	2	98	9,047	1	0	2	100
				AFR	12,380	2	0	2	137	12,902	2	0	2	143	13,154	2	0	2	146
P6	137W	40	1050	T1S	17,545	2	0	3	128	18,285	2	0	3	133	18,642	2	0	3	136
				T2M	16,253	3	0	4	119	16,939	3	0	4	124	17,269	3	0	4	126
				T3M	16,442	2	0	4	120	17,135	3	0	4	125	17,469	3	0	4	128
				T3LG	14,687	2	0	2	107	15,306	2	0	2	112	15,605	2	0	2	114
				T4M	16,687	2	0	4	122	17,391	3	0	5	127	17,730	3	0	5	129
				T4LG	15,177	2	0	2	111	15,817	2	0	2	115	16,125	2	0	2	118
				TFTM	16,802	2	0	4	123	17,511	2	0	4	128	17,852	2	0	5	130
				T5M	17,168	4	0	2	125	17,893	5	0	3	131	18,241	5	0	3	133
				T5W	17,447	5	0	3	127	18,183	5	0	3	133	18,537	5	0	3	135
				T5LG	17,218	4	0	2	126	17,944	4	0	2	131	18,294	4	0	2	134
				BLC3	11,959	0	0	3	87	12,464	0	0	3	91	12,707	0	0	3	93
				BLC4	12,352	0	0	4	90	12,873	0	0	4	94	13,124	0	0	4	96
				RCCO	12,067	1	0	3	88	12,576	1	0	3	92	12,821	1	0	3	94
				LCCO	12,067	1	0	3	88	12,576	1	0	3	92	12,821	1	0	3	94
				AFR	17,545	2	0	3	128	18,285	2	0	3	133	18,642	2	0	3	136
P7	171W	40	1300	T1S	20,806	2	0	3	122	21,683	2	0	3	127	22,106	2	0	3	129
				T2M	19,273	3	0	4	113	20,086	3	0	4	118	20,478	3	0	4	120
				T3M	19,497	3	0	5	114	20,319	3	0	5	119	20,715	3	0	5	121
				T3LG	17,416	2	0	2	102	18,151	2	0	2	106	18,504	2	0	2	108
				T4M	19,787	3	0	5	116	20,622	3	0	5	121	21,024	3	0	5	123
				T4LG	17,997	2	0	2	105	18,756	2	0	2	110	19,121	2	0	2	112
				TFTM	19,924	3	0	5	117	20,765	3	0	5	122	21,170	3	0	5	124
				T5M	20,359	5	0	3	119	21,217	5	0	3	124	21,631	5	0	3	127
				T5W	20,689	5	0	3	121	21,561	5	0	3	126	21,982	5	0	3	129
				T5LG	20,418	4	0	2	120	21,279	4	0	2	125	21,694	4	0	2	127
				BLC3	14,182	0	0	3	83	14,780	0	0	3	87	15,068	0	0	3	88
				BLC4	14,647	0	0	4	86	15,265	0	0	4	89	15,562	0	0	4	91
				RCCO	14,309	1	0	3	84	14,913	1	0	3	87	15,204	1	0	3	89
				LCCO	14,309	1	0	3	84	14,913	1	0	3	87	15,204	1	0	3	89
				AFR	20,806	2	0	3	122	21,683	2	0	3	127	22,106	2	0	3	129



# ATTACHMENT 4

## Performance Data


### Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.



Rotated Optics																			
Performance Package	System Watts	LED Count	Drive Current (mA)	Distribution Type	30K					40K					50K				
					(3000K, 70 CRI)					(4000K, 70 CRI)					(5000K, 70 CRI)				
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
P10	51W	30	530	T1S	7,399	3	0	3	145	7,711	3	0	3	151	7,862	3	0	3	154
				T2M	6,854	3	0	3	135	7,144	3	0	3	140	7,283	3	0	3	143
				T3M	6,933	3	0	3	136	7,225	3	0	3	142	7,366	3	0	3	145
				T3LG	6,194	2	0	2	122	6,455	2	0	2	127	6,581	2	0	2	129
				T4M	7,036	3	0	3	138	7,333	3	0	3	144	7,476	3	0	3	147
				T4LG	6,399	2	0	2	126	6,669	2	0	2	131	6,799	2	0	2	134
				TFTM	7,086	3	0	3	139	7,385	3	0	3	145	7,529	3	0	3	148
				T5M	7,239	3	0	2	142	7,545	3	0	2	148	7,692	3	0	2	151
				T5W	7,357	3	0	2	145	7,667	3	0	2	151	7,816	4	0	2	154
				T5LG	7,260	3	0	1	143	7,567	3	0	1	149	7,714	3	0	1	152
				BLC3	5,043	3	0	3	99	5,256	3	0	3	103	5,358	3	0	3	105
				BLC4	5,208	3	0	3	102	5,428	3	0	3	107	5,534	3	0	3	109
				RCCO	5,089	0	0	2	100	5,303	0	0	2	104	5,407	0	0	2	106
				LCCO	5,089	0	0	2	100	5,303	0	0	2	104	5,407	0	0	2	106
				AFR	7,399	3	0	3	145	7,711	3	0	3	151	7,862	3	0	3	154
P11	68W	30	700	T1S	9,358	3	0	3	138	9,753	3	0	3	143	9,943	3	0	3	146
				T2M	8,669	3	0	3	127	9,034	3	0	3	133	9,211	3	0	3	135
				T3M	8,768	3	0	3	129	9,138	3	0	3	134	9,316	3	0	3	137
				T3LG	7,833	3	0	3	115	8,164	3	0	3	120	8,323	3	0	3	122
				T4M	8,899	3	0	3	131	9,274	3	0	3	136	9,455	3	0	3	139
				T4LG	8,093	3	0	3	119	8,435	3	0	3	124	8,599	3	0	3	126
				TFTM	8,962	3	0	3	132	9,340	3	0	3	137	9,522	3	0	3	140
				T5M	9,156	4	0	2	135	9,542	4	0	2	140	9,728	4	0	2	143
				T5W	9,304	4	0	2	137	9,696	4	0	2	143	9,885	4	0	2	145
				T5LG	9,182	3	0	1	135	9,569	3	0	1	141	9,756	3	0	1	143
				BLC3	6,378	3	0	3	94	6,647	3	0	3	98	6,777	3	0	3	100
				BLC4	6,587	3	0	3	97	6,865	3	0	3	101	6,999	3	0	3	103
				RCCO	6,436	0	0	2	95	6,707	0	0	2	99	6,838	0	0	2	101
				LCCO	6,436	0	0	2	95	6,707	0	0	2	99	6,838	0	0	2	101
				AFR	9,358	3	0	3	138	9,753	3	0	3	143	9,943	3	0	3	146
P12	103W	30	1050	T1S	13,247	3	0	3	128	13,806	3	0	3	134	14,075	3	0	3	136
				T2M	12,271	4	0	4	119	12,789	4	0	4	124	13,038	4	0	4	126
				T3M	12,412	4	0	4	120	12,935	4	0	4	125	13,187	4	0	4	128
				T3LG	11,089	3	0	3	107	11,556	3	0	3	112	11,782	3	0	3	114
				T4M	12,597	4	0	4	122	13,128	4	0	4	127	13,384	4	0	4	129
				T4LG	11,457	3	0	3	111	11,940	3	0	3	116	12,173	3	0	3	118
				TFTM	12,686	4	0	4	123	13,221	4	0	4	128	13,479	4	0	4	130
				T5M	12,960	4	0	2	125	13,507	4	0	2	131	13,770	4	0	2	133
				T5W	13,170	4	0	3	127	13,726	4	0	3	133	13,994	4	0	3	135
				T5LG	12,998	3	0	2	126	13,546	3	0	2	131	13,810	3	0	2	134
				BLC3	9,029	3	0	3	87	9,409	3	0	3	91	9,593	3	0	3	93
				BLC4	9,324	4	0	4	90	9,718	4	0	4	94	9,907	4	0	4	96
				RCCO	9,110	1	0	2	88	9,495	1	0	2	92	9,680	1	0	2	94
				LCCO	9,110	1	0	2	88	9,494	1	0	2	92	9,680	1	0	2	94
				AFR	13,247	3	0	3	128	13,806	3	0	3	134	14,075	3	0	3	136
P13	129W	30	1300	T1S	15,704	3	0	3	122	16,366	3	0	3	127	16,685	4	0	4	130
				T2M	14,547	4	0	4	113	15,161	4	0	4	118	15,457	4	0	4	120
				T3M	14,714	4	0	4	114	15,335	4	0	4	119	15,634	4	0	4	121
				T3LG	13,145	3	0	3	102	13,700	3	0	3	106	13,967	3	0	3	108
				T4M	14,933	4	0	4	116	15,563	4	0	4	121	15,867	4	0	4	123
				T4LG	13,582	3	0	3	105	14,155	3	0	3	110	14,431	3	0	3	112
				TFTM	15,039	4	0	4	117	15,673	4	0	4	122	15,979	4	0	4	124
				T5M	15,364	4	0	2	119	16,013	4	0	2	124	16,325	4	0	2	127
				T5W	15,613	5	0	3	121	16,272	5	0	3	126	16,589	5	0	3	129
				T5LG	15,409	3	0	2	120	16,059	3	0	2	125	16,372	4	0	2	127
				BLC3	10,703	4	0	4	83	11,155	4	0	4	87	11,372	4	0	4	88
				BLC4	11,054	4	0	4	86	11,520	4	0	4	89	11,745	4	0	4	91
				RCCO	10,800	1	0	2	84	11,256	1	0	2	87	11,475	1	0	3	89
				LCCO	10,800	1	0	2	84	11,255	1	0	2	87	11,475	1	0	3	89
				AFR	15,704	3	0	3	122	16,366	3	0	3	127	16,685	4	0	4	130

# ATTACHMENT 4



## Dimensions

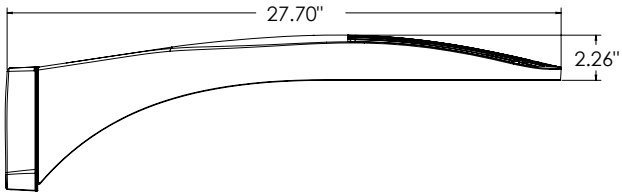


DSX0 with RPA, RPA5, SPA5, SPA8N mount  
Weight: 25 lbs

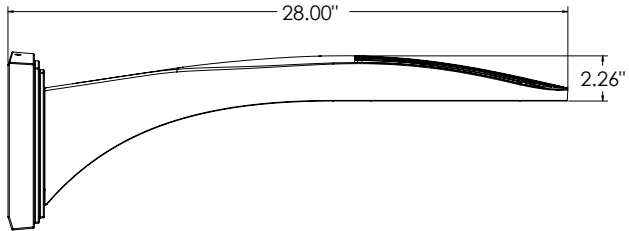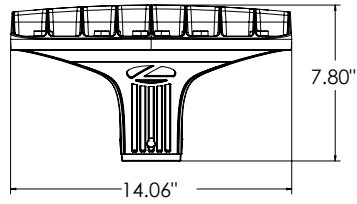


DSX0 with WBA mount  
Weight: 27 lb

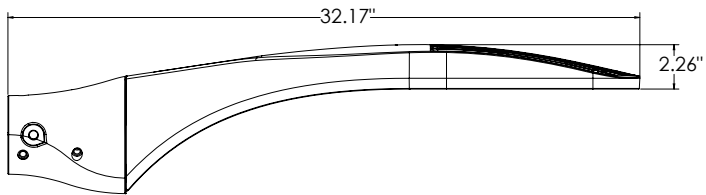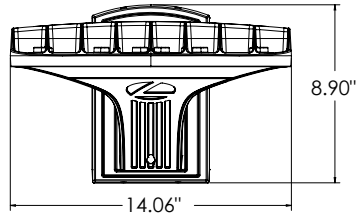


DSX0 with MA mount  
Weight: 28 lbs

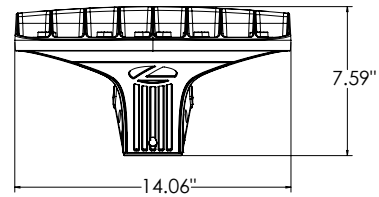


SPA (STANDARD ARM)




RPA




SPA5



RPA5






SPA8N





### nLight Sensor Coverage Pattern

#### NLTAIR2 PIRHN

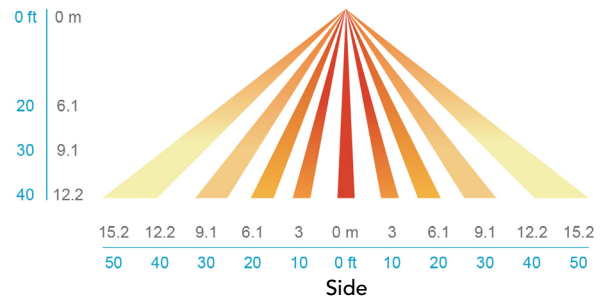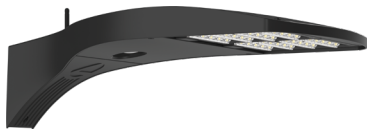

## FEATURES & SPECIFICATIONS

### INTENDED USE

The sleek design of the D-Series Size 0 reflects the embedded high performance LED technology. It is ideal for many commercial and municipal applications, such as parking lots, plazas, campuses, and pedestrian areas.

### CONSTRUCTION

Single-piece die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. Modular design allows for ease of maintenance and future light engine upgrades. The LED driver is mounted in direct contact with the casting to promote low operating temperature and long life. Housing driver compartment is completely sealed against moisture and environmental contaminants (IP66). Vibration rated per ANSI C136.31 for 3G. Low EPA (0.44 ft²) for optimized pole wind loading.

### FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Available in both textured and non-textured finishes.

### COASTAL CONSTRUCTION (CCE)

Optional corrosion resistant construction is engineered with added corrosion protection in materials and/or pre-treatment of base material under super durable paint. Provides additional corrosion protection for applications near coastal areas. Finish is salt spray tested to over 5,000 hours per ASTM B117 with scribe rating of 10. Additional lead-times may apply.

### OPTICS

Precision-molded proprietary silicone lenses are engineered for superior area lighting distribution, uniformity, and pole spacing. Light engines are available in 3000 K, 4000 K or 5000 K (70 CRI) configurations. 80CRI configurations are also available. The D-Series Size 0 has zero uplight and qualifies as a Nighttime Friendly™ product, meaning it is consistent with the LEED® and Green Globes™ criteria for eliminating wasteful uplight.

### ELECTRICAL

Light engine(s) configurations consist of high-efficacy LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life (up to L80/100,000 hours at 25°C). Class 1 electronic drivers are designed to have a power factor >90%, THD <20%, and an expected life of 100,000 hours with <1% failure rate. Easily serviceable 10kV surge protection device meets a minimum Category C Low operation (per ANSI/IEEE C62.41.2).

### STANDARD CONTROLS

The DSX0 LED area luminaire has a number of control options. DSX Size 0, comes standard with 0-10V dimming driver. Dusk to dawn controls can be utilized via optional NEMA twist-lock photocell receptacles. PIR integrated motion sensor with on-board photocell feature field-adjustable programming and are suitable for mounting heights up to 40 feet. Control option BL features a bi-level device that allows a second control circuit to switch all light engines to either 30% or 50% light output.

### nLIGHT AIR CONTROLS

The DSX0 LED area luminaire is also available with nLight® AIR for the ultimate in wireless control. This powerful controls platform provides out-of-the-box basic motion sensing and photocontrol functionality and is suitable for mounting heights up to 40 feet. Once commissioned using a smartphone and the easy-to-use CLAIRITY app, nLight AIR equipped luminaires can be grouped, resulting in motion sensor and photocell group response without the need for additional equipment. Scheduled dimming with motion sensor over-ride can be achieved when used with the nLight Eclipse. Additional information about nLight Air can be found [here](#).

### INSTALLATION

Integral mounting arm allows for fast mounting using Lithonia standard #8 drilling and accommodates pole drilling's from 2.41 to 3.12" on center. The standard "SPA" option for square poles and the "RPA" option for round poles use the #8 drilling. For #5 pole drillings, use SPA5 or RPA5. Additional mountings are available including a wall bracket (WBA) and mast arm (MA) option that allows luminaire attachment to a 2 3/8" horizontal mast arm.

### LISTINGS

UL listed to meet U.S. and Canadian standards. UL Listed for wet locations. Light engines are IP66 rated; luminaire is IP66 rated. Rated for -40°C minimum ambient.

DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product. Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org/QPL](http://www.designlights.org/QPL) to confirm which versions are qualified.

International Dark-Sky Association (IDA) Fixture Seal of Approval (FSA) is available for all products on this page utilizing 3000K color temperature only.

### BUY AMERICAN ACT

Product with the BAA option is assembled in the USA and meets the Buy America(n) government procurement requirements under FAR, DFARS and DOT regulations. Please refer to [www.acuitybrands.com/buy-american](http://www.acuitybrands.com/buy-american) for additional information.

### WARRANTY

5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: [www.acuitybrands.com/support/warranty/terms-and-conditions](http://www.acuitybrands.com/support/warranty/terms-and-conditions)

**Note:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

## FEATURES & SPECIFICATIONS

**INTENDED USE** — Ideal for applications requiring low-profile, attractive emergency lighting with Optional normally-off or normally-on with photocell control. Provides a minimum of 90 minutes of illumination both indoors and outdoors upon loss of AC power. **Certain airborne contaminants can diminish the integrity of acrylic and/or polycarbonate. Click here for Acrylic-Polycarbonate Compatibility table for suitable uses.**

**CONSTRUCTION** — Compact, low-profile, architectural design with die-cast aluminum housing. Finishes are texturized powder coat paint for dark bronze, white, black and non-texturized for natural aluminum. Test switch indicator light and remote enabled are located on the bottom of the housing and are easily accessible and visible from the floor.

**OPTICS** — LEDs with L70 of 55,000 hours. Delivers 635 lumens in Normal-On and Emergency operation. Optional field configurable for wide and forward throw distribution (**U.S. Patent No. - US10236712 B2**).

Outdoor wide throw distribution: 70' (3' path of egress) at a 7.5' mounting height with 1 FC Average.

4,000K correlated color temperature (CCT).

70 CRI.

**ELECTRICAL** — UVOLT (120 thru 347V, 50/60hz). Current-limiting charger maximizes battery life and minimizes energy consumption to provide low operating costs. Small battery chargers Certified in the CA Title 20 Appliance Efficiency Database

Short-circuit protection — current-limiting charger circuitry protects printed circuit board from shorts. Regulated charge voltage maintains a stable charge voltage over a wide range of line voltages.

Prevents over/undercharging that shortens battery life and reduces capacity. Filtered charger input minimizes charge voltage ripple and extends battery life.

Photocell option (PEL) for normally on product in order to discontinue illumination during periods when ambient light is present. Photocell option (PEL) for normally on products allow the user to force lamp illumination by user control (external switch). When power is not connected to switched line, illumination will respond to internal daylight sensor. For switched line applications, no other types of products shall be connected on the switched leg.

Remote units (OELR) are normally off. Emergency only functionality with DC power from an external battery.

**BATTERY:** Sealed, maintenance-free Lithium Iron Phosphate battery.

**SELF-DIAGNOSTICS AND REMOTE TEST (SDRT OPTION):** Automatic 24-hour recharge after a 90-minute discharge. Advanced electrical design provides constant light output throughout the entire discharge period for non-CW batteries. (For cold weather and cold temperature applications, the light may diminish though the discharge cycle). Brownout protection is automatically switched to emergency mode when supply voltage drops below approximately 80 percent nominal of 120, 220, 277 or 347. Other input voltages may vary. AC/LVD re-set allows battery connection before AC power is applied and prevents battery damage from deep discharge.

Self-Diagnostics: Continuously monitors AC functionality. Standard derangement monitoring will indicate disconnected battery, charger failure and displays green flashing indicator light while in emergency mode. Single multi-chromatic LED indicator to display two-state charging, test activation and three-state self-diagnostics.

Self-diagnostic testing: Five minutes every 30 days and 90 minutes annually. Diagnostic evaluation of lamps, AC to DC transfer, battery charging and condition of microprocessor. Automatic test is easily postponed for eight hours by activating manual test switch or use of remote tester (RTKIT accessory).

Manual testing: Test switch and remote tester (RTKIT accessory) provides manual activation of 60-second diagnostic testing for on-demand visual inspection. 90 minute manual testing can be enabled by pressing the test switch again while in test mode.

**INSTALLATION** — Wall mount: typically meets 7.5' to 14' mounting height from ground or floor. Power supplied by either mounting directly to a 4" square or 4" octagon j-box (wall mount) and accepts rigid or flex conduit.

**LISTINGS** — UL wet location listed standard at 32-122°F (0-50°C). Unit with CW battery (cold weather) listed for -22°F to 122°F (-30° to 50°C). Remote listed for -40°F to 122°F (-40° to 50°C). Meets or exceeds all applicable requirements for UL 924, NFPA 101 (current Life Safety code), NFPA 70 (NEC), NOM (Norma Oficial Mexicana), California Energy Commission Title 20 section 1605.3 (W)(4), FCC Title 47, Part 15, Subpart B and OSHA. List and labeled to comply with Canadian Standards C22.2 No. 141-10. Meets City of Chicago Code.

**BUY AMERICAN ACT** — Product with the BAA option is assembled in the USA and meets the Buy America(n) government procurement requirements under FAR, DFARS and DOT regulations. Please refer to [www.acuitybrands.com/buy-american](http://www.acuitybrands.com/buy-american) for additional information.

**WARRANTY** — 5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: [www.acuitybrands.com/support/warranty/terms-and-conditions](http://www.acuitybrands.com/support/warranty/terms-and-conditions)

**Note:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

Catalog Number
Notes
Type

## AFFINITY®

Premium Die-Cast Architectural Emergency Light

# AFF



without photocell (white)



without photocell (natural aluminum)



with photocell (white)



with photocell (dark bronze)

## MOUNTING

All dimensions are inches (centimeters).




Shipping weight: 3.5 lbs. (1.59 kgs.)

Length: 6 1/2 (16.51)

Depth: 3 27/100 (8.30)

Height: 10 (25.45)

Weight : 3.5 lbs ( 1.59kg)



† Small Battery Chargers Certified in the CA Title 20 Appliance Efficiency Database.



## SELF-POWERED MODELS

### ORDERING INFORMATION

For the shortest lead times, configure product using **bolded options**.

**Example:** AFF PEL DWHGXD UVOLT LTP SDRT WT

Series	Unit Type <sup>1</sup>	Housing Color	Voltage	Battery Type	Automatic Testing	Optics	Options
<b>AFF</b> AFFINITY Premium	<b>PEL</b> Photocell: Normally-ON with internal battery <b>OEL</b> Normally-OFF with internal battery	<b>DWHGXD</b> White textured <b>DBLBXD</b> Black textured <b>DNAXD</b> Natural aluminum <b>DDBTXD</b> Dark bronze textured	<b>UVOLT</b> 120-347VAC, 50/60Hz	<b>LTP</b> Lithium Iron Phosphate	<b>SDRT</b> Self-diagnostics remote test	<b>WT</b> Wide Throw <b>FCT</b> Field configurable throw <sup>2</sup>	<b>CW</b> Cold Weather (-30 - 50°C) <b>BAA</b> Buy America(n) Act Compliant

#### Notes

<sup>1</sup> AFF with internal battery is not remote capable.

**REMOTE MODELS** listed for -40°F to 122°F (-40° to 50°C)

### ORDERING INFORMATION

For the shortest lead times, configure product using **bolded options**.

**Example:** AFF OELR DWHGXD WT

Series	Unit Type	Housing Color	Voltage	Optics	Options
<b>AFF</b> AFFINITY Premium	<b>OELR</b> Remote fixture, Normally OFF (requires external battery source)	<b>DWHGXD</b> White textured <b>DBLBXD</b> Black textured <b>DNAXD</b> Natural aluminum <b>DDBTXD</b> Dark bronze textured	<b>(blank)</b> Universal DC voltage (8-30VDC)	<b>WT</b> Wide Throw <b>FCT</b> Field configurable throw <sup>1</sup>	<b>BAA</b> Buy America(n) Act Compliant


#### Notes

<sup>1</sup> FCT optics ships standard in the WT (wide throw) mode. Upon installation, configuration can be changed to the FCT mode.

**Accessories:** Order as separate catalog number.

RTKIT Remote test kit, up to 40' away (includes goggles, laser and battery)

## AFF SPACING GUIDELINES

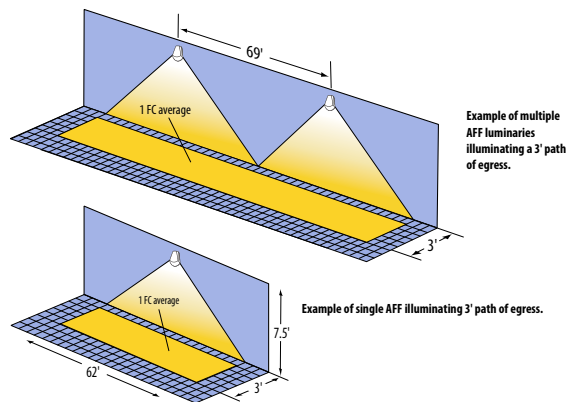


Maximum Spacing Guidelines - AFF (WT)

Mounting Height	Illumination Level	Single Luminaire		Multiple Luminaire		Application Notes *
		3' Path of Egress	6' Path of Egress	3' Path of Egress	6' Path of Egress	
7.5'	1FC Avg	62'	46'	69'	53'	200' Open Space 80/50/20 reflectances
10'		48'	34'	55'	46'	
12'		28'	22'	46'	41'	
14'		6'	N/A	38'	36'	

\* Also meets the additional illumination requirements of NFPA 101: 1FC minimum and max/min ratio of 40:1.

AFF FCT

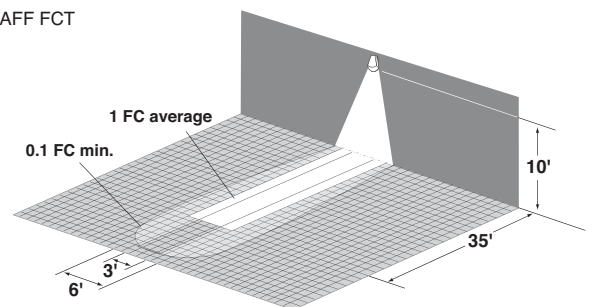

Maximum Spacing Guidelines - AFF (FCT)

Mounting Height	Illumination Level	Single Luminaire		Application Notes *
		3' Path of Egress	6' Path of Egress	
7.5'	1FC Avg	24'	23'	200' Open Space 80/50/20 reflectances
10'		35'	35'	
12'		37'	31'	
14'		31'	N/A	

\* Also meets the additional illumination requirements of NFPA 101: 1FC minimum and max/min ratio of 40:1.

## SPECIFICATIONS

### Electrical: Primary Circuit

Unit Type	Battery Type	Input Voltage(V)	Input Current(A)	Watts(W)
PEL WT	LTP	120-347	0.053-0.086	11.28
	LTP CW	120-347	0.089-0.167	20.39
PEL FCT	LTP	120-347	0.053-0.086	11.28
	LTP CW	120-347	0.089-0.167	20.39
OEL WT	LTP	120-347	0.025-0.032	2.50
	LTP CW	120-347	0.075-0.097	11.60
OEL FCT	LTP	120-347	0.025-0.032	2.50
	LTP CW	120-347	0.075-0.097	11.60
OELR WT	N/A	8-30	0.248 - 1.225	8.57*
OELR FCT	N/A	8-30	0.254 - 1.168	8.22*

\*OELR watts data is in addition to the lamp heads on the product

### BATTERY

Lithium Iron Phosphate					
Type	Voltage	Typical Shelf Life <sup>1</sup>	Typical Life <sup>1</sup>	Maintenance <sup>2</sup>	Temperature range <sup>3,4</sup>
STD	12.8V	1 year	6-8 years	none	32 - 122°F (0 - 50°C)
CW	12.8V	1 year	6-8 years	none	-22 - 122°F (-30 - 50°C)

#### Notes

- 1 At 77°F (25°C).
- 2 Battery life is negatively impacted by many variables including temperature, charging rates, number of cycles and deep discharges due to long periods of time without AC power.
- 3 All life safety equipment, including emergency lighting for path of egress must be maintained, serviced, and tested in accordance with all National Fire Protection Association (NFPA) and local codes. Failure to perform the required maintenance, service, or testing could jeopardize the safety of occupants and will void all warranties.
- 4 Temperature range where unit will provide capacity for 90 minutes. Higher and lower temperatures affect life and capacity. See option packages for expanded temperature ranges.