# LOCATION / KEY MAP

SCALE: I" = 1000'±


# CHASE!


# PROPOSED BANK WITH REMOTE DRIVE-UP ATM

SITE PLAN

**FOR** 

MAP 150A, LOTS 1 & 15 576 METACOM AVENUE (RHODE ISLAND ROUTE 136) TOWN OF BRISTOL, BRISTOL COUNTY, RHODE ISLAND

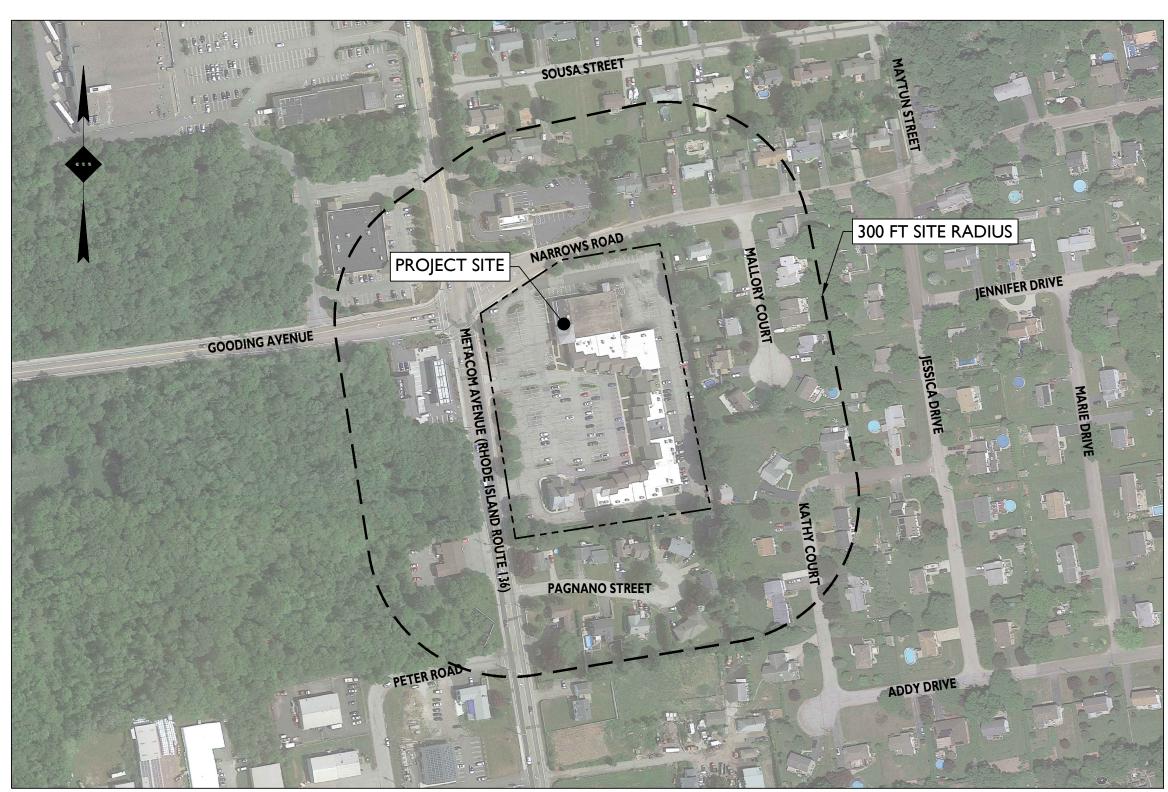

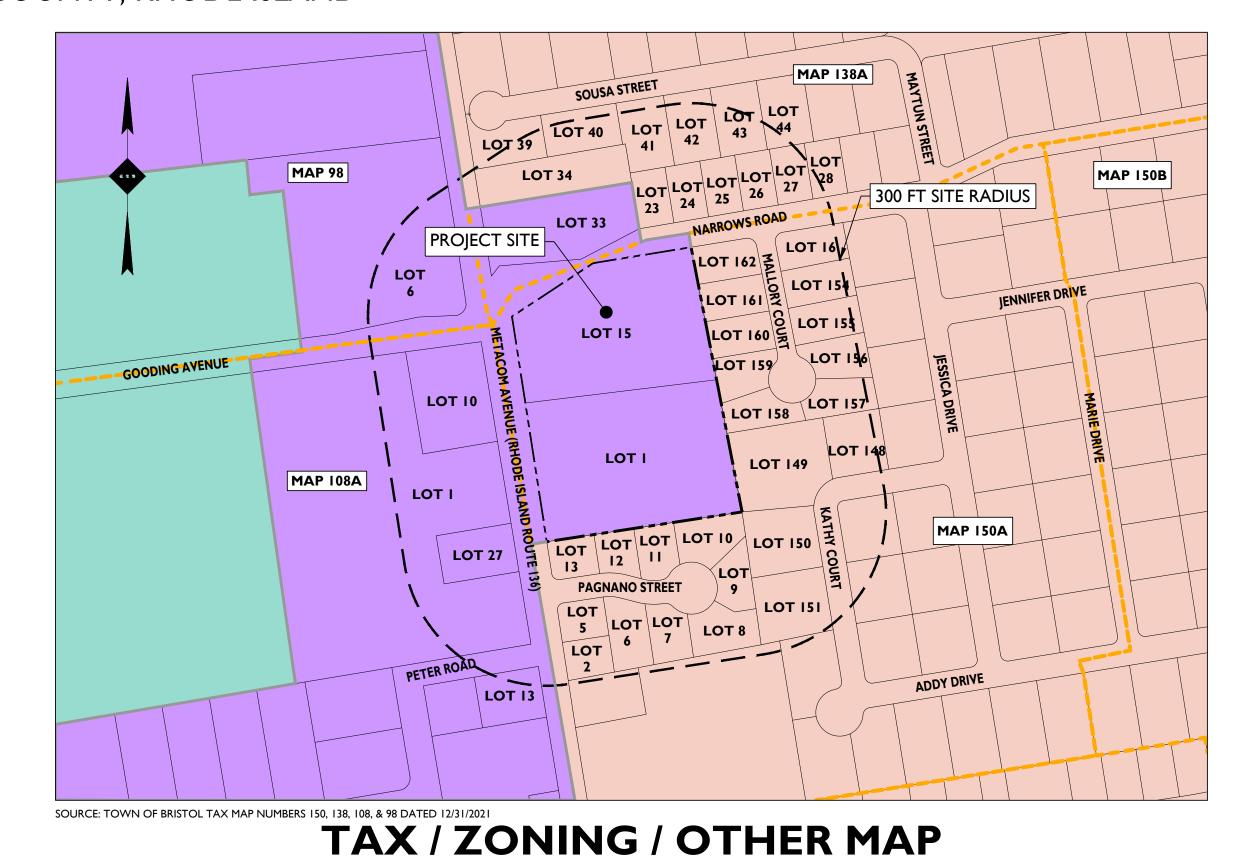

SOURCE: GOOGLE EARTH PRO, DATED 6/6/2022

## **AERIAL MAP**

SCALE:  $I'' = 200' \pm$ 

#### **PLAN REFERENCE MATERIALS:**

- I. THIS PLAN SET REFERENCES THE FOLLOWING DOCUMENTS **INCLUDING, BUT NOT LIMITED TO:**  BOUNDARY, PARTIAL TOPOGRAPHIC & UTILITY
  - SURVEY OF THE SUBJECT PROPERTY, PREPARED BY CONTROL POINT ASSOCIATES, INC., AND DATED 1/13/2023.
  - ARCHITECTURAL PLANS
  - **GEOTECHNICAL REPORT**
  - AERIAL MAP OBTAINED FROM GOOGLE EARTH PRO, **DATED 6/6/2022**
  - KEY MAP OBTAINED FROM USGS QUADRANGLE MAP 7.5 MINUTE SERIES, BRISTOL RI-MA, DATED 2021 & USGS QUADRANGLE MAP 7.5 MINUTE SÉRIES, FALL RIVER RI-MA,
  - TAX & ZONING MAPS OBTAINED FROM TOWN OF BRISTOL GIS, DATED 12/31/2021
- 2. ALL REFERENCE MATERIAL LISTED ABOVE SHALL BE CONSIDERED A PART OF THIS PLAN SET AND ALL INFORMATION CONTAINED WITHIN THESE MATERIALS SHALL BE UTILIZED IN CONJUNCTION WITH THIS PLAN SET. THE CONTRACTOR IS RESPONSIBLE TO OBTAIN A COPY OF EACH REFERENCE AND REVIEW IT THOROUGHLY PRIOR TO THE START OF

## PLANS PREPARED BY:



Rutherford, NJ · New York, NY · Boston, MA Princeton, NJ · Tampa, FL · Detroit, MI www.stonefieldeng.com

I Beacon Street, 15 Floor, Boston, MA 02108 Phone 617.203.2076

# SCALE: $I'' = 200' \pm$

### R-15 - RESIDENTIAL (15,000 SF LOT SIZE)

**ZONING LEGEND** 





OS - OPEN SPACE

Know what's **below** Call before you dig.

| SHEET INDI               | EX        |
|--------------------------|-----------|
| DRAWING TITLE            | SHEET #   |
| COVER SHEET              | C-I       |
| EXISTING CONDITIONS PLAN | C-2       |
| DEMOLITION PLAN          | C-3       |
| SITE PLAN                | C-4       |
| LIGHTING PLAN            | C-5       |
| CONSTRUCTION DETAILS     | C-6 - C-7 |

|   |     |    | SPECIAL PERMIT SUBMISSION | SPECIAL PERMIT SUBMISSION | REVISED DRIVE-THRU CONCRETE MAT | ADDENDUM #1 | REVISED PER ADA ENTRANCE LANDING | REVISED PER ADA PARKING IMPROVEMENTS | ISSUED FOR REVIEW | DESCRIPTION |  |
|---|-----|----|---------------------------|---------------------------|---------------------------------|-------------|----------------------------------|--------------------------------------|-------------------|-------------|--|
|   |     |    | EB                        | EB                        | JJR                             | JJR         | JJR                              | JJR                                  | JJR               | ВҮ          |  |
|   |     |    | 09/08/2023                | 08/04/2023                | 5/3/2023                        | 4/10/2023   | 4/5/2023                         | 3/29/2023                            | 3/3/2023          | DATE        |  |
|   |     |    | 7                         | 9                         | 2                               | 4           | 3                                | 2                                    | -                 | ISSUE       |  |
| N | ΙΛΤ | ۸D | ^חח                       | \/ <b>F</b> F             | \ <b>F</b> \                    | D C         | ANI                              | CTD                                  |                   | riani       |  |

#### NOT APPROVED FOR CONSTRUCTION



JOSHUA H. KLINE, P.E. RHODE ISLAND LICENSE No. 13607




LICENSED PROFESSIONAL ENGINEER


SCALE: AS SHOWN PROJECT ID: BOS-220076


**COVER SHEET** 


DRAWING:

C-I

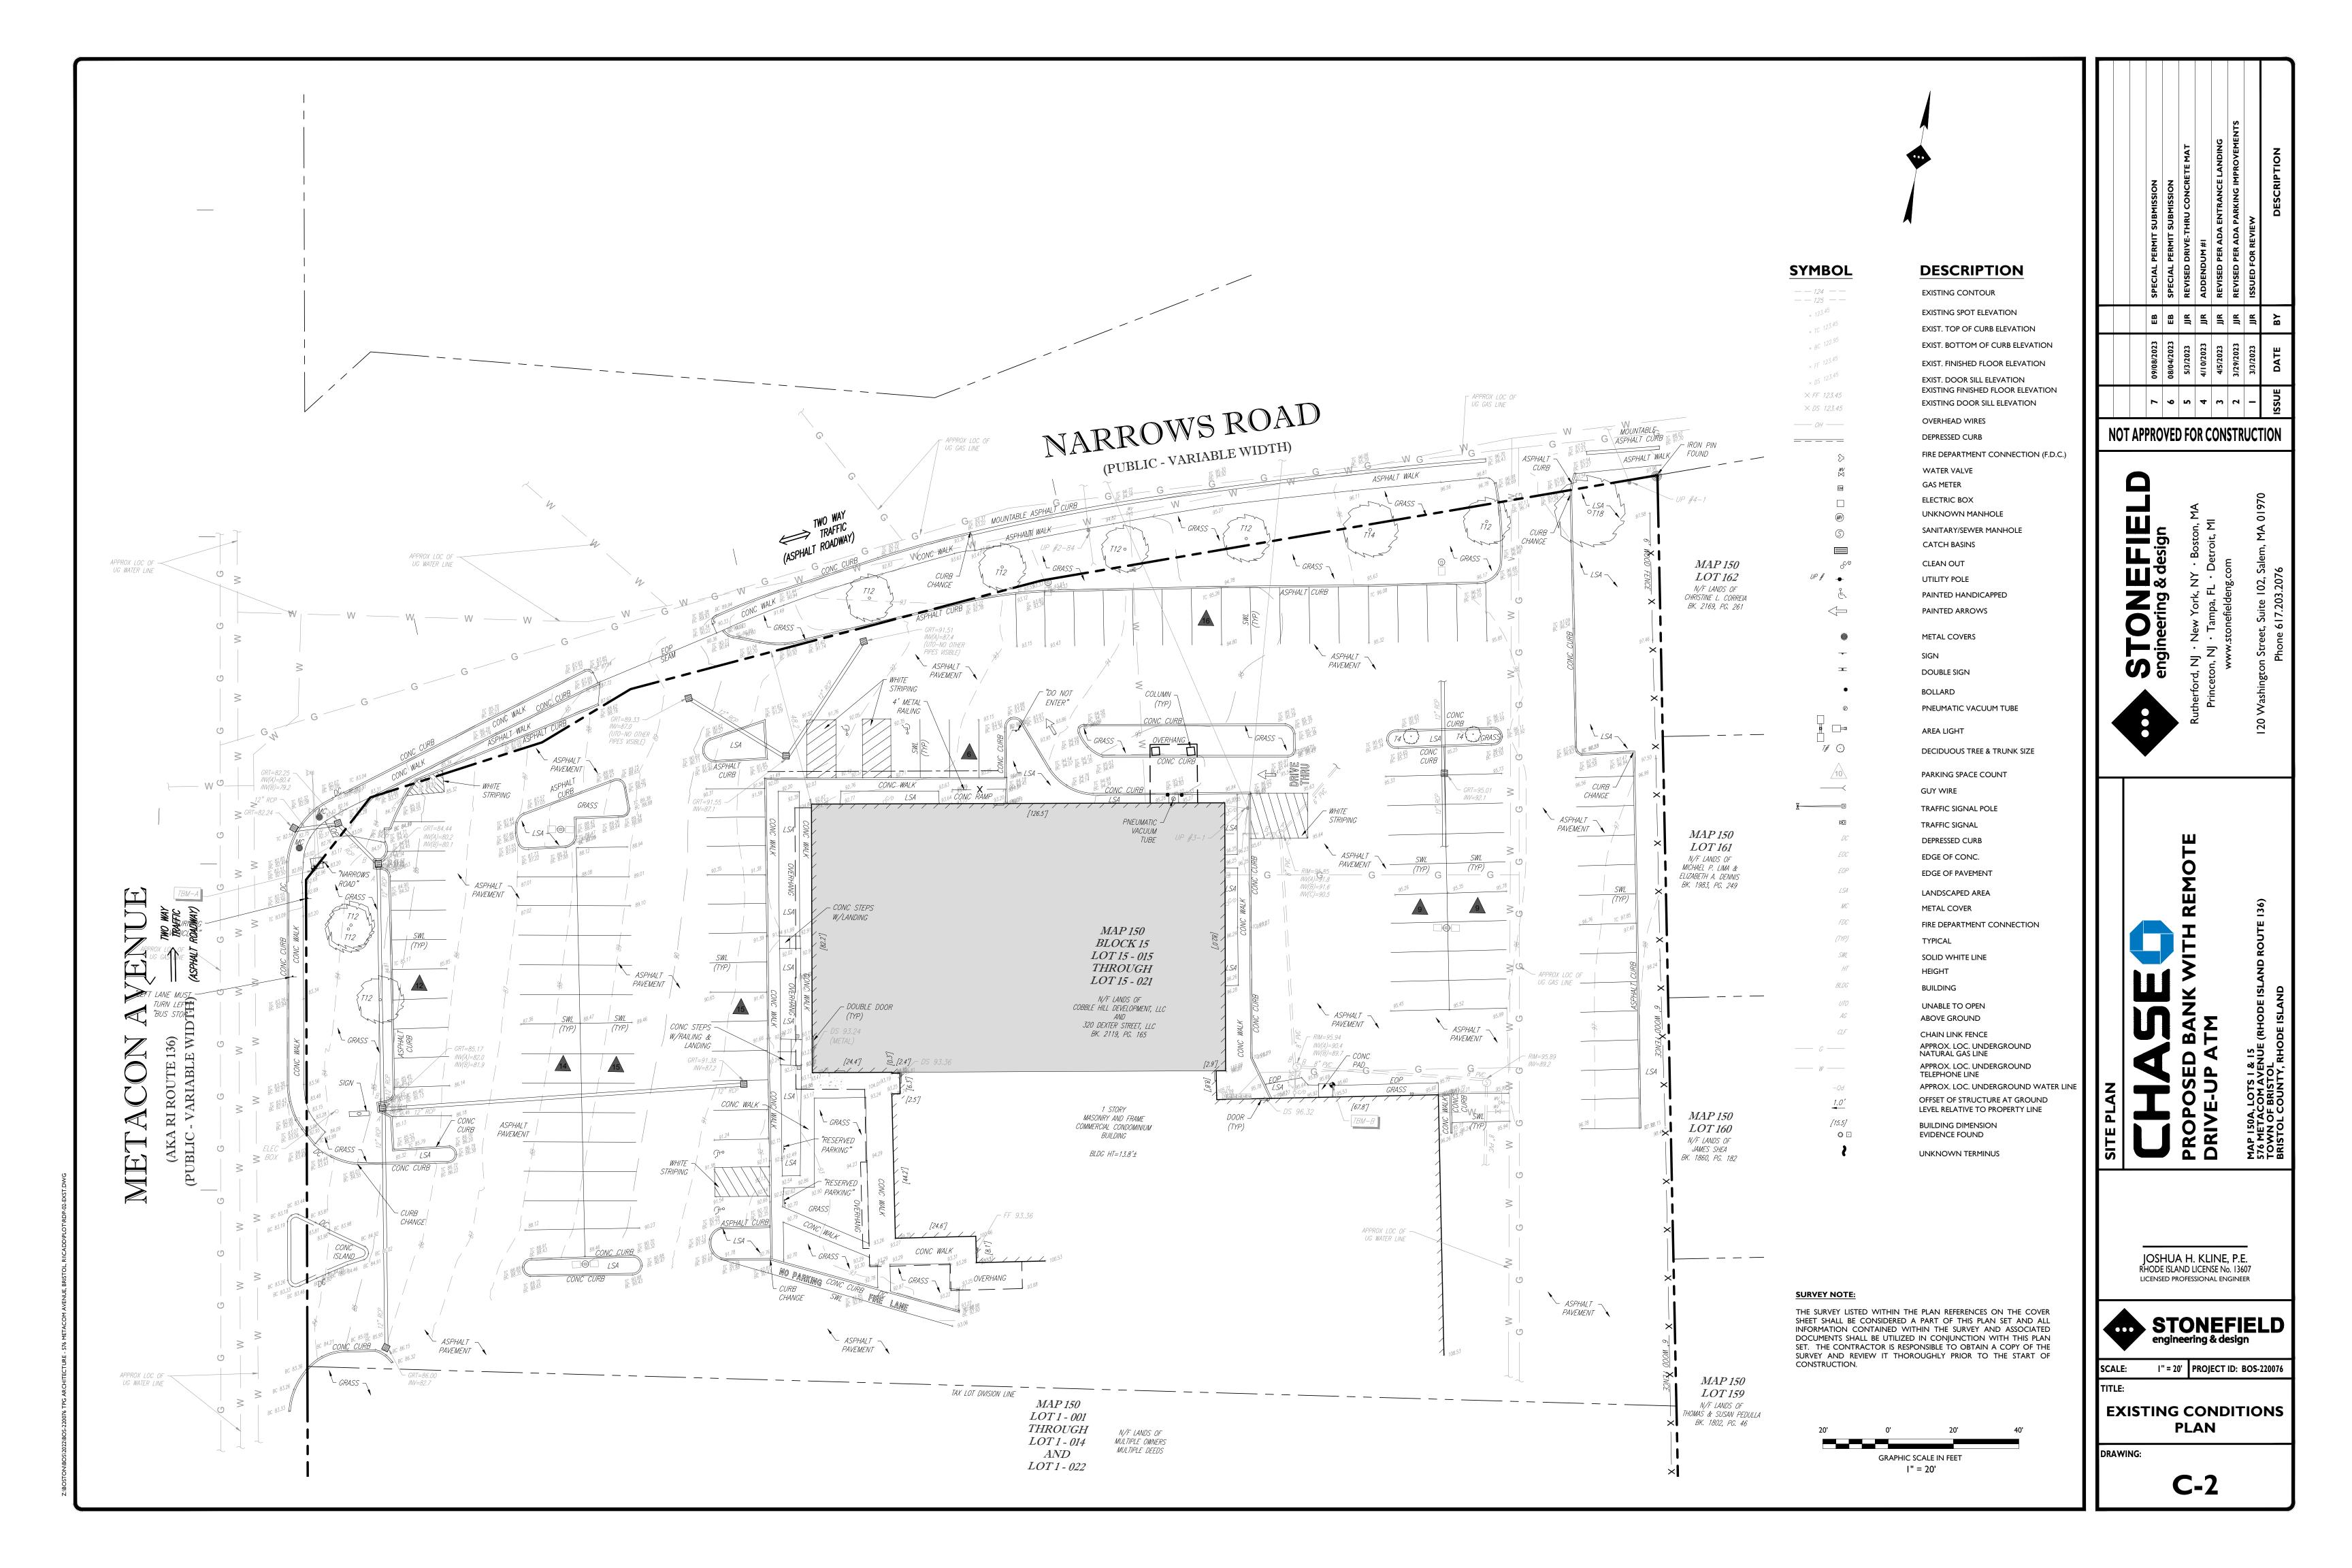

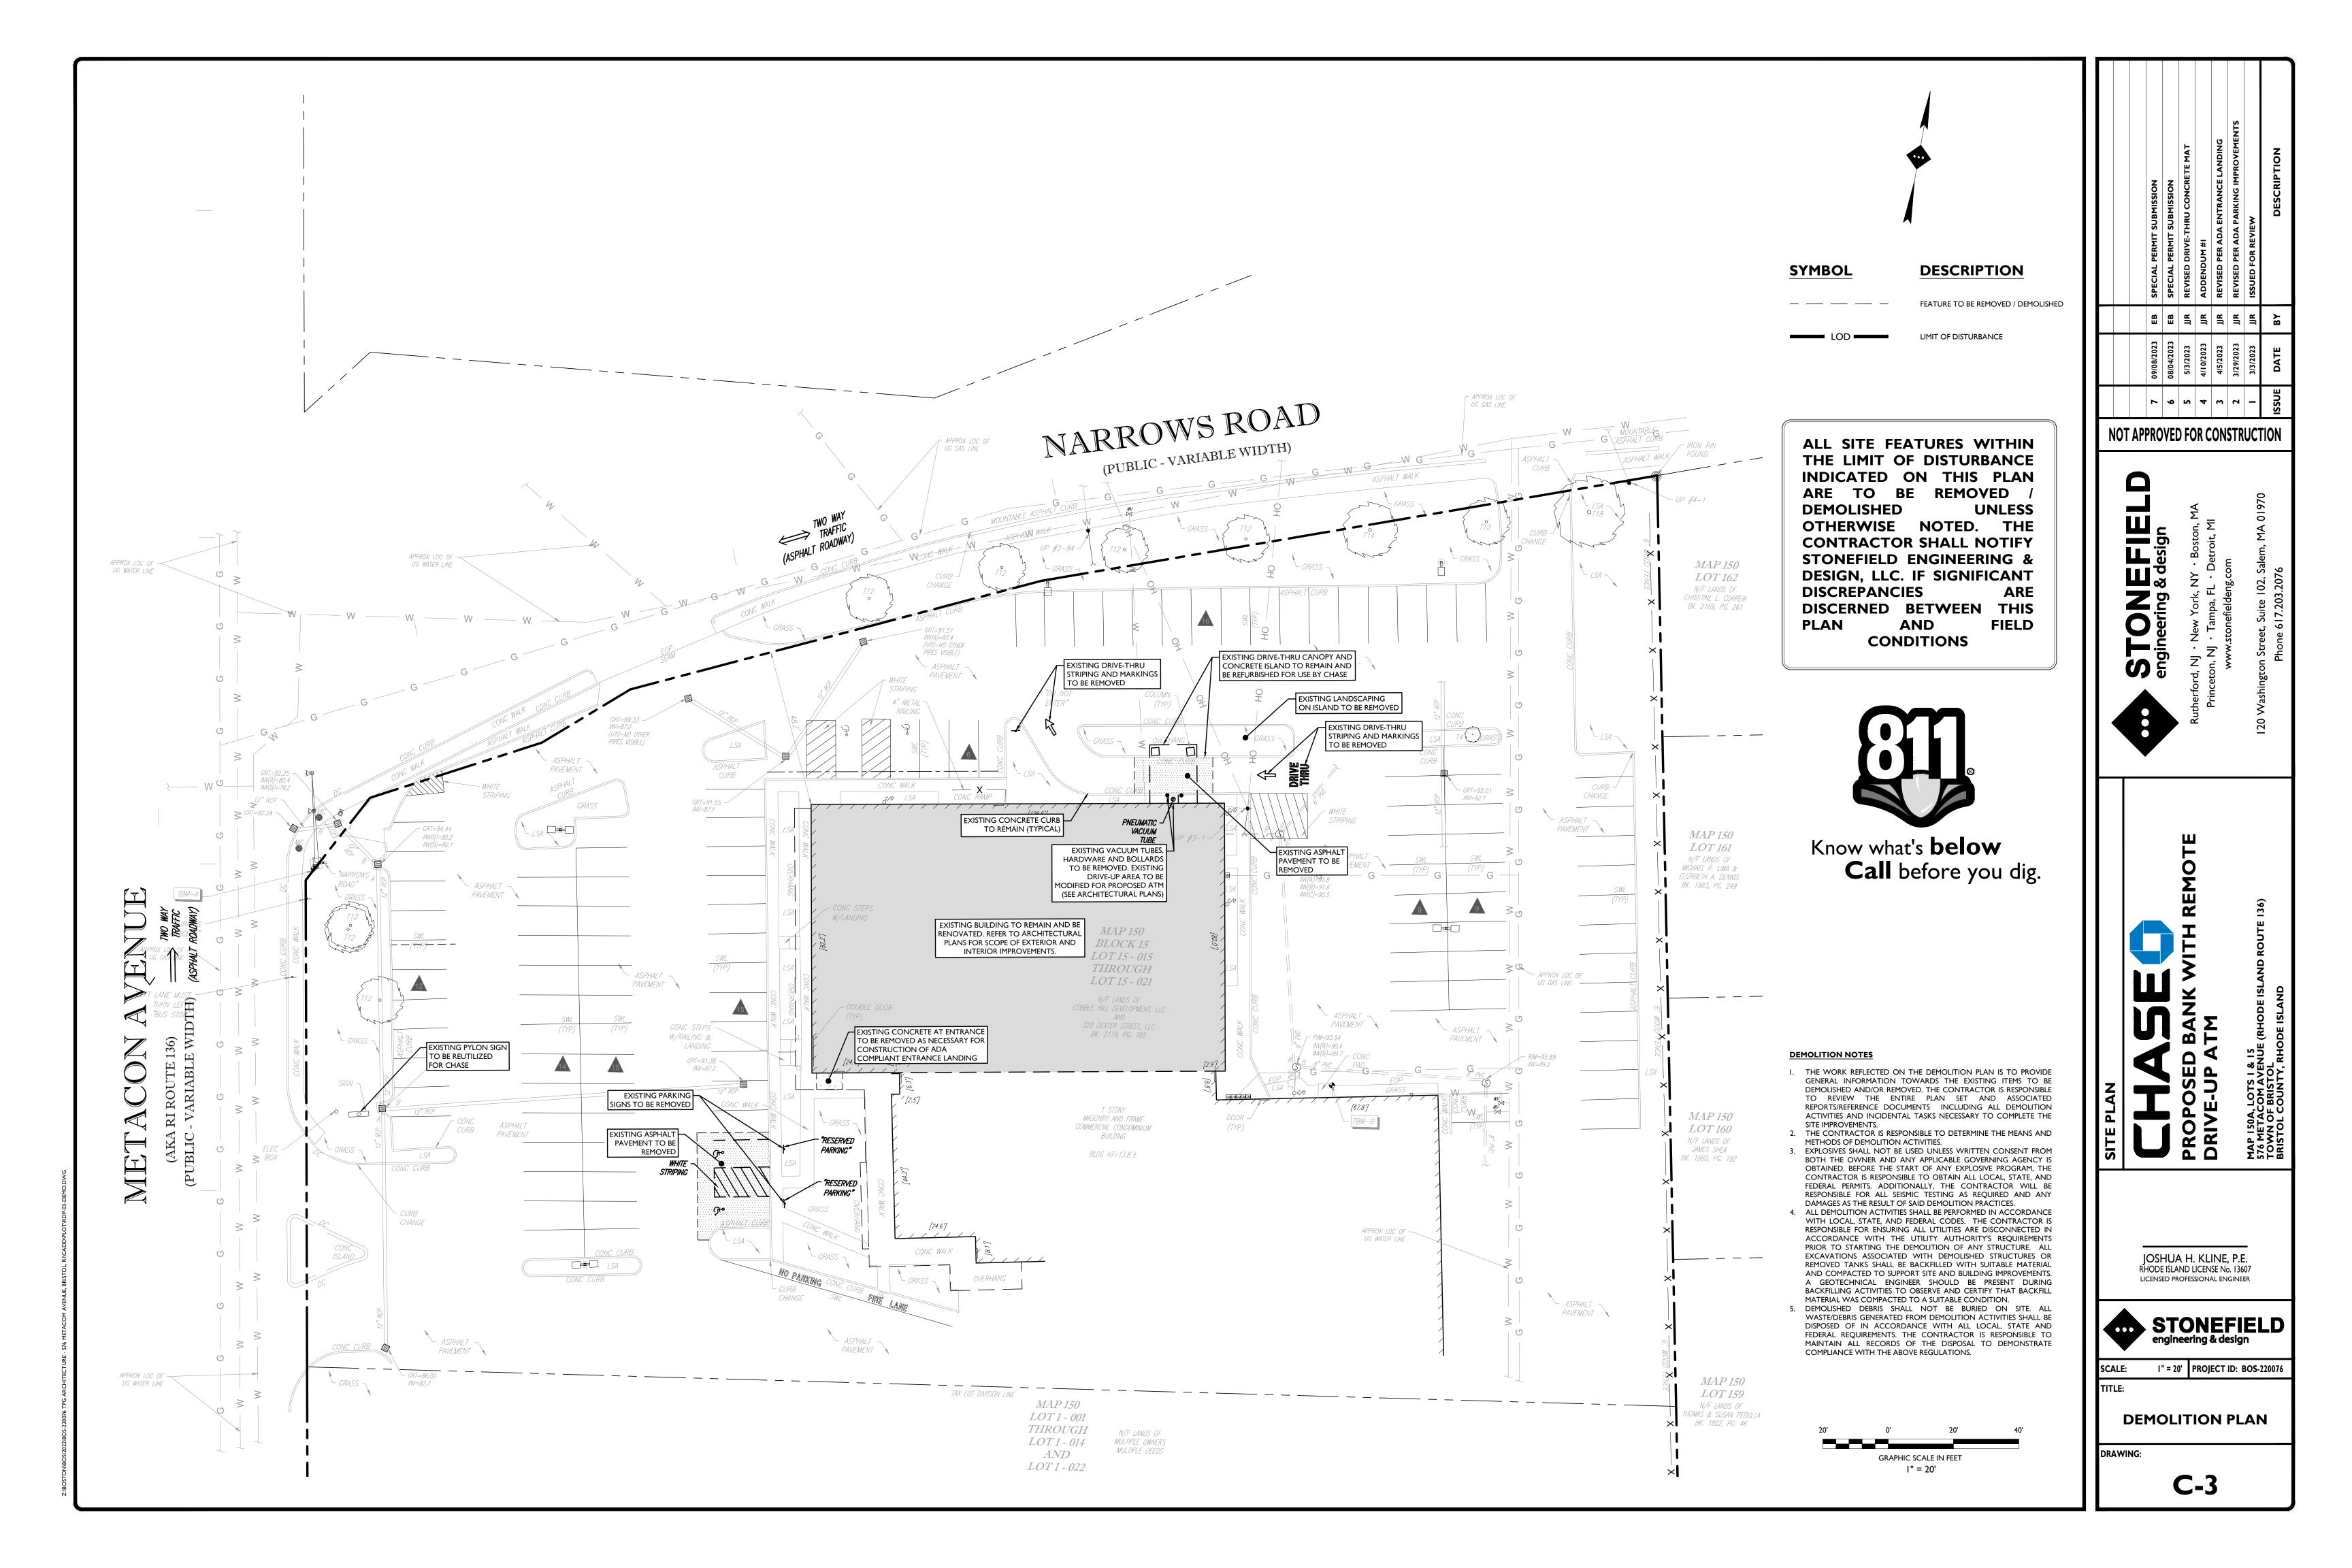

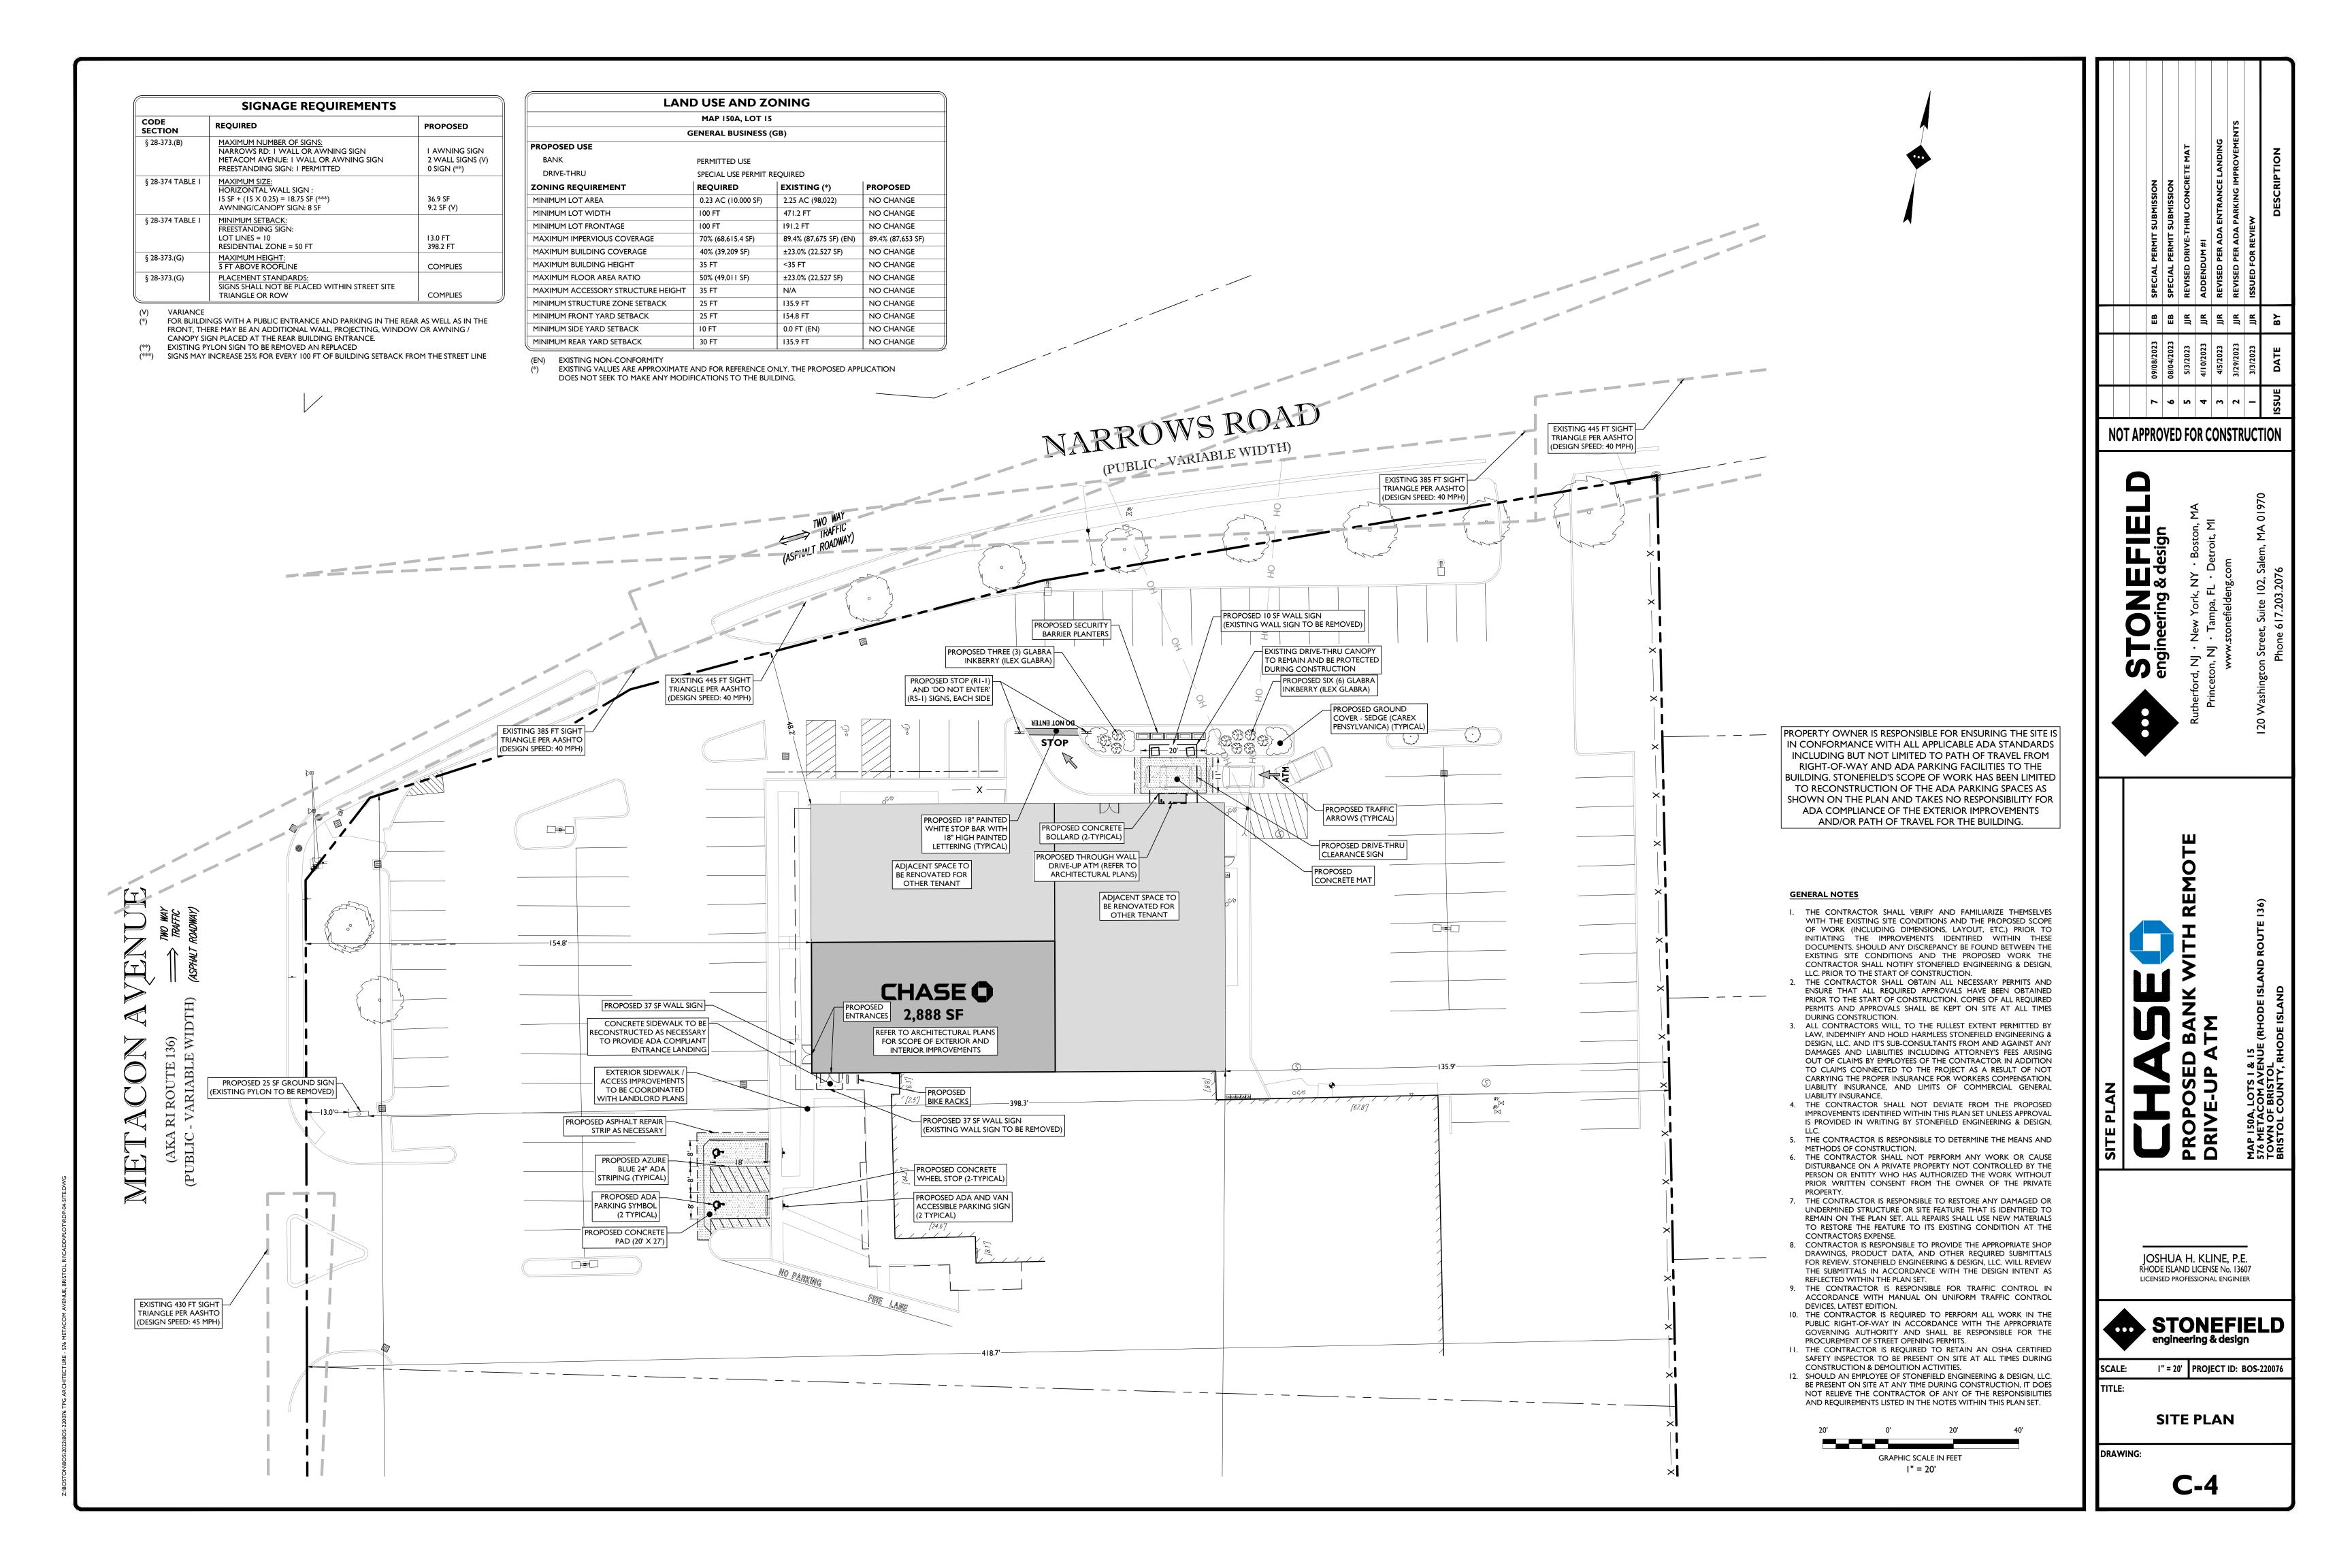

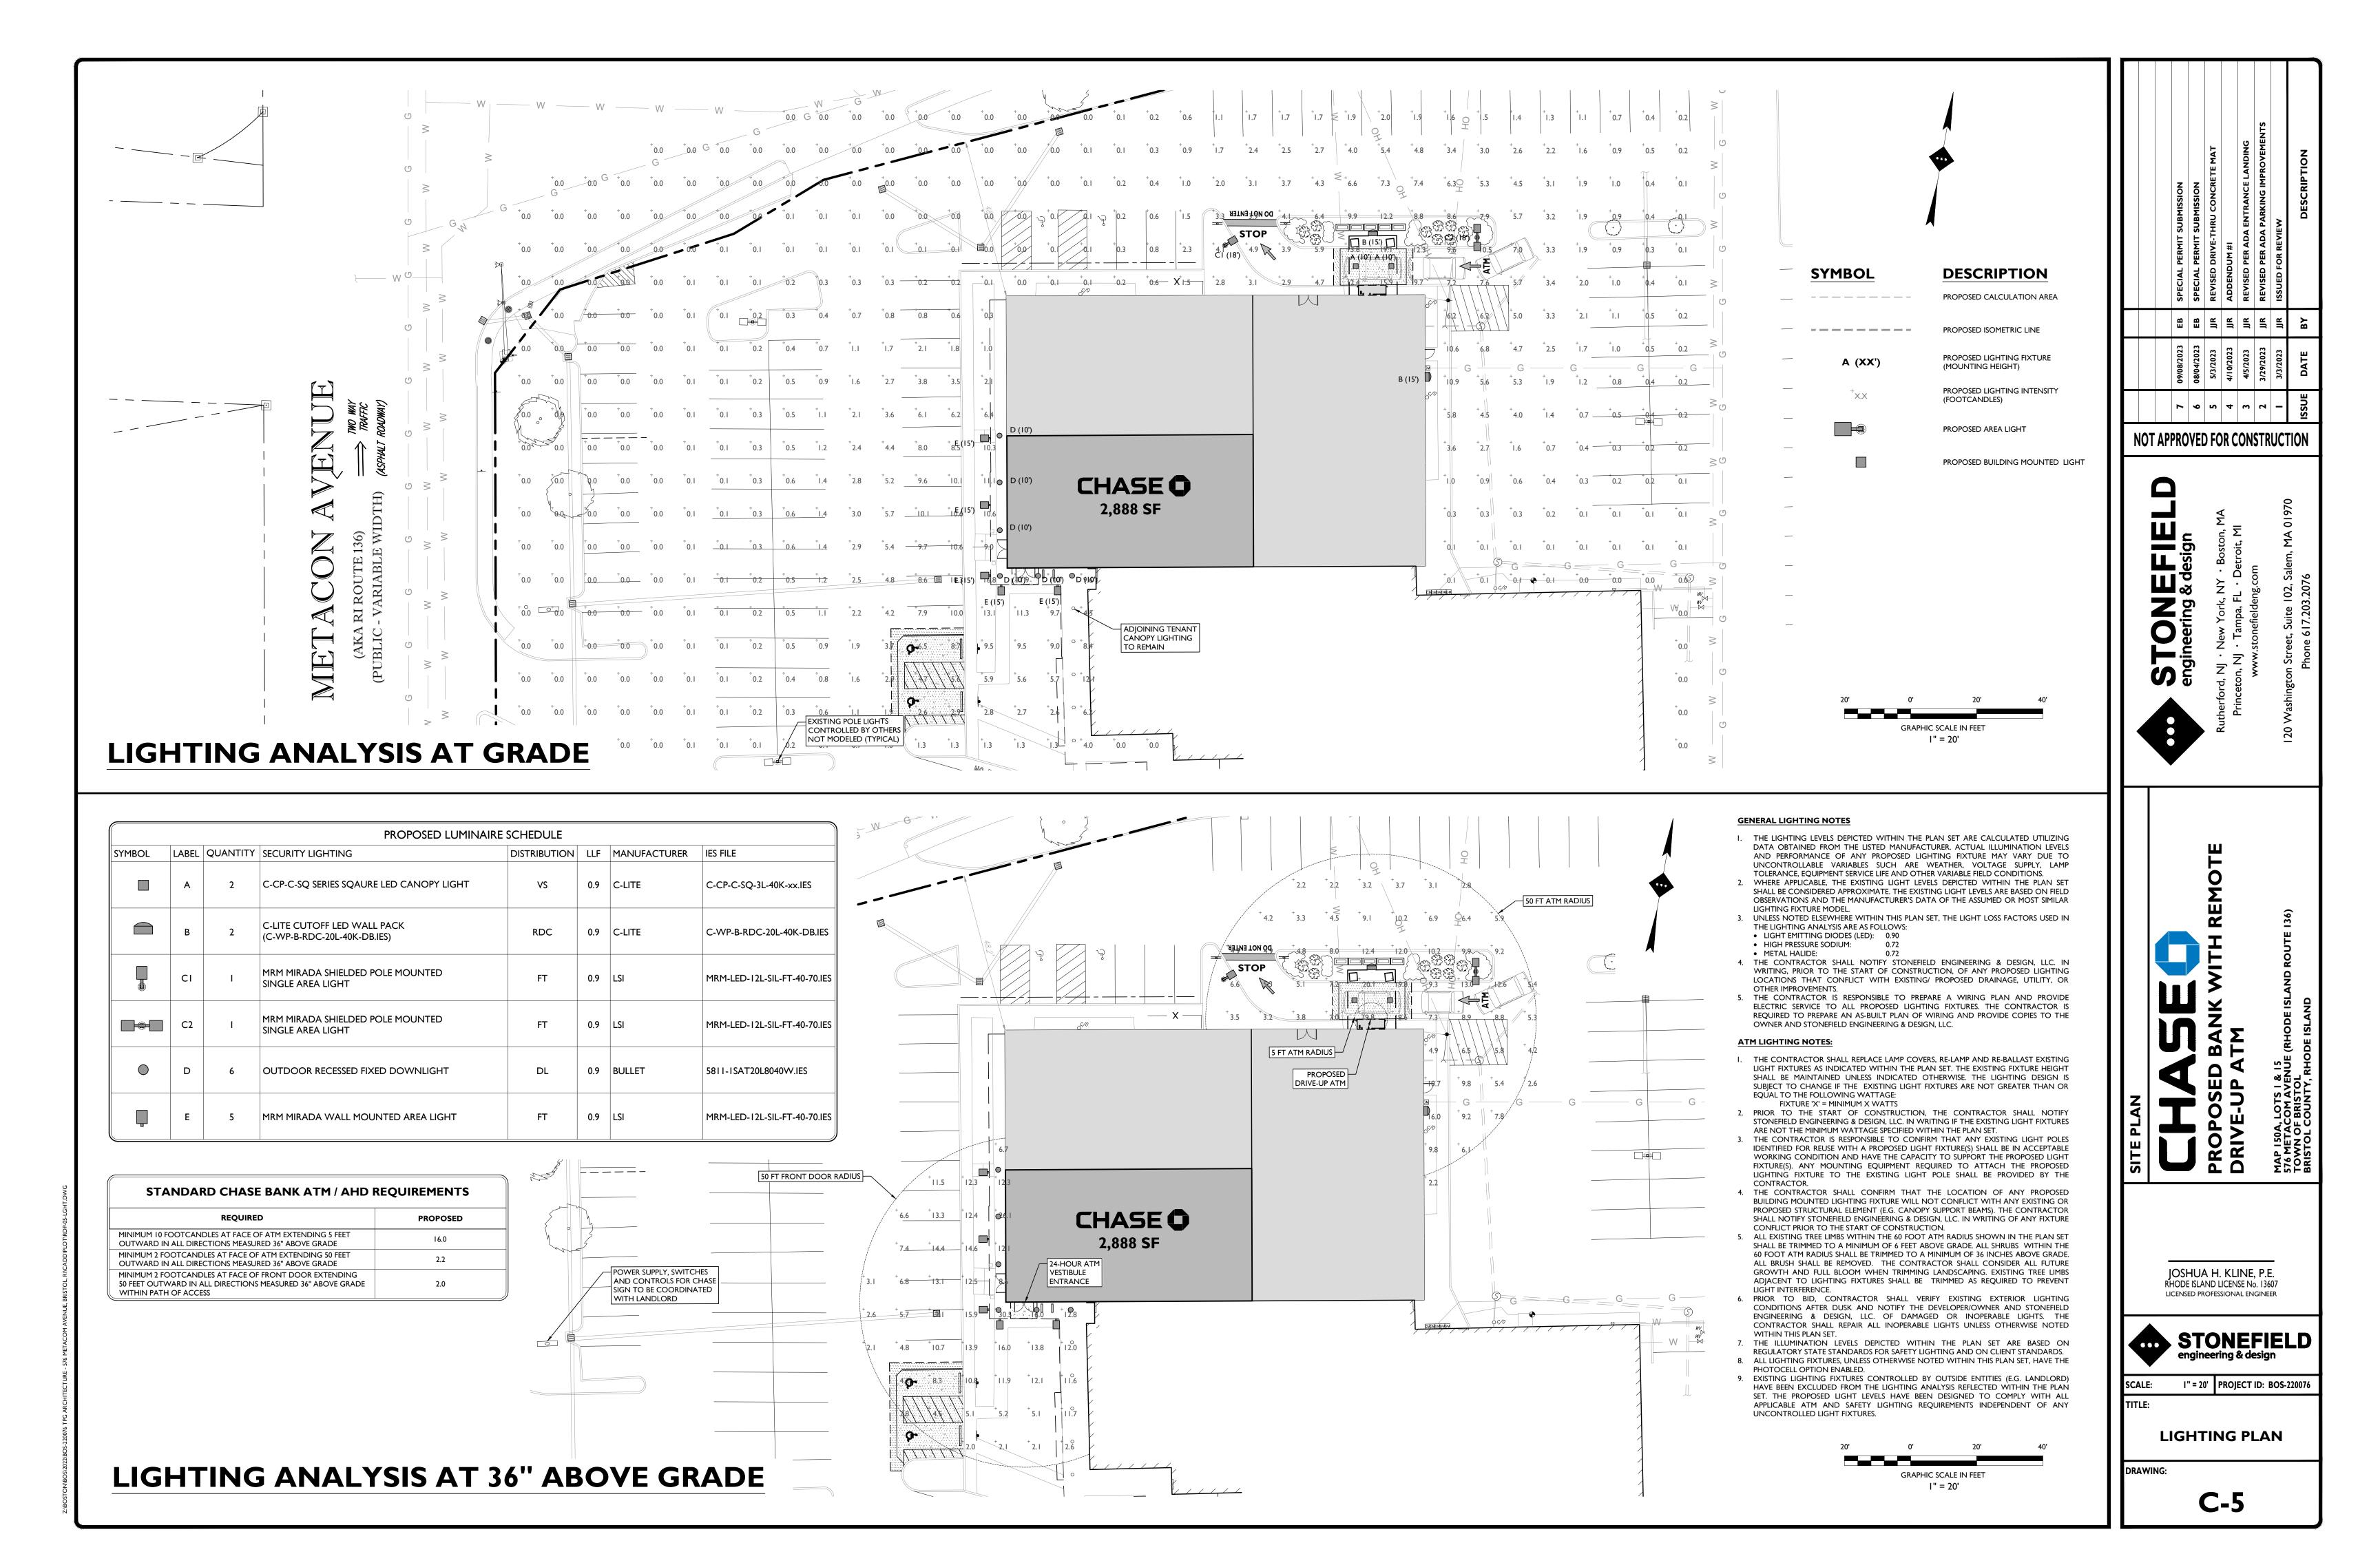



AFFORDABLE, ENERGY EFFICIENT AND MADE TO LAST Our C-CP-C-SQ Series Square LED Canopy Light features a highly durable design and delivers affordability and energy efficiency to any canopy application. It comes cULus Listed for wet locations and is DLC Premium 5.1 Listed, delivering up to 144 LPW. This means it delivers even more savings on monthly energy

bills than less energy efficient products. It's a perfect option

for added security at entryways and around perimeters.



#### PRODUCT SPECIFICATIONS

 Initial Delivered Lumens: 3800 (3L); 4900 (4L); 7000 (7L) ; 13,000 (12L)

 CRI: ≥ 70 CCT: Neutral White 4000K, Cool White 5000K

• Input Power: 27W (3L); 38W (4L); 53W (7L); 90W (12L) Dimmable: 0-10V to 10%

• Estimated L<sub>70</sub> Lifetime @ 25°C: >54,000 hours Power Factor: > 0.9 • Total Harmonic Distortion: < 20% at full load Limited Warranty: 5-Years\*

• 3L & 4L: Replaces 100W PSMH; 7L: Replaces 150W PSMH/175W MH: 12L: Replaces 250W PSMH • Operating Temperature Range: -22°F to 104°F (-30°C to 40°C) • For use under covered ceilings only

| FEATURES   | DURABLE   | RECOMMENDED USE | INPUT VOLTAGE                                |
|--|---|-----------------|--|
| <ul> <li>Uses up to 80% less energy than<br/>comparable PSMH fixtures</li> <li>Type VS distribution pattern</li> </ul> | Polyester powder-coat finish provides corrosion protection for long-lasting color     UV-stabilized acrylic lens designed to last     Die-cast aluminum housing | Littiyyyays     | • Universal (120V through<br>277V Operation) |
|  |   |                 |  |

#### **ORDERING INFORMATION** Example: C-CP-C-SQ-12L-50K-DB

| C-CP-C  | SQ                  |  |   |   |  |
|---------|---------------------|--|---|---|--|
| PRODUCT | SHAPE               | LUMEN PACKAGE  |   | CCT   | COLOR  |
| C-CP-C  | <b>SQ</b><br>Square | 3L<br>3800 Lumens<br>27W<br>4L<br>4900 Lumens<br>38W | <b>7L</b><br>7000 Lumens<br>53W<br><b>12L</b><br>13,000 Lumens<br>90W | 40K<br>Neutral White (4000K)<br>50K<br>Cool White (5000K) | <b>DB</b><br>Dark Bronze<br><b>WH</b><br>White |



For informational purposes only. Content is subject to change. \*See lighting.cree.com/warranty for details

# AREA LIGHT FIXTURE 'A' SPECIFICATIONS

NOT TO SCALE

- MUTCD STANDARD SIGN (SIZE, SHAPE AND COLORS). SEE SIGN CHART. U-CHANNEL

| M.U.T.C.D.             | TEVT            | СО     | LOR        | SIZE OF SIGN<br>(WIDTH X | TYPE OF<br>MOUNT |
|------------------------|-----------------|--------|------------|--------------------------|------------------|
| NUMBER                 | TEXT            | LEGEND | BACKGROUND | HEIGHT)                  |                  |
| STOP SIGN<br>(RI-I)    | STOP            | RED    | WHITE      | 36"x36"                  | GROUND           |
| DO NOT ENTER<br>(R5-I) | DO NOT<br>ENTER | RED    | WHITE      | 30"×30"                  | GROUND           |

I. ALL SIGNS SHALL BE IN ACCORDANCE WITH THE FEDERAL HIGHWAY ADMINISTRATION (FHWA) MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (MUTCD), EXCEPT AS NOTED. 2. ALL SIGNS SHALL BE MOUNTED AS TO NOT OBSTRUCT THE SHAPE OF "STOP" (R1-1) AND "YIELD" (R1-2) SIGNS.

#### SIGN POST DETAIL

NOT TO SCALE

C-LITE LEB LIGHTING C-WP-B-RDC Series Cutoff LED Wall Pack Replaces up to 400W PSMH OFF THE WALL SAVINGS Our cULus listed C-Lite Cutoff LED Wall Pack delivers up to 21,100 lumens and is available in 4000K and 5000K. It's dimmable, for maximum energy savings, and comes with a 5-year limited warranty. It also comes with a DLC Premium

PRODUCT SPECIFICATIONS

5.1 Listing.

OVERVIEW • Initial Delivered Lumens: 1500 - 21,000 Lumens

 Estimated L70 Lifetime @ 25°C: > 100,000 hours • CRI:≥70 CCT: 4000K, 5000K Power Factor: > 0.9

· Mounting height: 12 - 25 feet • Input Power: 12W/22W/47W/77W/144W Dimmable: Yes, 0-10V

• Total Harmonic Distortion: < 20% Limited Warranty: 5 Years\* Replaces up to 400 PSMH

• Operating Temperature Range: -40°F to 104°F (-40°C to 40°C)

| TEMOLES  | HECOMMENDED COL   | IIII OT TOLINGE                           |
|--|---|---|
| Replaces up to 400W PSMH<br>JkV Surge suppression<br>Contractor friendly install | <ul><li>Security</li><li>Perimeter</li><li>Commercial</li></ul> | • Universal (120V through 277V Operation) |
|  |   |   |


#### ORDERING INFORMATION Example: C-WP-B-RDC-1L-40K-DB

| C-WP            | В      | RDC                 |  |         |   | DB                       |  |
|-----------------|--------|---------------------|--|---------|---|--------------------------|--|
| PRODUCT         | SERIES | TYPE                | LUMEN PACKAGE  |         | CCT   | COLOR                    |  |
| C-WP            | В      | RDC<br>Round Cutoff | 1L<br>1500L<br>12W<br>3L<br>3000L (4000K), 3100L<br>20,900L (4000K), |         | 40K<br>4000K<br>(Neutral White)<br>50K<br>5000K<br>(Cool White) | DB<br>Dark Bronze        |  |
| CERTIFICATIONS- |        |                     |  |         |   |                          |  |
|                 |        |                     |  | C UL US |   | SYEAR DIMMABLE SWARRANTY |  |

## AREA LIGHT FIXTURE 'B' SPECIFICATIONS

NOT TO SCALE

For informational purposes only. Content is subject to change. \*See lighting.cree.com/warranty for details

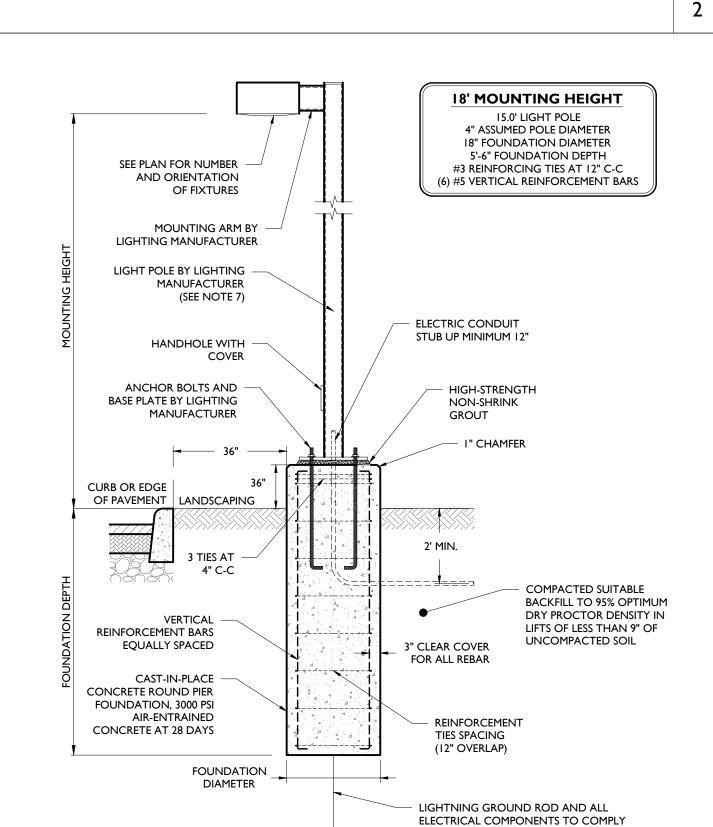

#### LIGHT POLE 'E' INSTALLATION DETAIL

NOT TO SCALE

I. MINIMUM SOIL BEARING PRESSURE OF 1500 PSF, SOIL FRICTION ANGLE OF 30 DEGREES, AND SOIL DRY UNIT WEIGHT OF 120 PCF SHALL BE CONFIRMED IN THE FIELD BY A QUALIFIED PROFESSIONAL. 2. CAST-IN-PLACE CONCRETE SHALL BE CONSOLIDATED USING VIBRATOR.

ALL REBAR TO BE NEW GRADE 60 STEEL. 4. PRE-CAST PIERS ACCEPTABLE UPON WRITTEN APPROVAL OF SHOP DRAWING BY ENGINEER.

CONCRETE TO BE INSTALLED A MINIMUM OF 7 DAYS PRIOR TO INSTALLING LIGHT POLE. POURED CONCRETE MIX REQUIRED TO OBTAIN 80% OF DESIGN STRENGTH PRIOR TO INSTALLING LIGHT POLE. 6. CONCRETE SHALL HAVE A MAXIMUM SLUMP OF 4" (WITHIN I" TOLERANCE). POLE SHALL BE RATED FOR 10 MPH HIGHER THAN MAXIMUM WIND SPEED 33FT ABOVE GROUND FOR THE AREA BASED

ON ANSI/ASCE 7-93. 8. POUR TO BE TERMINATED AT A FORM. WORK SHALL CONFORM TO ACI BEST PRACTICES FOR APPROPRIATE TEMPERATURE AND WEATHER CONDITIONS. 10. CONTRACTOR TO TEMPORARILY SUPPORT ADJACENT SOIL AND STRUCTURES DURING EXCAVATION IF REQUIRED.

SIL - Silicone 2 - Type 2 3 - Type 3 5W - Type 5 Wide FT - Forward Throw R - Optics rotated right 90° FTA - Forward Throw Automotive AM - Automotive Merchandise Custom Lumen Color Temp 40 - 4.000 CCT BRZ - Dark Bronze IH - Integral Houseside Shield<sup>2</sup>
IL - Integral Louver (Sharp Spill Light Cutoff)<sup>2</sup> GMG - Gun Metal Gray 30 - 3,000 CCT AMB - Phosphor Converted Amber 12 GPT - Graphite MSV - Metallic Silver PLP - Platinum Plus SVG - Satin Verde Green Lutron Limelight Controls
LLC – LimeLight Integral Wireless Radio Control by Lutron<sup>4</sup>
LLCS1 – Limelight Integral Wireless Radio Control and PIR Motion/ Stand-Alone Controls (Blank) - None Wireless Controls System

ALSC - Airl ink Synanse Con MSBT1-Integral Bluetooth™ Motion and Photocell Sensor
(8-24 MH)\*

IMSBT2-Integral Bluetooth™ Motion and Photocell Sensor
(8-24 MH)\*

IMSBT2-Integral Bluetooth™ Motion and Photocell Sensor
(25-40 MH)\*

Button Type Photocells

LLCS1 — Limeight Integral Wireless Radio Control and PIR Motion/
Daylight Sensor by Lutron 16-30\* mt height\*

LLCS3 — Limeight Integral Wireless Radio Control and PIR Motion/
Daylight Sensor by Lutron 14-30\* mt height\* ALSC - AirLink Synapse Control System
ALSCH - AirLink Synapse Control System Host / Satellite <sup>3</sup>
ALSCHO2 - AirLink Synapse Control System with 12-20' Motion Sensor
ALSCHS02 - AirLink Synapse Control System Host / Satellite with 12-20' Motion Sensor <sup>3</sup>
ALSCHS04 - AirLink Synapse Control System Host / Satellite with 20-40' Motion Sensor <sup>3</sup>
ALSCHS04 - AirLink Synapse Control System Host / Satellite with 20-40' Motion Sensor <sup>3</sup>
ALBCS1 - AirLink Blue Wireless Motion & Photo Sensor Controller (8-24' mounting height)
ALBCS2 - AirLink Blue Wireless Motion & Photo Sensor Controller (25-40' mounting height) Button Type Photocells PCI120 - 120V PCI208-277 - 208 -277V Accessory Ordering Information<sup>7</sup> Controls Accessories PC120 Photocell for use with CR7P option (120 Universal Mounting Brack PC208-277 Photocell for use with CR7P option (208V, 240V, 2 Adjustable Slip Fitter (2" - 2 3/8" Ter Twist Lock Photocell (480V) for use with CR7P Quick Mount Pole Bracket (Square Po AirLink 5 Pin Twist Lock Controller® AirLink 7 Pin Twist Lock Controller® Wall Mount Bracket Shorting Cap for use with CR7P Wood Pole Bracket (6" Minimum Pole Diameter) Order Number FOOTNOTES:

1. Custom lumen and wattage packages at standard tolerances but not DLC listed. Not available in HV.
 IMSBT is field configurable via the LSI app that can be downloaded from your smartphone? native app store.

Control device or shorting cap must be ordered separately. See Accessory Ordering Information. LSI Industries Inc. 10000 Alliance Rd. Cincinnati, OH 45242 • www.lsicorp.com (513) 372-3200 • @2020 I SI Industries Inc. All Diable Decembed Cyrels Page 2/9 Rev. 12/14/21


TYPICALORDER EXAMPLE: MRM LED 36L SIL FTA UNV DIM 50 70CRI ALSCS04 BRZ IL


ORDERING GUIDE

Mirada Medium Outdoor LED Area Light

Back to Quick Links

## AREA LIGHT FIXTURE 'CI', 'C2' & 'E' SPECIFICATIONS

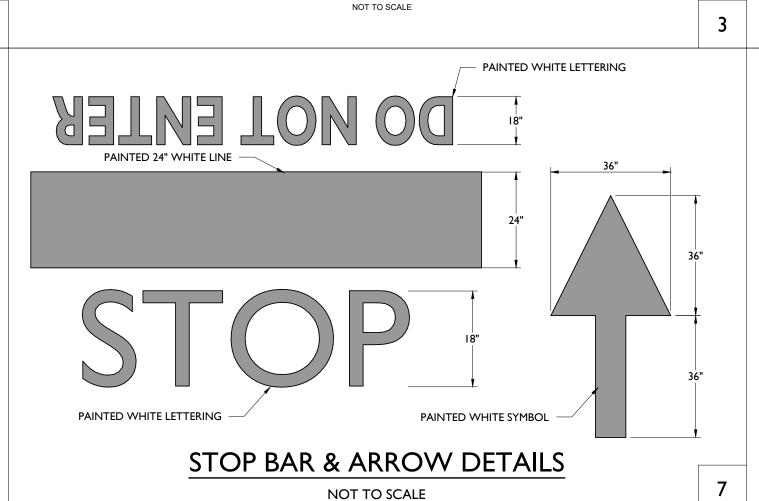

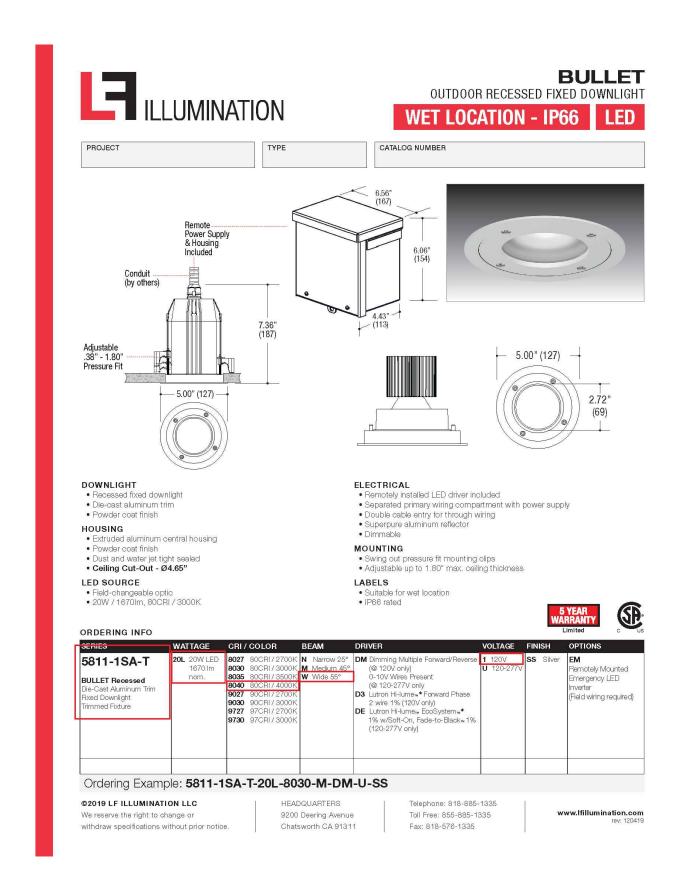



NOT TO SCALE

NOT APPROVED FOR CONSTRUCTION



JOSHUA H. KLINE, P.E. RHODE ISLAND LICENSE No. 13607 LICENSED PROFESSIONAL ENGINEER



SCALE: NO SCALE PROJECT ID: BOS-220076

CONSTRUCTION

**DETAILS** 

DRAWING:

