


48 Constitution Street, Apt. 2 Product Photos & Information

VELUX - VCM Manual Venting Curb Mounted Skylight System
Aluminum - Grey




Builder's Best - Duraflo Roof Cap Dryer/Bathroom Exhaust Vent
Plastic - Black




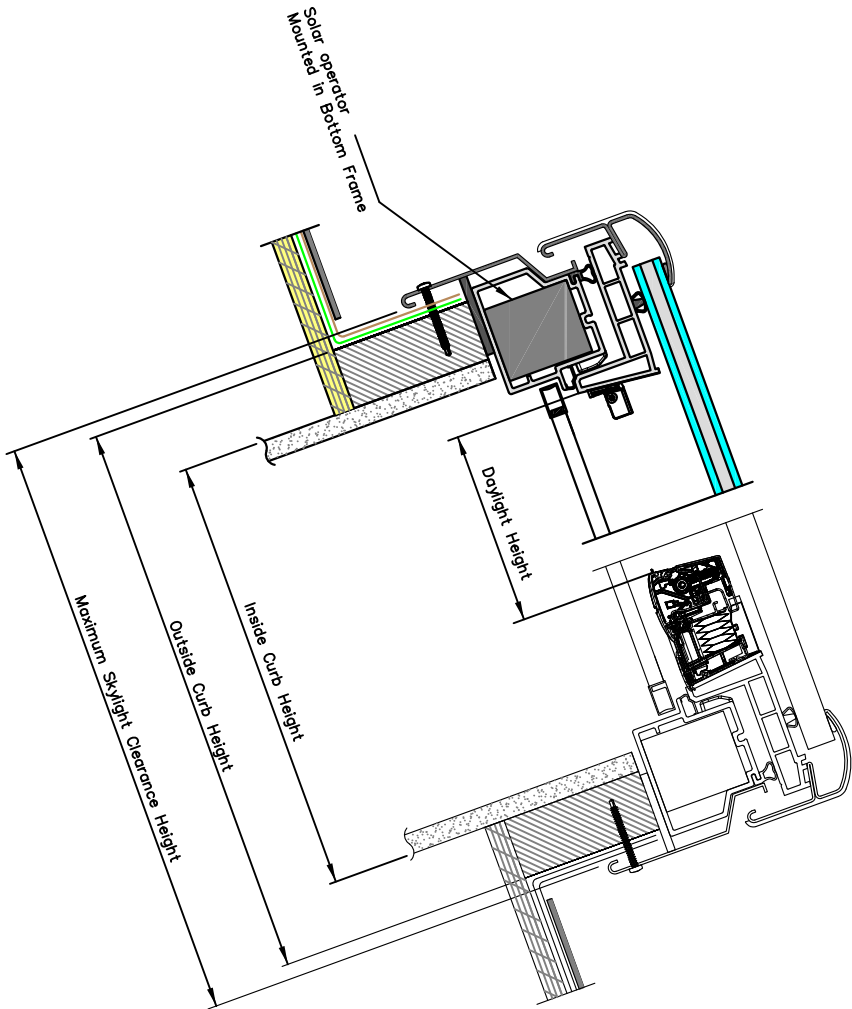

VERTICAL CROSS SECTION

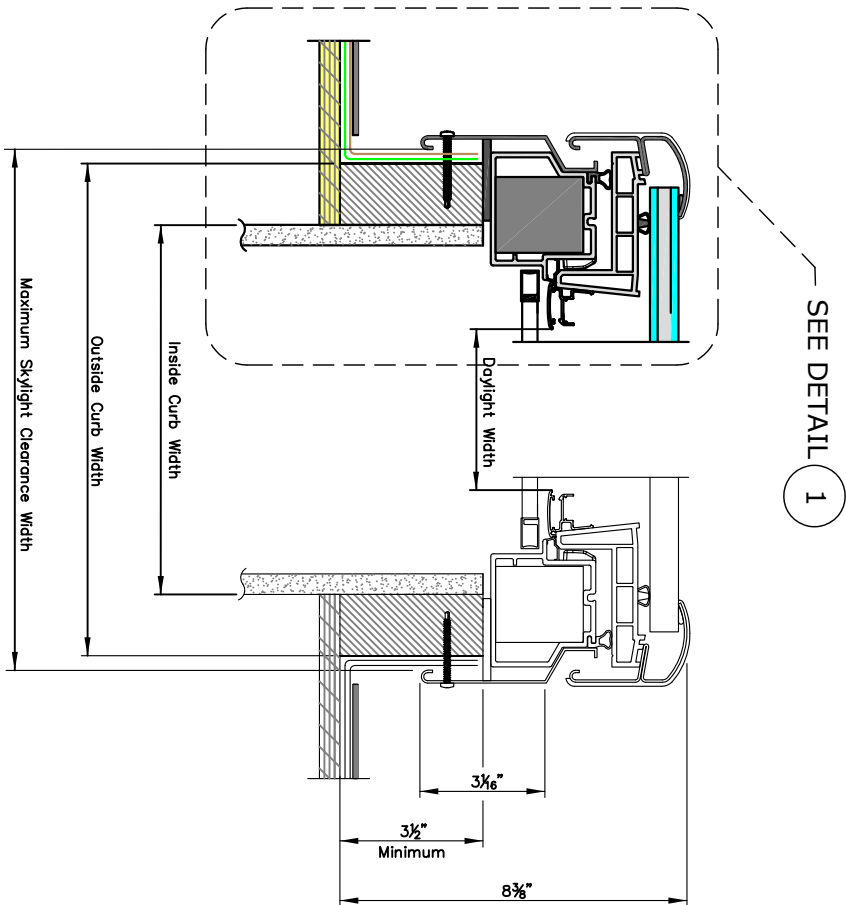

HORIZONTAL CROSS SECTION

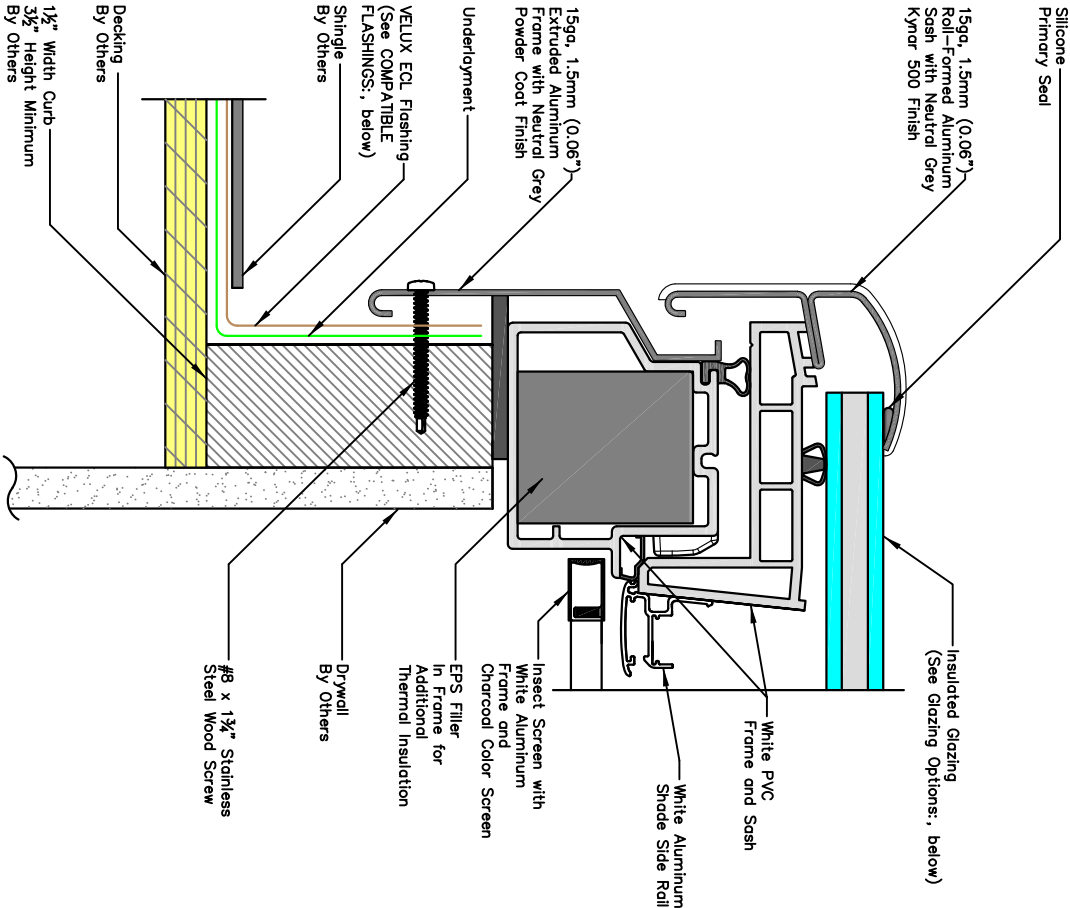

DETAIL 1

PRODUCT DIMENSIONS

IMPERIAL UNITS(INCHES)

Size	Outside Curb Width	Inside Curb Width	Maximum Skylight Clearance Width	Daylight Width	Outside Curb Height	Inside Curb Height	Maximum Skylight Clearance Height	Daylight Height	Daylight Area* (Sq. Feet)	Ventilation Area* (Sq. Feet)
2222	25 1/2	22 1/2	26 5/8	19 1/2	25 1/2	22 1/2	26 5/8	20	2.71	3.17
2234	25 1/2	22 1/2	26 5/8	19 1/2	37 1/2	34 1/2	38 5/8	32	4.33	4.16
2246	25 1/2	22 1/2	26 5/8	19 1/2	49 1/2	46 1/2	50 5/8	44	5.95	5.15
3030	33 1/2	30 1/2	34 5/8	27 1/2	33 1/2	30 1/2	34 5/8	28	5.34	4.49
3046	33 1/2	30 1/2	34 5/8	27 1/2	49 1/2	46 1/2	50 5/8	44	8.40	5.81
3434	37 1/2	34 1/2	38 5/8	31 1/2	37 1/2	34 1/2	38 5/8	32	7.00	5.15
4630	49 1/2	46 1/2	50 5/8	43 1/2	33 1/2	30 1/2	34 5/8	28	8.45	5.71
*4646	49 1/2	46 1/2	50 5/8	43 1/2	49 1/2	46 1/2	50 5/8	44	13.29	7.13

* Indicates size not available for 06 Impact glass and 08 white laminated glass

NOTES:

1. Max sash opening is 11" by stainless steel chain.

GLAZING OPTIONS:

- Laminated LowE3 (04)
- Impact(06) Special Order
- White Laminated(08) Special Order

COMPATIBLE FLASHINGS:

- ECL Step flashing
- ECW Tile flashing

ELECTRICAL/CONTROL DATA:

- VCM shade controlled via 2.4 GHz radio frequency KLI remote control provided with skylight. Optional controls for VCS Skylight are VELUX Touch(KLR 300 WW, VELUX App Control(KIG 300US), VELUX Solar Operator(KIX 300US).
- Solar Operator. Powered by Battery Pack with 24VDC output. Battery Pack is a 9 Cell NiMH 10.8V, 2100mAh.

VCM - Manual Venting Curb Mounted Skylight System



Sky-Global Product Management

VELUX America LLC
1418 Evans Pond Road
Greenville, SC 29646
1-800-88-VELUX
www.VELUXUSA.com

CHECKED/DRAWN: C/JRC
DATE: 01/15/2025



Builder's Best, Inc.
 201 Broiles Drive
 Jacksonville, TX 75766
 903-586-8283
 sales@buildersbest.com
 www.BuildersBest.com

DURAFLO® ROOF CAP DRYER/BATH EXHAUST VENT

DESCRIPTION

The "new generation"* duraFlo® roof exhaust is designed to exhaust dryer or bathroom vents through the roof.

PRODUCT FEATURES

- Grid/Grill for use in bathroom vent installation
Do not use grid/grill when used as dryer vent
- Back draft flapper
- Nail marks on flange for easier and faster installation

PRODUCT SPECIFICATIONS


- Heavy duty black plastic (polypropylene)
- Leakproof, seamless outer shell
- Enlarged opening at the duct terminal to meet code requirement with improved air flow
- 15 square inches Net Free Area without grid



12425
includes collar



12426
flush

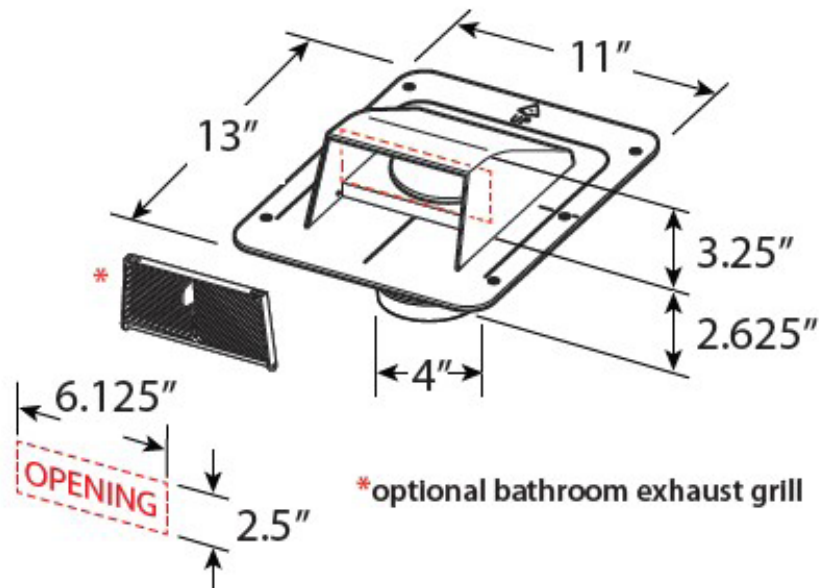

*REPLACES OLD MODELS

duraFlo® Roof Caps now feature a removable grid/grill for bathroom or dryer venting

- 12425 with collar replaces 11250 and 11508
- 12426 flush replaces 11507 and 11509

PART NUMBERS

Dia.	Color	Use for:	Collar	Flapper	Grid	Each #	Qty	Case/Skid #	Package	Labeled	UPC
4"	Black	dryer/bathroom vent (6014BL)	2.635"	flapper	removable, molded	12425	6	112425	Bulk	•	662671074232
4"	Black	dryer/bathroom vent (6014BL)	2.635"	flapper	removable, molded	12425	90	612425	Skid	•	662671074232
4"	Black	dryer/bathroom vent (6015BL)	flush	flapper	removable, molded	12426	10	112426	Bulk	•	662671075215
4"	Black	dryer/bathroom vent (6015BL)	flush	flapper	removable, molded	12426	150	612426	Skid	•	662671075215

WARRANTY

Complete Warranty Statement <https://canplas.com/duraflo/warranty-reginfo/>