


SILFAB  
PRIME **NTC**

SIL-440 QD

**SILFAB**  
SOLAR®

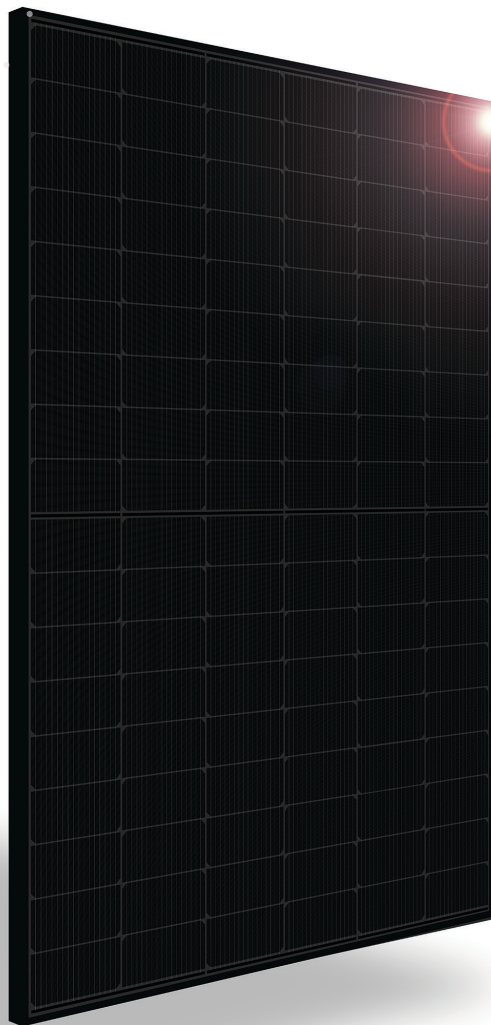

## NEXT-GENERATION N-TYPE CELL TECHNOLOGY

- Improved Shade Tolerance
- Improved Low-Light Performance
- Increased Performance in High Temperatures
- Enhanced Durability
- Reduced Degradation Rate
- 25-Year Product Warranty/  
30-Year Performance Warranty



[SILFABSOLAR.COM](https://silfabsolar.com)



ELECTRICAL SPECIFICATIONS		440	
Test Conditions		STC	NOCT
Module Power (Pmax)	Wp	440	328.0
Maximum power voltage (Vpmax)	V	33.41	31.17
Maximum power current (Ipmax)	A	13.17	10.52
Open circuit voltage (Voc)	V	38.97	36.64
Short circuit current (Isc)	A	14.22	11.44
Module efficiency	%	22.6%	
Maximum system voltage (VDC)	V	1000	
Series fuse rating	A	25	
Power Tolerance	Wp	0 to +10	


Measurement conditions: STC 1000 W/m² • AM 1.5 • Temperature 25 °C • NOCT 800 W/m² • AM 1.5 • Measurement uncertainty ≤ 3%  
Sun simulator calibration reference modules from Fraunhofer Institute. Electrical characteristics may vary by ±5% and power by 0 to +10 W.

MECHANICAL PROPERTIES / COMPONENTS	METRIC	IMPERIAL
Module weight	21 kg ± 0.2 kg	46.3 lbs ± 0.4 lbs
Dimensions (H x L x D)	1721 mm x 1133 mm x 35 mm	67.8 in x 44.6 in x 1.37 in
Maximum surface load (wind/snow)*	4000 Pa rear load / 5400 Pa front load	83.5 lb/ft² rear load / 112.8 lb/ft² front load
Hail impact resistance	ø 25 mm at 83 km/h	ø 1 in at 51.6 mph
Cells	108 Half cells - N-Type Silicon solar cell 182 mm x 91 mm	108 Half cells - N-Type Silicon solar cell 7.16 in x 3.58 in
Glass	3.2 mm high transmittance, tempered, antireflective coating	0.126 in high transmittance, tempered, antireflective coating
Cables and connectors (refer to installation manual)	1350 mm, ø 5.7 mm, MC4 from Staubli	53.1 in, ø 0.22 in (12 AWG), MC4 from Staubli
Backsheet	High durability, superior hydrolysis and UV resistance, multi-layer dielectric film, fluorine-free PV backsheet	
Frame	Anodized aluminum (Black)	
Junction Box	UL 3730 Certified, IEC 62790 Certified, IP68 rated, 3 diodes	

TEMPERATURE RATINGS		WARRANTIES	
Temperature Coefficient Isc	0.04 %/°C	Module product workmanship warranty	25 years**
Temperature Coefficient Voc	-0.24 %/°C	Linear power performance guarantee	30 years
Temperature Coefficient Pmax	-0.29 %/°C		≥ 98% end 1st yr
NOCT (± 2 °C)	45 °C		≥ 94.7% end 12th yr
Operating temperature	-40/+85 °C		≥ 90.8% end 25th yr ≥ 89.3% end 30th yr

CERTIFICATIONS		SHIPPING SPECS	
Product	UL 61215, UL 61730, CSA C22.2#61730, IEC 61215, IEC 61730, IEC 61701 (Salt Mist Corrosion), IEC 62716 (Ammonia Corrosion), CEC Listed, UL Fire Rating: Type 2	Modules Per Pallet:	26 or 26 (California)
		Pallets Per Truck	32 or 30 (California)
Factory	ISO9001:2015	Modules Per Truck	832 or 780 (California)

\* ⚠ Warning. Read the Safety and Installation Manual for mounting specifications and before handling, installing and operating modules.  
\*\* 12 year extendable to 25 years subject to registration and conditions outlined under "Warranty" at [silfabsolar.com](https://silfabsolar.com).  
PAN files generated from 3rd party performance data are available for download at: [silfabsolar.com/downloads](https://silfabsolar.com/downloads).

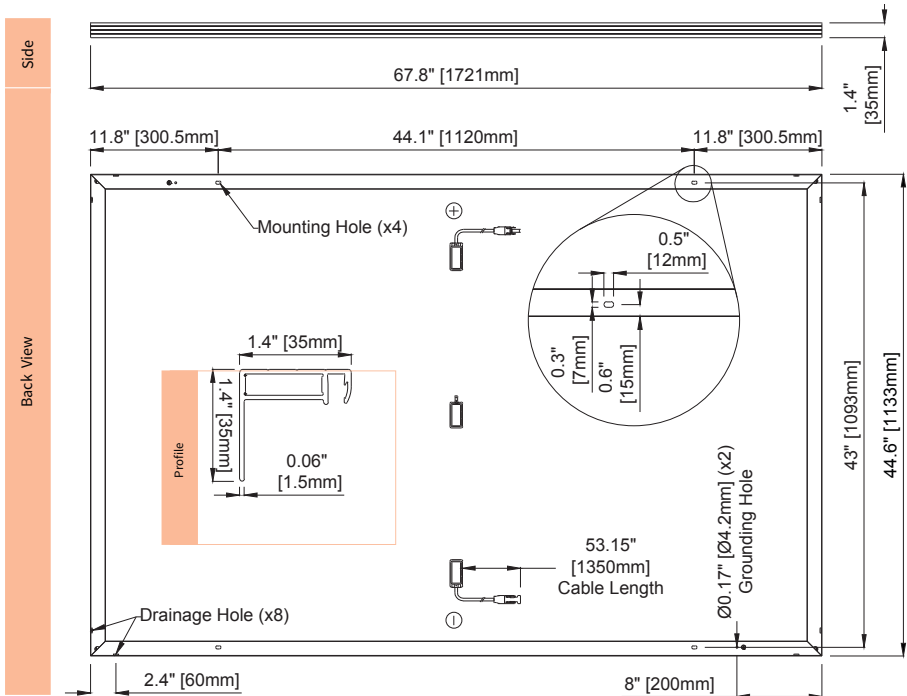

SILFAB SOLAR INC.

1770 Port Drive  
Burlington WA 98233 USA  
T +1 360.569.4733  
info@silfabsolar.com  
SILFABSOLAR.COM

7149 Logistics Lane  
Fort Mill SC 29715 USA  
T +1 839.400.4338

240 Courtneypark Drive East  
Mississauga ON L5T 2Y3 Canada  
T +1 905.255.2501  
F +1 905.696.0267


Silfab - SIL-440-QD-20241217  
No reproduction of any kind is allowed without permission.  
Data and information is subject to modifications without notice. © Silfab Solar Inc., 2024. Silfab Solar® is a registered trademark of Silfab Solar Inc.

# IQ8MC Microinverter

Our newest IQ8 Series Microinverters<sup>1,2,3</sup> are the industry's first microgrid-forming<sup>4</sup>, software-defined microinverters with split-phase power conversion capability to convert DC power to AC power efficiently.



Key specifications	IQ8MC-72-M-US @240 VAC	IQ8MC-72-M-US @208 VAC
Peak output power	330 VA	315 VA
Nominal grid voltage (L-L)	240 V split-phase (L-L), 180°	208 V single-phase (L-L), 120°
Nominal frequency	60 Hz	60 Hz
CEC weighted efficiency	97%	96.5%
Maximum input DC voltage	60 V	60 V
MPPT voltage range	25–45 V	25–45 V
Maximum module I <sub>sc</sub>	20 A	20 A
Ambient temperature range	–40°C to 65°C (–40°F to 149°F)	

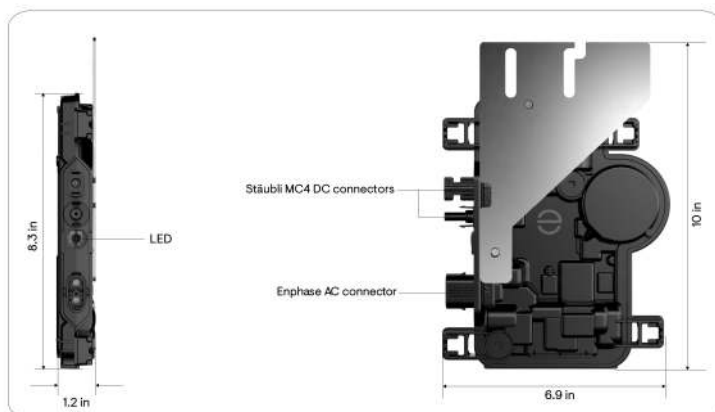

## Simple

- Lightweight and compact with plug-and-play connectors
- Power line communication (PLC) between components
- Faster installation with simple two-wire cabling

## Reliable

- Produces power even when the grid is down<sup>4</sup>
- More than one million cumulative hours of testing
- Industry-leading limited warranty of up to 25 years
- Class II double-insulated enclosure
- Optimized for the latest high-powered PV modules

## Microgrid-forming

- Complies with the latest advanced grid support
- Remote automatic updates for the latest grid requirements
- Configurable to support a wide range of grid profiles
- Meets CA Rule 21 (UL 1741-SA) and IEEE 1547:2018 (UL 1741-SB 3<sup>rd</sup> Ed.)

<sup>1</sup> IQ8 Series Microinverters can be added to existing IQ7 systems on the same IQ Gateway only in the following grid-tied configurations: Solar Only or Solar + Battery (IQ Battery 3T/10T and IQ Battery 5P) without backup.

<sup>2</sup> IQ7 Series Microinverters cannot be added to a site with existing IQ8 Series Microinverters on the same gateway. Mixed system of IQ7 and IQ8 will not support IQ8-specific PCS features and grid-forming capabilities.

<sup>3</sup> IQ Microinverters ship with default settings that meet North America's IEEE 1547 interconnection standard requirements. Region-specific adjustments may be requested by an Authority Having Jurisdiction (AHJ) or utility representative, according to the IEEE 1547 interconnection standard. Use an IQ Gateway to make these changes during installation.

<sup>4</sup> Meets UL 1741 only when installed with IQ System Controller 2 or 3.

Input data (DC)	Units	IQ8MC-72-M-US	
Commonly used module pairings <sup>5</sup>	W	260–460	
Module compatibility	—	To meet compatibility, PV modules must be within the following max. input DC voltage and max. module $I_{sc}$ . Module compatibility can be checked at <a href="https://enphase.com/installers/microinverters/calculator">https://enphase.com/installers/microinverters/calculator</a> .	
MPPT voltage range	V	25–45	
Operating range	V	18–58	
Min./Max. start voltage	V	22/58	
Max. input DC voltage	V	60	
Max. continuous operating DC current	A	14	
Max. input DC short-circuit current	A	25	
Max. module $I_{sc}$	A	20	
Overvoltage class DC port	—	II	
DC port backfeed current	mA	0	
PV array configuration	—	Ungrounded array; no additional DC side protection required; AC side protection requires a maximum of 20 A per branch circuit.	
Output data (AC)	Units	IQ8MC-72-M-US @240 VAC	IQ8MC-72-M-US @208 VAC
Peak output power	VA	330	315
Max. continuous output power	VA	320	310
Nominal grid voltage (L-L)	V	240, split-phase (L-L), 180°	208, single-phase (L-L), 120°
Min./Max. grid voltage <sup>6</sup>	V	211–264	183–229
Max. continuous output current	A	1.33	1.49
Nominal frequency	Hz	60	
Extended frequency range	Hz	47–68	
AC short-circuit fault current over three cycles	Arms	2.70	
Max. units per 20 A (L-L) branch circuit <sup>7</sup>	—	12	10
Total harmonic distortion	%	<5	
Overvoltage class AC port	—	III	
AC port backfeed current	mA	18	
Power factor setting	—	1.0	
Grid-tied power factor (adjustable)	—	0.85 leading ... 0.85 lagging	
Peak efficiency	%	97.4	97.2
CEC weighted efficiency	%	97.0	96.5
Nighttime power consumption	mW	33	25
Mechanical data	IQ8MC-72-M-US		
Ambient temperature range	–40°C to 65°C (–40°F to 149°F)		
Relative humidity range	4% to 100% (condensing)		

<sup>5</sup>No enforced DC/AC ratio

Mechanical data	IQ8MC-72-M-US
DC connector type	Stäubli MC4
Dimensions (H × W × D); Weight	212 mm (8.3") × 175 mm (6.9") × 30.2 mm (1.2"); 1.1 kg (2.43 lb)
Cooling	Natural convection – no fans
Approved for wet locations; Pollution degree	Yes; PD3
Enclosure	Class II double-insulated, corrosion-resistant polymeric enclosure
Environ. category; UV exposure rating	NEMA Type 6; outdoor
Compliance	IQ8MC-72-M-US
Certifications	<p>CA Rule 21 (UL 1741-SA), UL 62109-1, IEEE 1547:2018 (UL 1741-SB 3<sup>rd</sup> Ed.), FCC Part 15 Class B, ICES-0003 Class B, CAN/CSA-C22.2 NO. 107.1-01.</p> <p>This product is UL Listed as PV rapid shutdown equipment and conforms with NEC 2014, NEC 2017, NEC 2020, and NEC 2023 section 690.12 and C22.1-2018 Rule 64-218 rapid shutdown of PV systems for AC and DC conductors when installed according to the manufacturer's instructions.</p>

# Components of the Enphase Energy System



## **IQ Battery**

All-in-one AC-coupled storage solution that integrates seamlessly with your solar energy system, providing reliable backup power and intelligent energy management for maximum performance and energy savings.



## **IQ System Controller**

The IQ System Controller connects the home to the grid power, IQ Batteries, generator and solar PV with microinverters.



## **IQ Combiner/IQ Gateway**

The IQ Combiner/IQ Gateway is a device that performs energy management, provides internet connectivity, and integrates with the IQ Series Microinverters to provide complete control and insights into the Enphase Energy System.



## **IQ Cable**

The IQ Cable is a continuous-length 12-AWG cable with pre-installed connectors for IQ Microinverters that support faster, simpler, and more reliable installations. The cable is handled like standard outdoor-rated electrical wire, allowing it to be cut, spliced, and extended as needed.

# Revision history

Revision	Date	Description
DSH-00049-5.0	December 2024	Updated information on backward compatibility with IQ7 Series Microinverters.
DSH-00049-4.0	February 2024	Added information about IEEE 1547 interconnection standard requirements.
DSH-00049-3.0	October 2023	Included NEC 2023 specification in the “Compliance” section.
DSH-00049-2.0	September 2023	Updated module compatibility information.
DSH-00049-1.0	May 2023	Preliminary release.