

YOUR PROFESSIONAL-CLASS PRODUCT

Endure EN600 Series 601 - Double Hung



OUTSIDE VIEW

INSIDE VIEW

SIZING

Opening Width Range: 31 1/4" to 31 1/2"
Opening Height Range: 31 1/4" to 32 1/4"
Window Size: 31" x 31"
United Inches: 62
Egress Size: 26" x 8 27/32"
Egress Square Foot: 1.6023
Egress Meets Criteria: No
Top Sash Size: 27" x 14 1/16"
Top Glass Size: 25 3/16" x 12 5/16" x 3/4"
Top Glass Viewable Size: 24 3/16" x 11 5/16"
Bottom Sash Size: 28" x 15 1/16"
Bottom Glass Size: 25 3/16" x 12 5/16" x 3/4"
Bottom Glass Viewable Size: 24 3/16" x 11 5/16"
Size:
Bottom Screen: 27 1/2" x 15 1/2"

Structural

Product: Vinyl Double Hung
Cert #: 462-H-001.01
Class: LC-PG50
Max Test Size: 44" x 75"
Test Std: AAMA/WDMA/CSA
101/1.5.2/A440-11



ENERGY

ENERGY PERFORMANCE RATINGS

U-Factor (U.S./I-P) Solar Heat Gain Coefficient

0.27 0.24

ADDITIONAL PERFORMANCE RATINGS

Visible Transmittance Condensation Resistance

0.44 59.00

Air Infiltration (cfm/ft2)

<= 0.05



ENERGY STAR® Certified
In All 50 States.

STC: 27; OITC: 24; Acoustic Test Report: f2964.01-113-11



508-881-8555
60 Pleasant Street
Ashland, MA 01721

QUOTE INFORMATION

Job: Belmonte. Constituti

Tag: Kitchen

Qty: 1

DETAILS

Endure Window - EN600 Series

601 - Double Hung
White
Exact Size: 31" x 31"
Compound Tension Balance System
Snap-In Frame Sash Stops
Double Profile DA Locks
White Hardware
INNERGY Thermal Sash Reinforcement
Extruded Bottom Screen (White) with BetterVue Screen Mesh
Graphite Foam Insulation
Head Expander and Sill Extender
ComforTech DLA
Double Strength Glass
3/4" IG Thickness
Colonial Contoured Grid - 2V x 1H
White Grids

Sell Price: \$915.00

INFORMATION AND WARNINGS


Hard Coat Low-E is on glass surface #4 and requires care when cleaning.
See the linked knowledge base article for more information and cleaning instructions.

Installation Instructions




YOUR PROFESSIONAL-CLASS PRODUCT

Endure EN600 Series 601 - Double Hung

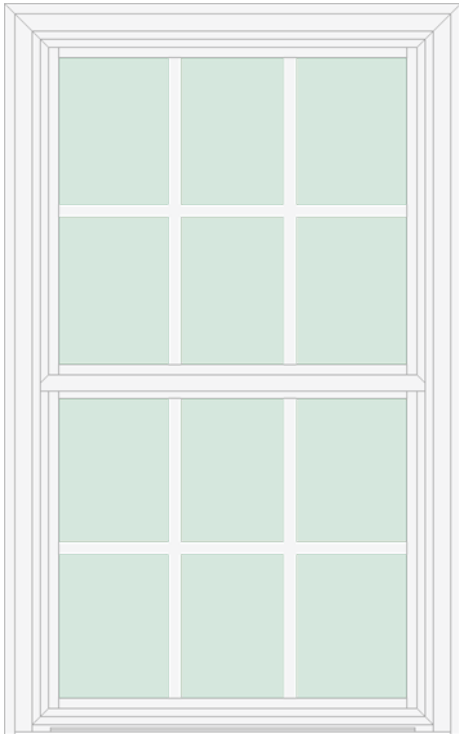

OUTSIDE VIEW

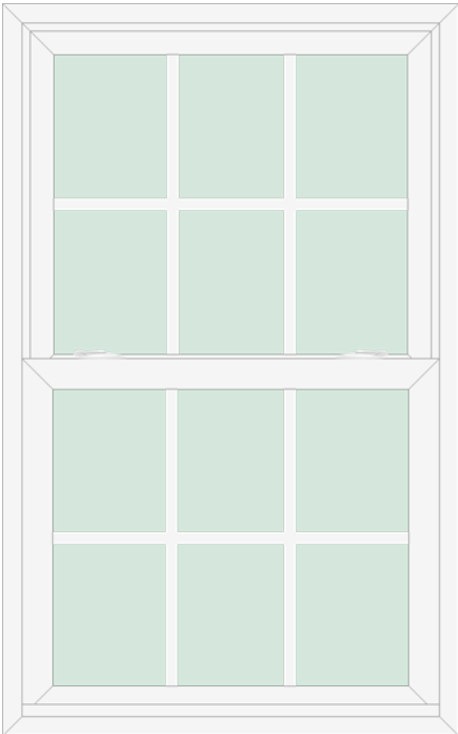

INSIDE VIEW

SIZING

Opening Width Range: 28 1/4" to 28 1/2"
Opening Height Range: 45 1/4" to 46 1/4"
Window Size: 28" x 45"
United Inches: 73
Egress Size: 23" x 14 27/32"
Egress Square Foot: 2.3757
Egress Meets Criteria: No
Top Sash Size: 24" x 21 1/16"
Top Glass Size: 22 3/16" x 19 5/16" x 3/4"
Top Glass Viewable Size: 21 3/16" x 18 5/16"
Bottom Sash Size: 25" x 22 1/16"
Bottom Glass Size: 22 3/16" x 19 5/16" x 3/4"
Bottom Glass Viewable Size: 21 3/16" x 18 5/16"
Size:
Bottom Screen: 24 1/2" x 22 1/2"

Structural

Product: Vinyl Double Hung
Cert #: 462-H-001.01
Class: LC-PG50
Max Test Size: 44" x 75"
Test Std: AAMA/WDMA/CSA
101/1.S.2/A440-11



ENERGY

ENERGY PERFORMANCE RATINGS

U-Factor (U.S./I-P) Solar Heat Gain Coefficient

0.27

0.24

ADDITIONAL PERFORMANCE RATINGS

Visible Transmittance Condensation Resistance

0.44

59.00

Air Infiltration (cfm/ft2)

<= 0.05



ENERGY STAR® Certified
In All 50 States.

STC: 27; OITC: 24; Acoustic Test Report: f2964.01-113-11



508-881-8555
60 Pleasant Street
Ashland, MA 01721

QUOTE INFORMATION

Job: Belmonte. Constituti

Tag: Bedroom

Qty: 1

DETAILS

Endure Window - EN600 Series

601 - Double Hung
White
Exact Size: 28" x 45"
Compound Tension Balance System
Snap-In Frame Sash Stops
Double Profile DA Locks
White Hardware
INNERGY Thermal Sash Reinforcement
Extruded Bottom Screen (White) with BetterVue Screen Mesh
Graphite Foam Insulation
Head Expander and Sill Extender
ComforTech DLA
Double Strength Glass
3/4" IG Thickness
Colonial Contoured Grid - 2V x 1H
White Grids

Sell Price: \$941.00

INFORMATION AND WARNINGS

Hard Coat Low-E is on glass surface #4 and requires care when cleaning. See the linked knowledge base article for more information and cleaning instructions.

Installation Instructions




Tuesday, August 29, 2023 | Due to variances in color and manufacturing process, images shown may vary from final product. | Mtrpak PPM:14661

The base proposal reflects furnishing labor and materials to complete the window installation and carpentry work following professional standards as stated. 1) Removal of existing windows and/or doors 2) Rubbish removal 3) Flashing, Insulating, and Sealant System See UHE Proposal for Terms and Conditions of proposed work Specific Exclusions: (we understand that the following items are NOT included): --Interior Painting or Staining (unless specified) --Exterior Painting or Staining (unless specified)

YOUR PROFESSIONAL-CLASS PRODUCT

Endure EN600 Series 601 - Double Hung

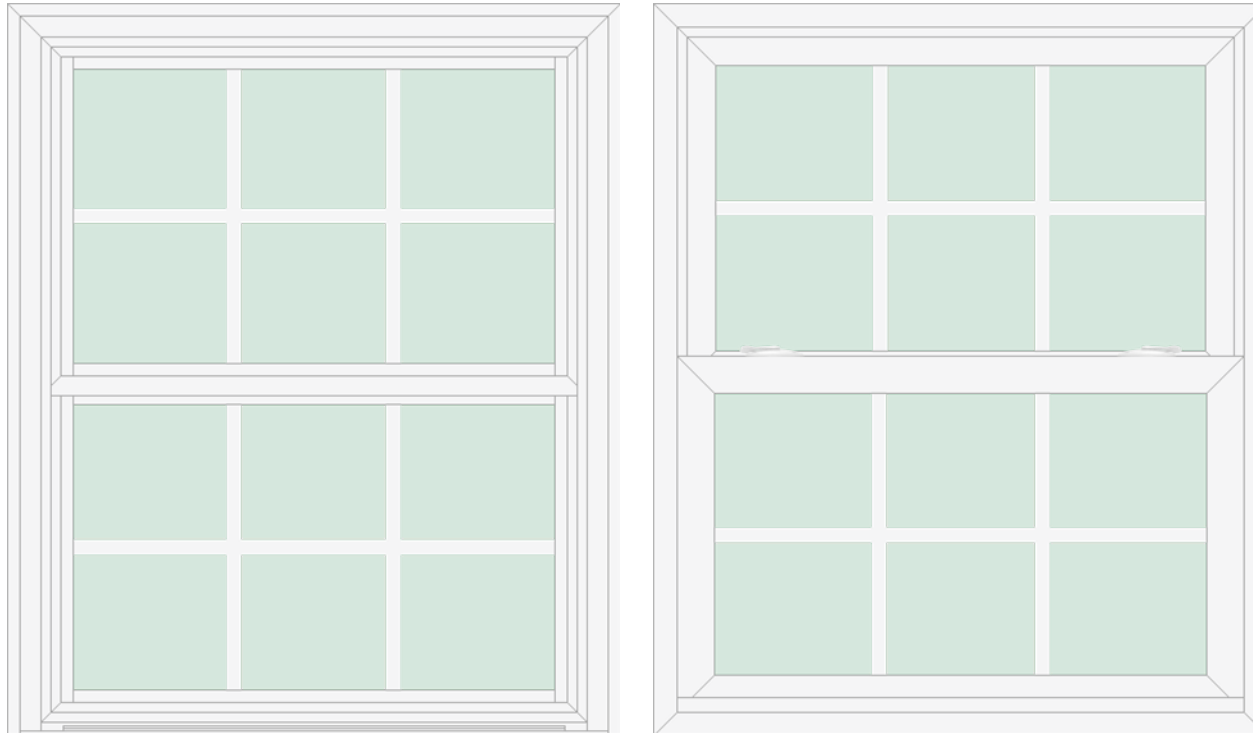

OUTSIDE VIEW

INSIDE VIEW

SIZING

Opening Width Range: 31 1/4" to 31 1/2"
Opening Height Range: 37 1/4" to 38 1/4"
Window Size: 31" x 37"
Unit Inches: 68
Egress Size: 26" x 10 27/32"
Egress Square Foot: 1.9634
Egress Meets Criteria: No
Top Sash Size: 27" x 17 1/16"
Top Glass Size: 25 3/16" x 15 5/16" x 3/4"
Top Glass Viewable Size: 24 3/16" x 14 5/16"
Bottom Sash Size: 28" x 18 1/16"
Bottom Glass Size: 25 3/16" x 15 5/16" x 3/4"
Bottom Glass Viewable Size: 24 3/16" x 14 5/16"
Size:
Bottom Screen: 27 1/2" x 18 1/2"

Structural

Product: Vinyl Double Hung
Cert #: 462-H-001.01
Class: LC-PG50
Max Test Size: 44" x 75"
Test Std: AAMA/WDMA/CSA
101/1.S.2/A440-11



ENERGY

ENERGY PERFORMANCE RATINGS

U-Factor (U.S./I-P) Solar Heat Gain Coefficient

0.27 0.24

ADDITIONAL PERFORMANCE RATINGS

Visible Transmittance Condensation Resistance

0.44 59.00

Air Infiltration (cfm/ft2)

<= 0.05



ENERGY STAR® Certified
In All 50 States.

STC: 27; OITC: 24; Acoustic Test Report: f2964,01-113-11



508-881-8555
60 Pleasant Street
Ashland, MA 01721

QUOTE INFORMATION

Job: Belmonte. Constituti

Tag: Br1 -

Qty: 1

DETAILS

Endure Window - EN600 Series

601 - Double Hung

White

Exact Size: 31" x 37"

Compound Tension Balance System

Snap-In Frame Sash Stops

Double Profile DA Locks

White Hardware

INNERGY Thermal Sash Reinforcement

Extruded Bottom Screen (White) with BetterVue Screen Mesh

Graphite Foam Insulation

Head Expander and Sill Extender

ComforTech DLA

Double Strength Glass (Tempered)

3/4" IG Thickness

Colonial Contoured Grid - 2V x 1H

White Grids

Sell Price: \$1,043.00

Total: \$2,899.00

INFORMATION AND WARNINGS

Hard Coat Low-E is on glass surface #4 and requires care when cleaning.
See the linked knowledge base article for more information and cleaning instructions.

Tempered glass requires additional lead time.

Installation Instructions



Tuesday, August 29, 2023 | Due to variances in color and manufacturing process, images shown may vary from final product. | Mtrpak PPM:14661

The base proposal reflects furnishing labor and materials to complete the window installation and carpentry work following professional standards as stated. 1) Removal of existing windows and/or doors 2) Rubbish removal 3) Flashing, Insulating, and Sealant System See UHE Proposal for Terms and Conditions of proposed work Specific Exclusions: (we understand that the following items are NOT included): --Interior Painting or Staining (unless specified) --Exterior Painting or Staining (unless specified)