
Do not remove until final code inspection. Save label for future reference.

ENERGY STAR® Certified in Highlighted Regions
Certifié ENERGY STAR dans les régions en surbrillance

Canada
energystar.gc.ca

ENERGY STAR

U.S. / É.U.
energystar.gov

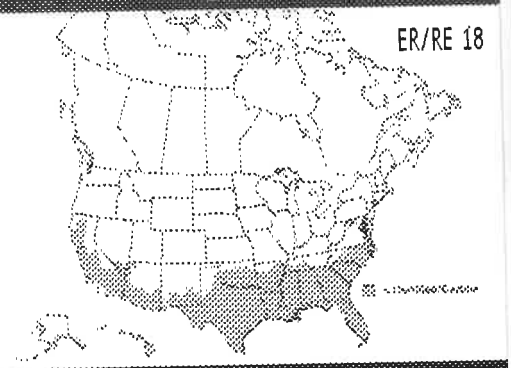

ER/RE 18

DO NOT REMOVE UNTIL FINAL INSPECTION/NE PAS RETIRER AVANT L'INSPECTION FINALE

NFRC
National Fenestration Rating Council®
CERTIFIED

RENEWAL by ANDERSEN

AND-N-184-07776-00001
Vinyl/Wood Composite Material
Dual-Pane HP SmSun HL with Argon
Product Type: Double Hung

ENERGY PERFORMANCE RATINGS

U-Factor		Solar Heat Gain Coefficient
0.26 (U.S./I-P)	1.48 (Metric/SI)	0.20

ADDITIONAL PERFORMANCE RATINGS

Visible Transmittance	
0.47	-

Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for any specific use. Consult manufacturer's literature for other product performance information.
www.nfrc.org

WINDOW & DOOR MANUFACTURERS ASSOCIATION
WDMA
Hallmark Certified
www.wdma.com

Licensee: 129-H-835
Andersen Corporation
RbA Double-Hung
Manufacturer stipulates certification as indicated below

STANDARD	RATING
AAMA/WDMA/CSA 101/I.S.2/A440-08	Class LC-PG40; Size Tested: 40.0 x 76.9 in DP +40/-40
AAMA/WDMA/CSA 101/I.S.2/A440-11	Class LC-PG40; Size Tested: 40.0 x 76.9 in DP +40/-40
CSA A440 S1-09	Class LC-PG40; Size Tested:1016 x 1953 mm DP +1920/-1920 Pa Water Penetration Test Pressure = 290 Pa Canadian Air Infil/Exfil = A3