
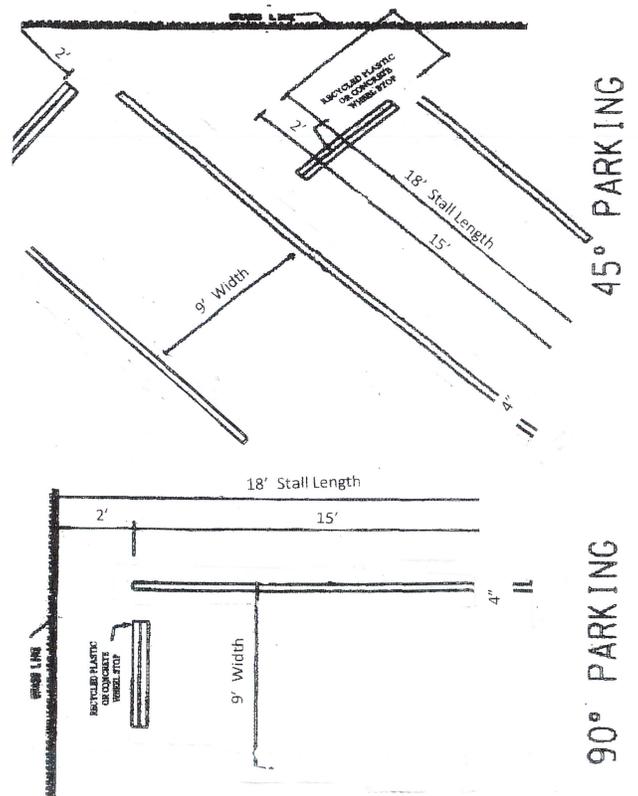


Sec. 25-5. Design of off-street parking.

- (a) *On-site parking required.* Required off-street parking facilities shall be located on the same lot or parcel of land that they are intended to serve.
- (b) *Parking space dimensions.* Each parking space required and/or provided shall not be less than the following:
 - (1) *Width.* All parking spaces shall be a minimum of nine feet in width, provided that spaces restricted to wheelchair drivers shall be a minimum of 12 feet in width. The width of a parking space shall be measured perpendicular to the parking angle.
 - (2) *Length.* All parking spaces shall be a minimum of 18 feet in length, provided that parallel parking spaces shall be a minimum of 25 feet in length. The length of a parking space shall be measured parallel to the parking angle.
- (c) *Layout.* All **non-residential** parking spaces shall be designed, striped and provided with concrete or recycled plastic wheel stops in accordance with figure 25-1(a). **Multifamily residential parking spaces may be designed, striped and provided with concrete or recycled plastic wheel stops in accordance with figure 25-1(a) or 25-1(b).**

FIGURE 1(a) PARKING SPACE DESIGNSTANDARDS

FIGURE 1(b) PARKING SPACE DESIGNSTANDARDS

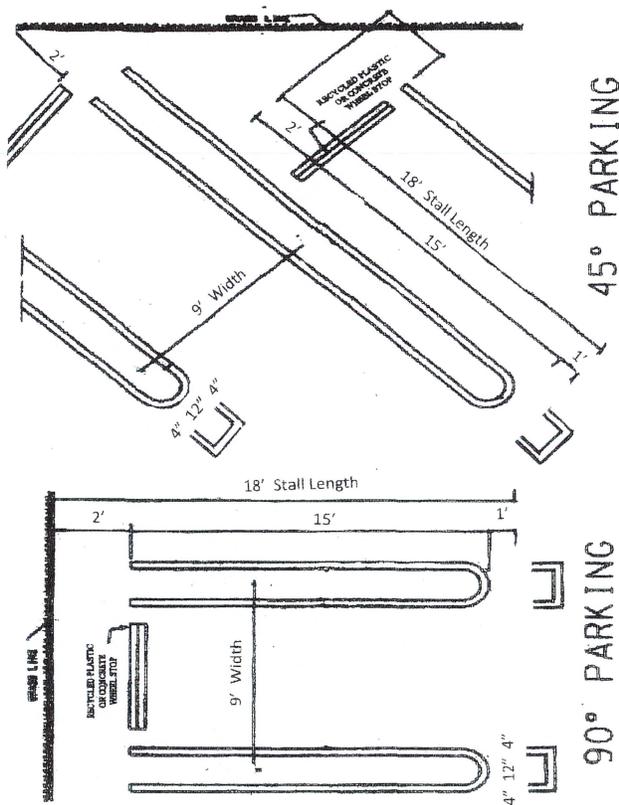

- (d) *Access.*