


No.	DATE	REVISION	BY

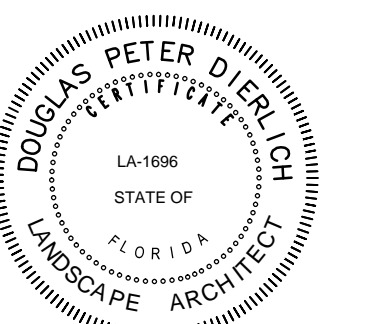

LANDSCAPE ALONG RIGHT-OF-WAY

LENGTH ALONG ROW	338.5 LIN.FT.
TREES REQUIRED:	1 TREE PER 30 LIN. FT.
TREES REQUIRED =	338.5/30 = 11.2
	12 TREES REQUIRED
TREES PROVIDED =	12 TREES PROVIDED

INTERNAL LANDSCAPING REQUIREMENTS:

TOTAL AREA OF SITE	= 104,686 SQ.FT.
	= 2.4 ACRES
TOTAL IMPERVIOUS AREA	= 5,635 SQ.FT.
INTERIOR LANDSCAPE AREA REQUIRED	= TOTAL IMPERVIOUS AREA x 2.5%
	= 5,635 SQ.FT. X .025
	= 141 SQ.FT. REQUIRED
INTERIOR LANDSCAPE AREA PROVIDED	= 368 SQ.FT.
TREES REQUIRED	= 1 TREE / 100 S.F. = 1.4 TREES
	= 2 TREES REQUIRED
TREES PROVIDED	= 3 TREES PROVIDED

TREE PLANTING SCHEDULE

SYMBOL	QTY.	BOTANICAL/COMMON NAME	HEIGHT	SPREAD	ROOT	REMARKS
AR	2	ACER RUBRUM FLORIDA FLAME MAPLE	12'	6'	B&B	3" CAL. MIN.
LI	3	LAGERSTROMIA INDICA CRAPE MYRTLE MUSKOGEE	11'	5'	B&B	2-1/2" CAL. MIN.
MG	2	MAGNOLIA GRANDIFLORA SOUTHERN MAGNOLIA	12'	6'	B&B	3" CAL. MIN.
Mlg	3	MAGNOLIA GRANDIFLORA "LITTLE GEM" LITTLE GEM MAGNOLIA	10'	5'	B&B	2-1/2" CAL. MIN.
QS	1	QUERCUS SHUMARDII SHUMARD OAK	12'	6'	B&B	3" CAL. MIN.
QV	5	QUERCUS VIRGINIANA LIVE OAK	12'	6'	B&B	3" CAL. MIN.
QV1	12	QUERCUS VIRGINIANA LIVE OAK	14'	7'	B&B	4" CAL. MIN.
TU	2	TABEBUIA UNBELATTA YELLOW TABEBUIA	8'	4'	B&B	2-1/2" CAL. MIN.

SHRUB PLANTING SCHEDULE

SYMBOL	QTY.	BOTANICAL/COMMON NAME	HEIGHT	SPREAD	ROOT	REMARKS
SHRUBS:						
AG	119	ARACHIS GLABRATA PERENNIAL PEANUT	6"	NA	3 GAL.	30" O.C., FULL
HP	16	HAMELIA PATENS FIREBUSH	24"	18"	3 GAL.	24" O.C., FULL
IVN	148	ILEX VOMITORIA NANA DWF. YAUPOH HOLLY	24"	18"	3 GAL.	30" O.C., FULL
MC	98	MUHLENBERGIA CAPILLANS MUHLY GRASS	24"	18"	3 GAL.	30" O.C., FULL
PM	58	PODOCARPUS MACROPHYLLUS SOUTHERN YEW	30"	24"	3 GAL.	FULL, WELL BRANCHED
SB	340	SPARTINA BAKERI SAND CORD GRASS	24"	18"	3 GAL.	36" O.C., FULL
ZF	78	ZAMIA FRUITICOSA COONTIE	24"	18"	3 GAL.	30" O.C., FULL
SOD-MULCH:						
SOD	51,673 sq./ft.	PASPALUM NOTATUM BAHAGRASS	--	--	--	--
ARTIFICIAL TURF	26,600 sq./ft.		--	--	--	--

