

CITY OF CREST HILL
CITY CENTER

Change Order

Date: 10/14/2022
Project: Crest Hill City Center

Contractor: Omega Plumbing

Change Order #:

Description:

Sensored Plumbing Fixtures

*Furnish and Install Chicago Faucet 116.606.AB.1 for (23) Faucets within the Facility located within Restrooms, Locker Rooms, Etc.

Note: See Attached RCO / Proposals

Original Contract:	\$ 410,500.00
Previous Change Orders:	<u>\$ 45,387.00</u>
Contract Total Prior to this CO:	\$ 455,887.00
New Change Order Amount:	<u>\$ 5,719.00</u>
New Contract Amount:	<u><u>\$ 461,606.00</u></u>

Approved:

Administrator

Date

Shawn Thompson - Project Manager

Date

Sub-Contractor

Date

Dan Skiera - Superintendent

Date



521 Oak Leaf Cr, Unit A
Joliet, IL 60436
815-773-0808
FAX: 815-773-0812
LIC. 058-138280

TO: Bob Gabel and Kirk Wilkins

RE: Crest Hill City Center Change Order 1

Below are two touchless sensor faucets options for the lavatory sinks, Urinal flush valves, and bottle filler stations.

Option 1: Sloan EBF650-BAT-CP-.05-GPM-MLM-FCT (Currently 7 in stock, 2- 3 weeks to get the rest)

- Cost per faucet: \$ 488.00
- Total Cost for 23 faucets: \$ 11,224.00
- Credit for Original Faucets: -\$ 1,779.00
- Total Change Amount: \$ 9,445.00

Option 2: Chicago Faucet 116.606.AB.1 (None in stock, 3 weeks from date of order)

- Cost per faucet: \$ 326.00
- Total cost for 23 faucets: \$ 7,498.00
- Credit for Original faucets: -\$ 1,779.00
- Total Change Amount: \$ 5,719.00

Below is the amount for changing the manual urinal flush valves to Sloan 8186-1 Royal G2 Optima Battery powered flush valves.

- Cost per flush valve: \$ 431.00
- Total Cost for 5 flush valves: \$ 2,155.00
- Credit for Original flush valves: - \$ 784.00
- Total Change Amount: \$ 1,371.00

Below is the amount to add a bottle filling station to EWC-1

- Cost Per Unit: \$ 854.00
- Labor per unit: \$ 276.00
- Total for 4 units: \$ 4,520.00

Please refer to attached cut sheets for all four items.

Touchless Faucets

116.606.AB.1

Product Type

Touch-free, programmable faucet with above-deck electronics

Features & Specifications

- Single hole
- Vandal Proof Pressure compensating Econo-Flo™ non-aerating laminar spray 0.5 GPM
- ECAST® design provides durable construction with total lead content equal to or less than 0.25% by weighted average
- Complies with the requirements of the Buy American Act of 1933.
- CFNow! Item Ships in 3 Days





Performance Specification

- Rated Operating Pressure: 20-125 PSI
- Rated Operating Temperature: 40-140°F

Warranty

- 3-Year Limited Electronics and Solenoid Warranty
- 5-Year Limited Faucet Warranty
- 1-Year Limited Finish Warranty
- 5-Year Limited Mechanical Warranty

Codes & Standards

-  ASME A112.18.1/CSA B125.1
-  ADA ANSI/ICC A117.1
- Complies with CALGreen requirements
-  NSF/ANSI 372 Low Lead Content
-  NSF/ANSI 61, Section 9

Job Name _____

Item Number _____

Section/Tag _____

Model Specified _____

Architect _____

Engineer _____

Contractor _____

☐ Submitted as Shown

☐ Submitted with Variations

Date _____




ECAST

ECAST products are intended for installation where state laws and local codes mandate lead content levels or in any location where lead content is a concern.

Architect/Engineer Specification

Chicago Faucets No. 116.606.AB.1, E-Tronic™ 40 electronic faucet with dual-beam infrared sensor. Traditional-style spout, chrome plated. Single-hole deck mount. 0.5 GPM (1.9 L/min) vandal-proof, pressure compensating, Econo-Flo, non-aerating spray. Single supply for tempered water. 6-volt lithium CRP2 battery included. Multiple field-adjustable modes and ranges. Compatible with Chicago Faucets Commander™ handheld programming unit. Compliant to CALGreen standard: .2 gallons per cycle maximum when used with supplied E2805 outlet. ECAST® construction with less than 0.25% lead content by weighted average. CALGreen compliant. This product meets ADA ANSI/ICC A117.1 requirements and is tested and certified to industry standards: ASME A112.18.1/CSA B125.1, Certified to NSF/ANSI 61, Section 9 by CSA, California Health and Safety Code 116875 (AB1953-2006), Vermont Bill S.152, NSF/ANSI 372 Low Lead Content, and California Green Building Standards Code (CALGreen).

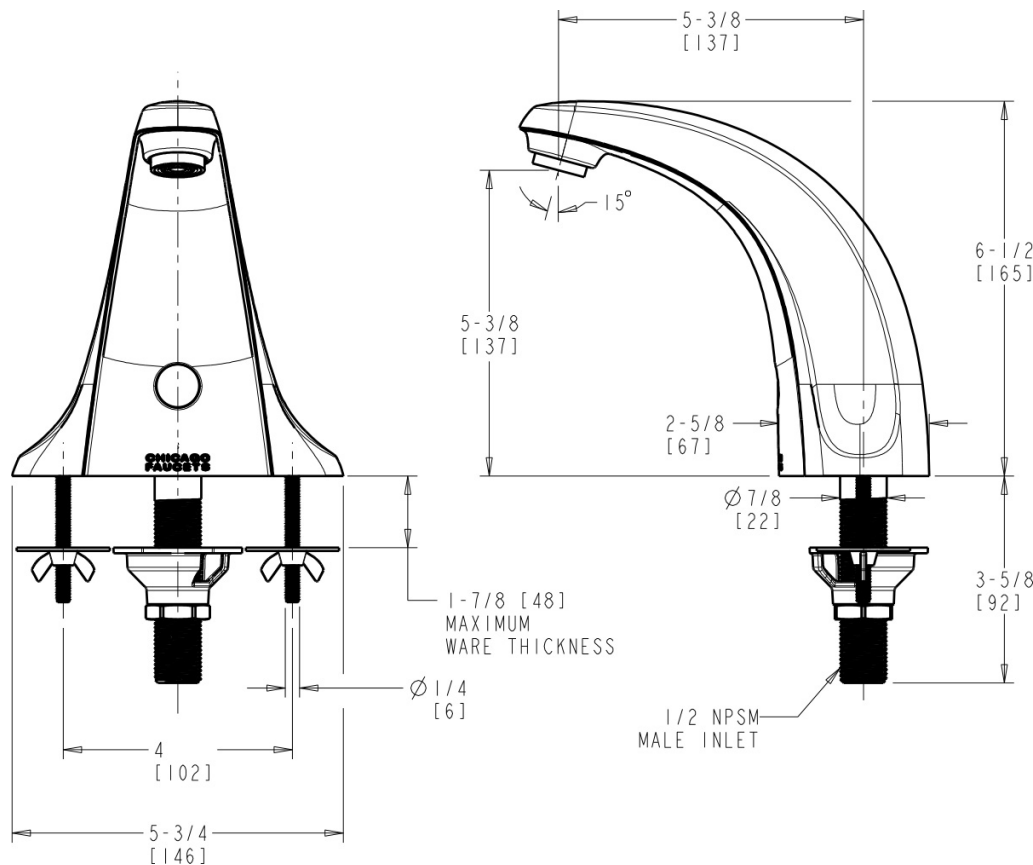

Operation and Maintenance

Installation should be in accordance with local plumbing codes. Flush all pipes thoroughly before installation. After installation, remove spout outlet or flow control and flush faucet thoroughly to clear any debris. Care should be taken when cleaning the product. Do not use abrasive cleaners, chemicals or solvents as they can result in surface damage. Use mild soap and warm water for cleaning and protecting the life of Chicago Faucet products. For specific operation and maintenance refer to the installation instructions and repair parts documents that are located at www.chicagofaucets.com.

Chicago Faucets, member of the Geberit Group, is the leading brand of commercial faucets and fittings in the United States, offering a complete range of products for schools, laboratories, hospitals, office buildings, food service, airports and sport facilities. Call 1.800.TECTRUE or 1.847.803.5000 Option 1 for installation or other technical assistance.

