



Quote: 10804

Page: 1/3

ANDY YEAGER
 GREEN COVE SPRINGS ELECTRIC
 CITY OF GREEN COVE SPRINGS
 1289 HARBOR RD
 GREEN COVE SPRINGS FL 32043

FormAddress-EmailURI: sales@sherman-reilly.com
 Date: May 24, 2023
 Your Reference: PLW-200X; BWT-1424
 Valid To: Jul 9, 2023
 Request Date: Oct 30, 2023
 Customer Number: 1009360

Contact: 6830 JOHN CARTER &
 ASSOCIATES, INC.
 E-Mail: sales@sherman-reilly.com

Dear Sir or Madam,
 Thank you for your interest. We offer the following items:

Line	Product	Description	Quantity	Net Price	Net Value
10	720001	PLW-200X;W/ROPE+GRIP+SWWL; PAINT	1 Each	176,984.05 USD / 1 Each	176,984.05 USD
		List Price	186,299.00 USD / 1 Each	186,299.00 USD	
		Product Discount (%)	-5.00 %	-9,314.95 USD	
<p>PLW-200X-T TURRET MOUNTED HYDRAULIC POWERED 4-DRUM PILOT LINE WINDER. PULL RATING OF 2,000 LBS. ON TOP OF EACH DRUM WITH 6,000' OF 7/16" PE-12 ROPE. UNIT IS POWERED BY A DIESEL ENGINE. FEATURES INCLUDE: SAFE ZONE CAB™ (HALF-CAB WITH OPERATOR PROTECTIVE SCREEN AND COMPLETE CONTROL FROM CONTROL PANEL INSIDE CAB), LOW FATIGUE ADJUSTABLE SEAT, WITH SWIVEL FITTINGS ALLOW 360 DEGREE ROTATION OF THE TURRET, AND HAS FIVE (5) HYDRAULIC JACKS. 7 PIN TRAILER PLUG. UNIT IS PAINTED S+R WHITE.</p> <p>FURNISHED WITH FOUR (4) REELS OF 7/16" X 6,000' PE-12 PULLING ROPE AND FOUR (4) VINYL DRUM COVERS.</p>					
20	623647	BWT-1424-RC; FINAL ASSY; 3MJ	1 Each	57,188.10 USD / 1 Each	57,188.10 USD
		List Price	60,198.00 USD / 1 Each	60,198.00 USD	
		Product Discount (%)	-5.00 %	-3,009.90 USD	

Total Item Net Value	234,172.15 USD
Shipping and Handling	3,036.00 USD
Other Surcharge2	1,170.86 USD
Total	238,379.01 USD

Payment Terms: 30 days net
 Incoterms: FOB Origin, -

Sherman & Reilly, Inc.
 400 West 33rd Street
 Chattanooga, TN 37410 USA
 www.sherman-reilly.com



Quote: 10804

Page: 2 / 3

Quote Number: 10804

*This quote is consistent with the City of Tallahassee Agreement No. 5069.

*Other Surcharge 2 listed on quote is a transaction fee required when Tallahassee contract is utilized by others.


SHIPPING AND HANDLING IS ESTIMATE ONLY. RATE SUBJECT TO CHANGE.



SHERMAN+REILLY

PLW-200X PILOT LINE WINDER

2,000 LBS. FOUR DRUM TURRET PILOT LINE WINDER

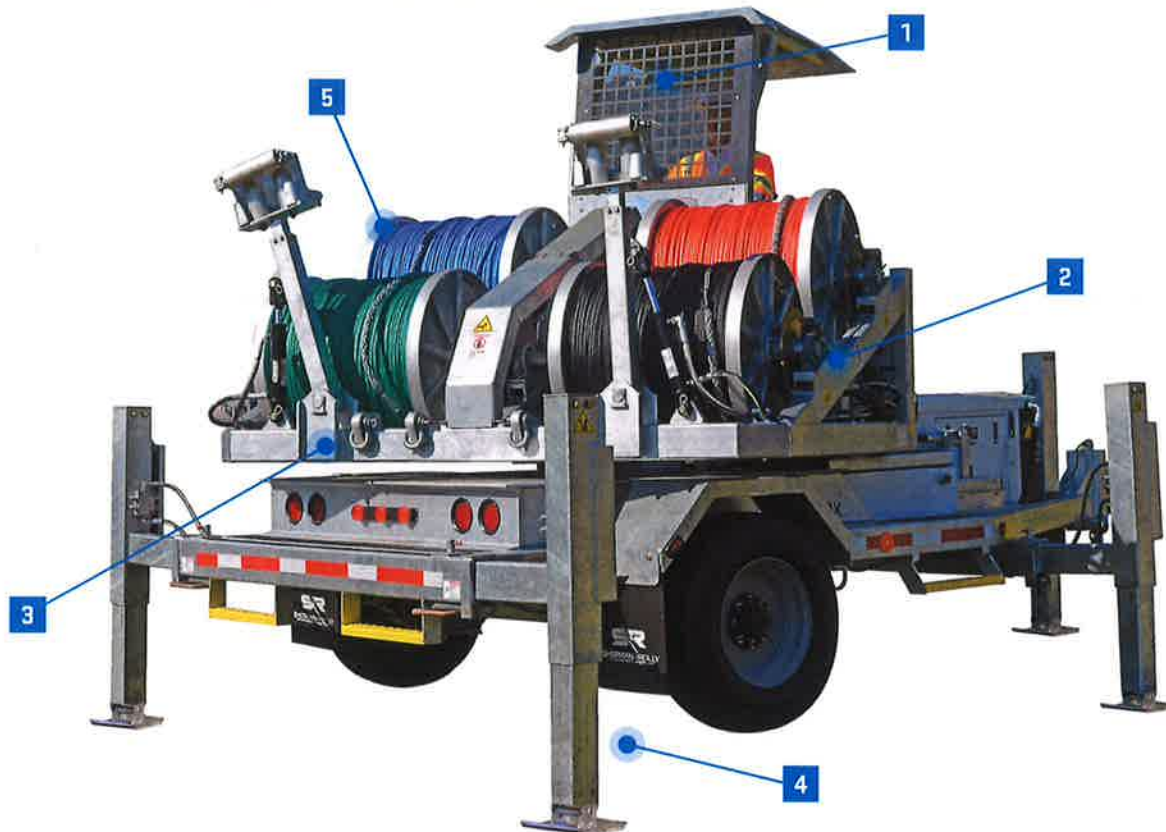

- 1 Ergonomic operator's station with intuitive controls
- 2 Braking system with electric over hydraulic activation
- 3 Tie off points rotate with turret for ease of use
- 4 Adjustable leveling jacks
- 5 6,000 ft. capacity for 7/16 in. rope

FEATURES

- 2,000 lbs. pulling capacity
- Equipped with CANbus technology and real-time self-diagnostics
- 360° continuous turret rotation for flexibility on the jobsite

PLW-200X PILOT LINE WINDER

2,000 LBS. FOUR DRUM TURRET PILOT LINE WINDER

Sherman-Reilly.com


SPECIFICATIONS

Pulling Capacity Max:	2,000 lbs. (Rated at top of drum)
Max Line Speed:	4.0 mph top of drum
Payout Break:	Hydraulic disc-caliper, electronically over hydraulic with finite PSI control
Turret Rotation:	360°, continuous
Reel Capacity:	6,000 ft. of 7/16" PE-12 rope
Drive System:	Hydraulic motor, chain and sprocket
Engine:	Tier 4 Diesel, 49 peak Hp, water cooled
Fuel Capacity:	13 Gallon
Hydraulic Fluid:	ISO Grade 32
Hydraulic Reservoir:	25 Gallon
Levelwind:	Hydraulically controlled, joystick controlled (2)
Operator's Safety Enclosure:	Safe-Zone® Cab, Open/Half cab, turret mounted
Frame Construction:	Steel tubing, continuous weld
Length: (Overall, Nom.)	16 ft., 11 in.
Width: (Overall, Nom.)	8 ft., 1 in.
Height: (Overall, Nom.)	9 ft., 7 in.
Weight*:	11,990 lbs.
GVWR:	12,500 lbs.
Suspension:	Leaf-spring
Axle Configuration:	Single
Wheel Configuration & Tires:	235/75R 17.5
Brakes: (Trailer)	Electric, with break-away switch
Towing Attachment:	3 in. pintle eye, with two safety chains and hooks
Tie Downs:	5/8 in. dia. Steel D-Rings (4)
Front/Nose Jack:	Hydraulic with galvanized shoe (1)
Stabilizing Jacks:	Hydraulic with galvanized shoe (4)
Electrical System:	12 VDC
Battery:	12 Volt, group 27
Lights / Navigation:	US DOT LED, 12 VDC
Grounding:	3/4 in. dia. Copper-clad steel loops (4)
Wheel Chocks:	Standard
Fire Extinguisher:	ABC
Color:	S+R White
Drum Covers:	Vinyl
Grips and Swivels:	1038 Kellems grip and B-40 Swivel

OPTIONS

Solar Battery Charger

Galvanized Finish Available

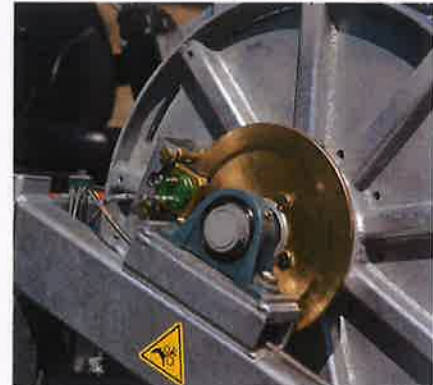

Braking system with electric over hydraulic activation



Ergonomic operator's station



Ergonomic operator's station



SHERMAN+REILLY

BWT-1424H HERITAGE TENSIONER

4,000 LBS. TENSIONING CAPACITY



- 1 Safe-Zone® enclosure with OcuView™.
- 2 8,000 lbs. Reel Stand Capacity.
- 3 Removable Bullwheel Liners.
- 4 All stringing operations controlled from the safety of the Safe-Zone® enclosure.

FEATURES

- Supports IEEE 524 requirements for conductors that range from 4/0 AWG to 795 kcmil.
- 4,000 lbs. tensioning capacity.

SPECIFICATIONS

TENSIONER	
Tensioning Capacity:	4,000 lbs.
Max. Line Speed:	4 mph.
Bullwheel Size/Count/Grooves:	42 in. / 2 / 5 groove
Bullwheel Diameter at Bottom of Groove:	40.73 in.
Groove Radius / Depth:	0.6 in. / 0.6 in.
Groove Lining Material:	Replaceable - Cast Urethane
Tension Brake:	Aluminum bronze, 27.75 in.
Tension Brake Control:	Hydraulic
Fairlead:	Supports LH and RH Lay
REEL CARRIER	
Max. Reel Diameter:	84 in.
Max. Reel Width:	52 in.
Max. Reel Weight:	8,000 lbs. Static and Dynamic
Payout Brake:	16 in. caliper disc
Payout Brake Control:	Hydraulic
TRAILER	
Operator's Safety Enclosure:	Safe-Zone open air cab
Frame Construction:	Steel tubing, continuous-weld
Length x Width x Height (ft.)	20.42 ft. L x 8.31 ft. W x 9.31 ft. H (overall, nom.)
Weight, (nom.)	5,600 lb (unloaded)*
GVWR:	14,000 lb*
Suspension:	Leaf spring
Axle Configuration:	6,500 lbs. per axle (2 total)*
Wheel Configuration and Tires:	ST235/80R16E, 3,417 lb @ 80 psi
Brakes, Trailer:	Electric brakes standard
Towing Attachment:	3 in. adjustable pintle eye
Safety Chains:	2 ea., with hooks
Front/Nose Jacks:	Manual two-speed crank jack on nose
Corner Stability Jacks:	Drop & pin style manual jacks on rear
Electrical System:	Split 12 VDC
Battery:	12V
Lights/Navigation:	12V, LED, US DOT- approved
Grounding (1):	Single, rear
Deck Cover:	Non-slip surface
Wheel Chocks	Standard
Fire Extinguisher:	ABC
Color:	S+R white

EXPERIENCE THE DIFFERENCE

CONTACT OUR TEAM FOR A PRODUCT DEMO

(423) 756-5300 or sales@sherman-reilly.com