

Pacific Lifestyle Homes Geotechnical Engineering Evaluation

Reserve at Green Mountain (Formerly Bahu Property) 2625 NE Goodwin Road Camas, Washington

True North Project No. 24-0368-2

April 2025 (revised May 2025)

April 18, 2025 (revised May 22, 2025)

Pacific Lifestyle Homes (PLH)

11815 NE 99th Street, Suite 1200 Vancouver, WA 98682

Attn: Nick Edwards

Email: nicke@buildplh.com

Subject: Geotechnical Engineering Evaluation

Reserve at Green Mountain Subdivision (Formerly Bahu Property)

2625 NE Goodwin Road

Camas, Clark County, Washington Clark County Parcel No. 173192000

True North Project # 24-0368-2

True North Geotechnical Services (True North) is pleased to submit our finalized Geotechnical Engineering Evaluation for the project noted above. This report was prepared in accordance with "True North Geotechnical - General Services Agreement (GSA) P24-0368-2" dated March 18, 2025, which was authorized by Samantha Zimmer with PLH on March 20, 2025. This report is intended to build off our conclusions summarized in our previously issued report, "Preliminary Geotechnical Engineering Evaluation – Goodwin Road (Bahu)", dated December 3, 2024. This report summarizes the entirety of our work accomplished and provides our geotechnical recommendations for development of the property with the proposed Reserve at Green Mountain development.

PROJECT UNDERSTANDING

Our current understanding of the project is based on the information provided to True North by Pacific Lifestyle Homes (PLH) and their project civil engineer, PLS Engineering. We have been provided the following document related to the proposed project:

 A one-page drawing, titled "Reserve at Green Mountain PRD", undated, prepared by PLS Engineering. This pre-application drawing shows the proposed layout of the development, including 49 single-family lots, a network of 2-lane local streets, and the proposed stormwater facility. The proposed development is overlain on the site's existing conditions and includes a wetland buffer for the mapped potential wetland in the southern quarter of the site.

Briefly, we understand that the subdivision will be developed with 49 single-family residential lots with concrete driveways. The remainder of the property will be developed with asphalt paved roads, associated utilities, landscape/hardscape, and stormwater infiltration facilities. The south of the site includes proposed recreational open space, including passive areas (wetland and buffer), and active open space for public recreation.



We understand this project is in the preliminary planning stages. As such, we have not been provided any structural drawings or foundation loads other than an indication that the single-family residences will be 1- or 2-story buildings. Preliminarily, we have assumed that maximum building loads will on the order of be 4 kips per linear foot for continuous wall footings, 25 kips per isolated column footing, and 150 psf for floor slabs on grade. As the site is generally flat, or gently sloped, we anticipate cuts and fills no greater than 2 to 4 feet, with the exception of utility trenches, and assuming the proposed new residences are not planned to have basements. Finally, we have assumed that the proposed development will be constructed in accordance with the provisions of the 2021 International Building Code (IBC) as well as any jurisdictional code requirements.

SCOPE OF SERVICES

The purpose of our services was to explore the site surface and subsurface conditions in order to provide geotechnical recommendations for the proposed development. The following describes our specific scope of services:

- **Geologic Map Review**: We reviewed relevant available geologic maps of the site for information regarding geologic conditions and hazards at or near the site.
- Subsurface Explorations: We excavated a total of 9 test pits (TP-1 through TP-9) to depths ranging between 4.5 and 11 feet below existing ground surface (bgs) across the proposed development area, at the locations shown on Figure 2. Soil samples were collected from the major strata encountered in each test pit.
- **Infiltration Testing:** Infiltration testing was attempted, but due to shallow groundwater and unsuitable soils, could not be performed.
- Laboratory Testing: All samples were returned to our office and select samples were subjected to additional laboratory testing, that included: in-situ moisture content and fines content testing.
- **Engineering Analyses:** All data collected during the subsurface exploration, literature research, and laboratory testing was evaluated and used to develop geotechnical design and construction recommendations.
- **Geotechnical Engineering Evaluation:** This document summarizes our geotechnical engineering evaluation services, and includes:
 - A site vicinity map and site plan showing the approximate locations of our explorations.
 - A discussion of subsurface conditions encountered including pertinent soil and rock properties as well as the encountered groundwater conditions.
 - Geotechnical related recommendations for foundation design including allowable bearing capacity and estimated settlements.
 - Seismic design parameters in accordance with ASCE 7-16.
 - The results of our infiltration testing.
 - Structural fill recommendations, including an evaluation of whether the in-situ soils can be used as structural fill.
 - Floor slab support recommendations.

- General retaining wall design parameter recommendations, including earth pressures, backfill, and drainage.
- Flexible and rigid pavement design recommendations.
- General comments regarding site grading and drainage.
- Discussions on other geotechnical issues that may impact the project.

SITE CONDITIONS

Surface Description

The proposed development is an 11.67-acre lot, located at 2625 NE Goodwin Road, Camas, Clark County, Washington; Clark County Parcel # 173192000. The site is bound to the north by NE Goodwin Road and to the east and west by similarly rural single-family residences. The parcel to the south is maintained as an open park space by Clark County Parks.

The current development at the site consists of one single-family residence and attached garage, two outbuildings, a concrete well house, a paved driveway, and all utilities associated with the residence (including a septic tank to the east of the existing residence and a power vault to the north of the residence). It is our understanding that the single-family residence will remain while the existing outbuildings, well house, and driveway on site will be demolished as part of development activities.

There is significant variation in vegetation over the ground surface of the lot. The northern third of the site, abutting NE Goodwin Road, generally consists of an open pasture. Vegetation in this area consists of thick, hummocky, knee-high grasses, tall weeds, and blackberry bushes along the existing fence lines. The existing outbuildings and well house are located in the central third of the site, which is largely characterized by mature evergreen trees, significant stands of blackberry bushes (especially around the southern outbuilding, well house, and along the east and west property lines), and maintained lawn along the existing driveway. The existing residence is located in the southern third of the site, which is largely made up of a field of maintained, low grass transitioning to wetland vegetation in the southwest and southern extents of the site.

In terms of topography, the northeastern corner of the property is located at 234 feet AMSL (above median sea level), and the site descends at a gentle 0 to 10 percent gradient to the southwestern corner of the property, which is located at 196 feet AMSL. Within the proposed development area, the ground surface is locally flatter and approximately terraced, with an approximate 0 to 5 percent gradient descending to the south. The existing residence sits at the southern extent of this terrace, and south of the existing residence, the local slopes are slightly steeper as they descend into the wetland and proposed open space, with a 5 to 10 percent gradient.

Geologic Setting

The map area lies on the eastern margin of the Portland Basin, which is part of the Puget-Willamette Lowland that separates the Cascade Range from the Oregon Coast Range. Since late Eocene time,

the Cascade Range has been the locus of an episodically active volcanic arc associated with underthrusting of oceanic lithosphere beneath the North American continent along the Cascadia Subduction Zone.

The underlying geologic unit at the subject property is mapped by the Washington Geologic Information Portal as "QTc – Quaternary-Tertiary continental sedimentary rocks and deposits – conglomerate with sandy and silty facies. Quaternary-Miocene pebble, cobble, and boulder gravel. Pleistocene-Pliocene gravel, sand, silt, and clay; deposits of the ancestral Columbia River."

According to the USDA Soil Survey, there are a number of surficial soils mapped at the site.



Exhibit 1: USDA mapped surficial soils at the site

In the northeastern corner of the site, surface soils are mapped as the "MIA: McBee silt loam, coarse variant, 0 to 3 percent slopes". The McBee series consists of somewhat poorly drained soils that permeate at a moderately high to high rate. These soils formed in alluvium and are found in

depressions and drainageways. In the area of the existing outbuildings in the center of the site and in the southwestern corner of property, surface soils are mapped as "CvA: Cove silty clay loam, 0 to 3 percent slopes". The Cove series is poorly drained, with moderately low to moderately high permeability, and are generally encountered within flood plains. Both the McBee and Cove series are characterized as hydric soils, which have shallow depths to the water table and experience regular or extended flooding or ponding.

Additional soil types mapped at the site include "DoB: Dollar loam, 0 to 5 percent slopes", and "LrC: Lauren gravelly loam, cemented substratum, 3 to 15 percent slopes". Both the Dollar and Lauren series are moderately well drained, with very low to high permeability.

Subsurface Conditions

On November 4, 2024, we visited the site to excavate five exploratory test pits (TP-1 through TP-5), as part of our preliminary evaluation of the site. On March 21, 2025 we returned to excavate four additional test pits (TP-6 through TP-9). In all, we excavated a total of 9 test pits to depths ranging between 4.5 and 11 feet below existing ground surface (bgs) across the proposed development area. Soil samples were collected from the major strata encountered in each test pit and were returned to our office for examination and index testing. See Figure 2 - Site & Exploration Plan for the locations of our explorations.

As indicated above, the subsurface conditions at the site are highly variable and the conditions encountered in our explorations appear consistent with the soil types indicated in regional soil maps. Descriptions of field and lab procedures and the exploration logs are included in Appendix A. The following is a highly generalized description of the subsurface units encountered:

FILL:

At the ground surface of TP-2, we encountered 2 feet of soft, silt with clay, undocumented fill, overlying 6 inches of crushed gravel. As this material will be removed as part of development activities, we did not perform any laboratory testing on this layer.

SILT:

At the ground surface in all the explorations except TP-2, we encountered dark brown to red-brown soft to medium stiff SILT with Clay and Clayey SILT. At TP-2, we first encountered this layer beneath the undocumented fill, at 2.5 feet bgs. In TP-1 and TP-2, in the northeast portion of the site, these soft to medium stiff, fine-grained soils extended to depths of 6 to 9 feet. Over the remainder of our explorations these surficial fine-grained soils extended to 1.5 to 5 feet bgs.

Laboratory tests conducted on soil samples collected from this layer returned moisture contents ranging from 21 to 32 percent, and fines contents ranging from 54 to 77 percent.

SAND:

Underlying the silt material found at TP-1, TP-4, TP-6 and TP-8, we encountered medium dense to very dense SAND with varying amounts of fines (clay and gravel). This layer extended to depths ranging between 2 and 9 feet bgs.

Laboratory testing conducted on this layer returned moisture contents ranging between 19 and 41 percent and fines contents ranging between 39 and 49 percent..

GRAVEL (WEATHERED BEDROCK):

Underlying the silt or sand material found in all test pits except TP-3 and TP-4, we encountered dense to very dense GRAVEL with varying amounts of clay, extending to the termination depth of those explorations where it was encountered explorations. This material was interpreted to be weathered bedrock at depths.

Laboratory tests conducted on soil samples collected from these layers returned moisture contents ranging from 19 to 55 percent, and a fines content of 25 percent.

As previously mentioned, the subsurface conditions at the site exhibited significant variation, consistent with the multiple mapped USDA soil types within the property. The above generalized descriptions are a rough overview of the encountered conditions. More detailed information of subsurface conditions can be found in the attached Test Pit Logs in Appendix A.

Groundwater

Groundwater was encountered at TP-1, TP-2, TP-3, TP-6, TP-8, and TP-9, at depths of 5, 8.5, 6, 3.5, 1.5, and 3 feet bgs, respectively. TP-1 and TP-6 were excavated near mapped hydric soils in the southeast corner of the site, while TP-2, TP-4, TP-8 and TP-9 were excavated in non-hydric soils. Data published on Clark County MapsOnline indicates that groundwater at the site is between 0 to 10 feet bgs, which agrees with groundwater conditions observed in our explorations.

Depending on the time of year of construction, it may be possible that groundwater could be an issue during shallow foundation construction. Additionally, utility trenches may encounter perched water and infiltration facilities will need to be located at a shallow enough depth that adequate vertical spacing is provided between the bottom of the facility and seasonal high groundwater. Groundwater elevations can fluctuate depending on the time of year of construction and changes in land use.

Infiltration Testing/Feasibility

Based on the presence of shallow groundwater at most of our explorations and the lack of suitable soils above the groundwater table for infiltration, infiltration testing could not be reliably completed at the property. It is our opinion that subsurface infiltration is not a feasible method of stormwater management at this site.

Geologic Hazards Review

The following provides a geologic hazards review for the subject site in accordance with CCC 40.430. The geologic hazard review is based on our site reconnaissance and explorations, as well as a review of publicly available published literature and maps.

Mapped Hazards: As a part of our due diligence, we reviewed the Clark County Property Information Center - MapsOnline website (https://gis.clark.wa.gov/gis/property) for information on geologic hazards present at this property. No geologic hazards are mapped on this property. The site is mapped as having an NEHRP site class C and very low liquefaction susceptibility. We address the applicable sections of CCC 40.430 below:

<u>Liquefaction</u>: As stated above, the area to be developed is mapped as having a very low liquefaction susceptibility. This corresponds to the conditions observed in our explorations where dense soils with a significant coarse material percentage (eg, sand, gravel, cobbles, or boulders) were encountered at relatively shallow depths ranging between 1.5 and 9 feet bgs. Dense, large-grained soils below the water table (encountered at 5 feet bgs at the shallowest) have a very low potential for liquefaction.

<u>Ground Motion Amplification:</u> In accordance with ASCE 7-16, we recommend a Site Class C (dense soil and soft rock soil profile with an average N-value greater than 50) for this site when considering the average of the upper 100 feet of bearing material beneath the foundations. This recommendation is based on the results of our subsurface investigation as well as our understanding of the local geology. Inputting our recommended Site Class as well as the site latitude and longitude into the ACSE 7 website (<u>ASCE 7 Hazard Tool</u>), we obtained the seismic design parameters shown in Table 1 below. Note that the values for F_a and F_v in Table 2 were obtained from ASCE's Supplement 3 dated November 5, 2021 and issued for ASCE 7-16 to correct some seismic design issues in the original publication.

| Table 1. 2021 IBC (ASCE 7-16, Supplement 3) Seismic Design Parameters | | | | | | | |
|---|---|-------------|--|--|--|--|--|
| Location | Short Period 1-Second | | | | | | |
| Maximum Credible Earthquake Spectral Acceleration | on $S_s = 0.797 g$ $S_1 = 0.351 g$ | | | | | | |
| Site Class | C | , | | | | | |
| Site Coefficient | F _a = 1.2 F _v = 1.5 | | | | | | |
| Adjusted Spectral Acceleration | S _{MS} = 0.957 g S _{M1} = 0.527 | | | | | | |
| Design Spectral Response Acceleration Parameters | S _{DS} = 0.638 g S _{D1} = 0.351 g | | | | | | |
| MCE _G Peak Ground Acceleration | MCE _G PGA | x = 0.357 g | | | | | |
| Site Amplification Factor at PGA | F _{PGA} : | = 1.2 | | | | | |
| Site Modified Peak Ground Acceleration | PGA _M = 0.429 g | | | | | | |

g – acceleration due to gravity, * See note below.

The return interval for the ground motions reported in the table above is 2 percent probability of exceedance in 50 years.

CONCLUSIONS AND RECOMMENDATIONS

Geotechnical Design and Construction Considerations

Based on the results of our Geotechnical Engineering Evaluation, development of the site with the proposed development is feasible provided the recommendations in this report are included in the project design and implemented during construction.

The primary geotechnical concerns associated with the project are:

- 1. **Presence of soft surficial soils.** As noted above, we encountered variable depths of fill and/or soft surficial soils across the site, ranging in thickness between 0.5 and 2.5 feet below existing ground surface (bgs). The fill encountered in TP-2 extended to about 2.5 feet bgs and consisted of 2 feet of soft silt with clay underlain by 6 inches of 3/4" minus gravel. During mass grading we expect much of the surficial soils will be removed from the site or stockpiled for use in landscape areas. Once the subgrade has been approved by True North, mass grading may begin using suitable onsite material or imported structural/engineered fill. We expect that foundations will generally bear on properly placed and compacted structural/engineered fill.
- 2. Presence of shallow groundwater and seepage. As stated above, we encountered shallow groundwater in several of our explorations across the site, in both mapped hydric soils areas, and outside of these areas. We do not anticipate that generally groundwater will become an issue for mass grading and shallow foundation construction. However, given that groundwater was encountered at 1.5 feet bgs at TP-8, it is more likely that groundwater may present an issue during mass grading and shallow foundation construction in the north of the site, and particularly during the wet winter months.

Additionally, utility trenches and other embedded structure excavations will likely encounter groundwater during development of the site. The contractor will need to be prepared for this condition.

Finally, due to the presence of shallow groundwater across the site, it is our opinion that the subsurface conditions are not conducive to the use of infiltration for stormwater management for the proposed project.

In summary, provided the recommendations in this report are adhered to, we do not foresee any major issues that would preclude the proposed development. The above-mentioned factors are listed to draw the attention of the reader to the issues to address during design and construction.

Moisture Sensitive Soils/Weather Related Concerns

The fine-grained soils at this site are considered moisture sensitive. During wet weather periods, increases in the moisture content of the soil can cause significant reduction in the soil strength and support capabilities. In addition, soils that become wet may be slow to dry and thus significantly retard the progress of grading and compaction activities. It will, therefore, be advantageous to perform earthwork and foundation construction activities during dry weather.

Given the depth of the soft surficial soils encountered across this site, the contractor may need to consider the construction of temporary haul roads depending on the time of year construction takes place. True North can provide more detailed wet weather recommendations if needed. Stormwater should not be allowed to collect on prepared subgrades.

Site Preparation

Site preparation will include clearing, grubbing, etc. to remove the upper organic and fill soils to expose the underlying, native, medium dense silty sand and/or very dense, silty gravel and cobbles. Once the stripping has been approved we recommend proofrolling the site with a fully loaded, tandem axle dump truck to identify any excessively soft spots under the observation of the Geotechnical Engineer during various phases of construction to ensure proper fill placement. Areas not able to be adequately proofrolled (or where not practical) will be evaluated by the Geotechnical Engineer using a ½-inch diameter steel probe rod. Any soft spots identified should be over excavated to expose firm and unyielding soils and replaced with compacted structural fill.

Any utilities present beneath the proposed construction will need to be located and rerouted as necessary and any abandoned pipes or utility conduits should be removed to inhibit the potential for subsurface erosion. Utility trench excavations should be backfilled with properly compacted structural fill in accordance with the structural fill recommendations in this report.

It should be noted that, due to the soft surficial soils observed over much of the site, construction traffic on these upper soils may have a difficult time moving around on site. We recommend consideration be given to constructing haul roads depending on site conditions at the time of construction.

Subgrade Verification

Following site preparation, including removal of all topsoil/till zone and compaction of the exposed subgrade and prior to placing aggregate base for the foundations, building pad, or pavement section, the exposed subgrade should be evaluated. The subgrades should be evaluated by qualified True North personnel using a steel foundation probe. Unsuitable areas identified during the field evaluation should be re-compacted to or be excavated to firm ground and replaced with structural fill.

Excavations

In Federal Register, Volume 54, No. 209 (October 1989), the United States Department of Labor, Occupational Safety and Health Administration (OSHA) amended its "Construction Standards for Excavations, 29 CFR, part 1926, Subpart P". This document and subsequent updates were issued to better ensure the safety of workmen entering trenches or excavations. It is mandated by this federal regulation that excavations, whether they be utility trenches, basement excavations or footing excavations, be constructed in accordance with the new OSHA guidelines. It is our understanding that these regulations are being strictly enforced and if they are not closely followed, the owner and the contractor could be liable for substantial penalties.

The contractor is solely responsible for designing and constructing stable, temporary excavations and should shore, slope, or bench the sides of the excavations as required to maintain stability of both the excavation sides and bottom. The contractor's "responsible person", as defined in 29 CFR Part 1926, should evaluate the soil exposed in the excavations as part of the contractor's safety procedures. In no case should slope height, slope inclination, or excavation depth, including utility trench excavation depth, exceed those specified in local, state, and federal safety regulations.

Depending on the time of year, and the depth of the excavation, groundwater may be encountered at shallow depths. If groundwater is encountered during excavation, the soils encountered in our subsurface explorations should be classified as Type C soil according to the most recent OSHA regulations. If groundwater is not encountered or dewatering is accomplished in advance of excavation, the soils may be classified as Type B soil. In our opinion, excavations should be safely sloped or shored.

If groundwater is encountered during excavation, positive groundwater control will be required, including the possibility of wells extending below the depth of excavation. Groundwater levels will be lowest in the dry season, and construction during that time will minimize groundwater control problems. The groundwater conditions at the time of construction and the contractor's ability to control these conditions will control the degree of inclination of temporary slopes. In our opinion, temporary excavation slopes can be constructed as steep as 1.5H:1V, if groundwater levels are maintained at least 2 feet below the bottom of the excavation. Slopes should be flattened if significant seepage or running soils are encountered.

If slopes of this inclination, or flatter, cannot be constructed, or if excavations greater than four feet in depth are required, temporary shoring may be necessary. This shoring would help protect against slope or excavation collapse and would provide protection to workmen in the excavation.

We are providing this information solely as a service to our client. True North does not assume responsibility for construction site safety or the contractor's compliance with local, state, and federal safety or other regulations.

Construction Dewatering

The results of our subsurface investigations indicate that the groundwater seepage at the site is located some 3 to 5 feet below the ground surface, and will fluctuate in response to seasonal precipitation. Excavations that extend below the groundwater level may result in caving, heaving, or running soils, especially if excavations extend into the sandy clay soils encountered in our explorations. The contractor should consider the use of a network of ditches and sumps, into which water can flow to be pumped out of the excavation.

The depth and dewatering time will need to be determined at the time of construction and adjusted depending on site conditions. Unprotected working should not be allowed near temporary un-shored excavations until groundwater levels have been stabilized and shoring, such as trench shields or bracing, has been installed.

Structural Fill

Structural fill should be granular, free of organics or other deleterious materials, have a maximum particle size less than 3 inches, be relatively well graded, and have a liquid limit less than 45 and plasticity index less than 25. In our professional opinion, we anticipate the surficial fine-grained soils stripped from this site may be used only in landscape areas. These soils are moisture sensitive and could be difficult (depending on time of year of construction) to properly moisture condition and place. As such, the contractor will need to account for the need to import material to raise site grades. We recommend crushed rock structural fill be placed beneath footings, slabs, or other structural elements to allow for uniform load distribution, to provide protection from the elements, and to create a clean working surface.

We recommend all structural fill be moisture conditioned to within 3 percentage points below and 2 percentage points above optimum moisture as determined by ASTM D1557 (modified proctor). If water must be added, it should be uniformly applied and thoroughly mixed into the soil by disking or scarifying.

Fill should be placed in relatively uniform horizontal lifts on the prepared subgrade which has been stripped of deleterious materials (i.e. topsoil and fill) and approved by the Geotechnical Engineer or his representative. Each loose lift should be about 1-foot thick. The type of compaction equipment used will ultimately determine the maximum lift thickness. Structural fill should be compacted to at least 95 percent of modified proctor maximum dry density as determined by ASTM D1557. Each lift of compacted engineered fill should be tested by a representative of the Geotechnical Engineer prior to placement of subsequent lifts.

Utility Trench Backfill

Trench backfill for the utility pipe base and pipe zone should consist of well-graded granular material with a maximum particle size of $\frac{3}{4}$ inch and less than 8 percent by weight passing the U.S. Standard No. 200 Sieve. The material should be free of roots, organic matter, and other unsuitable materials.

Trench backfill should be compacted to at least 90 percent of the maximum dry density at depths greater than 4 feet below finished grade and to 95 percent of the maximum dry density within 4 feet of finished grade. Compaction is based on ASTM D1557/AASHTO T-180, the modified proctor test, or as recommended by the pipe manufacturer.

Foundation Recommendations

Once the site has been properly prepared as discussed above, the planned construction can be supported on a conventional shallow foundation system. All foundations should bear on native, undisturbed, medium stiff clayey silt, or, heavily recompacted, native, sandy clay, or, atop compacted granular crushed rock structural fill placed atop the approved subgrade soils. Spread footings for building columns and continuous footings for bearing walls supported on the above-mentioned materials can be designed for an allowable soil bearing pressure of 2,000 psf based on dead load plus design live load and can be increased by one-third when including short-term wind or seismic loads. The above allowable soil bearing pressures can be increased by one-third when including short-term wind or seismic loads. Construction shall be accomplished in accordance with the 2021 International Building Code (IBC).

Lateral frictional resistance between the base of footings and the subgrade can be expressed as the applied vertical load multiplied by a coefficient of friction of 0.33 for concrete foundations bearing directly on the subgrade soils described above or on compacted structural fill placed atop that strata In addition, lateral loads may be resisted by passive earth pressures based on an equivalent fluid pressure of 250 pounds per cubic foot (pcf) for footings poured "neat" against the above-mentioned soil/rock strata. These are ultimate values—we recommend a factor of safety of 1.5 be applied to the equivalent fluid pressure, which is appropriate due to the amount of movement required to develop full passive resistance.

Exterior footings and foundations in unheated areas should be located at a depth of at least 18 inches below the final exterior grade to provide adequate frost protection. If the construction takes place during the winter months and the foundation soils will likely be subjected to freezing temperatures after foundation construction, then the foundation soils should be adequately protected from freezing. Otherwise, interior foundations can be located at nominal depths compatible with architectural and structural considerations.

The foundation excavations should be observed by a representative of the Geotechnical Engineer prior to steel or concrete placement to assess that the foundation materials are capable of supporting the design loads and are consistent with the materials discussed in this report. Unsuitable soil zones encountered at the bottom of the foundation excavations should be removed and replaced with properly compacted structural fill as directed by the Geotechnical Engineer.

The fine-grained soils at this site are moisture sensitive. As such, they should be kept to as close to their in-situ moisture content. This should be accomplished during construction by covering the

soil subgrade the same day it is exposed with crushed rock structural fill. Surface run-off water should be drained away from the excavations and not be allowed to pond.

Based on the known subsurface conditions we anticipate that properly designed and constructed foundations supported on the above-mentioned materials could experience maximum total settlement on the order of 1-inch and differential settlement on the order of 1/2-inch over 30 horizontal feet.

<u>Granular Pads:</u> Granular pads should be used if unsuitable foundation conditions are encountered at the proposed foundation subgrade elevations. Granular pads should extend 6 inches horizontally beyond the margins of the footings for each foot of the pad thickness or to the depth of firm, undisturbed native soil. The granular pads should be a minimum of 6 inches thick, however if embedded structures are encountered in the foundation areas, the embedded structure should be removed down to a minimum 24-inches below the base of footing, and granular pads should be thickened accordingly.

The granular pads should consist of ¾-inch minus crushed rock that is fairly well graded between coarse and fine, contains no organic matter or other deleterious materials, and has less than 5 percent passing the U.S. Standard No. 200 Sieve. The imported crushed rock should be compacted to not less than 92 percent of the maximum dry density, as determined by ASTM D 698.

Retaining Walls

We were not provided any construction drawings that would indicate if site retaining walls are necessary to complete the grading of the site. True North is available to provide a separate retaining wall design for any planned walls. We provide the following recommendations for use by the Structural Engineer in the event additional stem walls or other concrete structural walls are required for the homes.

The foundations for the proposed walls should be designed in accordance with foundation recommendations above. Lateral earth pressures on walls, which are not restrained at the top, may be calculated on the basis of an "active" equivalent fluid pressure of 35 pcf for level backfill, and 60 pcf for sloping backfill with a maximum 2H:1V slope. Lateral earth pressures on walls that are restrained from yielding at the top (i.e. stem walls) may be calculated on the basis of an "at-rest" equivalent fluid pressure of 55 pcf for level backfill, and 90 pcf for sloping backfill with a maximum 2H:1V slope. The stated equivalent fluid pressures do not include surcharges, such as foundation, vehicle, equipment, etc., behind walls, hydrostatic pressure buildup, or earthquake loading. For seismic loading on retaining walls with level backfill, new research indicates that the seismic load

is to be applied at 1/3 H of the wall instead of 2/3 H, where H is the height of the wall. We recommend that a Mononobe-Okabe earthquake thrust per linear foot of 4.8 psf* H² be applied at 1/3 H, where H is the height of the wall measured in feet. For a maximum 2H:1V slope we recommend 8.5 psf*H². This assumes a combination of soil and granular backfill retained by the walls within the active wedge.

All backfill for retaining walls should be select granular material, such as sand or crushed rock with a maximum particle size between ¾ and 1½ inches, having less than 5 percent material passing the No. 200 sieve. Because of their silt content, the native soils do not meet this requirement, and it will be necessary to import material to the project for wall backfill. Silty soils can be used for the last 18 to 24 inches of backfill, thus acting as a seal to the granular backfill. All backfill behind retaining walls should be moisture conditioned to within ± 2 percent of optimum moisture content and compacted to a minimum of 90 percent of the material's maximum dry density as determined in accordance with ASTM D1557. Fill materials should be placed in layers that, when compacted, do not exceed about 8 inches. Care in the placement and compaction of fill behind retaining walls must be taken in order to ensure that undue lateral loads are not placed on the walls. An adequate subsurface drain system will need to be designed and installed behind retaining walls to prevent hydrostatic buildup.

Slab-on-grade Floors

Support for lightly loaded floor slabs can be obtained on the undisturbed native soil or on engineered structural fill. A minimum 4-inch-thick layer of imported granular material should be placed and compacted over the prepared subgrade to assist as a capillary break and provide uniform load distribution.

A subgrade modulus of 150 pounds per cubic inch may be used to design floor slabs. Imported granular material should be crushed rock or crushed gravel and sand that is well-graded between coarse and fine, contain no deleterious materials, have a maximum particle size of 1½ inches, and have less than 5% by weight passing the U.S. Standard No. 200 Sieve. The imported granular material may be placed in one lift and should be compacted until well-keyed, about 95% of the maximum dry density as determined by ASTM D1557 (AASHTO T-180).

Pavement

The following pavement design recommendations are based on our experience with similar facilities and subgrade conditions.

For automobile parking areas, we recommend a pavement section consisting of 3 inches of asphaltic concrete (AC) over 8 inches of crushed rock base (CRB) or 5 inches of Portland Cement concrete (PCC) over 5 inches of crushed rock base (CRB). For truck traffic areas, the pavement section should consist of 4 inches of AC over 12 inches of CRB or 6 inches of PCC over 8 inches of CRB. These recommended pavement sections are based on the assumption that the subgrade consists of firm structural fill or compacted native subgrade and that the pavement will be constructed during the dry summer months. Proofrolling should be used to evaluate pavement subgrade. Any soft areas disclosed by proofrolling will likely need to be reworked. Some contingency should be provided for the repair of any soft areas. If pavement construction is scheduled for the wet season, it will be necessary to increase the above-recommended base course sections.

AC and CRB materials should conform to WSDOT specifications. All CRB should be compacted to at least 95 percent of the modified proctor ASTM D-1557 laboratory test standard.

<u>Drainage:</u> Permanent, properly installed drainage is also an essential aspect of pavement design and construction. All paved areas should have positive drainage to prevent ponding of surface water and saturation of the base course. This is particularly important in cut sections or at low points within the paved areas, such as around stormwater catch basins. Effective means to prevent saturation of the base course including installing weep holes in the sidewalls to catch basins.

<u>Geotextile Separation Fabric:</u> A geotextile separation fabric will be required at the interface of the native soil and imported subgrade material beneath the proposed roadways. The separation fabric should meet the specificiation provided in WSS 9-33.2(1) – Geotextile Properties (Table 3) for soil separation. The geotextile should be installed in conformance with the specifications provided in WSS 2-12 – Construction Geosynthetic.

Stabilization Material: In the case of unsuitable or unstable pavement subgrade conditions, stabilization material consisting of pit- or quarry-run rock or crushed rock should be placed below the above-described pavement sections. The material should have a maximum particle size of 6-inches and less than 5 percent by dry weight passing the U.S. Standard No. 4 sieve, have at least two mechanically fractured faces, and be free or organic matter or other deleterious material. Material meeting the specification provided in WSS 9-27.3(6) – Stone is generally acceptable for use. Stabilization material should be placed in lifts between 12 and 18 inches thick and compacted to a firm condition with a smooth-drum roller without using vibratory action.

Drainage and Groundwater Considerations

The Contractor should be made responsible for temporary drainage of surface water and groundwater as necessary during construction to prevent standing water and/or erosion at the site.

As a matter of good construction practice, we recommend that perimeter drains be installed for all buildings. Perimeter drains should consist of perforated drainpipe embedded in a zone of free draining fill that is wrapped in a non-woven geotextile filter. The pipe should be connected to a tightline drainpipe leading to storm drain facilities. Foundation and crawl space drainage should be sloped to drain to a sump or low point drain outlet. Water should not be allowed to pond within crawl spaces. Roof drains should be connected to a tightline drainpipe leading to storm drain outlet facilities.

Water should not be allowed to collect in the foundation excavations or on prepared subgrades for the foundations/slabs/roadway during construction. Positive site drainage should be maintained throughout construction activities. Undercut or excavated areas should be sloped toward one corner to facilitate removal of any collected rainwater, groundwater, or surface runoff.

The site grading plan should be developed to provide rapid drainage of surface water away from the building areas and to inhibit infiltration of surface water around the perimeter of the buildings and beneath the floor slabs. The grades should be sloped away from the building area. We anticipate stormwater will be routed to the storm system (infiltration facility) to be constructed as part of this development.

Soil Erosion

Site-specific erosion control measures should be implemented to address the maintenance of slopes or exposed areas. This may include silt fence, bio-filter bags, straw wattles, or other suitable methods. During construction, all exposed areas should be well compacted and protected from erosion. Temporary slopes or exposed areas may be covered with straw, crushed aggregate, or rip in localized areas to minimize erosion.

LIMITATIONS

This report was prepared for the exclusive use of Pacific Lifestyle Homes and members of the design team for specific application to the Goodwin Road (Bahu) Property development located at the address noted above. It should be made available to prospective contractors for information on the factual data only, and not as a warranty of subsurface conditions such as those interpreted from the explorations and presented in the discussions of the subsurface conditions included in this report.


The recommendations contained in this report are based on information derived through subsurface sampling. No matter how effective subsurface sampling may be, variations between exploration location and the presence of unsuitable materials are possible and cannot be determined until exposed during construction. Accordingly, True North's recommendations can be finalized only through True North's observation of the project's earthwork construction. True North accepts no responsibility or liability for any party's reliance on True North's recommendations.

Within the limitations of the scope, schedule and budget, the analyses, conclusions, and recommendations presented in this report were prepared in accordance with generally accepted professional geotechnical engineering principles and practice in this area at the time this report was prepared. We make no warranty, either express or implied.

CLOSING

We appreciate the opportunity to be of service to you. If you have any questions, or if we can be of further assistance to you, please contact us at (360) 984-6584.

Respectfully Submitted,



Timothy J. North, P.E. Principal Geotechnical Engineer

Reviewed By:

Lauren Shepherd, E.I.T. Staff Geotechnical Engineer


Attachment: Figure 1 – Site Vicinity

Figure 2 – Site Layout and Explorations

Figure 3 – Site Photographs


Appendix A – Field Exploration Methods, Lab Testing Procedures, Exploration Logs

FIGURES

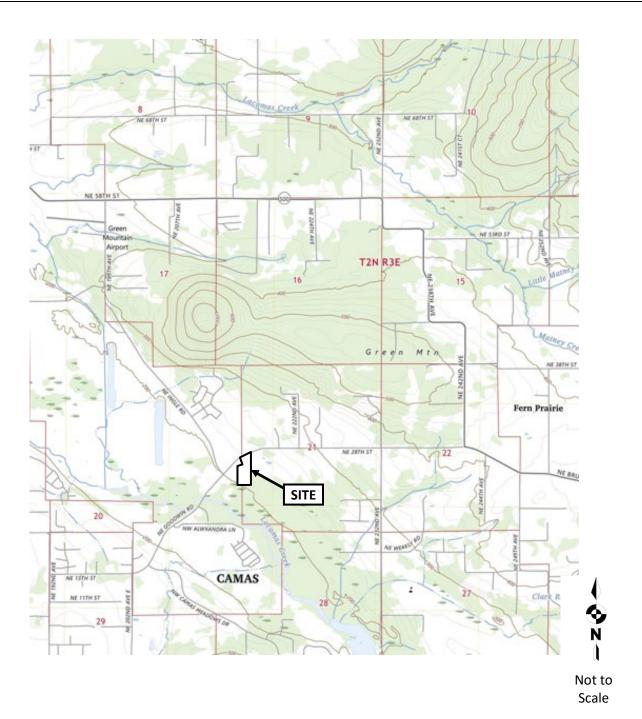

Source: "Topographic Map of the Lacamas Creek Quadrangle, 7.5 minute series" 2023, United States Geological Survey (USGS).

| TRUE NORTH • GEOTECHNICAL • | Pacific Lifestyle Homes Reserve at Green Mountain Camas, Washington | Project # 24-0368-2 |
|--|---|-------------------------|
| 219 West 4 th Street Vancouver, WA 98660 360-984-6584 | April 2025 | Figure 1 – Vicinity Map |

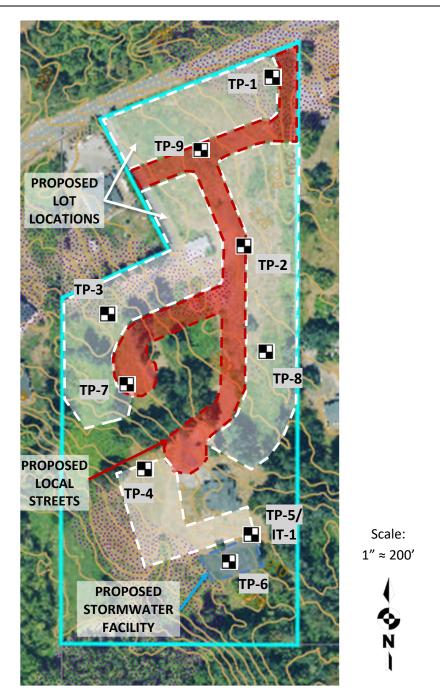

TP-1 Approximate Exploratory Test Pit Locations, November 4, 2024, and March 21, 2025.

Source: Aerial & Topo – Clark County MapsOnline, accessed November 18, 2024.

Note: Purple shading indicates mapped hydric soils.

| TRUE NORTH • GEOTECHNICAL • | Pacific Lifestyle Home Reserve at Green Mountain Camas, Washington | Project # 24-0368-2 |
|--|--|---------------------|
| 219 West 4 th Street Vancouver, WA 98660 360-984-6584 | April 2025 (revised May 2025) | Figure 2 –Site Plan |



Photo 1. From the approximate location of TP-1, looking west across the pasture.



Photo 2. From between the two outbuildings, looking north along the private driveway connecting with NE Goodwin Road.

| TRUE NORTH • GEOTECHNICAL • | Pacific Lifestyle Homes Reserve at Green Mountain Camas, Washington | Project # 24-0368-2 |
|--|---|--|
| 219 West 4 th Street Vancouver, WA 98660 360-984-6584 | April 2025 | Figure 3A – Site Photographs (1 of 5) |



Photo 3. From between the existing outbuildings, looking south, towards the existing residence.



Photo 4. From approximate location of TP-3, looking east towards existing outbuildings.

| TRUE NORTH • GEOTECHNICAL • | Pacific Lifestyle Homes Reserve at Green Mountain Camas, Washington | Project # 24-0368-2 |
|--|---|--|
| 219 West 4 th Street Vancouver, WA 98660 360-984-6584 | April 2025 | Figure 3B – Site Photographs (2 of 5) |



Photo 5. From approximate location of TP-4, looking southeast towards existing residence.



Photo 6. From the existing residence, looking west across gentle descending slope to proposed open recreational area.

| TRUE NORTH • GEOTECHNICAL • | Pacific Lifestyle Homes Reserve at Green Mountain Camas, Washington | Project # 24-0368-2 |
|--|---|--|
| 219 West 4 th Street Vancouver, WA 98660 360-984-6584 | April 2025 | Figure 3C – Site Photographs (3 of 5) |



Photo 1. South of the existing residence, looking east, towards the location of TP-6



Photo 2. From the existing driveway, looking southwest towards the existing residence and TP-7, in progress

| TRUE NORTH • GEOTECHNICAL • | Pacific Lifestyle Homes Reserve at Green Mountain Camas, Washington | Project # 24-0368-2 |
|--|---|--|
| 219 West 4 th Street Vancouver, WA 98660 360-984-6584 | April 2025 | Figure 3D – Site Photographs (4 of 5) |



Photo 3. From north of the existing residence, looking north, towards the location of TP-8



Photo 4. From near the existing barn, looking north towards TP-9, in progress

| TRUE NORTH • GEOTECHNICAL • | Pacific Lifestyle Homes Reserve at Green Mountain Camas, Washington | Project # 24-0368-2 |
|--|---|--|
| 219 West 4 th Street Vancouver, WA 98660 360-984-6584 | April 2025 | Figure 3E – Site Photographs (5 of 5) |

APPENDIX A

Field Exploration Procedures
Laboratory Testing Procedures
Test Pit Logs

FIELD EXPLORATION PROCEDURES

General

We excavated a total of 9 test pits (TP-1 through TP-9) to depths ranging between 4.5 and 11 feet below existing ground surface (bgs) across the proposed development area. The excavations were advanced utilizing a Link-Belt 80 X3 with a 30-inch wide toothed bucket owned and operated by Thompson Brothers Excavating. Soil samples were collected from the major strata encountered in each test pit and at the bottom of each infiltration test pit location The approximate exploration locations are shown in Figure 2.

Soil Sampling

Representative grab samples of the soil observed in the explorations were obtained from the sidewalls or spoils. Samples obtained in the exploration were sealed in airtight, plastic bags to retain moisture and returned to our laboratory for additional examination and testing. The test explorations were loosely backfilled.

Pocket Penetrometer Testing

The undrained shear strength of fine-grained soil (silt and clay) was estimated with a pocket penetrometer applied to the sidewalls of the test pits. A pocket penetrometer is a hand-held device that indicates undrained compressive strength in tons per square foot. The test method is approximate and applicable only to fine-grained soil.

Field Classification

Soil samples were initially classified visually in the field. Consistency, color, relative moisture, degree of plasticity, peculiar odors, and other distinguishing characteristics of the soil samples were noted. The terminology used is described in the key and glossary that follow.

Summary Exploration Logs

Results from the explorations are shown in the summary exploration logs. The left-hand portion of a log provides our interpretation of the soil encountered, sample depths, and groundwater information. The right-hand, graphic portion of a log shows the results of pocket penetrometer and laboratory testing. Soil descriptions and interfaces between soil types shown in summary logs are interpretive, and actual transitions may be gradual.

LABORATORY TESTING PROCEDURES

Soil samples obtained during field explorations are examined in our laboratory, and representative samples may be selected for further testing.

Visual-Manual Classification

Soil samples are classified in general accordance with guidelines presented in ASTM D2488, Standard Practice for Description and Identification of Soils (Visual-Manual Procedure). The physical characteristics of the samples are noted and the field classifications are modified, where

necessary, in accordance with ASTM terminology, though certain terminology that incorporates current local engineering practice may be used. The term which best described the major portion of the sample is used to describe the soil type.'

Natural Moisture Content

Natural moisture content is determined in general accordance with guidelines presented in ASTM D2216, Standard Test Methods for Laboratory Determination of Water (Moisture) Content of Soil and Rock by Mass. The natural moisture content is the ratio, expressed as a percentage, of the weight of water in a given amount of soil to the weight of solid particles.

Fines Content

Fines content testing is performed in general accordance with guidelines presented in ASTM D1140, Standard Test Methods for Determining the Amount of Material Finer than 75-µm (No.200) Sieve in Soils by Washing. The fines content is the fraction of soil that passes the U.S. Standard Number 200 Sieve. This sieve differentiates fines (silt and clay) from sand and gravel. Soil material that remains on the Number 200 sieve is sand. Material that passes the sieve is fines. The test is used to refine soil type.



TABLE A1 Key to Test Pit and Boring Terminology and Symbols

| | | MAJOR DIVISI | ONS | SYM | BOLS | TYPICAL DESCRIPTION | | | |
|----------------------|--|---|---|-------------|------------------------------|--|--|--|--|
| | | WAJOR DIVISI | ONS | GRAPH | LETTER | TIFICAL DESCRIPTION | | | |
| | | | Clean Gravels | 000000 | GW | Well-graded Gravels, Gravel-Sand Mixtures, Little or No Fines | | | |
| <u>s</u> | rial 0 | Gravel and Gravelly Soils More Than 50% Coarse | (Little or No Fines) | | GP | Poorly-graded Gravels, Gravel-Sand Mixtures, Little or No Fines | | | |
| d Soi | More Than 50% Material Retained on No. 200 Sieve | Fraction Retained on No. 4 Sieve | Gravels with Fines | | GM | Silty Gravels, Gravel-Sand-Silt Mixtures | | | |
| aine | in 50% d on No Sieve | | (Significant Percentage of Flnes) | | GC | Clayey Gravels, Gravel-Sand-Clay Mixtures | | | |
| e Gr | nan 5 ned o Sie | | Clean Sands | | SW | Well-graded Sands, Gravelly Sands, Little or No Fines | | | |
| Coarse Grained Soils | re Tł Retaii | Sand and Sandy Soils More Than 50% Coarse | (Little or No Fines) | | SP | Poorly-graded Sands, Gravelly Sands, Little or No Fines | | | |
| O | M R | Fraction Passing No. 4 Sieve | Sands with Fines | | SM | Silty Sands, Sand-Silt Mixtures | | | |
| | | | (Significant Percentage of Flnes) | | SC | Clayey Sands, Sand-Clay Mixtures | | | |
| | ٥. | | | | ML | Inorganic Silts and Very Fine Sands, Rock Flour, Silty-Clayey Fine Sands, Clayey Silts | | | |
| Soils | 0% Ig Nc | Silts and Clays | Liquid Limit Less than 50 percent | | CL | Inorganic Clays of Low to Medium Plasticity, Gravelly Clays, Sandy Clays, Silty Clays | | | |
| Fine Grained Soils | ian 5 assir Sieve | | | | OL | Organic Silts and Organic Silty Clays of Low Plasticity | | | |
| Grai | More Than 50% Material Passing No. 200 Sieve | | | | МН | Inorganic Silts Micaceous or Diatomaceous Fine Sand or Silty Soils | | | |
| Fine | Moi /ater | Silts and Clays | Liquid Limit Greater than 50 percent | | СН | Inorganic Clays of High Plasticity, Fat Clays | | | |
| | | | | | ОН | Organic Clays of Medium to High Plasticity, Organic Silts | | | |
| | | | | + + + + + + | PT | PT Peat, Humus, Swamp Soils | | | |
| | | Topsoil | | | | Humus and Duff Layer | | | |
| | | Fill | | | Highly Variable Constituents | | | | |

| Relative Density of Coarse-Grained Soils | | | | | | |
|--|------------------------------------|--|--|--|--|--|
| Relative Density | elative Density N - Blows per Foot | | | | | |
| Very Loose | 0 - 4 | | | | | |
| Loose | 4 - 10 | | | | | |
| Medium Dense | 10 - 30 | | | | | |
| Dense | 30 - 50 | | | | | |
| Very Dense | 50+ | | | | | |

Key to Sampler Type Symbols









Moore



Core

| | Very Soft | 0 - 2 |
|---|--------------|---------|
| | Soft | 2 - 4 |
| | Medium Stiff | 4 -8 |
| | Stiff | 8 - 15 |
| | Very Stiff | 15 - 30 |
| | Hard | 30 - 50 |
| | Very Hard | 50+ |
| N | | |

Relative Density

Consistency of Fine-Grained Soils

N - Blows per Foot



219 W. 4th Street Vancouver, WA 98660

Phone: (360) 984-6584

Geotechnical Log - Test Pit

TP-1

UTM : 10T Excavator : Link-Belt Job Number : 24-0368-1

Latitude : 45.58570 Excavator Supplier: Thompson Brothers Excavating Client : Pacific Lifestyle Homes Longitude : -122.40267 Logged By Project : Goodwin Road (Bahu Property)

| | •, | ton, USA | s, Washing | | Location Loc Comme | : TJN : 11/04/2024 | Reviewed By Date | yed | t Surve ft BGL | | Elevation pth | Ground Total De |
|-------|------------------|-------------------|-------------------|---------|--------------------------------|---|---|-------------|-------------------|--|------------------|--------------------|
| Notes | Pocket Pen (TSF) | Fines Content (%) | Water Content (%) | | otion | Soil Descripti | | USCS Symbol | Graphic Log | | Sample No. | Depth (ft) |
| | | | | | nches bgs; slightly moist. | ILT, some clay; rooted to 8 inch | t, dark brown, SIL | | | | | - |
| | 1.0 | | 32 | | | | | ML | | _ | S1 | 1- |
| | 0.75 | | - | | some sand; very moist. | , red brown, CLAYEY SILT, sor | t to medium stiff, | | | | - | 2 — |
| | 1.5 | 70 | 24 | | | | | | | | S2 | 3 — |
| | 1.5 | | | | | | | CL-ML | | | - | 4 — |
| | | | | | | | | | | | - | <u>▼</u> 5 — |
| | | | _ | | GRADED SILTY SAND; wet. | ense, gray brown, POORLY G | dium dense to de | | | | - | 6 — |
| | | 49 | 41 | | | | | SM | | | S3 | 7 — |
| | | | | | | | | | | | _ | 8 — |
| | | | _ | oulders | AND BOULDERS, some clay; bo | | nse, tan gray, POo to 22 inches in dia | | | ·/ | - | 9 — |
| | | | 55 | | | | | | | 2 | S4 | |
| | | | | | | ntered at 5 feet bgs. Test pit back and tamped to grad | oundwater encount | | | | | |
| | | 49 | | oulders | ackfilled with excavated soils | liameter; wet. ntered at 5 feet bgs. Test pit back | to 22 inches in dia | | | // // // // // // // // // // // // // | | - |



219 W. 4th Street Vancouver, WA 98660

Phone: (360) 984-6584

Geotechnical Log - Test Pit

TP-2

UTM : 10T Excavator : Link-Belt Job Number : 24-0368-1

 Latitude
 : 45.58570
 Excavator Supplier
 : Thompson Brothers Excavating
 Client
 : Pacific Lifestyle Homes

 Longitude
 : -122.40267
 Logged By
 : LS
 Project
 : Goodwin Road (Bahu Property)

 Ground Elevation : Not Surveyed
 Reviewed By
 : TJN
 Location
 : Camas, Washington, USA

| Cround | | : -122.4026 : Not Surve | | Logged By Reviewed By | : LS : TJN | | | : Goodwin Roa : Camas, Wash | | ету) | |
|-------------------------|------------|----------------------------|-------------|--------------------------|--|--|-------------------------|--------------------------------|-------------------|------------------|-------|
| Total De | | : 11 ft BGL | | Date Date | : 11/04/2024 | | Location Loc Comment | | ngton, USA | | |
| Depth (ft) | Sample No. | Graphic Log | USCS Symbol | Bute | | escription | | Water Content | Fines Content (%) | Pocket Pen (TSF) | Notes |
| 1— 2— 3— 4— 5— 6— 7— 8— | S1 | | CL-ML | Fill- dense, gray, P | OORLY GRADED GRA | NEL; moist. | | 26 | 68 | 2.5 | |
| 9 — | \$2 \$3 | | GW | | dense, dark blue-gray, V lles up to 8 inches in dia | VELL-GRADED GRAVEL ameter; wet. | AND COBBL | 39 39 | | | |
| | | | | Groundwater encou | ntered at 8.5 feet bgs. Tes and tamped | st pit backfilled with excava d to grade. | ted soils | | | | |



219 W. 4th Street Vancouver, WA 98660

Phone: (360) 984-6584

Geotechnical Log - Test Pit

TP-3

UTM : 10T Excavator : Link-Belt Job Number : 24-0368-1

Latitude : 45.58570 Excavator Supplier : Thompson Brothers Excavating Client : Pacific Lifestyle Homes

Longitude : -122.40267 Logged By : LS Project : Goodwin Road (Bahu Property)

Ground Elevation : Not Supplied : TIN

| Ground | Elevation | Not Su | | Reviewed By : TJN Locatio | | s, Washing | | 3, | |
|------------|------------|-------------|-------------|---|-------------|-------------------|----------------------|------------------|-------|
| Total De | pth | 4.5 ft B | GL — | Date : 11/04/2024 Loc Cor | mment : | | | | |
| Depth (ft) | Sample No. | Graphic Log | USCS Symbol | Soil Description | | Water Content (%) | Fines Content (%) | Pocket Pen (TSF) | Notes |
| | | | | Soft to medium stiff, dark brown, SILT, some clay; rooted to 6 inches bgs; m | noist. | | | | |
| 1 — | | | ML | | | | | 2.0 | |
| 2 — | | | | Stiff, red brown, SILTY CLAY WITH GRAVEL AND BOULDERS; with bould feet in diameter; moist. | ers up to 3 | | | 1.0 | |
| - | S1 | - | | | | 15 | 69 | - 1.0 | |
| 3 — | | | CL-ML | | | | | 2.0 | |
| 4 — | | | | | | | | 4.5+ | |
| | | | | Refusal due to practical equipment failure. No groundwater encountered. Test pir backfilled with excavated soils and tamped to grade. | t | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |



219 W. 4th Street Vancouver, WA 98660

Phone: (360) 984-6584

Geotechnical Log - Test Pit

TP-4

UTM : 10T Excavator : Link-Belt Job Number : 24-0368-1

 Latitude
 : 45.58570
 Excavator Supplier
 : Thompson Brothers Excavating
 Client
 : Pacific Lifestyle Homes

 Longitude
 : -122.40267
 Logged By
 : LS
 Project
 : Goodwin Road (Bahu Property)

 Ground Elevation : Not Surveyed
 Reviewed By
 : TJN
 Location
 : Camas, Washington, USA

| | | : Not Surve | | Reviewed By | : TJN | | | : Camas, Wash | | | |
|------------|------------|--------------|-------------|---------------------------------------|-------------------------|-------------------------------|---------------|---------------|-----------------------|------------------|-------|
| Total De | pth | : 6.5 ft BGL | | Date | : 11/04/2024 | | Loc Comment | t: | | | 1 |
| Depth (ft) | Sample No. | Graphic Log | USCS Symbol | | Soil D | escription | | Water Content | (%) Fines Content (%) | Pocket Pen (TSF) | Notes |
| | | | | Soft to medium stiff, | , dark brown, SILT, sor | me clay; rooted to 6 inche | s bgs; moist. | | | | |
| 1— | | _ | ML | | | | | | | | |
| | S1 | | | | | | | 24 | 57 | 1.0 | |
| 2 — | | | | Stiff, gray brown wit slightly moist. | th red mottling, SAND` | Y CLAY WITH GRAVEL, s | ome cobbles | ; | | 1.5 | |
| _ | | // | | | | | | | | 1.5 | |
| 3 — | S2 | // | | | | | | 19 | | | |
| - | | | SC | | | | | | | 4.5+ | |
| 4 — | | // | | | | | | | | 4.5+ | |
| - | | /// | | | | | | | | | |
| 5 — | | | | Medium dense, red | brown, POORLY GRA | ADED SAND, some clay; v | ery moist. | | | | |
| | S3 | | SP | | | | | 37 | 39 | | |
| 6 — | | | | | | | | | | | |
| | | | | Groundwater encou | | t pit backfilled with excavat | ed soils | | | | |
| | | | | | and tampe | d to grade. | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |



219 W. 4th Street Vancouver, WA 98660

Phone: (360) 984-6584

Geotechnical Log - Test Pit

TP-5

JTM : 10T Excavator : Link-Belt Job Number : 24-0368-1

Latitude : 45.58570 Excavator Supplier : Thompson Brothers Excavating Client : Pacific Lifestyle Homes

Longitude :-122.40267 Logged By : LS Project : Goodwin Road (Bahu Property)

Ground Elevation : Not Surveyed Reviewed By : TJN Location : Camas. Washington, USA

| | | : Not Surve | | Reviewed By | : TJN | ĺ | Location | : Camas, Wash | | -3 , | |
|------------|------------|--------------|-------------|-----------------------|---|------------------------|---------------|---------------|-----------------------|------------------|--|
| Total Dep | th : | : 6.5 ft BGL | I | Date I | : 11/04/2024 | | Loc Comment | t: | | | T |
| Depth (ft) | Sample No. | Graphic Log | USCS Symbol | | Soil Descript | tion | | Water Content | (%) Fines Content (%) | Pocket Pen (TSF) | Notes |
| | | | | Medium stiff, dark b | prown, SILT, some clay; rooted | d to 4 inches bgs; me | oist. | | | | |
| 1 | | | | | | | | | | | |
| 1- | S1 | 1 | ML | | | | | 21 | | 2.0 | |
| 2 — | | | | | | | | | | 1.5 | |
| 3 — | | | | | | | | | | | |
| | | 1,00 | GM | | GRAVEL; slightly moist. | | | | | 4.5+ | |
| 4 — | | | | Stiff, red brown with | n gray and red mottling, SILTY | Y CLAY; dry to slightl | y moist. | | | | |
| | | | | | | | | | | 4.5+ | |
| 5 — | S2 | | CL-ML | | | | | 22 | 53 | | Infiltration testing completed at 4.5 feet |
| | | | | | | | | | | | bgs |
| 6 | S3 | 1. 000 | | | | | | 16 | | | |
| | | . 00 | GM | | rown, SILTY GRAVEL AND Bodyn or slightly moist. | OULDERS; with bou | Iders up to 2 | 24 | | | |
| | | | | | oractical equipment refusal. Gro ackfilled with excavated soils an | | ntered. | | | | |
| | | | | · | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | 1 | 1 |