Exhibit 7 SPRV24-1001

ABBREVIATIONS

ABV	ABOVE
ADJ	ADJACENT
ALT	ALTERNATE
ALN	ALIGN
APPRX	APPROXIMATE
ARCH	ARCHITECTURAL
ASPH	ASPHALT
ASTM	AMERICAN SOCIETY FOR TESTING AND MATERIALS
BIO	BIO-INFILTRATION
BM	BENCH MARK
BLDG	BUILDING
BO	BY OTHERS
BOT	BOTTOM
BS	BOTH SIDES
CAL	CALIPER
CB	CATCH BASIN
CFCI	CONTRACTOR FURNISHED CONTRACTOR INSTALLED
CI	CAST IRON
CIPC	CAST-IN-PLACE CONCRETE
CJ	CONTROL JOINT
CL	CENTERLINE
CLR	CLEAR
CMU	CONCRETE MASONRY UNIT
CO	CLEAN OUT
COL	COLUMN
CONC	CONCRETE
CONST	CONSTRUCTION
CONT	CONTINUOUS
CP	COORDINATES POINT / CENTER POINT
CTR	CENTER
DBL	DOUBLE
DBH	DIAMETER AT BREAST HEIGHT
DEMO	DEMOLISH / DEMOLITION
DET	DETAIL
DIA	DIAMETER
DIM	DIMENISION
DS	DOWNSPOUT
DWG	DRAWING
EA	EACH
EJ	EXPANSION JOINT
ELEC	ELECTRICAL
ELEV	ELEVATION
ENCL	ENCLOSURE
EOP	EDGE OF PAVEMENT
EQUIP	EQUIPMENT
EW	EACH WAY
EXIST	EXISTING
FBO	FURNISHED BY OWNER
FDC	FIRE DEPARTMENT CONNECTION
FG	FINISH GRADE
FOC	FACE OF CONCRETE
FOW	FACE OF WALL
FS	FINISHED SURFACE
FTG	FOOTING
FURN	FURNITURE/ FURNISHED
GA	GAUGE
GALV	GALVANIZED
GC	GENERAL CONTRACTOR
GND	GROUND
GV	GATE VALVE
HOR	HORIZONTAL
HR	HOUR
HT/H	HEIGHT / HIGH
HVAC	HEATING, VENTILATING & AIR CONDITIONING
ID	INSIDE DIAMETER
INCL	INCLUDING
INFO	INFORMATION
INT	INTERIOR
MAS	MASONRY
MAT	MATERIAL
MAX	MAXIMUM
MECH	MECHANICAL
MED	MEDIUM
MET/MTL	METAL
MFR	MANUFACTURER
MH	MANHOLE
MIN	MINUMUM
MISC	MISCELLANEOUS
MIX	MIXTURE
N	NORTH
N/A	NOT APPLICABLE
NIC	NOT IN CONTRACT
NO	NUMBER
NOM	NOMINAL
NTS	NOT TO SCALE
OC	ON CENTER
OD	OUTSIDE DIAMETER
OH	OVERHEAD
PA	PLANTING AREA
PC	PORTLAND CEMENT/PRECAST CONCRETE
PL	PROPERTY LINE
POLY	POLYETHYLENE
PT	PRESSURE TREATED
PVC	POLYVINYL CHLORIDE
QTY	QUANTITY
QUAL	QUALITY
RAD/r	RADIUS
RD	ROOF DRAIN
REBAR	REINFORCING BAR
REF	REFER OR REFERENCE
REINF	REINFORCED / REINFORCING
REM	REMOVE
REPL	REPLACE
REQD	REQUIRED
REV	REVISE / REVISION
ROW	RIGHT-OF-WAY LINE
SCH	SCHEDULE
SD	STORM DRAIN
SECT	SECTION
SPEC	SPECIFICATION
SQ	SQUARE
SS	STAINLESS STEEL
ST	STONE
STA	STATION
STD	STANDARD
STL	STEEL
SYM	SYMMETRICAL
SHT	SHEET
STRUCT	STRUCTURAL
S/W	SIDEWALK
T	TREAD / THICK
TC	TOP OF CURB
TEMP	TEMPORARY
THK	THICKNESS
TOC	TOP OF CONCRETE
TOS	TOP OF SLAB/ STEEL
TOW/TW	TOP OF WALL
TYP	TYPICAL
UNO	UNLESS NOTED OTHERWISE
V	VENT / VOLT/ VALVE
(V)	VERIFY
VERT	VERTICAL
VOL	VOLUME
XFMR	TRANSFORMER
&	AND
<	ANGLE
@	AT
℄	CENTERLINE
⅊	PROPERTY LINE
ø	DIAMETER
±	PLUS OR MINUS
#	NUMBER

GENERAL NOTES

1. SEE SPECIFICATIONS FOR PLANT MATERIAL, TOP SOIL AND PLANTING MIX TYPES AND DEPTH, MULCHING, SOIL AMENDMENTS, FERTILIZERS AND WARRANTIES.
2. CONTRACTOR SHALL VERIFY ON-SITE CONDITIONS PRIOR TO BIDDING AND CONSTRUCTION.
3. THE CONTRACTOR AND OWNER ARE RESPONSIBLE FOR READING THE PLANS, SPECIFICATIONS AND NOTES.
6. SE BYBEE ROAD RIGHT OF WAY LANDSCAPE INCLUDED FOR REFERENCE ONLY,SEE SE BYBEE ROAD REALIGNMENT PERMIT DRAWINGS DATED JULY 2024 FOR LANDSCAPE STREET FRONTAGE IMPROVEMENTS.

REFERENCE SYMBOLS

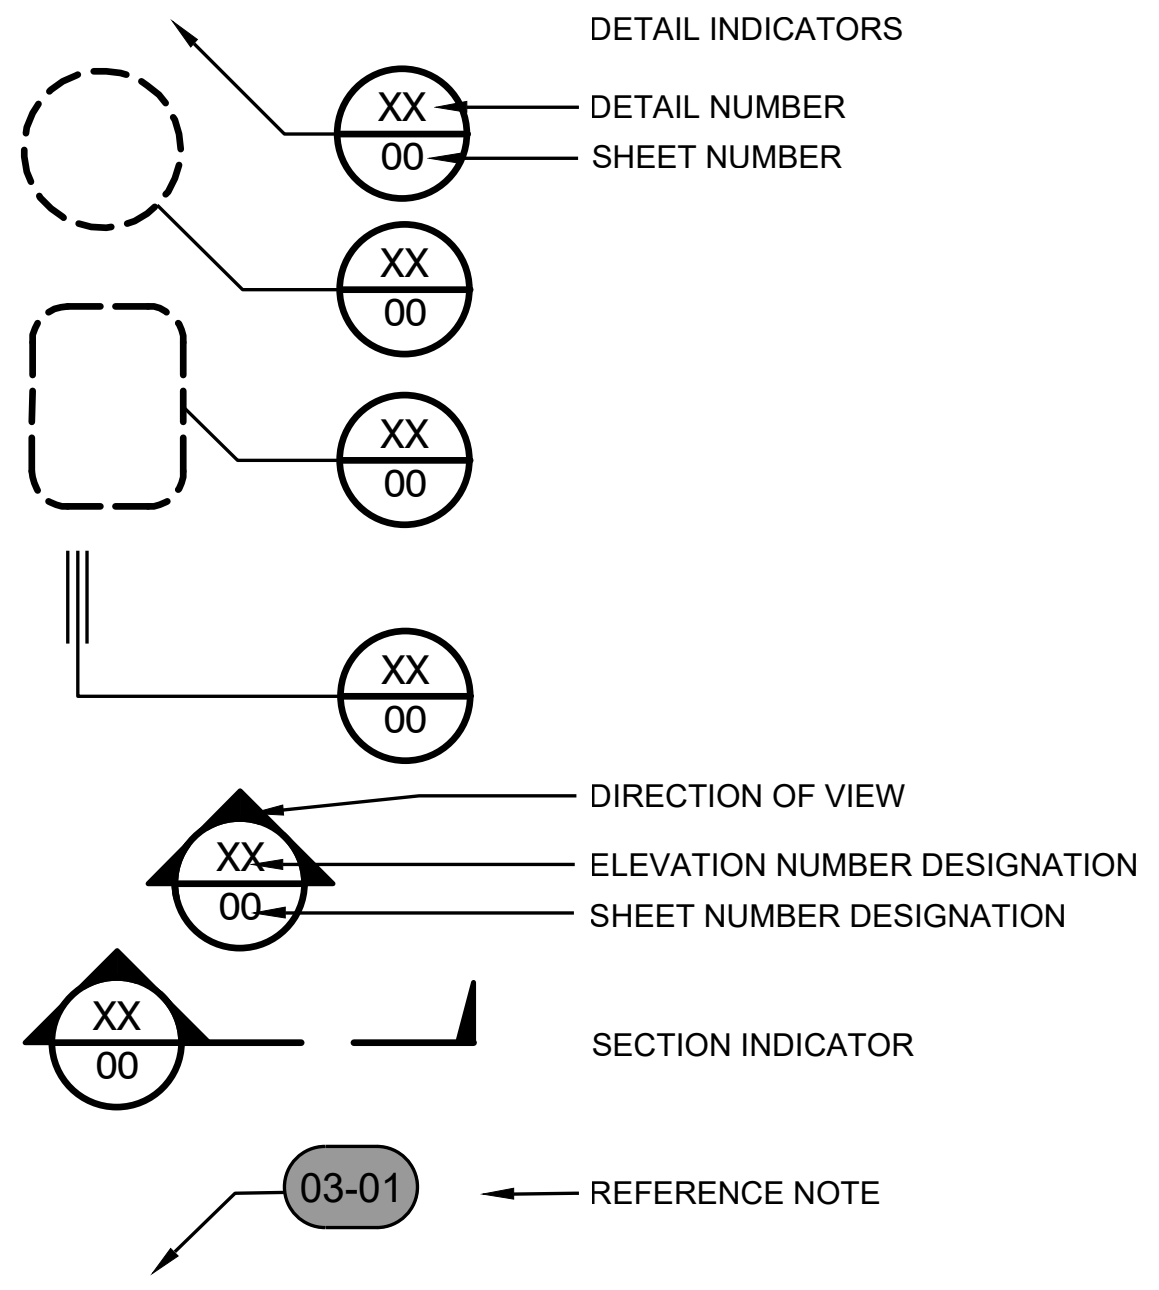

DIMENSIONING SYMBOLS

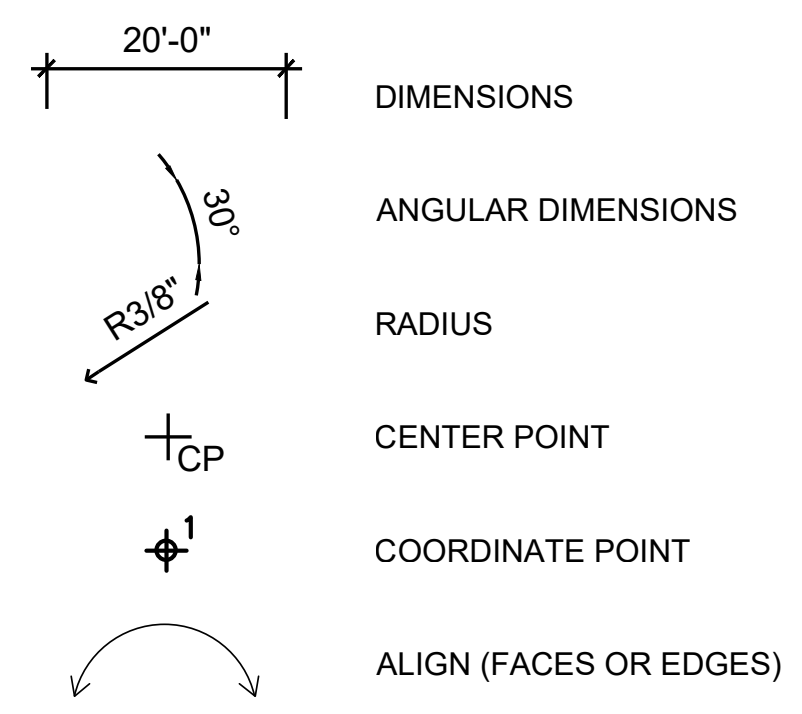

DRAWING REVISION SYMBOLS

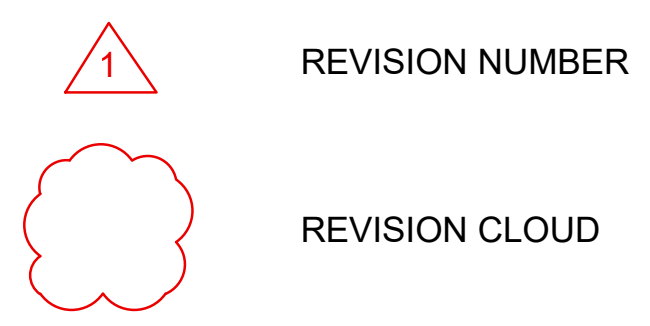

SHEET LIST

Sheet Number	Sheet Title
L100	COVER SHEET
L101	TREE RETENTION PLAN
L102	TREE RETENTION TABLE
L103	TREE RETENTION TABLE
L104	OVERALL MATERIALS PLAN
L105	MATERIALS PLAN
L106	MATERIALS PLAN
L107	MATERIALS PLAN
L108	MATERIALS PLAN
L110	OVERALL PLANTING PLAN
L111	PLANTING PLAN
L112	PLANTING PLAN
L113	PLANTING PLAN
L114	PLANTING PLAN
L115	PLANTING PLAN
L116	PLANT SCHEDULE
L117	SOILS PLAN
L501	MATERIALS DETAILS
L502	PLANTING DETAILS

CODE SUMMARY TABLE

CAMAS MUNICIPAL CODE	CALCULATIONS	REQUIRED	PROVIDED
CITY OF CAMAS LANDSCAPE DETAIL LS1 NOTE 7: MINIMUM LANDSCAPING AS A PERCENT OF GROSS SITE AREA SHALL BE 15%	GROSS SITE AREA = 516,058 SF 516,058 X .15 = 77,408 SF	77,408 SF	207,050 SF

KMB architects
906 Columbia Street SW, Suite 400
Olympia, Washington 98501
811 First Ave, Suite 500
Seattle, Washington 98104
www.KMB-architects.com
360.352.8883

KMB Project # 23069

AHBL
TACOMA · SEATTLE · SPOKANE · TRI-CITIES
1200 6th Avenue, Suite 1620 Seattle, WA 98101
206.267.2425 TEL 206.267.2429 FAX www.ahbl.com WEB

VANCOUVER WASHINGTON TEMPLE
THE CHURCH OF JESUS CHRIST OF LATER-DAY SAINTS
1819 SE BYBEE ROAD
CAMAS, WA 98607

ORIGINAL SHEET SIZE = 30 x 42
HALF SIZE REDUCTIONS = 15 x 21

REVISIONS:

DATE:
2024.08.09

LAND USE PERMIT

SHEET NO.
L100
COVER SHEET

LEGEND

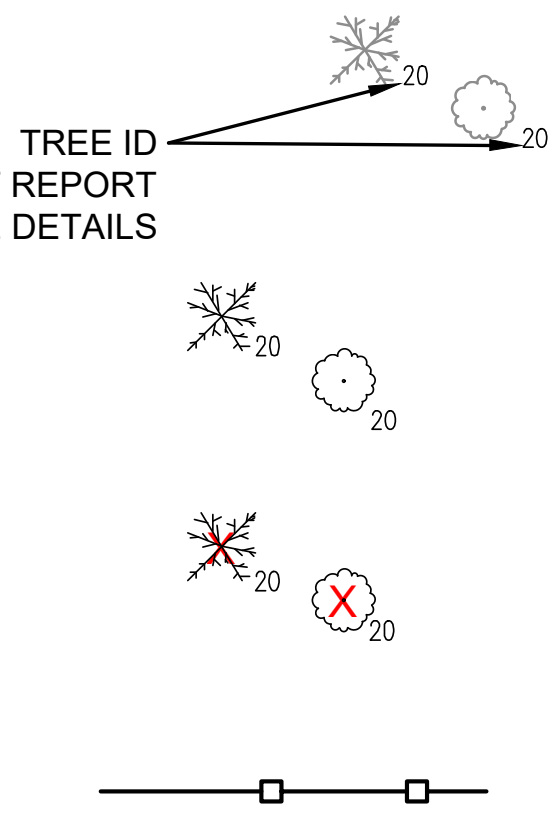

TREE ID
SEE ARBORIST REPORT
FOR TREE DETAILS

EXISTING TREES TO REMAIN
- BOTH PHASES

EXISTING TREES TO BE
REMOVED - RIGHT OF WAY PHASE

EXISTING TREES TO BE REMOVED
- LDS TEMPLE SITE PHASE

TREE PROTECTION FENCING
SEE SHEET L502 FOR DETAIL

GENERAL TREE RETENTION NOTES

1. SEE SEPARATE ISA CERTIFIED ARBORIST REPORT PREPARED FOR BYBEE ROAD BY DUDEK.
2. SEE SEPARATE ISA CERTIFIED ARBORIST REPORT PREPARED FOR TEMPLE SITE BY DUDEK.
3. BYBEE ROAD REPLACEMENT TREE PLANTING PLAN UNDER SEPARATE PERMIT.
4. SEE L110 FOR TEMPLE SITE TREE REPLACEMENT PLANTING PLAN.
5. SEE L502 FOR TREE PROTECTION FENCE DETAIL

TREE RETENTION CALCULATIONS

CAMAS MUNICIPAL CODE	CALCULATIONS	REQUIRED	PROVIDED
BYBEE ROAD SITE			
SECTION 18.13.051 MINIMUM TREE DENSITY REQUIREMENT	NET SITE ACREAGE: 13.42 DEVELOPABLE ACREAGE: 2.12 20 TREE UNITS PER ACRE X 2.12 ACRES = 42 TOTAL TREE UNITS	42 TOTAL TREE UNITS	42 TOTAL TREE UNITS
SECTION 18.13.051 MINIMUM TREE DENSITY REQUIREMENT	TREES ON SITE: 188 TREES TO BE REMOVED: 72 REMOVE DUE TO HEALTH: 5 NON-SIGNIFICANT: 0 TREES TO BE MITIGATED: 67	42 REPLACEMENT TREE UNITS	42 REPLACEMENT TREE UNITS
TEMPLE SITE			
SECTION 18.13.051 MINIMUM TREE DENSITY REQUIREMENT	NET SITE ACREAGE: 13.4 DEVELOPABLE ACREAGE: 10.4 20 TREE UNITS PER ACRE X 10.4 ACRES = 208 TOTAL TREE UNITS	208 TOTAL TREE UNITS	208 TOTAL TREE UNITS
SECTION 18.13.051 MINIMUM TREE DENSITY REQUIREMENT	TREES ON SITE: 167 TREES TO BE REMOVED: 165 REMOVE DUE TO HEALTH: 7 NON-SIGNIFICANT: 1 TREES TO BE MITIGATED: 157	208 REPLACEMENT TREE UNITS	208 REPLACEMENT TREE UNITS SEE SHEET L110 PLANTING PLAN

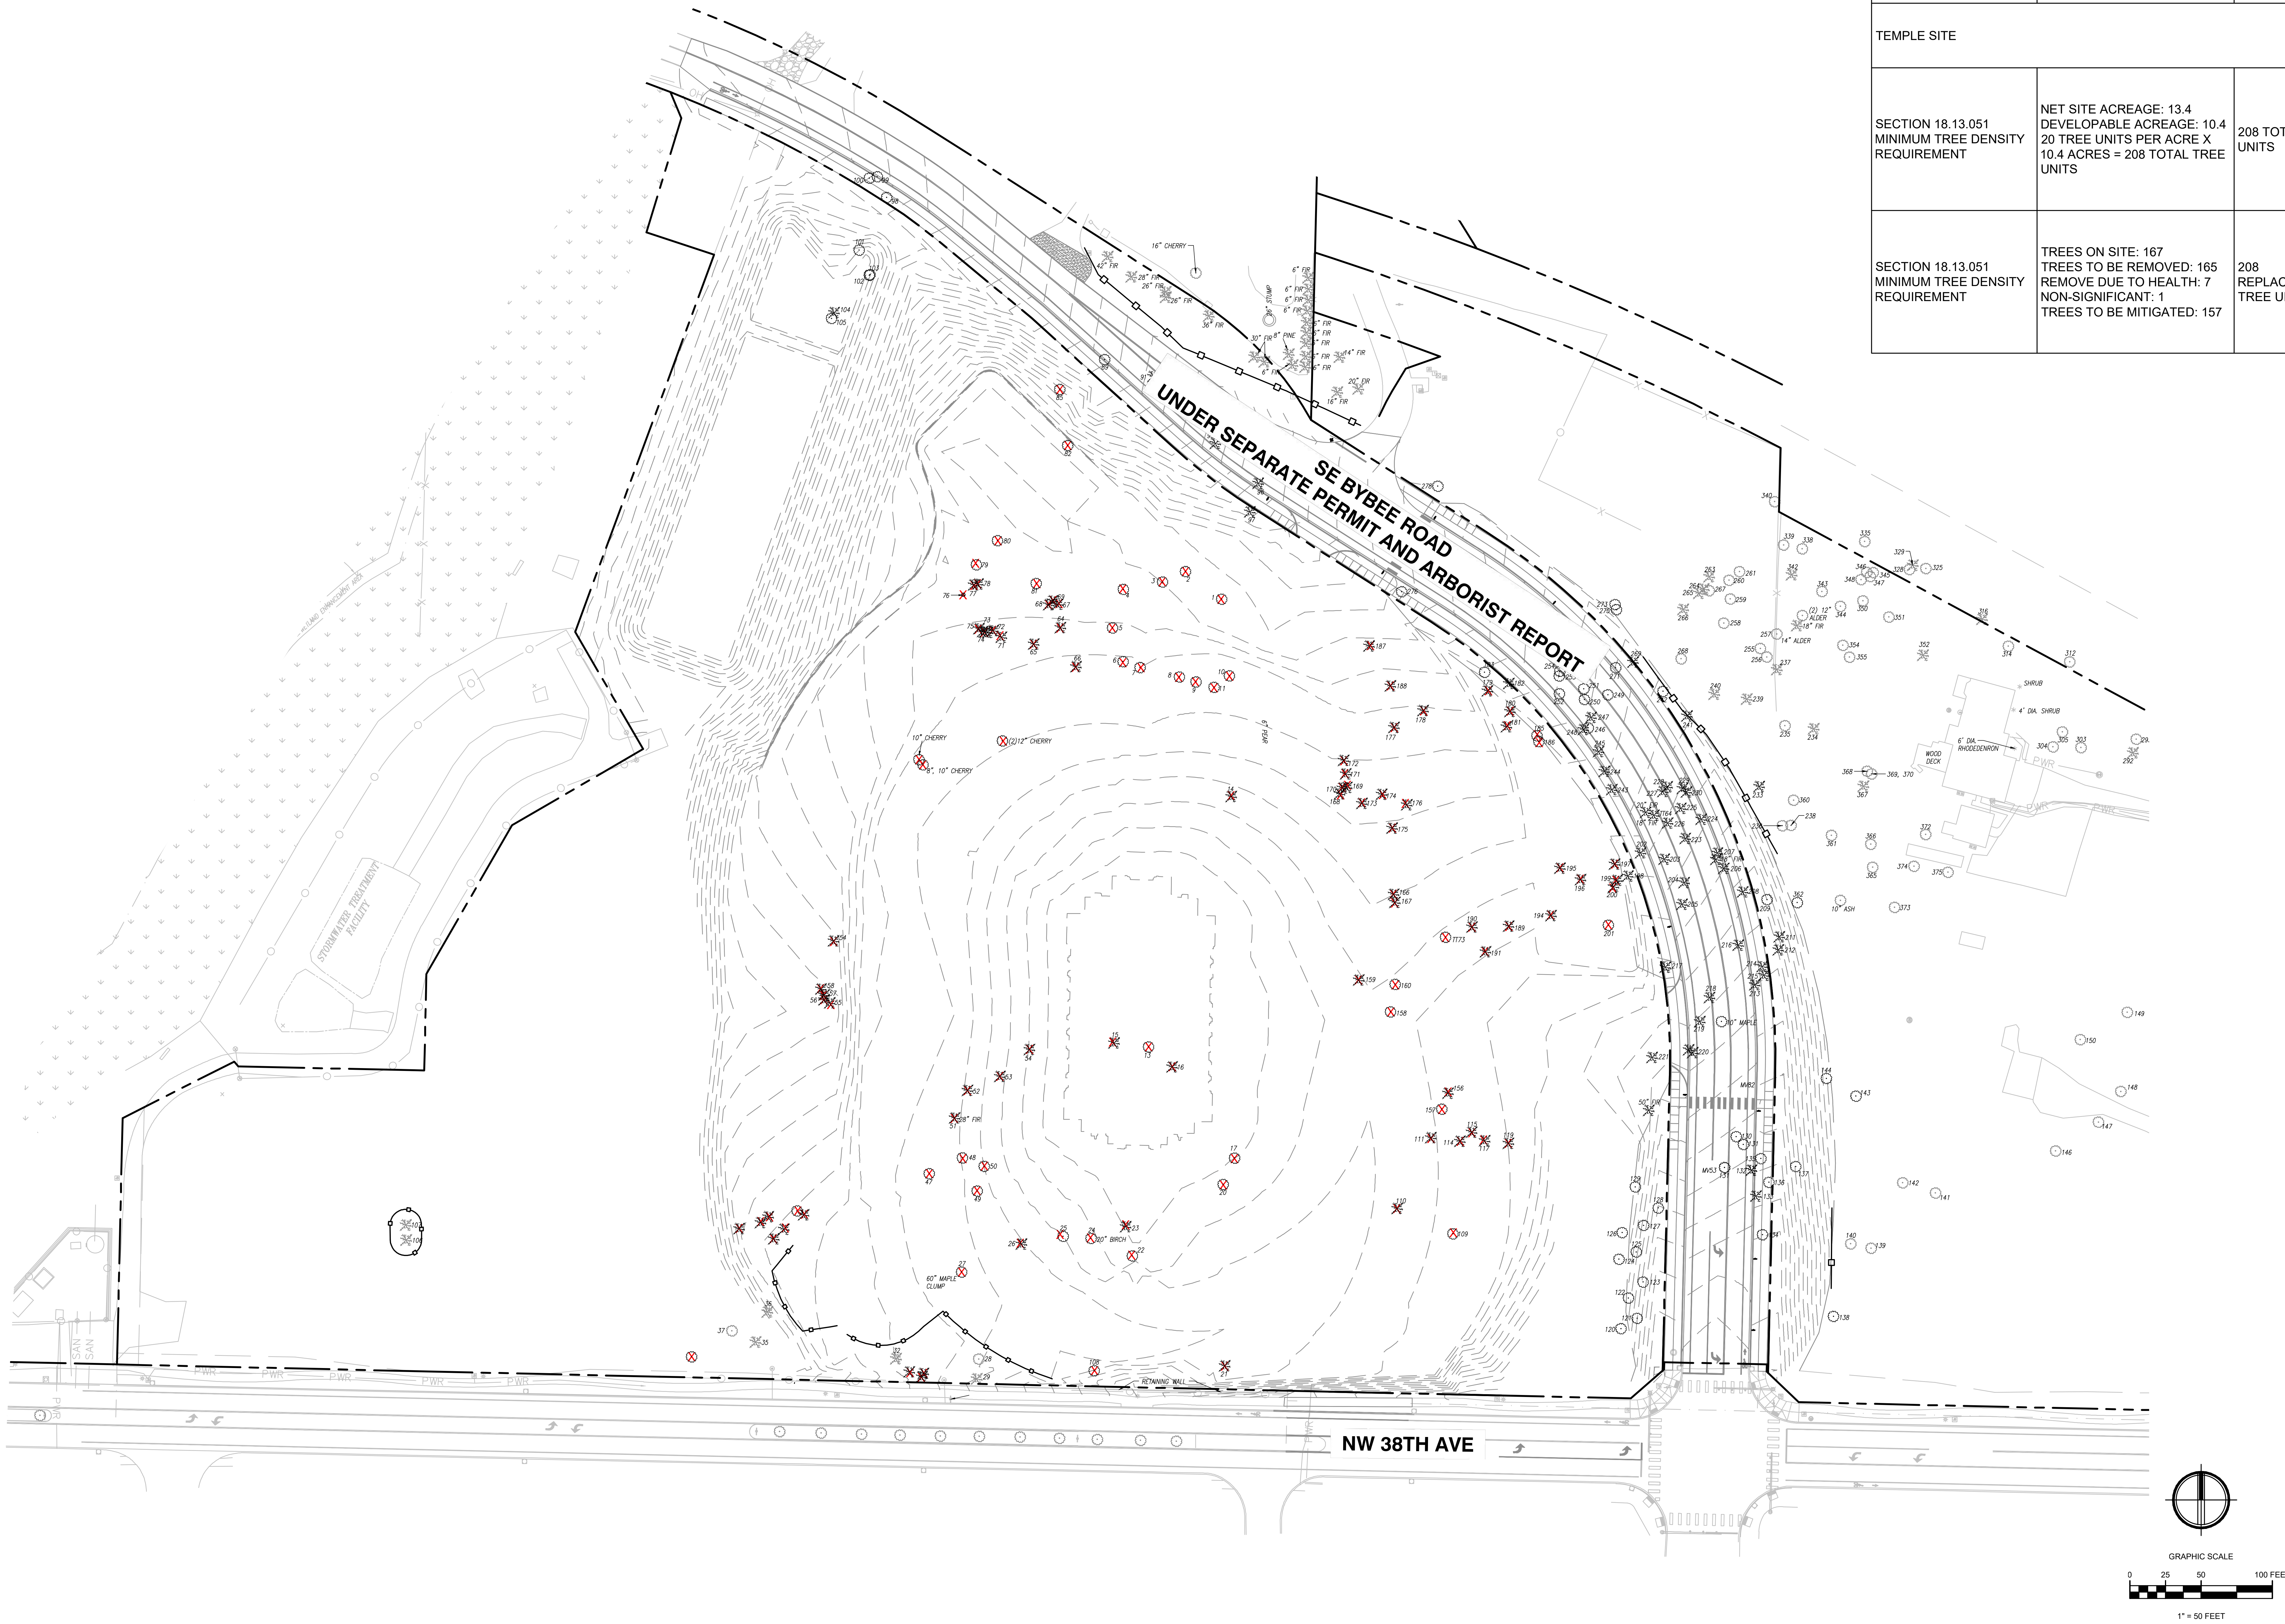

KMB architects
906 Columbia Street SW, Suite 400
Olympia, Washington 98501
811 First Ave, Suite 500
Seattle, Washington 98104
www.KMB-architects.com
360.352.8883

KMB Project # 23069

AHBL
TACOMA · SEATTLE · SPOKANE · TRI-CITIES
1200 6th Avenue, Suite 1620 Seattle, WA 98101
206.267.2425 TEL 206.267.2429 FAX www.ahbl.com WEB

VANCOUVER WASHINGTON TEMPLE
THE CHURCH OF JESUS CHRIST OF LATER-DAY SAINTS
1819 SE BYBEE ROAD
CAMAS, WA 98607

ORIGINAL SHEET SIZE = 30 x 42
HALF SIZE REDUCTIONS = 15 x 21

REVISIONS:

DATE:
2024.08.09

LAND USE PERMIT

SHEET NO.
L101
TREE RETENTION PLAN

Exhibit 7 SPRV24-1001

Tree ID Number	Botanical Name	Common Name	No. of Stems	S1	S2	S3	S4	S5	S6	Combined Diameter	Height (ft.)	Crown Width (ft.)	Health	Structural Integrity	Units	Evergreen	Protection Status	Tree Protection Zone (ft.)	Removed Due to Bybee Road	PROJECT
1	Liquidambar styraciflua	American sweetgum	1	12	0	0	0	0	0	12	17	13	Fair	Poor	2	No	Significant - Deciduous	15	no	LDS Church Project
2	Liquidambar styraciflua	American sweetgum	1	14	0	0	0	0	0	14	30	17	Good	Fair	3	No	Significant - Deciduous	18	no	LDS Church Project
3	Liquidambar styraciflua	American sweetgum	1	14	0	0	0	0	0	14	30	17	Good	Fair	3	No	Significant - Deciduous	18	no	LDS Church Project
4	Acer macrophyllum	Bigleaf maple	1	25	0	0	0	0	0	25	40	25	Fair	Poor	9	No	Significant - Deciduous	25	no	LDS Church Project
5	Acer platanoides	Norway maple	1	21	0	0	0	0	0	21	32	28	Fair	Fair	7	No	Significant - Deciduous	21	no	LDS Church Project
6	Acer platanoides	Norway maple	1	14	0	0	0	0	0	14	30	18	Fair	Fair	3	No	Significant - Deciduous	14	no	LDS Church Project
7	Acer platanoides	Norway maple	1	13	0	0	0	0	0	13	30	18	Fair	Fair	3	No	Significant - Deciduous	13	no	LDS Church Project
8	Acer platanoides	Norway maple	2	7	8	0	0	0	0	15	25	18	Fair	Fair	4	No	Significant - Deciduous	10	no	LDS Church Project
9	Acer platanoides	Norway maple	1	14	0	0	0	0	0	14	20	15	Fair	Fair	3	No	Significant - Deciduous	14	no	LDS Church Project
10	Populus nigra	Black poplar	4	1	4	5	2	0	0	12	25	5	Good	Fair	2	No	Significant - Deciduous	8	no	LDS Church Project
11	Acer platanoides	Norway maple	1	12	0	0	0	0	0	12	17	13	Fair	Fair	2	No	Significant - Deciduous	12	no	LDS Church Project
12	Chamaecyparis pisifera	Sawara cypress	1	8	0	0	0	0	0	8	15	8	Fair	Fair	2	Yes	Significant - Evergreen	5	no	LDS Church Project
13	Alnus rubra	Red alder	2	6	8	0	0	0	0	14	25	15	Fair	Poor	3	No	Significant - Deciduous	14	no	LDS Church Project
14	Pinus ponderosa	Ponderosa pine	1	8	0	0	0	0	0	8	30	15	Good	Good	2	Yes	Significant - Evergreen	5	no	LDS Church Project
15	Pseudotsuga menziesii	Douglas fir	1	29	0	0	0	0	0	29	70	30	Good	Good	11	Yes	Significant - Evergreen	44	no	LDS Church Project
16	Pseudotsuga menziesii	Douglas fir	1	27	0	0	0	0	0	27	70	30	Good	Good	10	Yes	Significant - Evergreen	41	no	LDS Church Project
17	Castanea sativa	Sweet chestnut	1	14	0	0	0	0	0	14	20	14	Fair	Fair	3	No	Significant - Deciduous	14	no	LDS Church Project
18	Corylus avellana	Common hazel	15	2	2	1	2	2	2	26	15	14	Fair	Fair	9	No	Significant - Deciduous	13	no	LDS Church Project
19	Corylus avellana	Common hazel	15	2	2	1	2	2	2	26	15	14	Fair	Fair	9	No	Significant - Deciduous	13	no	LDS Church Project
20	Malus domestica	Apple	1	16	0	0	0	0	0	16	15	18	Fair	Poor	4	No	Significant - Deciduous	16	no	LDS Church Project
21	Pseudotsuga menziesii	Douglas fir	1	44	0	0	0	0	0	44	75	45	Good	Good	18	Yes	Significant - Evergreen	66	no	LDS Church Project
22	Araucaria araucana	Monkey puzzle	1	25	0	0	0	0	0	25	60	35	Good	Good	9	Yes	Significant - Evergreen	38	no	LDS Church Project
23	Pseudotsuga menziesii	Douglas fir	1	48	0	0	0	0	0	48	75	45	Good	Good	20	Yes	Significant - Evergreen	72	no	LDS Church Project
24	Acer saccharum	Sugar maple	5	11	3	3	4	11	0	32	20	15	Fair	Fair	12	No	Significant - Deciduous	21	no	LDS Church Project
25	Acer platanoides	Norway maple	1	18	0	0	0	0	0	18	27	24	Fair	Good	5	No	Significant - Deciduous	18	no	LDS Church Project
26	Pseudotsuga menziesii	Douglas fir	1	48	0	0	0	0	0	48	75	45	Good	Good	20	Yes	Significant - Evergreen	72	no	LDS Church Project
27	Acer macrophyllum	Bigleaf maple	3	30	29	17	0	0	0	76	56	52	Fair	Fair	34	No	Significant - Deciduous	76	no	LDS Church Project
28	Acer platanoides	Norway maple	2	9	6	0	0	0	0	15	25	25	Fair	Fair	4	No	Significant - Deciduous	10	no	LDS Church Project
29	Pseudotsuga menziesii	Douglas fir	1	35	0	0	0	0	0	35	65	35	Good	Good	14	Yes	Significant - Evergreen	53	no	LDS Church Project
30	Pseudotsuga menziesii	Douglas fir	2	17	18	0	0	0	0	35	65	35	Poor	Fair	14	Yes	Significant - Evergreen	53	no	LDS Church Project
31	Pseudotsuga menziesii	Douglas fir	1	22	0	0	0	0	0	22	65	35	Poor	Fair	7	Yes	Significant - Evergreen	33	no	LDS Church Project
32	Pseudotsuga menziesii	Douglas fir	1	24	0	0	0	0	0	24	65	35	Poor	Fair	8	Yes	Significant - Evergreen	36	no	LDS Church Project
33	Calocedrus decurrens	California incense cedar	2	5	4	0	0	0	0	9	12	8	Good	Fair	2	Yes	Significant - Evergreen	6	no	LDS Church Project
34	Pseudotsuga menziesii	Douglas fir	1	27	0	0	0	0	0	27	65	30	Fair	Fair	10	Yes	Significant - Evergreen	41	no	LDS Church Project
35	Pseudotsuga menziesii	Douglas fir	1	27	0	0	0	0	0	27	65	30	Fair	Fair	10	Yes	Significant - Evergreen	41	no	LDS Church Project
36	Pseudotsuga menziesii	Douglas fir	1	33	0	0	0	0	0	33	75	45	Good	Fair	13	Yes	Significant - Evergreen	50	no	LDS Church Project
37	Acer macrophyllum	Bigleaf maple	1	39	0	0	0	0	0	39	58	40	Fair	Poor	16	No	Significant - Deciduous	39	no	LDS Church Project
38	Acer rubrum	Red maple	1	14	0	0	0	0	0	14	17	13	Poor	Poor	3	Yes	Significant - Evergreen	14	no	LDS Church Project
39	Pseudotsuga menziesii	Douglas fir	1	33	0	0	0	0	0	33	65	40	Fair	Fair	13	Yes	Significant - Evergreen	50	no	LDS Church Project
40	Pseudotsuga menziesii	Douglas fir	1	33	0	0	0	0	0	33	65	40	Fair	Fair	13	Yes	Significant - Evergreen	50	no	LDS Church Project
41	Pseudotsuga menziesii	Douglas fir	1	12	0	0	0	0	0	12	40	15	Fair	Fair	2	Yes	Significant - Evergreen	15	no	LDS Church Project
42	Pseudotsuga menziesii	Douglas fir	1	13	0	0	0	0	0	13	40	15	Fair	Fair	3	Yes	Significant - Evergreen	16	no	LDS Church Project
43	Pseudotsuga menziesii	Douglas fir	1	11	0	0	0	0	0	11	30	15	Fair	Fair	2	Yes	Significant - Evergreen	11	no	LDS Church Project
44	Pseudotsuga menziesii	Douglas fir	1	22	0	0	0	0	0	22	45	35	Fair	Fair	7	Yes	Significant - Evergreen	33	no	LDS Church Project
45	Acer macrophyllum	Bigleaf maple	1	30	0	0	0	0	0	30	55	40	Fair	Fair	11	No	Significant - Deciduous	30	no	LDS Church Project
46	Corylus avellana	Common hazel	20	2	3	3	1	1	1	25	10	8	Good	Fair	9	No	Significant - Deciduous	13	no	LDS Church Project
47	Malus domestica	Apple	1	12	0	0	0	0	0	12	14	12	Fair	Fair	2	No	Significant - Deciduous	12	no	LDS Church Project
48	Malus domestica	Apple	2	10	8	0	0	0	0	18	14	12	Fair	Fair	5	No	Significant - Deciduous	18	no	LDS Church Project
49	Malus domestica	Apple	5	11	8	11	4	5	0	39	28	13	Fair	Fair	16	No	Significant - Deciduous	39	no	LDS Church Project
50	Malus domestica	Apple	2	11	12	0	0	0	0	23	17	12	Fair	Fair	8	No	Significant - Deciduous	23	no	LDS Church Project
51	Pseudotsuga menziesii	Douglas fir	1	40	0	0	0	0	0	40	75	40	Good	Good	16	Yes	Significant - Evergreen	60	no	LDS Church Project
52	Pseudotsuga menziesii	Douglas fir	1	40	0	0	0	0	0	40	75	40	Good	Good	16	Yes	Significant - Evergreen	60	no	LDS Church Project
53	Pseudotsuga menziesii	Douglas fir	1	39	0	0	0	0	0	39	67	40	Good	Good	16	Yes	Significant - Evergreen	59	no	LDS Church Project
54	Pseudotsuga menziesii	Douglas fir	1	13	0	0	0	0	0	13	40	20	Fair	Fair	3	Yes	Significant - Evergreen	16	no	LDS Church Project
55	Pseudotsuga menziesii	Douglas fir	1	38	0	0	0	0	0	38	65	35	Fair	Fair	15	Yes	Significant - Evergreen	57	no	LDS Church Project
56	Pseudotsuga menziesii	Douglas fir	1	11	0	0	0	0	0	11	35	20	Fair	Fair	2	Yes	Significant - Evergreen	11	no	LDS Church Project
57	Pseudotsuga menziesii	Douglas fir	1	8	0	0	0	0	0	8	30	10	Fair	Fair	2	Yes	Significant - Evergreen	8	no	LDS Church Project
58	Pseudotsuga menziesii	Douglas fir	1	16	0	0	0	0	0	16	50	20	Fair	Fair	4	Yes	Significant - Evergreen	20	no	LDS Church Project
59	Acer platanoides	Norway maple	6	10	10	10	5	4	4	43	40	30	Fair	Fair	18	No	Significant - Deciduous	29	no	LDS Church Project
60	Acer platanoides	Norway maple	6	5	10	8	5	4	4	36	40	30	Fair	Fair	14	No	Significant - Deciduous	24	no	LDS Church Project
61	Acer platanoides	Norway maple	6	5	6	8	5	4	4	32	40	30	Fair	Fair	12	No	Significant - Deciduous	21	no	LDS Church Project
62	Acer platanoides	Norway maple	6	5	6	8	5	4	4	32	40	30	Fair	Fair	12	No	Significant - Deciduous	21	no	LDS Church Project
63	Pinus contorta	Lodgepole pine	1	16	0	0	0	0	0	16	50	20	Fair	Fair	4	Yes	Significant - Evergreen	16	no	LDS Church Project
64	Pinus contorta	Lodgepole pine	1	12	0	0	0	0	0	12	25	17	Poor	Fair	2	Yes	Significant - Evergreen	12	no	LDS Church Project
65	Pinus contorta	Lodgepole pine	1	12	0	0	0	0	0	12	40	20	Poor	Fair	2	Yes	Significant - Evergreen	12	no	LDS Church Project
66	Pinus monticola	Western white pine	1	8	0	0	0	0	0	8	12	8	Fair	Fair	2	Yes	Significant - Evergreen	5	no	LDS Church Project
67	Thuja plicata	Western red cedar	1	8	0	0	0	0	0	8	18	10	Fair	Good	2	Yes	Significant - Evergreen	5	no	LDS Church Project
68	Thuja plicata	Western red cedar	1	11	0	0	0	0	0	11	30	17	Fair	Good	2	Yes	Significant - Evergreen	7	no	LDS Church Project
69	Thuja plicata	Western red cedar	1	8	0	0	0	0	0	8	25	13	Fair	Good	2	Yes	Significant - Evergreen	5	no	LDS Church Project
70	Thuja plicata	Western red cedar	1	10	0	0	0	0	0	10	20	13	Dead	Dead	2	Yes	Significant - Evergreen	7	no	LDS Church Project
71	Thuja plicata	Western red cedar	2	30	32	0	0	0	0	62	60	25	Fair	Fair	27	Yes	Significant - Evergreen	62	no	LDS Church Project
72	Thuja plicata	Western red cedar	1	12	0	0	0	0	0	12	55	15	Dead	Dead	2	Yes	Significant - Evergreen	12	no	LDS Church Project
73	Thuja plicata	Western red cedar	2	12	20	0	0	0	0	32	60	45	Poor	Fair	12	Yes	Significant - Evergreen	32	no	LDS Church Project
74	Thuja plicata	Western red cedar	1	11	0	0	0	0	0	11	50	10	Poor	Fair	2	Yes	Significant - Evergreen	7	no	LDS Church Project
75	Thuja plicata	Western red cedar	1	24	0	0	0	0	0	24	55	25	Poor	Fair	8	Yes	Significant - Evergreen	24	no	LDS Church Project
76	Thuja occidentalis	Arborvitae	2	7	5	0	0	0	0	12	22	10	Fair	Fair	2	Yes	Significant - Evergreen	8	no	LDS Church Project
77	Thuja plicata	Western red cedar	1	11	0	0	0	0	0	11	22	10	Poor	Fair	2	Yes	Significant - Evergreen	7	no	LDS Church Project
78	Thuja plicata	Western red cedar	1	9	0	0	0	0	0	9	22	10	Poor	Fair	2	Yes	Significant - Evergreen	6	no	LDS Church Project
79	Acer platanoides	Norway maple	5	14	12	12	9	0	0	47	40	25	Fair	Fair	20	No	Significant - Deciduous	47	no	LDS Church Project
80	Acer platanoides	Norway maple	1	29	0	0	0	0	0	29	38	25	Poor	Fair	11	No	Significant - Deciduous	29	no	LDS Church Project
81	Populus nigra	Black poplar	1	15	0	0	0	0	0	15	42	20	Fair	Fair	4	No	Significant - Deciduous	15	no	LDS Church Project
82	Quercus rubra	Northern red oak	1	16	0	0	0	0	0	16	27	20	Fair	Fair	4	No	Significant - Deciduous	16	yes	LDS Church Project
83	Quercus rubra	Northern red oak	1	12	0	0	0	0	0	12	27	25	Fair	Fair	2	No	Significant - Deciduous	12	no	LDS Church Project
84	Quercus rubra	Northern red oak	1	12	0	0	0	0	0	12	12	5	Dead	Dead	2	No	Significant - Deciduous	12	no	LDS Church Project
85	Quercus rubra	Northern red oak	1	14	0	0	0	0	0	14	28	24	Fair	Fair	3	No	Significant - Deciduous	14	yes	LDS Church Project
86	Quercus rubra	Northern red oak	5	8	2	2	5	8	0	25	25	20	Fair	Fair	9	No	Significant - Deciduous	17	no	LDS Church Project
87	Quercus rubra	Northern red oak	4	2	2	2	2	0	0	8	10	5	Fair	Fair	2	No	Not protected	5	no	LDS Church Project
88	Picea glauca	White spruce	1	10	0	0	0	0	0	10	22	10	Good	Good	2	Yes	Significant - Evergreen	7	no	LDS Church Project
89	Quercus rubra	Northern red oak	1	22	0	0	0	0	0	22	38	30	Fair	Fair	7	No	Significant - Deciduous	22	no	LDS Church Project
90	Quercus rubra	Northern red oak	3	12	9	12	-	-	-	33	38	29	Fair	Fair	13	No	Significant - Deciduous	33	Yes	Bybee Road Realignment Project
91	Pinus monticola	Western white pine	1	10	-	-	-	-	-	10	15	18	Fair	Fair	2	Yes	Significant - Evergreen	7	Yes	Bybee Road Realignment Project
92	Betula pendula	Silver birch	1	13	-	-	-	-	-	13	27	20	Good	Good	3	No	Significant - Deciduous	13	Yes	Bybee Road Realignment Project
93	Thuja plicata	Western red cedar	1	13	-	-	-	-	-	13	22	15	Poor	Fair	3	Yes	Significant - Evergreen	13	yes	Bybee Road Realignment Project
94	Betula pendula	Silver birch	1	12	-	-	-	-	-	12	15	15	Poor	Fair	2	No	Significant - Deciduous	12	Yes	Bybee Road Realignment Project
95	Pinus nigra	Black pine	1	11	-	-	-	-	-	11	29	15	Fair	Good	2	Yes	Significant - Evergreen	7	yes	Bybee Road Realignment Project
96	Pseudotsuga menziesii	Douglas fir	1	49	-	-	-	-	-	49	70	45	Fair	Good	21	Yes	Significant - Evergreen	74	yes	Bybee Road Realignment Project
97	Pseudotsuga menziesii	Douglas fir	1	49	0	0	0	0	0	49	70	45	Dead	Dead	21	Yes	Significant - Evergreen	74	yes	LDS Church Project
98	Prunus avium	Sweet cherry	4	8	4	3	5	-	-	20	20	15	Fair	Fair	6	No	Significant - Deciduous	20	Yes	Bybee Road Realignment Project
99	Prunus avium	Sweet cherry	3	9	4	12	-	-	-	25	22	15	Fair	Fair	9	No	Significant - Deciduous	25	yes	Bybee Road Realignment Project
100	Prunus avium	Sweet cherry	3	10	7	6	-	-	-	23	22	15	Fair	Fair	8	No	Significant - Deciduous	23	yes	Bybee Road Realignment Project
101	Prunus avium	Sweet cherry	2	30	8	0	0	0	0	38	35	30	Fair	Fair	15	No	Significant - Deciduous	48	yes	LDS Church Project
102	Prunus avium	Sweet cherry	2	20	10	0	0	0	0	30	35	28	Fair	Fair	11	No	Significant - Deciduous	38	yes	LDS Church Project
103	Ulmus procera	English elm	2	15	5	0	0	0	0	20	29	14	Fair	Fair	6	No	Significant - Deciduous	20	yes	LDS Church Project
104	Thuja plicata	Western red cedar	3	20	17	18	0	0	0	55	38	25	Fair	Fair	24	Yes	Significant - Evergreen	55	yes	LDS Church Project
105	Quercus rubra	Northern red oak	1	15	0	0	0	0	0	15	34	20	Fair	Fair	4	No	Significant - Deciduous	15	yes	LDS Church Project
106	Pseudotsuga menziesii	Douglas fir	1	11	0	0	0	0	0	11	50	25	Good	Fair	2	Yes	Significant - Evergreen	11	no	LDS Church Project
107	Pseudotsuga menziesii	Douglas fir	1	10	0	0	0	0	0	10	38	17	Fair	Fair	2	Yes	Significant - Evergreen	10	no	LDS Church Project
108	Juglans nigra	Eastern black walnut	1	13	0	0	0	0	0	13	25	22	Good	Fair	3	No	Significant - Deciduous	16	no	LDS Church Project
109	Prunus serrulata	Japanese cherry	1	15	0	0	0	0	0	15	30	15	Poor	Poor	4	No	Significant - Deciduous	19	no	LDS Church Project
110	Pseudotsuga menziesii	Douglas fir	1	42	0	0	0	0	0	42	70	40	Fair	Fair	17	Yes	Significant - Evergreen	63	no	LDS Church Project
111	Cedrus deodara	Deodar cedar	1	20	0	0	0	0	0	20	50	27	Fair	Fair	6	Yes	Significant - Evergreen	20	no	LDS Church Project
112	Pinus nigra	Black pine	1	15	0	0	0	0	0	15	40	25	Dead	Dead	4	Yes	Significant - Evergreen	15	no	LDS Church Project
113	Pinus nigra	Black pine	1	20	0	0	0	0	0	20	20	5	Dead	Dead	6	Yes	Significant - Evergreen	20	no	LDS Church Project
114	Picea abies	Norway spruce	1	9	0	0	0	0	0	9	30	10	Fair	Fair	2	Yes	Significant - Evergreen	6	no	LDS Church Project
115	Picea pugens var glauca	Colorado blue spruce	1	9	0	0	0	0	0	9	30	10	Fair	Fair	2	Yes	Significant - Evergreen	6	no	LDS Church Project
116	Pinus ponderosa	Ponderosa pine	1	9	0	0	0	0	0	9	24	15	Good	Good	2	Yes	Significant - Evergreen	6	no	LDS Church Project
117	Pinus spp.	Pine	2	16	16	0	0	0	0	32	30	25	Dead	Dead	12	Yes	Significant - Evergreen	32	no	LDS Church Project
118	Thuja plicata	Western red cedar	1	10	0	0	0	0	0	10	20	8	Good	Good	2	Yes	Significant - Evergreen	7	no	LDS Church Project
119	Cedrus deodara	Deodar cedar	1	30	0	0	0	0	0	30	57	29	Good	Good	11	Yes	Significant - Evergreen	30	no	LDS Church Project
120	Populus trichocarpa	Black cottonwood	1	20	0	0	0	0	0	20	70	40	Good	Fair	6	No	Significant - Deciduous	30	yes	LDS Church Project
121	Populus trichocarpa	Black cottonwood	1	20	0	0	0	0	0	20	70	40	Good	Fair	6	No	Significant - Deciduous	30	yes	LDS Church Project
122	Populus trichocarpa	Black cottonwood	1	27	0	0	0	0	0	27	70	40	Good	Fair	10	No	Significant - Deciduous	41	yes	LDS Church Project
123	Populus trichocarpa	Black cottonwood	1	22	0	0	0	0	0	22	70	40	Good	Fair	7	No	Significant - Deciduous	33	yes	LDS Church Project
124	Populus trichocarpa	Black cottonwood	1	43	0	0	0	0	0	43	70	55	Good	Fair	18	No	Significant - Deciduous	65	yes	LDS Church Project
125	Populus trichocarpa	Black cottonwood	1	38	0	0	0	0	0	38	50	40	Good	Fair	15	No	Significant - Deciduous	57	yes	LDS Church Project
126	Populus trichocarpa	Black cottonwood	1	42	0	0	0	0	0	42	65	50	Good	Fair	17	No	Significant - Deciduous	63	yes	LDS Church Project
127	Populus trichocarpa	Black cottonwood	1	33	0	0	0	0	0	33	65	40	Good	Fair	13	No	Significant - Deciduous	50	yes	LDS Church Project
128	Acer macrophyllum	Bigleaf maple	8	15	14	6	10	11	15	93	65	40	Good	Fair	43	No	Significant - Deciduous	93	Yes	Bybee Road Realignment Project
129	Populus trichocarpa	Black cottonwood	1	33	0	0	0	0	0	33	48	40	Poor	Poor	13	No	Significant - Deciduous	50	yes	LDS Church Project
130	Corylus avellana	European hazel	20	5	1	1	1	1	1	24	25	30	Fair	Poor	8	No	Significant - Deciduous	12	yes	Bybee Road Realignment Project
131	Acer macrophyllum	Bigleaf maple	1	13	-	-	-	-	-	13	25	15	Dead	Dead	3	No	Significant - Deciduous	13	yes	Bybee Road Realignment Project
132	Pseudotsuga menziesii	Douglas fir	1	45	-	-	-	-	-	45	80	45	Fair	Fair	19	Yes	Significant - Evergreen	68	Yes	Bybee Road Realignment Project
133	Pseudotsuga menziesii	Douglas fir	1	40	-	-	-	-	-	40	75	45	Fair	Fair	16	Yes	Significant - Evergreen	60	Yes	Bybee Road Realignment Project
134	Acer macrophyllum	Bigleaf maple	1	12	-	-	-	-	-	12	45	40	Poor	Fair	2	No	Significant - Deciduous	12	yes	Bybee Road Realignment Project
135	Acer macrophyllum	Bigleaf maple	3	12	4	9	-	-	-	25	50	40	Poor	Fair	9	No	Significant - Deciduous	25	yes	Bybee Road Realignment Project
136	Acer macrophyllum	Bigleaf maple	1	13	-	-	-	-	-	13	50	20	Dead	Dead	3	No	Significant - Deciduous	13	yes	Bybee Road Realignment Project
137	Alnus rubra	Red alder	2	20	16	-	-	-	-	36	48	25	Dead	Dead	14	No	Significant - Deciduous	45	yes	Bybee Road Realignment Project
138	Acer macrophyllum	Bigleaf maple	1	44	-	-	-	-	-	44	48	45	Fair	Poor	18	No	Significant - Deciduous	44	yes	Bybee Road Realignment Project
139	Acer macrophyllum	Bigleaf maple	1	40	-	-	-	-	-	40	48	45	Fair	Poor	16	No	Significant - Deciduous	40	no	Bybee Road Realignment Project
140	Acer macrophyllum	Bigleaf maple	7	6	1	1	1	1	1	12	25	20	Fair	Poor	2	No	Significant - Deciduous	8	yes	Bybee Road Realignment Project
141	Acer macrophyllum	Bigleaf maple	4	12	22	8	6	-	-	48	40	30	Fair	Fair	20	No	Significant - Deciduous	48	no	Bybee Road Realignment Project
142	Acer macrophyllum	Bigleaf maple	1	13	-	-	-	-	-	13	30	20	Fair	Fair	3	No	Significant - Deciduous	13	no	Bybee Road Realignment Project
143	Acer macrophyllum	Bigleaf maple	2	25	16	-	-	-	-	41	40	30	Fair	Fair	17	No	Significant - Deciduous	41	yes	Bybee Road Realignment Project
144	Prunus subhirtella	Winter flowering cherry	1	14	-	-	-	-	-	14	30	30	Fair	Fair	3	No	Significant - Deciduous	18	yes	Bybee Road Realignment Project
145	Prunus subhirtella	Winter flowering cherry	1	14	-	-	-	-	-	14	25	10	Poor	Critical	3	No	Significant - Deciduous	18	yes	Bybee Road Realignment Project
146	Acer macrophyllum	Bigleaf maple	2	18	20	-	-	-	-	38	50	30	Fair	Fair	15	No	Significant - Deciduous	38	no	Bybee Road Realignment Project
147	Acer macrophyllum	Bigleaf maple	1	24	-	-	-	-	-	24	45	30	Poor	Fair	8	No	Significant - Deciduous	24	no	Bybee Road Realignment Project
148	Acer macrophyllum	Bigleaf maple	1	25	-	-	-	-	-	25	48	37	Poor	Fair	9	No	Significant - Deciduous	25	no	Bybee Road Realignment Project
149	Pyrus calleryana	Callery pear	4	16	5	2	4	-	-	27	27	30	Poor	Poor	10	No	Significant - Deciduous	27	no	Bybee Road Realignment Project
150	Pyrus calleryana	Callery pear	6	7	8	3	8	11	8	45	27	30	Poor	Poor	19	No	Significant - Deciduous	30	no	Bybee Road Realignment Project
151	Betula pendula	Silver birch	4	12	12	3	11	-	-	38	35	32	Fair	Fair	15	No	Significant - Deciduous	38	no	Bybee Road Realignment Project
152	Acer x fremanii	Freeman maple	2	8	7	-	-	-	-	15	35	20	Fair	Fair	4	No	Significant - Deciduous	10	no	Bybee Road Realignment Project
153	Acer x fremanii	Freeman maple	4	3	3	5	3	-	-	14	35	20	Fair	Fair	3	No	Significant - Deciduous	9	no	Bybee Road Realignment Project
154	Pseudotsuga menziesii	Douglas fir	1	26	-	-	-	-	-	26	75	27	Good	Good	9	Yes	Significant - Evergreen	39	no	Bybee Road Realignment Project
155	Pseudotsuga menziesii	Douglas fir	1	16	-	-	-	-	-	16	50	27	Good	Good	4	Yes	Significant - Evergreen	20	no	Bybee Road Realignment Project
156	Thuja plicata	Western red cedar	1	16	0	0	0	0	0	16	48	32	Good	Good	4	Yes	Significant - Evergreen	16	no	LDS Church Project
157	Thuja plicata	Western red cedar	1	16	0	0	0	0	0	16	48	32	Good	Good	4	Yes	Significant - Evergreen	16	no	LDS Church Project
158	Malus spp.	Apple	2	22	13	0	0	0	0	35	45	35	Fair	Fair	14	No	Significant - Deciduous	35	no	LDS Church Project
159	Pseudotsuga menziesii	Douglas fir	1	42	0	0	0	0	0	42	70	40	Good	Fair	17	Yes	Significant - Evergreen	63	no	LDS Church Project
160	Malus spp.	Apple	3	12	5	4	0	0	0	21	27	15	Poor	Poor	7	No	Significant - Deciduous	21	no	LDS Church Project
161	Corylus avellana	Common hazel	15	3	3	4	3	2	3	41	15	15	Fair	Poor	17	No	Significant - Deciduous	21	no	LDS Church Project
162	Corylus avellana	Common hazel	15	3	3	4	3	2	3	41	15	15	Fair	Poor	17	No	Significant - Deciduous	21	no	LDS Church Project
163	Malus spp.	Apple	1	12	0	0	0	0	0	12	27	20	Fair	Poor	2	No	Significant - Deciduous	12	no	LDS Church Project
164	Corylus avellana	Common hazel	15	3	3	4	3	2	3	41	15	15	Fair	Poor	17	No	Significant - Deciduous	21	no	LDS Church Project
165	Corylus avellana	Common hazel	15	3	3	4	3	2	3	41	15	15	Fair	Poor	17	No	Significant - Deciduous	21	no	LDS Church Project
166	Pseudotsuga menziesii	Douglas fir	1	44	0	0	0	0	0	44	75	45	Good	Fair	18	Yes	Significant - Evergreen	66	no	LDS Church Project
167	Pseudotsuga menziesii	Douglas fir	1	34	0	0	0	0	0	34	68	40	Good	Fair	13	Yes	Significant - Evergreen	51	no	LDS Church Project
168	Pseudotsuga menziesii	Douglas fir	2	14	17	0	0	0	0	31	60	30	Good	Fair	12	Yes	Significant - Evergreen	47	no	LDS Church Project
169	Pseudotsuga menziesii	Douglas fir	1	22	0	0	0	0	0	22	60	30	Good	Fair	7	Yes	Significant - Evergreen	33	no	LDS Church Project
170	Pseudotsuga menziesii	Douglas fir	1	16	0	0	0	0	0	16	55	20	Fair	Fair	4	Yes	Significant - Evergreen	20	no	LDS Church Project
171	Pseudotsuga menziesii	Douglas fir	1	22	0	0	0	0	0	22	70	25	Fair	Fair	7	Yes	Significant - Evergreen	33	no	LDS Church Project
172	Pseudotsuga menziesii	Douglas fir	1	39	0	0	0	0	0	39	70	30	Fair	Fair	16	Yes	Significant - Evergreen	59	no	LDS Church Project
173	Pseudotsuga menziesii	Douglas fir	1	44	0	0	0	0	0	44	70	45	Fair	Fair	18	Yes	Significant - Evergreen	66	no	LDS Church Project
174	Pseudotsuga menziesii	Douglas fir	1	30	0	0	0	0	0	30	70	30	Fair	Fair	11	Yes	Significant - Evergreen	45	no	LDS Church Project
175	Pseudotsuga menziesii	Douglas fir	1	37	0	0	0	0	0	37	70	37	Fair	Fair	15	Yes	Significant - Evergreen	56	no	LDS Church Project
176	Pseudotsuga menziesii	Douglas fir	1	37	0	0	0	0	0	37	70	37	Fair	Fair	15	Yes	Significant - Evergreen	56	no	LDS Church Project
177	Pseudotsuga menziesii	Douglas fir	2	37	35	0	0	0	0	72	70	50	Poor	Fair	32	Yes	Significant - Evergreen	108	no	LDS Church Project
178	Pseudotsuga menziesii	Douglas fir	1	46	0	0	0	0	0	46	70	40	Fair	Fair	19	Yes	Significant - Evergreen	69	no	LDS Church Project
179	Pseudotsuga menziesii	Douglas fir	1	46	0	0	0	0	0	46	70	40	Fair	Fair	19	Yes	Significant - Evergreen	69	yes	LDS Church Project
180	Pseudotsuga menziesii	Douglas fir	1	35	0	0	0	0	0	35	70	40	Fair	Fair	14	Yes	Significant - Evergreen	53	yes	LDS Church Project
181	Pseudotsuga menziesii	Douglas fir	1	45	0	0	0	0	0	45	70	40	Fair	Fair	19	Yes	Significant - Evergreen	68	yes	LDS Church Project
182	Pseudotsuga menziesii	Douglas fir	1	9	0	0	0	0	0	9	25	15	Fair	Fair	2	Yes	Significant - Evergreen	9	yes	LDS Church Project
183	Corylus avellana	Common hazel	15	8	1	1	1	1	1	22	20	20	Fair	Fair	7	No	Significant - Deciduous	11	yes	LDS Church Project
184	Corylus avellana	Common hazel	15	8	8	8	6	4	8	51	20	20	Fair	Fair	22	No	Significant - Deciduous	26	no	LDS Church Project
185	Prunus subhirtella	Winter flowering cherry	1	20	0	0	0	0	0	20	40	20	Fair	Fair	6	No	Significant - Deciduous	25	yes	LDS Church Project
186	Prunus subhirtella	Winter flowering cherry	2	20	14	0	0	0	0	34	40	20	Fair	Fair	13	No	Significant - Deciduous	43	yes	LDS Church Project
187	Pseudotsuga menziesii	Douglas fir	1	25	0	0	0	0	0	25	50	40	Poor	Poor	9	Yes	Significant - Evergreen	38	no	LDS Church Project
188	Pseudotsuga menziesii	Douglas fir	1	37	0	0	0	0	0	37	70	50	Fair	Fair	15	Yes	Significant - Evergreen	56	no	LDS Church Project
189	Cedrus deodara	Deodar cedar	1	22	0	0	0	0	0	22	50	35	Fair	Fair	7	Yes	Significant - Evergreen	22	no	LDS Church Project
190	Cedrus deodara	Deodar cedar	1	24	0	0	0	0	0	24	50	35	Fair	Poor	8	Yes	Significant - Evergreen	24	no	LDS Church Project
191	Pseudotsuga menziesii	Douglas fir	1	23	0	0	0	0	0	23	50	35	Fair	Fair	8	Yes	Significant - Evergreen	35	no	LDS Church Project
192	Pyrus calleryana	Callery pear	2	7	5	0	0	0	0	12	20	10	Fair	Fair	2	No	Significant - Deciduous	8	no	LDS Church Project
193	Pyrus calleryana	Callery pear	2	8	5	0	0	0	0	13	20	10	Critical	Poor	3	No	Significant - Deciduous	9	no	LDS Church Project
194	Pseudotsuga menziesii	Douglas fir	1	45	0	0	0	0	0	45	80	50	Critical	Poor	19	Yes	Significant - Evergreen	68	no	LDS Church Project
195	Pseudotsuga menziesii	Douglas fir	1	29	0	0	0	0	0	29	75	50	Fair	Fair	11	Yes	Significant - Evergreen	44	no	LDS Church Project
196	Pseudotsuga menziesii	Douglas fir	1	25	0	0	0	0	0	25	75	50	Fair	Fair	9	Yes	Significant - Evergreen	38	no	LDS Church Project
197	Pseudotsuga menziesii	Douglas fir	1	24	0	0	0	0	0	24	75	50	Fair	Poor	8	Yes	Significant - Evergreen	36	yes	LDS Church Project
198	Pseudotsuga menziesii	Douglas fir	1	29	0	0	0	0	0	29	70	40	Poor	Poor	11	Yes	Significant - Evergreen	44	yes	LDS Church Project
199	Pseudotsuga menziesii	Douglas fir	1	35	0	0	0	0	0	35	70	40	Poor	Poor	14	Yes	Significant - Evergreen	53	yes	LDS Church Project
200	Pseudotsuga menziesii	Douglas fir	1	16	0	0	0	0	0	16	45	20	Poor	Poor	4	Yes	Significant - Evergreen	20	yes	LDS Church Project
201	Prunus subhirtella	Winter flowering cherry	1	13	0	0	0	0	0	13	30	20	Fair	Fair	3	No	Significant - Deciduous	16	yes	LDS Church Project
202	Pseudotsuga menziesii	Douglas fir	1	29	-	-	-	-	-	29	70	50	Poor	Poor	11	Yes	Significant - Evergreen	44	yes	Bybee Road Realignment Project
203	Pseudotsuga menziesii	Douglas fir	1	25	-	-	-	-	-	25	70	45	Poor	Poor	9	Yes	Significant - Evergreen	38	yes	Bybee Road Realignment Project
204	Pseudotsuga menziesii	Douglas fir	1	16	-	-	-	-	-	16	50	30	Poor	Poor	4	Yes	Significant - Evergreen	20	yes	Bybee Road Realignment Project
205	Pseudotsuga menziesii	Douglas fir	1	46	-	-	-	-	-	46	50	30	Fair	Poor	19	Yes	Significant - Evergreen	69	yes	Bybee Road Realignment Project
206	Pseudotsuga menziesii	Douglas fir	1	30	-	-	-	-	-	30	70	40	Fair	Fair	11	Yes	Significant - Evergreen	45	yes	Bybee Road Realignment Project
207	Pseudotsuga menziesii	Douglas fir	2	30	24	-	-	-	-	54	70	40	Fair	Poor	23	Yes	Significant - Evergreen	81	yes	Bybee Road Realignment Project
208	Pseudotsuga menziesii	Douglas fir	1	37	-	-	-	-	-	37	60	40	Poor	Fair	15	Yes	Significant - Evergreen	56	yes	Bybee Road Realignment Project
209	Pyrus calleryana	Callery pear	1	12	-	-	-	-	-	12	25	15	Dead	Dead	2	No	Significant - Deciduous	12	yes	Bybee Road Realignment Project
210	Corylus avellana	European hazel	20	3	4	3	4	2	3	33	8	15	Fair	Poor	13	No	Significant - Deciduous	17	yes	Bybee Road Realignment Project
211	Cedrus deodara	Deodar cedar	1	10	-	-	-	-	-	10	25	15	Fair	Fair	2	Yes	Significant - Evergreen	10	yes	Bybee Road Realignment Project
212	Cedrus deodara	Deodar cedar	1	12	-	-	-	-	-	12	25	15	Fair	Fair	2	Yes	Significant - Evergreen	12	yes	Bybee Road Realignment Project
213	Pseudotsuga menziesii	Douglas fir	1	25	-	-	-	-	-	25	70	40	Fair	Poor	9	Yes	Significant - Evergreen	38	yes	Bybee Road Realignment Project
214	Pseudotsuga menziesii	Douglas fir	1	25	-	-	-	-	-	25	70	40	Fair	Poor	9	Yes	Significant - Evergreen	38	yes	Bybee Road Realignment Project
215	Pseudotsuga menziesii	Douglas fir	1	16	-	-	-	-	-	16	35	15	Critical	Poor	4	Yes	Significant - Evergreen	20	yes	Bybee Road Realignment Project
216	Pseudotsuga menziesii	Douglas fir	1	39	-	-	-	-	-	39	75	40	Fair	Fair	16	Yes	Significant - Evergreen	59	yes	Bybee Road Realignment Project
217	Pseudotsuga menziesii	Douglas fir	1	14	-	-	-	-	-	14	45	20	Fair	Fair	3	Yes	Significant - Evergreen	18	yes	Bybee Road Realignment Project
218	Pseudotsuga menziesii	Douglas fir	1	25	-	-	-	-	-	25	55	30	Poor	Poor	9	Yes	Significant - Evergreen	38	yes	Bybee Road Realignment Project
219	Pseudotsuga menziesii	Douglas fir	1	20	-	-	-	-	-	20	55	30	Poor	Poor	6	Yes	Significant - Evergreen	25	yes	Bybee Road Realignment Project
220	Pseudotsuga menziesii	Douglas fir	3	22	7	7	-	-	-	36	60	30	Poor	Poor	14	Yes	Significant - Evergreen	54	yes	Bybee Road Realignment Project
221	Pseudotsuga menziesii	Douglas fir	1	27	0	0	0	0	0	27	65	40	Fair	Poor	10	Yes	Significant - Evergreen	41	yes	LDS Church Project
222	Pyrus calleryana	Callery pear	1	14	-	-	-	-	-	14	35	20	Fair	Fair	3	No	Significant - Deciduous	14	yes	Bybee Road Realignment Project
223	Pseudotsuga menziesii	Douglas fir	1	18	-	-	-	-	-	18	65	40	Fair	Fair	5	Yes	Significant - Evergreen	23	yes	Bybee Road Realignment Project
224	Pseudotsuga menziesii	Douglas fir	1	22	-	-	-	-	-	22	65	40	Critical	Poor	7	Yes	Significant - Evergreen	33	yes	Bybee Road Realignment Project
225	Pseudotsuga menziesii	Douglas fir	1	22	-	-	-	-	-	22	65	40	Poor	Poor	7	Yes	Significant - Evergreen	33	yes	Bybee Road Realignment Project
226	Pseudotsuga menziesii	Douglas fir	1	21	-	-	-	-	-	21	65	40	Poor	Poor	7	Yes	Significant - Evergreen	32	yes	Bybee Road Realignment Project
227	Pseudotsuga menziesii	Douglas fir	1	18	-	-	-	-	-	18	65	40	Poor	Poor	5	Yes	Significant - Evergreen	23	yes	Bybee Road Realignment Project
228	Pseudotsuga menziesii	Douglas fir	1	25	-	-	-	-	-	25	65	40	Poor	Poor	9	Yes	Significant - Evergreen	38	yes	Bybee Road Realignment Project
229	Pseudotsuga menziesii	Douglas fir	1	21	-	-	-	-	-	21	65	40	Poor	Poor	7	Yes	Significant - Evergreen	32	yes	Bybee Road Realignment Project
230	Pseudotsuga menziesii	Douglas fir	1	22	-	-	-	-	-	22	65	40	Poor	Poor	7	Yes	Significant - Evergreen	33	yes	Bybee Road Realignment Project
231	Corylus avellana	European hazel	15	4	4	4	4	3	3	43	12	7	Fair	Fair	18	No	Significant - Deciduous	22	no	Bybee Road Realignment Project
232	Corylus avellana	European hazel	15	4	4	4	4	3	3	43	12	7	Fair	Fair	18	No	Significant - Deciduous	22	no	Bybee Road Realignment Project
233	Pseudotsuga menziesii	Douglas fir	1	27	-	-	-	-	-	27	70	40	Fair	Fair	10	Yes	Significant - Evergreen	41	yes	Bybee Road Realignment Project
234	Pseudotsuga menziesii	Douglas fir	1	33	-	-	-	-	-	33	70	40	Fair	Fair	13	Yes	Significant - Evergreen	50	no	Bybee Road Realignment Project
235	Pyrus calleryana	Callery pear	1	12	-	-	-	-	-	12	45	27	Fair	Fair	2	No	Significant - Deciduous	12	no	Bybee Road Realignment Project
236	Acer macrophyllum	Bigleaf maple	1	20	-	-	-	-	-	20	35	20	Critical	Critical	6	No	Significant - Deciduous	20	no	Bybee Road Realignment Project
237	Pseudotsuga menziesii	Douglas fir	1	25	-	-	-	-	-	25	65	40	Fair	Fair	9	Yes	Significant - Evergreen	38	no	Bybee Road Realignment Project
238	Pyrus calleryana	Callery pear	1	25	-	-	-	-	-	25	35	20	Critical	Critical	9	No	Significant - Deciduous	25	no	Bybee Road Realignment Project
239	Pseudotsuga menziesii	Douglas fir	1	36	-	-	-	-	-	36	65	40	Fair	Poor	14	Yes	Significant - Evergreen	54	no	Bybee Road Realignment Project
240	Pseudotsuga menziesii	Douglas fir	1	29	-	-	-	-	-	29	65	40	Poor	Poor	11	Yes	Significant - Evergreen	44	no	Bybee Road Realignment Project
241	Pseudotsuga menziesii	Douglas fir	1	34	-	-	-	-	-	34	65	40	Poor	Poor	13	Yes	Significant - Evergreen	51	no	Bybee Road Realignment Project
242	Fagus sylvatica	European beech	1	14	-	-	-	-	-	14	45	40	Critical	Poor	3	No	Significant - Deciduous	18	yes	Bybee Road Realignment Project
243	Pseudotsuga menziesii	Douglas fir	1	26	-	-	-	-	-	26	60	40	Poor	Poor	9	Yes	Significant - Evergreen	39	yes	Bybee Road Realignment Project
244	Pseudotsuga menziesii	Douglas fir	1	18	-	-	-	-	-	18	60	40	Fair	Poor	5	Yes	Significant - Evergreen	23	yes	Bybee Road Realignment Project
245	Pseudotsuga menziesii	Douglas fir	1	29	-	-	-	-	-	29	60	40	Fair	Poor	11	Yes	Significant - Evergreen	44	yes	Bybee Road Realignment Project
246	Fagus sylvatica	European beech	3	19	4	4	-	-	-	27	35	15	Fair	Poor	10	No	Significant - Deciduous	34	yes	Bybee Road Realignment Project
247	Pseudotsuga menziesii	Douglas fir	1	11	-	-	-	-	-	11	35	15	Fair	Poor	2	Yes	Significant - Evergreen	11	yes	Bybee Road Realignment Project
248	Pseudotsuga menziesii	Douglas fir	1	11	-	-	-	-	-	11	35	15	Fair	Poor	2	Yes	Significant - Evergreen	11	yes	Bybee Road Realignment Project
249	Acer macrophyllum	Bigleaf maple	1	13	-	-	-	-	-	13	40	15	Poor	Poor	3	No	Significant - Deciduous	13	yes	Bybee Road Realignment Project
250	Fagus sylvatica	European beech	1	13	-	-	-	-	-	13	40	15	Poor	Poor	3	No	Significant - Deciduous	16	yes	Bybee Road Realignment Project
251	Fagus sylvatica	European beech	2	13	10	-	-	-	-	23	40	15	Fair	Poor	8	No	Significant - Deciduous	29	yes	Bybee Road Realignment Project
252	Fagus sylvatica	European beech	1	14	-	-	-	-	-	14	35	15	Poor	Poor	3	No	Significant - Deciduous	18	yes	Bybee Road Realignment Project
253	Fagus sylvatica	European beech	2	12	12	-	-	-	-	24	35	15	Poor	Poor	8	No	Significant - Deciduous	30	yes	Bybee Road Realignment Project
254	Fagus sylvatica	European beech	1	15	-	-	-	-	-	15	40	20	Poor	Poor	4	No	Significant - Deciduous	19	yes	Bybee Road Realignment Project
255	Fagus sylvatica	European beech	2	12	5	-	-	-	-	17	35	15	Poor	Poor	5	No	Significant - Deciduous	21	no	Bybee Road Realignment Project
256	Fagus sylvatica	European beech	1	13	-	-	-	-	-	13	45	15	Poor	Poor	3	No	Significant - Deciduous	16	no	Bybee Road Realignment Project
257	Fagus sylvatica	European beech	1	14	-	-	-	-	-	14	45	15	Poor	Poor	3	No	Significant - Deciduous	18	no	Bybee Road Realignment Project
258	Acer macrophyllum	Bigleaf maple	1	14	-	-	-	-	-	14	45	15	Fair	Poor	3	No	Significant - Deciduous	14	no	Bybee Road Realignment Project
259	Acer macrophyllum	Bigleaf maple	2	18	6	-	-	-	-	24	45	15	Fair	Fair	8	No	Significant - Deciduous	24	no	Bybee Road Realignment Project
260	Acer macrophyllum	Bigleaf maple	3	15	14	15	-	-	-	44	40	15	Fair	Fair	18	No	Significant - Deciduous	44	no	Bybee Road Realignment Project
261	Acer macrophyllum	Bigleaf maple	2	15	20	-	-	-	-	35	40	15	Poor	Poor	14	No	Significant - Deciduous	35	no	Bybee Road Realignment Project
262	Corylus avellana	European hazel	20	4	4	4	4	3	3	40	15	15	Fair	Fair	16	No	Significant - Deciduous	20	no	Bybee Road Realignment Project
263	Pseudotsuga menziesii	Douglas fir	1	19	-	-	-	-	-	19	50	15	Poor	Fair	6	Yes	Significant - Evergreen	24	no	Bybee Road Realignment Project
264	Pseudotsuga menziesii	Douglas fir	1	8	-	-	-	-	-	8	30	10	Fair	Fair	2	Yes	Significant - Evergreen	8	no	Bybee Road Realignment Project
265	Pseudotsuga menziesii	Douglas fir	1	9	-	-	-	-	-	9	30	10	Fair	Fair	2	Yes	Significant - Evergreen	9	no	Bybee Road Realignment Project
266	Pseudotsuga menziesii	Douglas fir	1	12	-	-	-	-	-	12	30	10	Fair	Poor	2	Yes	Significant - Evergreen	15	no	Bybee Road Realignment Project
267	Fagus sylvatica	European beech	1	12	-	-	-	-	-	12	30	10	Poor	Poor	2	No	Significant - Deciduous	15	no	Bybee Road Realignment Project
268	Fagus sylvatica	European beech	1	13	-	-	-	-	-	13	40	20	Poor	Poor	3	No	Significant - Deciduous	16	no	Bybee Road Realignment Project
269	Pseudotsuga menziesii	Douglas fir	1	32	-	-	-	-	-	32	70	40	Fair	Poor	12	Yes	Significant - Evergreen	48	yes	Bybee Road Realignment Project
270	Pseudotsuga menziesii	Douglas fir	1	13	-	-	-	-	-	13	55	40	Fair	Poor	3	Yes	Significant - Evergreen	16	yes	Bybee Road Realignment Project
271	Fagus sylvatica	European beech	1	16	-	-	-	-	-	16	55	40	Poor	Poor	4	No	Significant - Deciduous	20	yes	Bybee Road Realignment Project
272	Fagus sylvatica	European beech	1	13	-	-	-	-	-	13	50	30	Poor	Poor	3	No	Significant - Deciduous	16	yes	Bybee Road Realignment Project
273	Fagus sylvatica	European beech	3	10	10	4	-	-	-	24	35	20	Poor	Poor	8	No	Significant - Deciduous	24	yes	Bybee Road Realignment Project
274	Acer macrophyllum	Bigleaf maple	2	6	6	-	-	-	-	12	40	20	Fair	Poor	2	No	Significant - Deciduous	8	no	Bybee Road Realignment Project
275	Acer macrophyllum	Bigleaf maple	1	12	-	-	-	-	-	12	20	10	Critical	Critical	2	No	Significant - Deciduous	12	yes	Bybee Road Realignment Project
276	Malus fusca	Western crabapple	4	8	4	3	4	-	-	19	20	20	Poor	Poor	6	No	Significant - Deciduous	19	yes	Bybee Road Realignment Project
277	Magnolia grandiflora	Southern magnolia	1	12	-	-	-	-	-	12	20	30	Fair	Fair	2	Yes	Significant - Evergreen	12	yes	Bybee Road Realignment Project
278	Acer macrophyllum	Bigleaf maple	1	34	-	-	-	-	-	34	30	30	Critical	Critical	13	No	Significant - Deciduous	34	yes	Bybee Road Realignment Project
279	Picea pugens var glauca	Colorado blue spruce	1	12	0	0	0	0	0	12	30	10	Fair	Fair	2	Yes	Significant - Evergreen	12	no	LDS Church Project
280	Pseudotsuga menziesii	Douglas fir	1	16	0	0	0	0	0	16	50	20	Fair	Fair	4	Yes	Significant - Evergreen	20	no	LDS Church Project
281	Pseudotsuga menziesii	Douglas fir	1	20	-	-	-	-	-	20	50	40	Good	Good	6	Yes	Significant - Evergreen	25	no	Bybee Road Realignment Project
282	Pseudotsuga menziesii	Douglas fir	1	22	-	-	-	-	-	22	50	40	Good	Good	7	Yes	Significant - Evergreen	28	no	Bybee Road Realignment Project
283	Pseudotsuga menziesii	Douglas fir	1	25	-	-	-	-	-	25	40	35	Good	Good	9	Yes	Significant - Evergreen	31	no	Bybee Road Realignment Project
284	Fraxinus latifolia	Oregon ash	1	22	-	-	-	-	-	22	50	35	Fair	Fair	7	No	Significant - Deciduous	28	no	Bybee Road Realignment Project
285	Fraxinus latifolia	Oregon ash	1	26	-	-	-	-	-	26	50	35	Fair	Fair	9	No	Significant - Deciduous	32	no	Bybee Road Realignment Project
286	Pseudotsuga menziesii	Douglas fir	1	32	-	-	-	-	-	32	50	20	Fair	Fair	12	Yes	Significant - Evergreen	40	no	Bybee Road Realignment Project
287	Pseudotsuga menziesii	Douglas fir	2	20	30	-	-	-	-	50	50	20	Fair	Fair	21	Yes	Significant - Evergreen	62	no	Bybee Road Realignment Project
290	Pseudotsuga menziesii	Douglas fir	1	8	-	-	-	-	-	8	25	0	Good	Good	2	Yes	Significant - Evergreen	10	no	Bybee Road Realignment Project
291	Acer macrophyllum	Bigleaf maple	5	8	15	12	10	15	-	60	30	20	Fair	Fair	26	No	Significant - Deciduous	75	no	Bybee Road Realignment Project
292	Pseudotsuga menziesii	Douglas fir	1	8	-	-	-	-	-	8	20	8	Good	Good	2	Yes	Significant - Evergreen	10	no	Bybee Road Realignment Project
293	Corylus avellana	European hazel	17	4	4	3	3	2	2	36	10	5	Fair	Fair	14	No	Significant - Deciduous	45	no	Bybee Road Realignment Project
294	Corylus avellana	European hazel	22	4	3	3	2	2	1	39	10	5	Fair	Fair	16	No	Significant - Deciduous	49	no	Bybee Road Realignment Project
295	Dead tree	Dead tree	1	15	-	-	-	-	-	15	12	5	Dead	Dead	4	No	Significant - Deciduous	19	no	Bybee Road Realignment Project
296	Corylus avellana	European hazel	25	2	2	2	2	1	1	36	10	0	Fair	Fair	14	No	Significant - Deciduous	45	no	Bybee Road Realignment Project
303	Acer macrophyllum	Bigleaf maple	10	15	3	3	3	2	2	38	25	15	Fair	Fair	15	No	Significant - Deciduous	48	no	Bybee Road Realignment Project
304	Acer macrophyllum	Bigleaf maple	5	6	6	7	4	4	-	27	25	10	Fair	Fair	10	No	Significant - Deciduous	34	no	Bybee Road Realignment Project
305	Corylus avellana	European hazel	30	2	2	2	1	1	1	38	15	10	Fair	Fair	15	No	Significant - Deciduous	48	no	Bybee Road Realignment Project
306	Thuja orientalis	Oriental arborvitae	1	14	-	-	-	-	-	14	35	15	Fair	Fair	3	Yes	Significant - Evergreen	18	no	Bybee Road Realignment Project
310	Fraxinus latifolia	Oregon ash	2	22	30	-	-	-	-	52	50	35	Fair	Fair	22	No	Significant - Deciduous	65	no	Bybee Road Realignment Project

KMB architects
906 Columbia Street SW, Suite 400
Olympia, Washington 98501
811 First Ave, Suite 500
Seattle, Washington 98104
www.KMB-architects.com
360.352.8883

KMB Project # 23069

AHBL
TACOMA • SEATTLE • SPOKANE • TRI-CITIES
1200 6th Avenue, Suite 1620 Seattle, WA 98101
206.267.2425 TEL 206.267.2429 FAX www.ahbl.com WEB

VANCOUVER WASHINGTON TEMPLE
THE CHURCH OF JESUS CHRIST OF LATER-DAY SAINTS

1819 SE BYBEE ROAD
CAMAS, WA 98607

ORIGINAL SHEET SIZE = 30 x 42
HALF SIZE REDUCTIONS = 15 x 21

REVISIONS:

DATE:
2024.08.09

LAND USE PERMIT

SHEET NO.

L102

TREE RETENTION TABLE

Exhibit 7 SPRV24-1001

Tree ID Number	Botanical Name	Common Name	No. of Stems	S1	S2	S3	S4	S5	S6	Combined Diameter	Height (ft.)	Crown Width (ft.)	Health	Structural Integrity	Units	Evergreen	Protection Status	Tree Protection Zone (ft.)	Removed Due to Bybee Road	PROJECT
312	Acer macrophyllum	Bigleaf maple	5	15	20	15	19	14	-	83	40	20	Fair	Fair	38	No	Significant - Deciduous	104	no	Bybee Road Realignment Project
313	Thuja plicata	Western red cedar	1	9	-	-	-	-	-	9	25	15	Good	Good	2	Yes	Significant - Evergreen	11	no	Bybee Road Realignment Project
314	Juglans regia	English walnut	1	12	-	-	-	-	-	12	25	15	Fair	Fair	2	No	Significant - Deciduous	15	no	Bybee Road Realignment Project
315	Corylus avellana	European hazel	25	2	2	2	1	1	1	36	10	5	Fair	Fair	14	No	Significant - Deciduous	45	no	Bybee Road Realignment Project
316	Pinus contorta	Lodgepole pine	1	18	-	-	-	-	-	18	50	20	Fair	Fair	5	Yes	Significant - Evergreen	22	no	Bybee Road Realignment Project
325	Alnus rubra	Red alder	1	13	-	-	-	-	-	13	40	20	Fair	Fair	3	No	Significant - Deciduous	16	no	Bybee Road Realignment Project
328	Alnus rubra	Red alder	1	13	-	-	-	-	-	13	40	20	Fair	Fair	3	No	Significant - Deciduous	16	no	Bybee Road Realignment Project
329	Pseudotsuga menziesii	Douglas fir	1	9	-	-	-	-	-	9	30	15	Fair	Fair	2	Yes	Significant - Evergreen	11	no	Bybee Road Realignment Project
330	Alnus rubra	Red alder	1	12	-	-	-	-	-	12	40	15	Fair	Fair	2	No	Significant - Deciduous	15	no	Bybee Road Realignment Project
331	Alnus rubra	Red alder	1	12	-	-	-	-	-	12	40	15	Fair	Fair	2	No	Significant - Deciduous	15	no	Bybee Road Realignment Project
334	Alnus rubra	Red alder	2	14	14	-	-	-	-	28	40	15	Fair	Fair	10	No	Significant - Deciduous	35	no	Bybee Road Realignment Project
335	Alnus rubra	Red alder	1	15	-	-	-	-	-	15	40	15	Fair	Fair	4	No	Significant - Deciduous	19	no	Bybee Road Realignment Project
336	Corylus avellana	European hazel	15	4	4	3	2	2	2	32	15	7	Fair	Fair	12	No	Significant - Deciduous	40	no	Bybee Road Realignment Project
338	Tilia cordata	Small-leaved linden	1	6	-	-	-	-	-	6	20	10	Fair	Fair	2	No	Not protected	8	no	Bybee Road Realignment Project
339	Corylus avellana	European hazel	25	6	4	4	3	3	2	50	10	5	Poor	Poor	21	No	Significant - Deciduous	62	no	Bybee Road Realignment Project
340	Malus domestica	Apple	3	14	10	5	-	-	-	29	15	15	Poor	Poor	11	No	Significant - Deciduous	36	no	Bybee Road Realignment Project
341	Corylus americana	Common hazel	30	4	4	3	3	2	2	49	15	5	Poor	Poor	21	No	Significant - Deciduous	61	no	Bybee Road Realignment Project
342	Pseudotsuga menziesii	Douglas fir	1	25	-	-	-	-	-	25	60	40	Fair	Fair	9	Yes	Significant - Evergreen	31	no	Bybee Road Realignment Project
343	Acer platanoides	Norway maple	1	25	-	-	-	-	-	25	40	0	Fair	Fair	9	No	Significant - Deciduous	31	no	Bybee Road Realignment Project
345	Alnus rubra	Red alder	1	12	-	-	-	-	-	12	40	0	Fair	Fair	2	No	Significant - Deciduous	15	no	Bybee Road Realignment Project
346	Alnus rubra	Red alder	1	12	-	-	-	-	-	12	40	0	Fair	Fair	2	No	Significant - Deciduous	15	no	Bybee Road Realignment Project
347	Alnus rubra	Red alder	1	12	-	-	-	-	-	12	40	0	Fair	Fair	2	No	Significant - Deciduous	15	no	Bybee Road Realignment Project
348	Alnus rubra	Red alder	1	12	-	-	-	-	-	12	40	0	Fair	Fair	2	No	Significant - Deciduous	15	no	Bybee Road Realignment Project
349	Alnus rubra	Red alder	2	8	6	-	-	-	-	14	40	0	Poor	Poor	3	No	Significant - Deciduous	18	no	Bybee Road Realignment Project
350	Acer platanoides	Norway maple	1	12	-	-	-	-	-	12	40	0	Fair	Fair	2	No	Significant - Deciduous	15	no	Bybee Road Realignment Project
351	Acer platanoides	Norway maple	1	15	-	-	-	-	-	15	40	0	Fair	Fair	4	No	Significant - Deciduous	19	no	Bybee Road Realignment Project
352	Cedrus deodara	Deodar cedar	1	32	-	-	-	-	-	32	45	25	Fair	Fair	12	Yes	Significant - Evergreen	40	no	Bybee Road Realignment Project
353	Corylus avellana	European hazel	25	3	3	2	2	2	1	41	10	5	Fair	Fair	17	No	Significant - Deciduous	51	no	Bybee Road Realignment Project
354	Acer platanoides	Norway maple	1	12	-	-	-	-	-	12	40	20	Fair	Fair	2	No	Significant - Deciduous	15	no	Bybee Road Realignment Project
355	Acer platanoides	Norway maple	1	14	-	-	-	-	-	14	40	20	Fair	Fair	3	No	Significant - Deciduous	18	no	Bybee Road Realignment Project
356	Dead tree	Dead tree	1	13	-	-	-	-	-	13	5	20	Dead	Dead	3	No	Significant - Deciduous	16	no	Bybee Road Realignment Project
357	Pseudotsuga menziesii	Douglas fir	1	18	-	-	-	-	-	18	60	25	Fair	Fair	5	Yes	Significant - Evergreen	22	no	Bybee Road Realignment Project
358	Dead tree	Dead tree	1	15	-	-	-	-	-	15	11	5	Dead	Dead	4	No	Significant - Deciduous	19	no	Bybee Road Realignment Project
359	Dead tree	Dead tree	1	15	-	-	-	-	-	15	25	5	Dead	Dead	4	No	Significant - Deciduous	19	no	Bybee Road Realignment Project
360	Acer macrophyllum	Bigleaf maple	1	28	-	-	-	-	-	28	35	20	Critical	Critical	10	No	Significant - Deciduous	35	no	Bybee Road Realignment Project
361	Alnus rubra	Red alder	1	22	-	-	-	-	-	22	40	20	Critical	Critical	7	No	Significant - Deciduous	28	no	Bybee Road Realignment Project
362	Dead tree	Dead tree	1	30	-	-	-	-	-	30	15	5	Dead	Dead	11	No	Significant - Deciduous	38	yes	Bybee Road Realignment Project
363	Corylus avellana	European hazel	15	4	4	3	2	2	2	32	10	5	Fair	Fair	12	No	Significant - Deciduous	40	no	Bybee Road Realignment Project
364	Corylus avellana	European hazel	25	5	4	3	2	2	2	46	10	5	Fair	Fair	19	No	Significant - Deciduous	58	no	Bybee Road Realignment Project
365	Alnus rubra	Red alder	1	16	-	-	-	-	-	16	35	15	Fair	Fair	4	No	Significant - Deciduous	20	no	Bybee Road Realignment Project
366	Acer macrophyllum	Bigleaf maple	4	16	18	9	11	-	-	54	45	15	Fair	Fair	23	No	Significant - Deciduous	68	no	Bybee Road Realignment Project
367	Pseudotsuga menziesii	Douglas fir	1	8	-	-	-	-	-	8	20	7	Poor	Poor	2	Yes	Significant - Evergreen	10	no	Bybee Road Realignment Project
368	Alnus rubra	Red alder	1	18	-	-	-	-	-	18	30	10	Fair	Fair	5	No	Significant - Deciduous	22	no	Bybee Road Realignment Project
369	Alnus rubra	Red alder	1	15	-	-	-	-	-	15	30	10	Fair	Fair	4	No	Significant - Deciduous	19	no	Bybee Road Realignment Project
370	Alnus rubra	Red alder	1	17	-	-	-	-	-	17	30	10	Fair	Fair	5	No	Significant - Deciduous	21	no	Bybee Road Realignment Project
371	Acer platanoides	Norway maple	1	6	-	-	-	-	-	6	30	15	Poor	Poor	2	No	Not protected	8	no	Bybee Road Realignment Project
372	Alnus rubra	Red alder	2	16	12	-	-	-	-	28	30	15	Fair	Fair	10	No	Significant - Deciduous	35	no	Bybee Road Realignment Project
373	Acer macrophyllum	Bigleaf maple	1	27	-	-	-	-	-	27	30	15	Fair	Fair	10	No	Significant - Deciduous	34	no	Bybee Road Realignment Project
374	Corylus avellana	European hazel	20	4	2	2	1	1	33	26	10	5	Fair	Fair	9	No	Significant - Deciduous	32	no	Bybee Road Realignment Project
375	Alnus rubra	Red alder	3	4	6	8	-	-	-	18	25	10	Fair	Fair	5	No	Significant - Deciduous	22	no	Bybee Road Realignment Project
376	Dead tree	Dead tree	1	25	-	-	-	-	-	25	20	0	Dead	Dead	9	No	Significant - Deciduous	31	no	Bybee Road Realignment Project
377	Prunus emarginata	Bitter cherry	12	6	4	5	3	2	2	30	12	4	Poor	Fair	11	No	Significant - Deciduous	38	no	Bybee Road Realignment Project
378	Acer macrophyllum	Bigleaf maple	1	17	-	-	-	-	-	17	35	15	Fair	Poor	5	No	Significant - Deciduous	21	no	Bybee Road Realignment Project
379	Corylus avellana	European hazel	20	3	3	2	2	2	1	35	15	12	Fair	Fair	14	No	Significant - Deciduous	44	no	Bybee Road Realignment Project
380	Corylus avellana	European hazel	20	3	3	3	2	1	1	32	15	12	Fair	Fair	12	No	Significant - Deciduous	40	no	Bybee Road Realignment Project
381	Acer platanoides	Norway maple	10	18	4	5	4	3	3	49	25	15	Critical	Critical	21	No	Significant - Deciduous	61	no	Bybee Road Realignment Project

KMB architects
906 Columbia Street SW, Suite 400
Olympia, Washington 98501
811 First Ave, Suite 500
Seattle, Washington 98104
www.KMB-architects.com
360.352.8883

KMB Project # 23069

AHBL
TACOMA • SEATTLE • SPOKANE • TRI-CITIES
1200 6th Avenue, Suite 1620 Seattle, WA 98101
206.267.2425 TEL 206.267.2429 FAX www.ahbl.com WEB

VANCOUVER WASHINGTON TEMPLE
THE CHURCH OF JESUS CHRIST OF LATER-DAY SAINTS
1819 SE BYBEE ROAD
CAMAS, WA 98607

ORIGINAL SHEET SIZE = 30 x 42
HALF SIZE REDUCTIONS = 15 x 21

REVISIONS:

DATE:
2024.08.09

LAND USE PERMIT

SHEET NO.
L103
TREE RETENTION TABLE

Exhibit 7 SPRV24-1001

NOTES

1. SEE SHEETS L105 - L108 FOR MATERIALS
2. SEE SHEET L501 FOR MATERIALS DETAILS

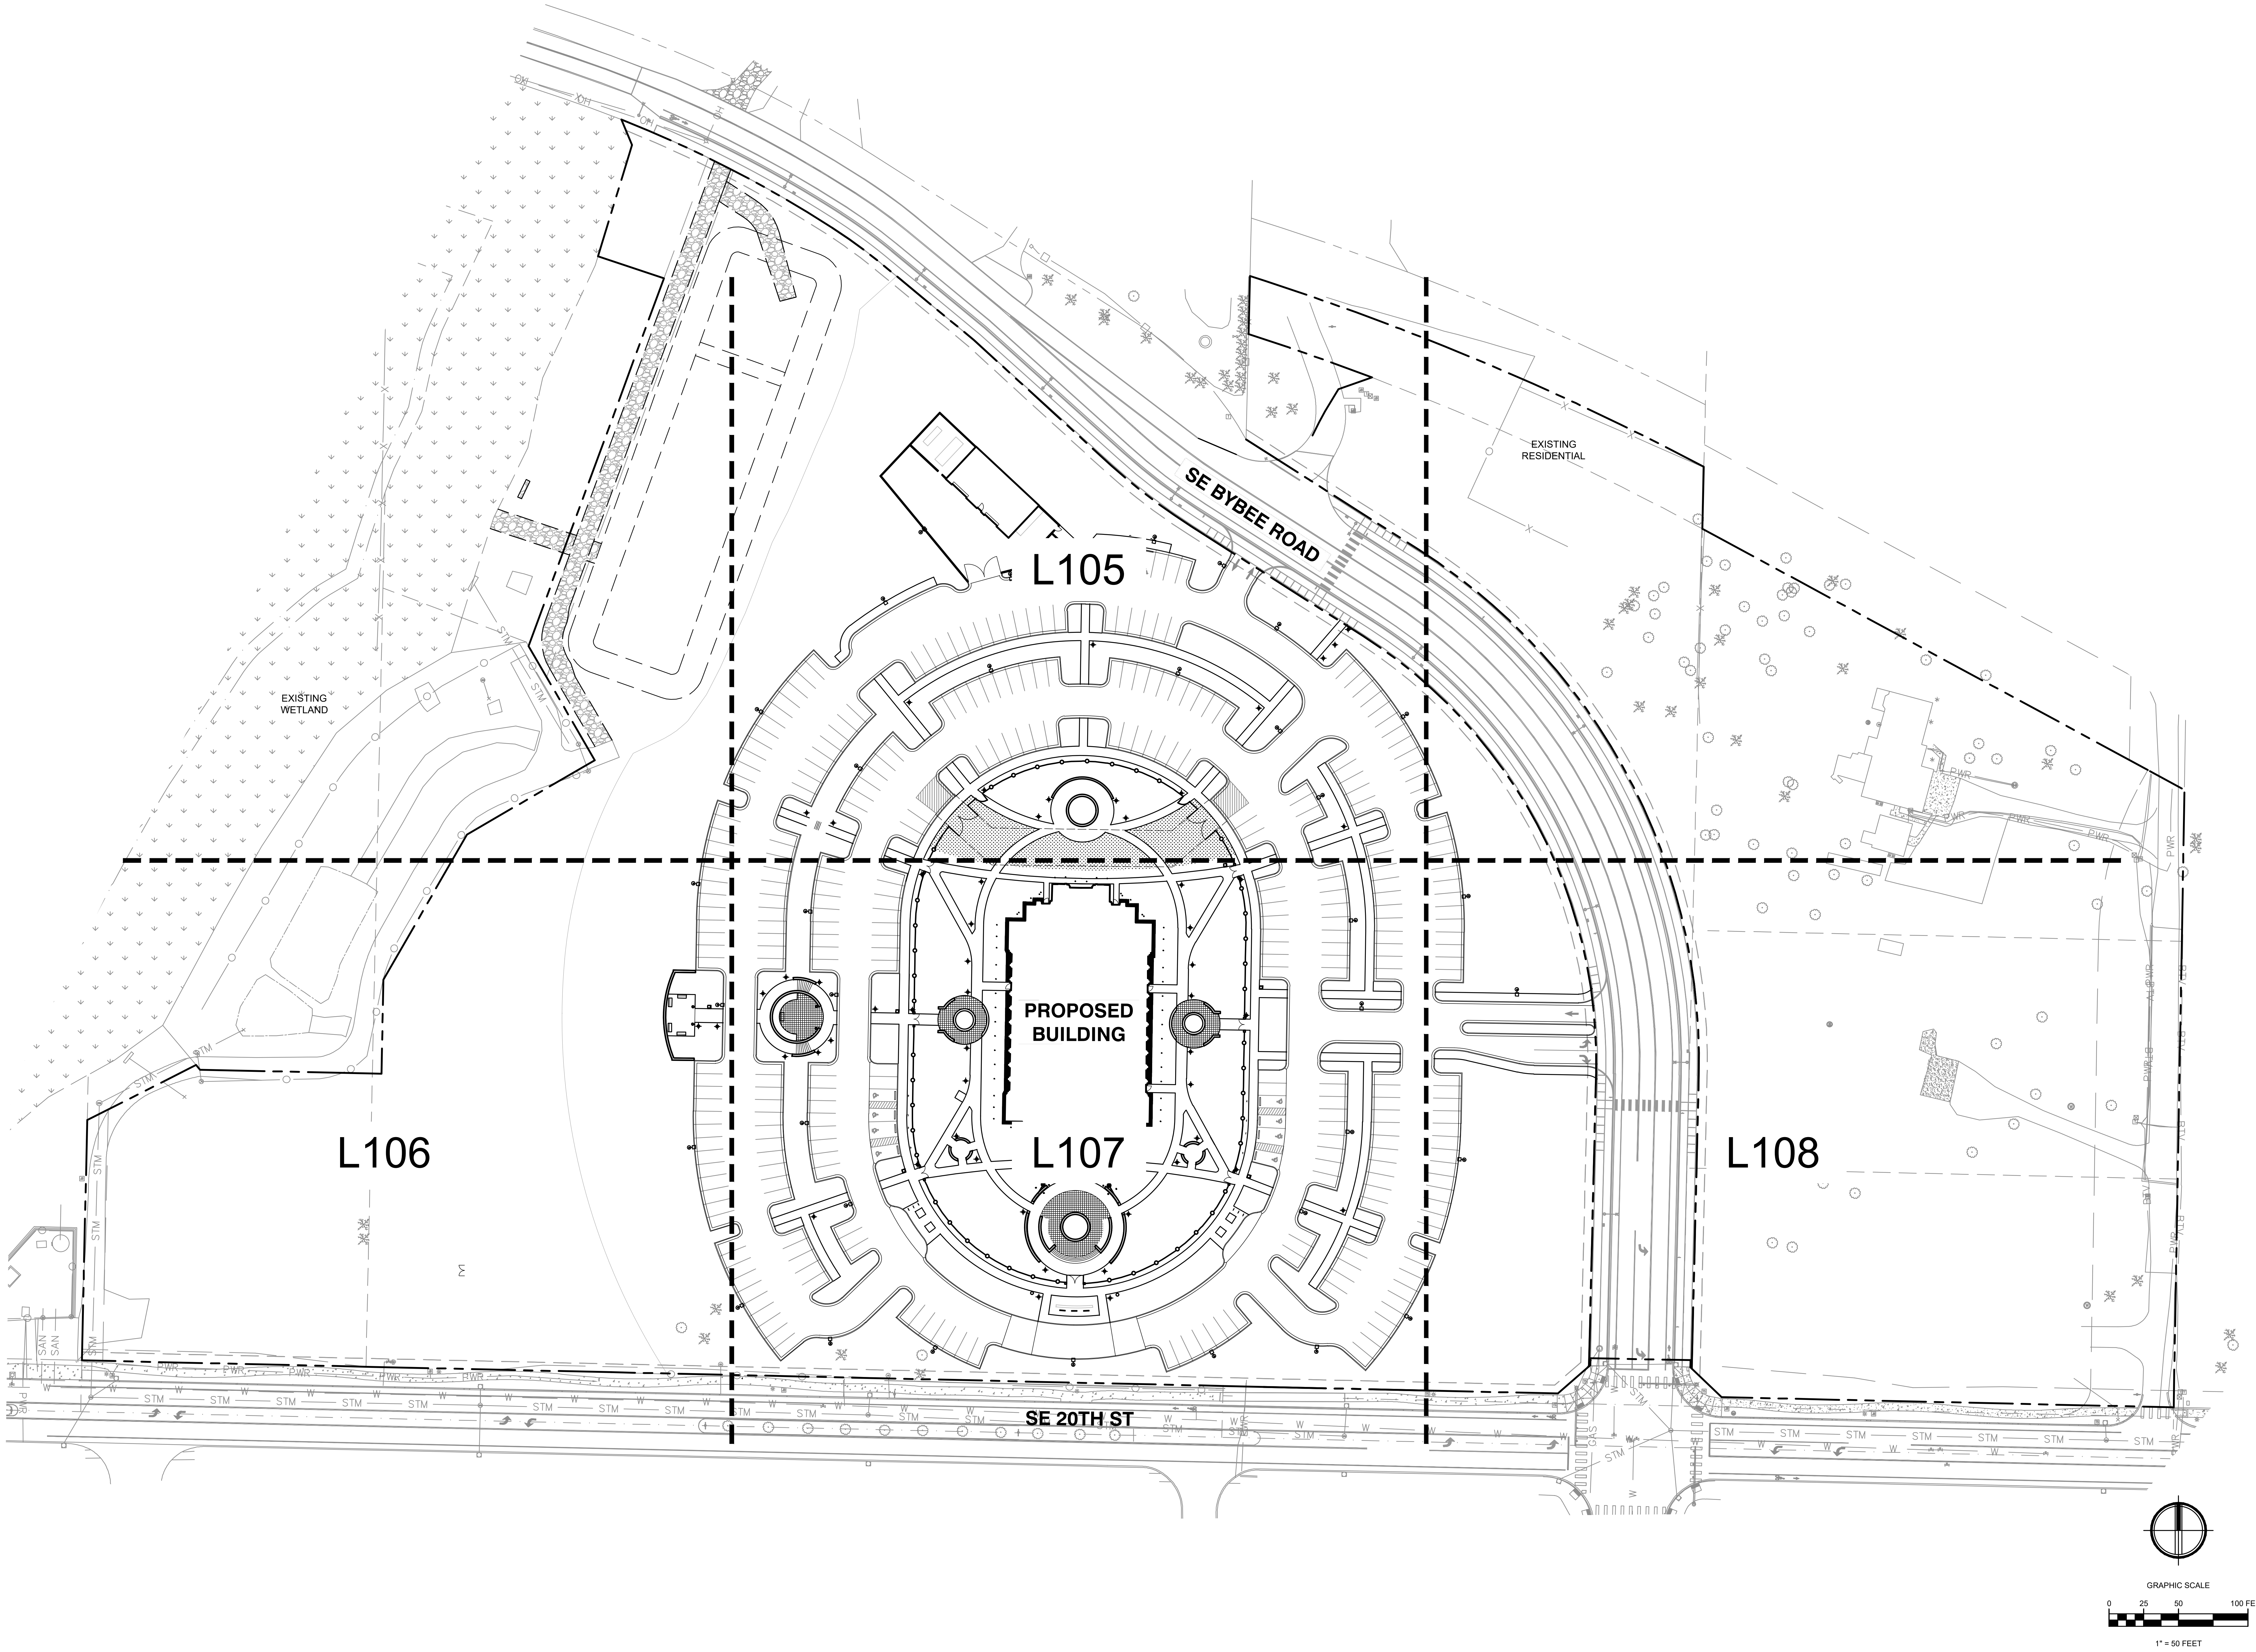
SE BYBEE ROAD
EXISTING RESIDENTIAL
EXISTING WETLAND
L105
L106
L107
L108
PROPOSED BUILDING
SE 20TH ST
STM
W
PWR
GRAPHIC SCALE
0
25
50
100 FEET
1" = 50 FEET

KMB architects
906 Columbia Street SW, Suite 400
Olympia, Washington 98501
811 First Ave, Suite 500
Seattle, Washington 98104
www.KMB-architects.com
360.352.8883

KMB Project # 23069

AHBL
TACOMA • SEATTLE • SPOKANE • TRI-CITIES
1200 6th Avenue, Suite 1620 Seattle, WA 98101
206.267.2425 TEL 206.267.2429 FAX www.ahbl.com WEB

VANCOUVER WASHINGTON TEMPLE
THE CHURCH OF JESUS CHRIST OF LATER-DAY SAINTS

1819 SE BYBEE ROAD
CAMAS, WA 98607

ORIGINAL SHEET SIZE = 30 x 42
HALF SIZE REDUCTIONS = 15 x 21

REVISIONS:

DATE:
2024.08.09

LAND USE PERMIT

SHEET NO.

L104
OVERALL MATERIALS PLAN

Exhibit 7 SPRV24-1001

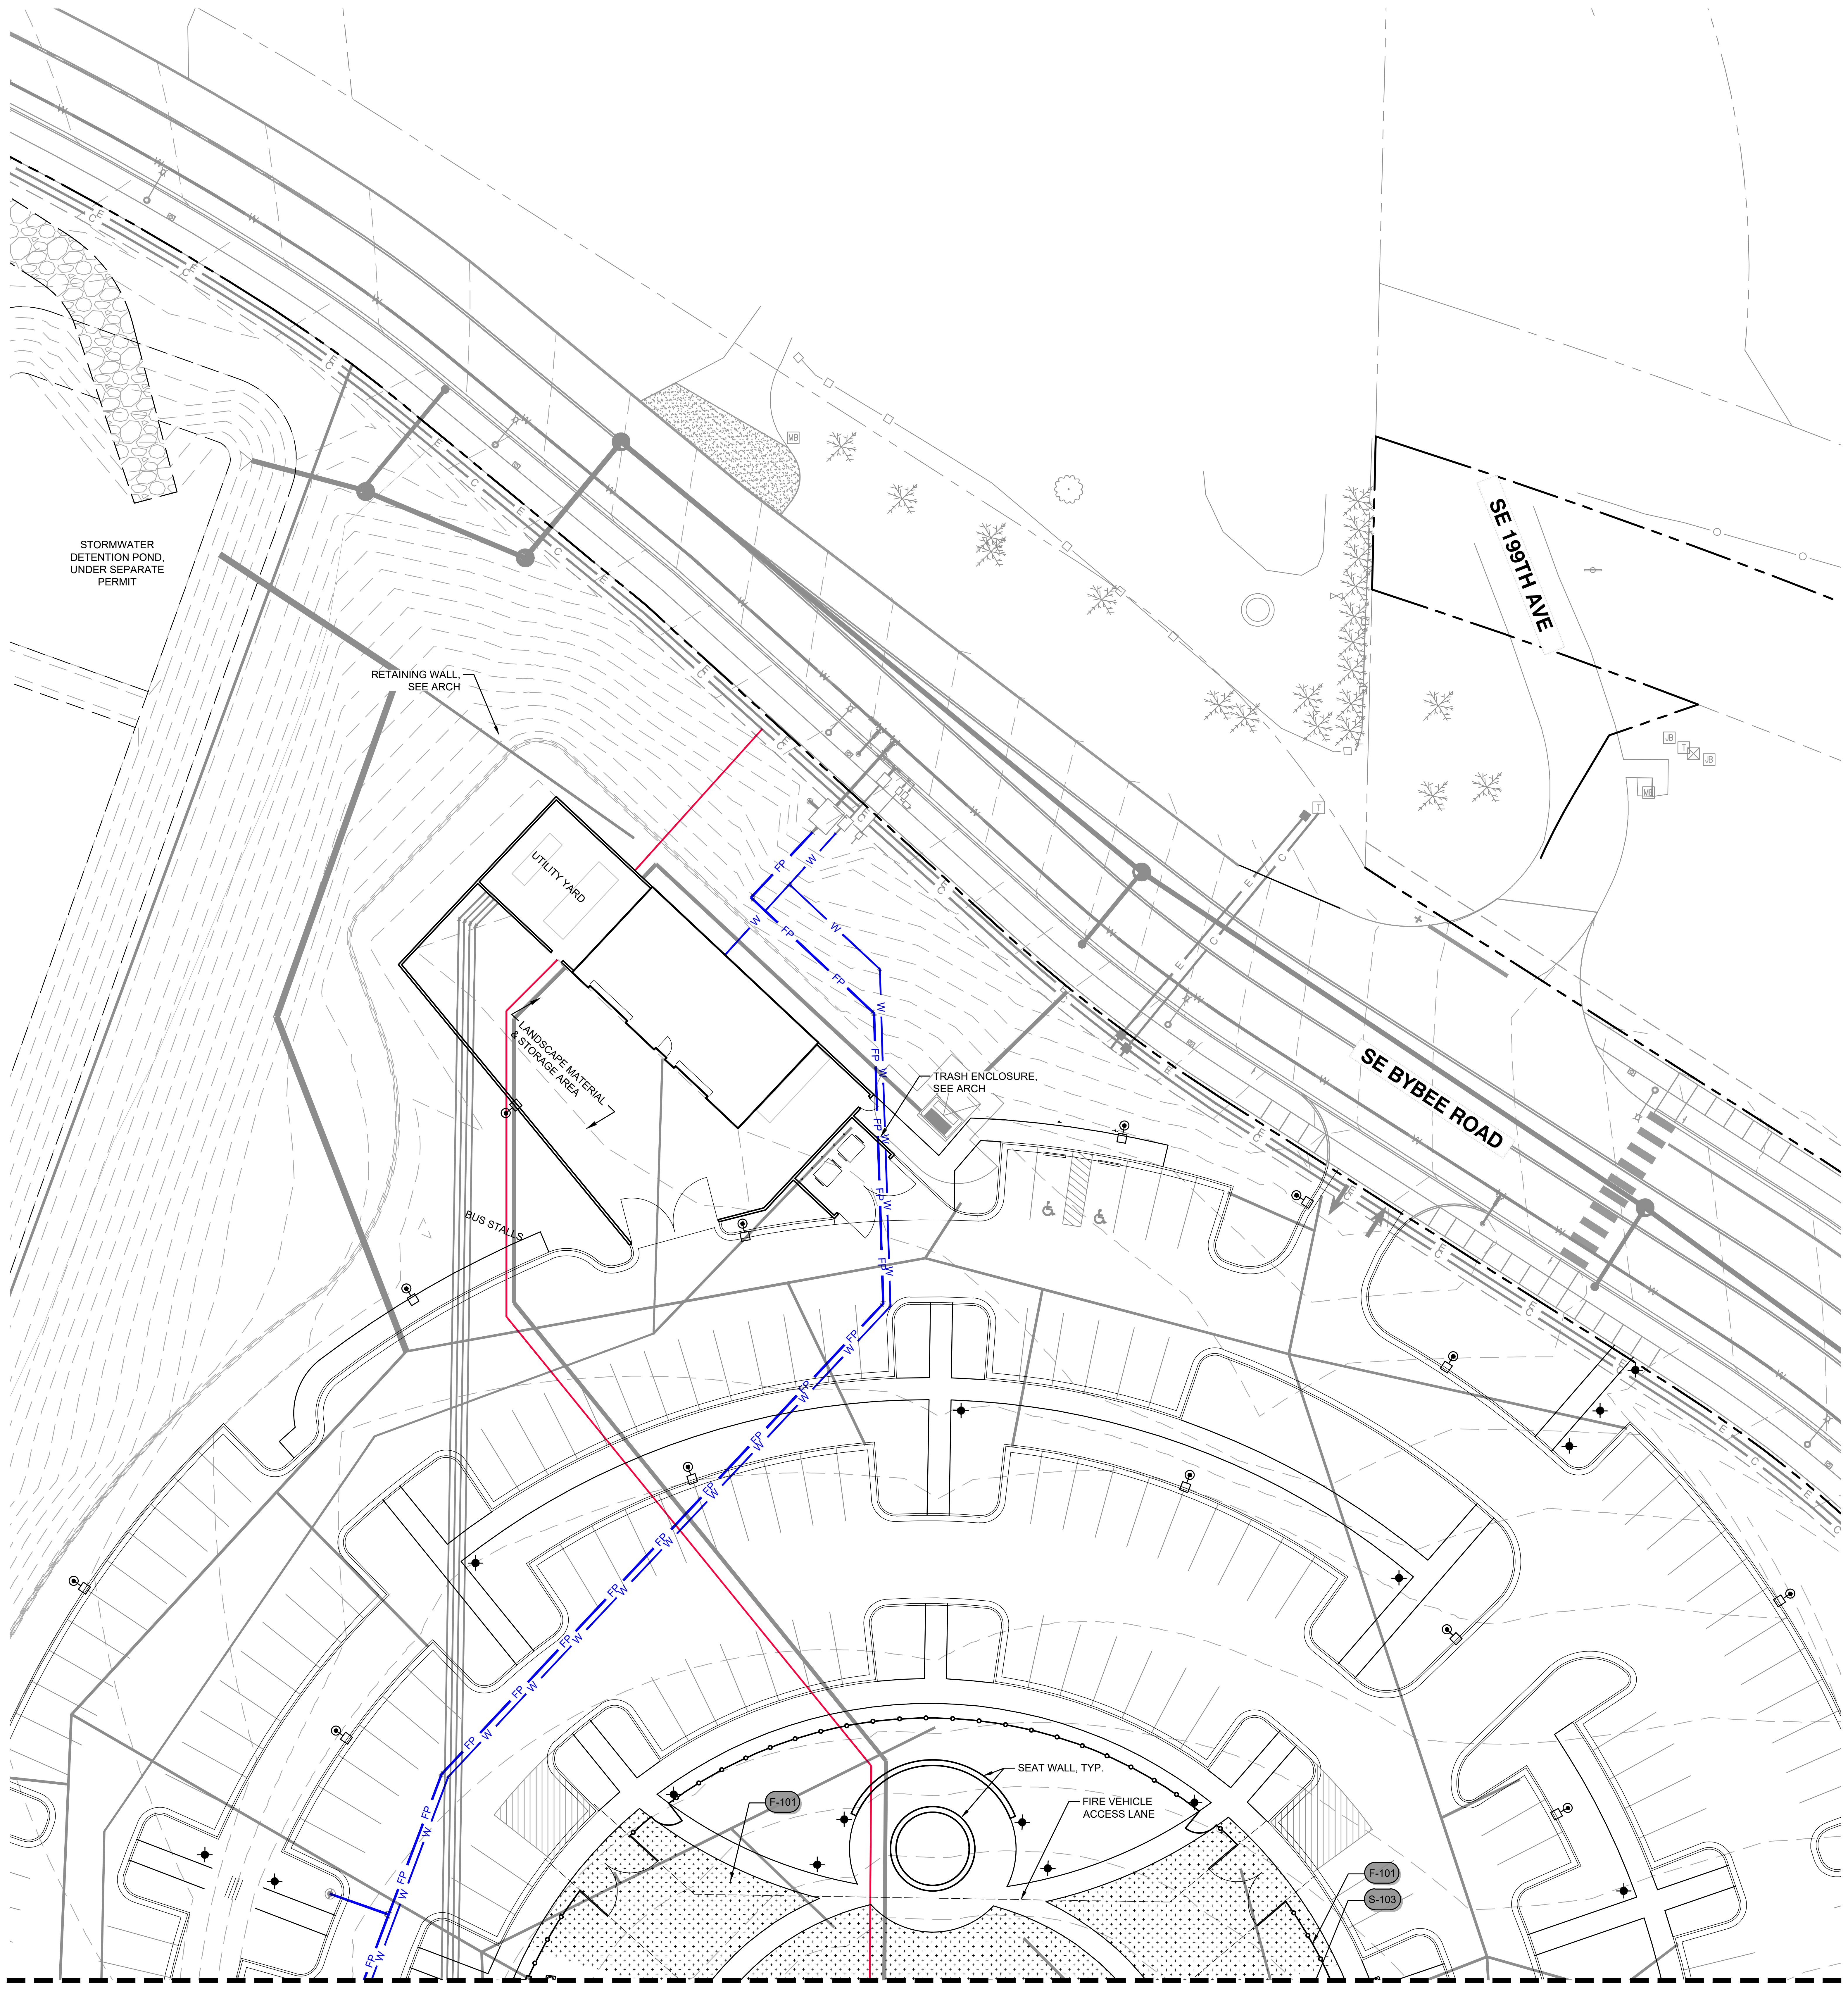
STORMWATER DETENTION POND, UNDER SEPARATE PERMIT
RETAINING WALL, SEE ARCH
UTILITY YARD
LANDSCAPE MATERIAL & STORAGE AREA
TRASH ENCLOSURE, SEE ARCH
BUS STALLS
SE 199TH AVE
SE BYBEE ROAD
SEAT WALL, TYP.
FIRE VEHICLE ACCESS LANE
F-101
F-101
S-103
FP
W

MATCHLINE - SEE SHEET L107

SITE FURNISHING SCHEDULE

SYMBOL	FENCE DESCRIPTION	QTY	DETAIL
F-101	ORNAMENTAL FENCE	9,134 LF	

SYMBOL	GATE DESCRIPTION	QTY	DETAIL
G-101	ORNAMENTAL DOUBLE SWING GATE	9	

SYMBOL	PAVING DESCRIPTION	QTY	DETAIL
P-101	STONE PAVERS	1,393 SF	
P-102	PRECAST CONCRETE PAVERS	SF	
P-103	VEHICULAR GRASS PAVE PRODUCT	6,145 SF	

SYMBOL	SITE FURNISHINGS DESCRIPTION	QTY	DETAIL
S-101	BENCH	5	
S-102	FLAGPOLE	1	
S-103	LITTER RECEPTACLE	10	
S-104	PLANTER	8	
S-105	BIKE RACK	6	

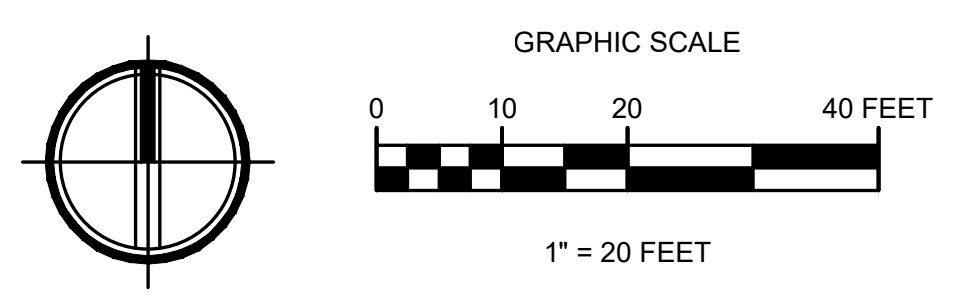
GRAPHIC SCALE
0
10
20
40 FEET
1" = 20 FEET

KMB architects
906 Columbia Street SW, Suite 400
Olympia, Washington 98501
811 First Ave, Suite 500
Seattle, Washington 98104
www.KMB-architects.com
360.352.8883

KMB Project # 23069

AHBL
TACOMA · SEATTLE · SPOKANE · TRI-CITIES
1200 6th Avenue, Suite 1620 Seattle, WA 98101
206.267.2425 TEL 206.267.2429 FAX www.ahbl.com WEB

VANCOUVER WASHINGTON TEMPLE
THE CHURCH OF JESUS CHRIST OF LATER-DAY SAINTS
1819 SE BYBEE ROAD
CAMAS, WA 98607

ORIGINAL SHEET SIZE = 30 x 42
HALF SIZE REDUCTIONS = 15 x 21

REVISIONS:

DATE:
2024.08.09

LAND USE PERMIT

SHEET NO.
L105
MATERIALS PLAN

Exhibit 7 SPRV24-1001

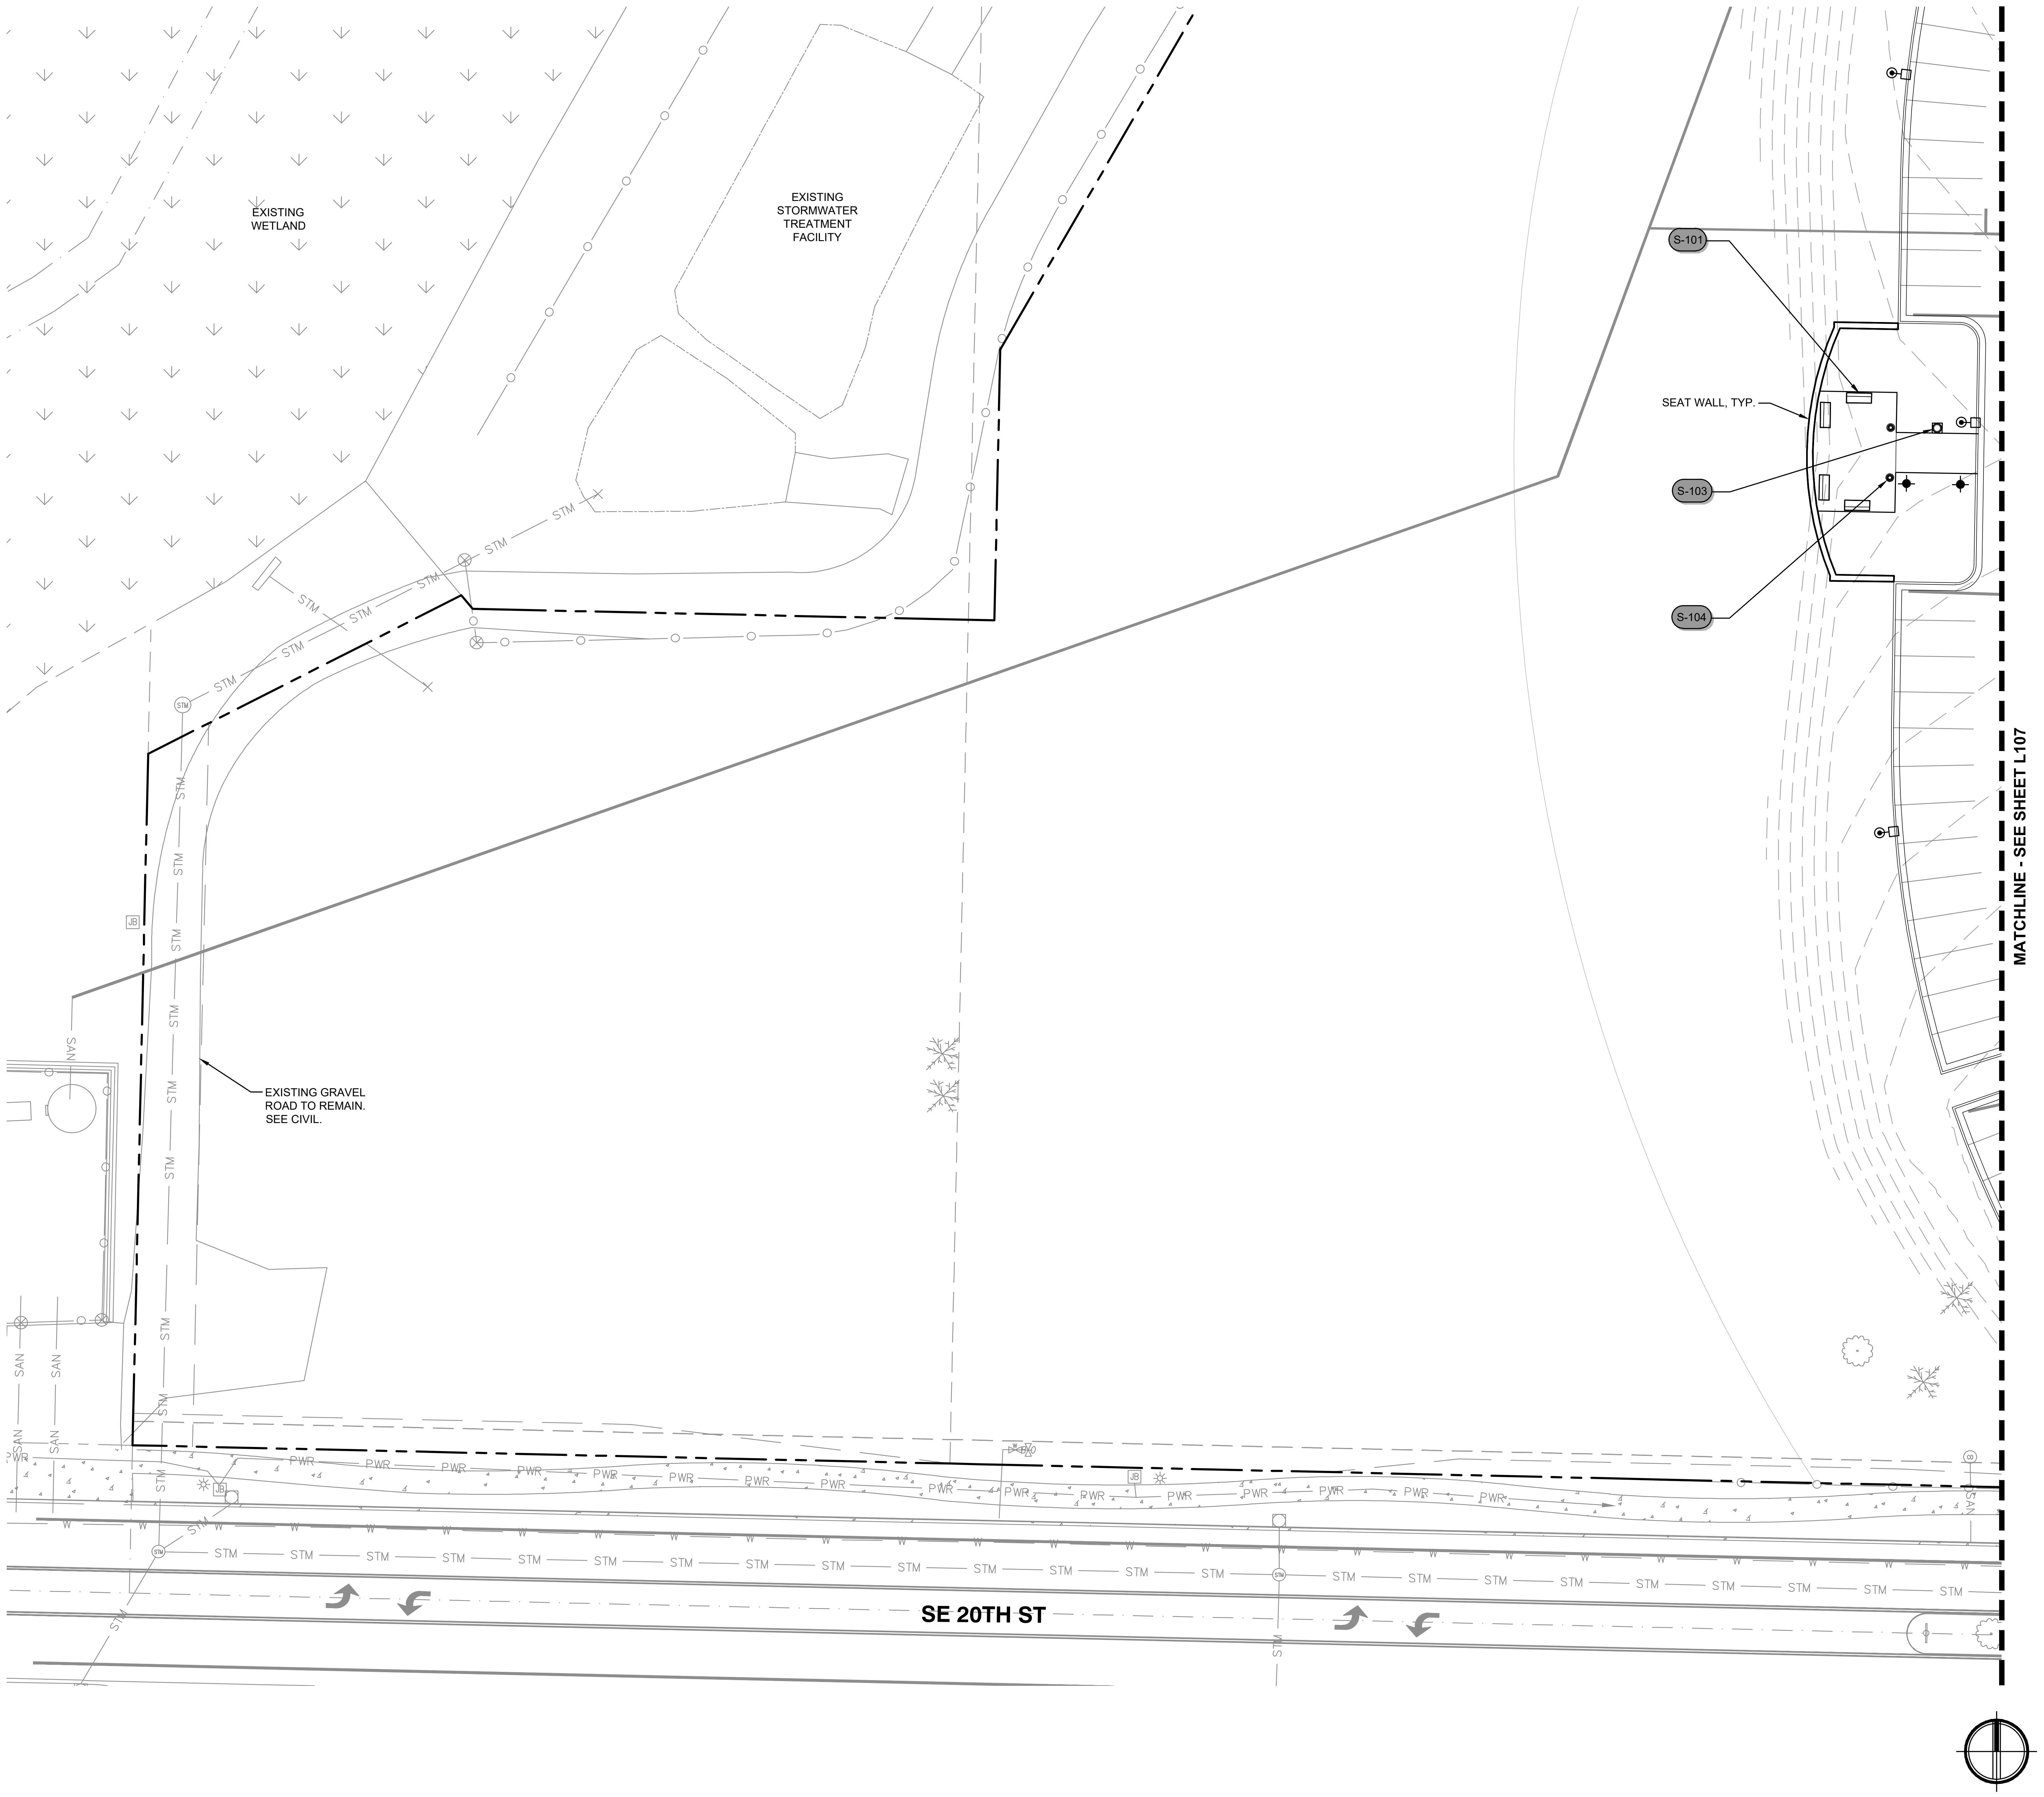
EXISTING WETLAND
EXISTING STORMWATER TREATMENT FACILITY
SEAT WALL, TYP.
S-101
S-103
S-104
EXISTING GRAVEL ROAD TO REMAIN. SEE CIVIL.
MATCHLINE - SEE SHEET L107
SE 20TH ST
STM
PWR
SAN

GRAPHIC SCALE
0 10 20 40 FEET
1" = 20 FEET

SITE FURNISHING SCHEDULE

SYMBOL	DESCRIPTION	QTY	DETAIL
	FENCE		
F-101	ORNAMENTAL FENCE	9,134 LF	
	GATE		
G-101	ORNAMENTAL DOUBLE SWING GATE	9	
	PAVING		
P-101	STONE PAVERS	1,393 SF	
P-102	PRECAST CONCRETE PAVERS	SF	
P-103	VEHICULAR GRASS PAVE PRODUCT	6,145 SF	
	SITE FURNISHINGS		
S-101	BENCH	5	
S-102	FLAGPOLE	1	
S-103	LITTER RECEPTACLE	10	
S-104	PLANTER	8	
S-105	BIKE RACK	6	

KMB architects
906 Columbia Street SW, Suite 400
Olympia, Washington 98501
811 First Ave, Suite 500
Seattle, Washington 98104
www.KMB-architects.com
360.352.8883

KMB Project # 23069

AHBL
TACOMA · SEATTLE · SPOKANE · TRI-CITIES
1200 6th Avenue, Suite 1620 Seattle, WA 98101
206.267.2425 TEL 206.267.2429 FAX www.ahbl.com WEB

VANCOUVER WASHINGTON TEMPLE
THE CHURCH OF JESUS CHRIST OF LATER-DAY SAINTS
1819 SE BYBEE ROAD
CAMAS, WA 98607

ORIGINAL SHEET SIZE = 30 x 42
HALF SIZE REDUCTIONS = 15 x 21

REVISIONS:

DATE:
2024.08.09

LAND USE PERMIT

SHEET NO.
L106
MATERIALS PLAN

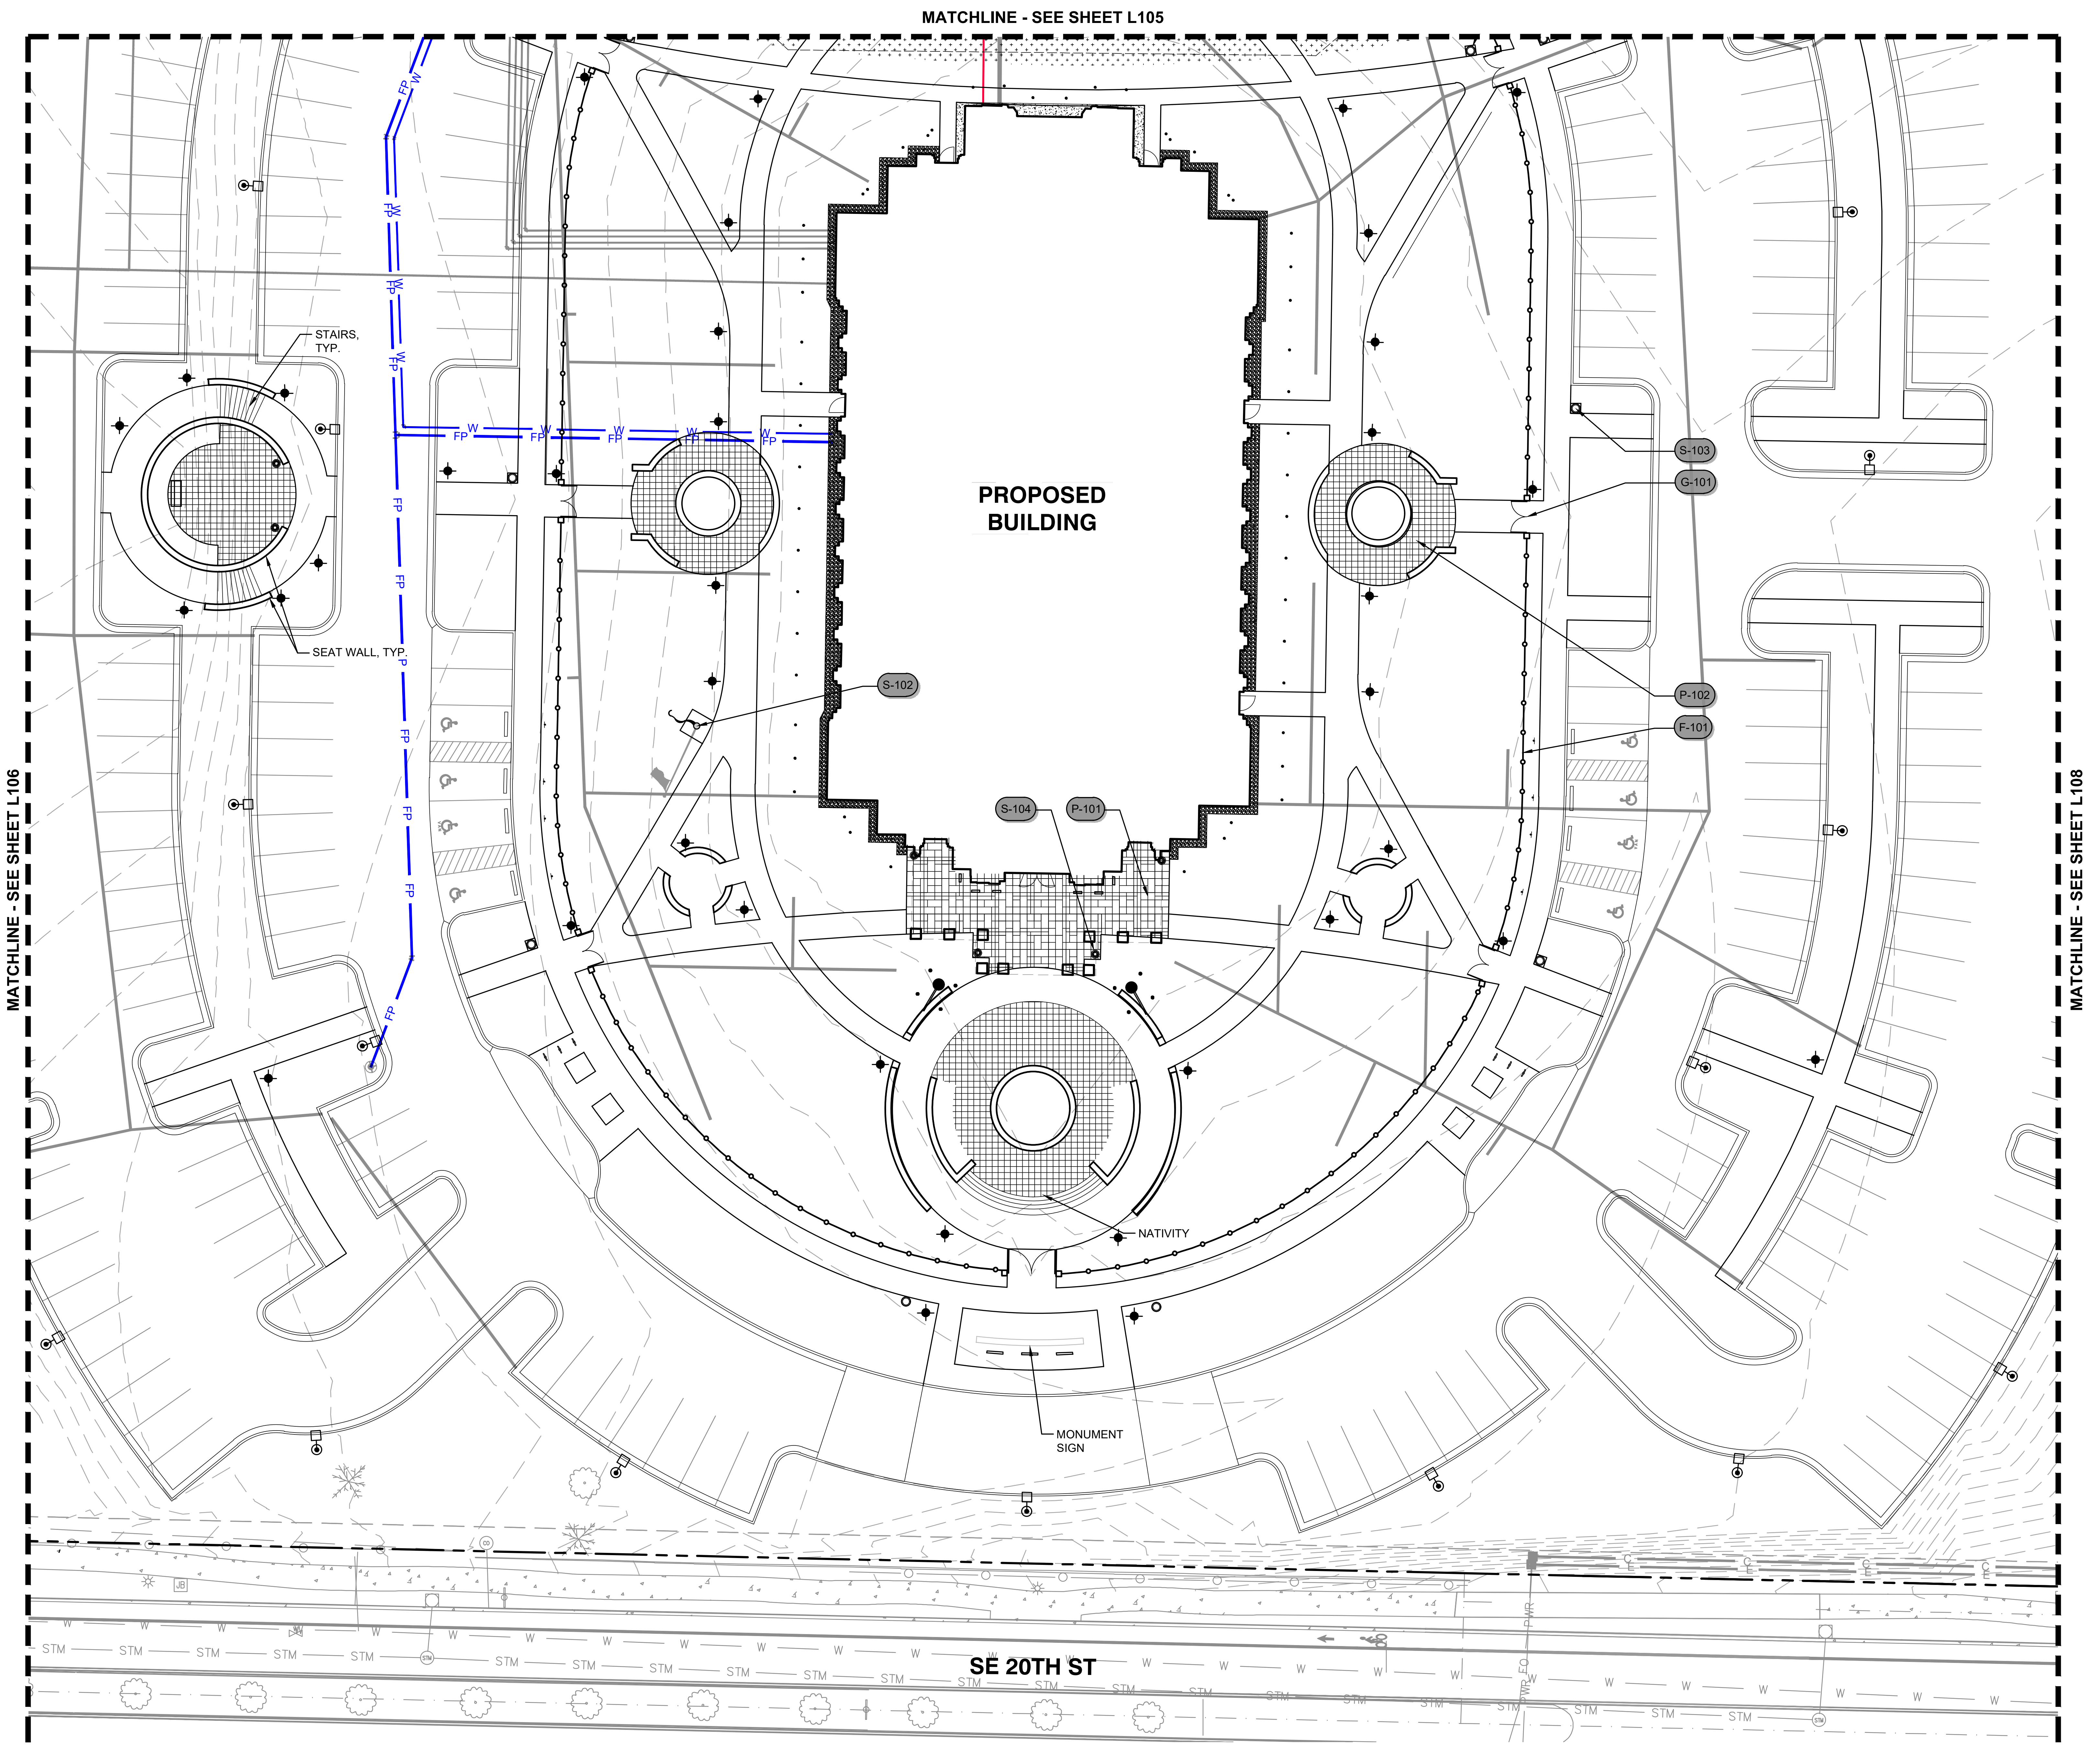
MATCHLINE - SEE SHEET L105
MATCHLINE - SEE SHEET L106
MATCHLINE - SEE SHEET L108
STAIRS, TYP.
SEAT WALL, TYP.
PROPOSED BUILDING
S-102
S-104
P-101
S-103
G-101
P-102
F-101
NATIVITY
MONUMENT SIGN
SE 20TH ST
FP
W
STM

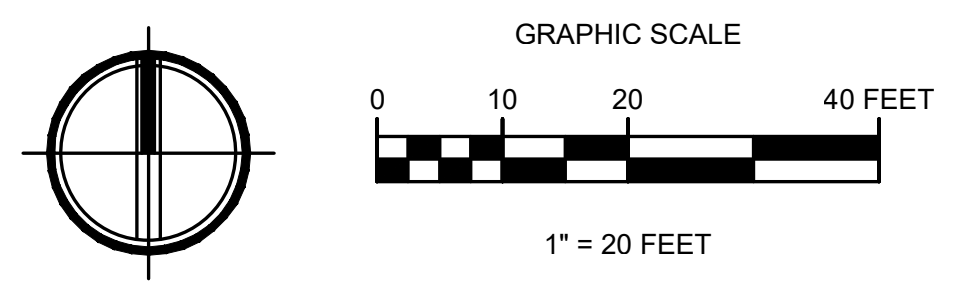
GRAPHIC SCALE
0
10
20
40 FEET
1" = 20 FEET

SITE FURNISHING SCHEDULE

	SYMBOL	DESCRIPTION	QTY	DETAIL
		FENCE		
—o—o	F-101	ORNAMENTAL FENCE	9,134 LF	
		GATE		
⋒	G-101	ORNAMENTAL DOUBLE SWING GATE	9	
		PAVING		
▦	P-101	STONE PAVERS	1,393 SF	
▦	P-102	PRECAST CONCRETE PAVERS	SF	
⁘	P-103	VEHICULAR GRASS PAVE PRODUCT	6,145 SF	
		SITE FURNISHINGS		
▭	S-101	BENCH	5	
	S-102	FLAGPOLE	1	
○	S-103	LITTER RECEPTACLE	10	
·	S-104	PLANTER	8	
–	S-105	BIKE RACK	6	

KMB architects
906 Columbia Street SW, Suite 400
Olympia, Washington 98501
811 First Ave, Suite 500
Seattle, Washington 98104
www.KMB-architects.com
360.352.8883

KMB Project # 23069

AHBL
TACOMA · SEATTLE · SPOKANE · TRI-CITIES
1200 6th Avenue, Suite 1620 Seattle, WA 98101
206.267.2425 TEL 206.267.2429 FAX www.ahbl.com WEB

VANCOUVER WASHINGTON TEMPLE
THE CHURCH OF JESUS CHRIST OF LATER-DAY SAINTS

1819 SE BYBEE ROAD
CAMAS, WA 98607

ORIGINAL SHEET SIZE = 30 x 42
HALF SIZE REDUCTIONS = 15 x 21

REVISIONS:

DATE:
2024.08.09

LAND USE PERMIT

SHEET NO.
L107
MATERIALS PLAN

Exhibit 7 SPRV24-1001

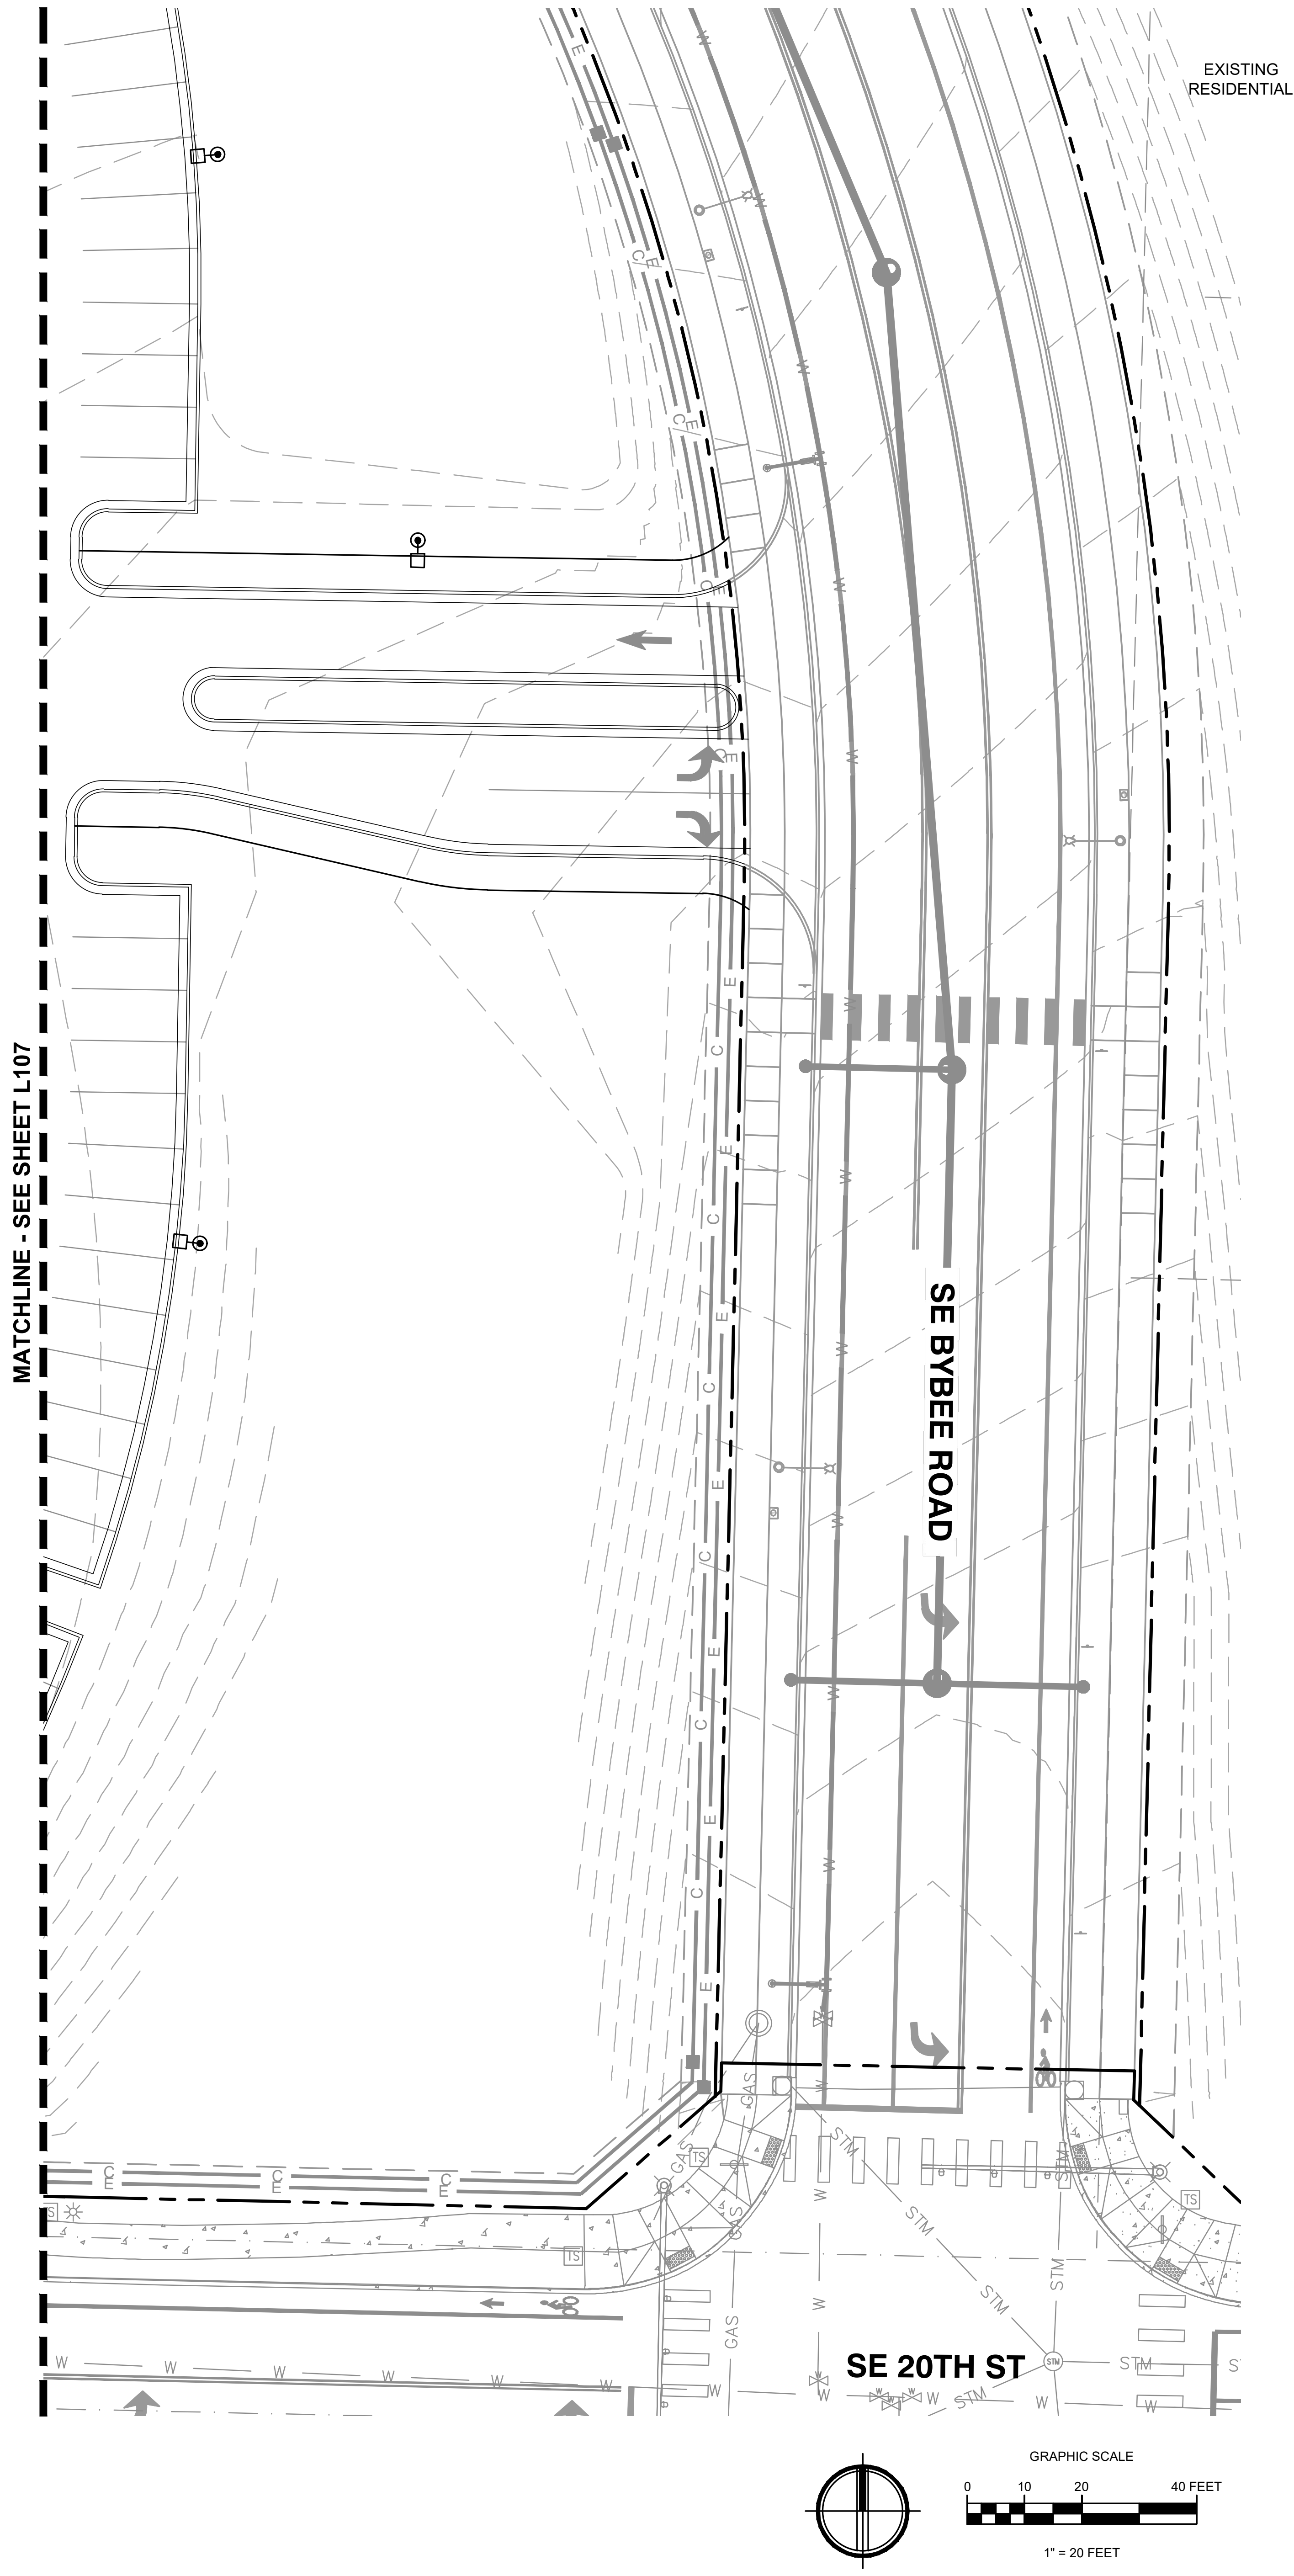
EXISTING RESIDENTIAL
MATCHLINE - SEE SHEET L107
SE BYBEE ROAD
SE 20TH ST
GRAPHIC SCALE
0
10
20
40 FEET
1" = 20 FEET

SITE FURNISHING SCHEDULE

SYMBOL	DESCRIPTION	QTY	DETAIL
	FENCE		
F-101	ORNAMENTAL FENCE	9,134 LF	
	GATE		
G-101	ORNAMENTAL DOUBLE SWING GATE	9	
	PAVING		
P-101	STONE PAVERS	1,393 SF	
P-102	PRECAST CONCRETE PAVERS	SF	
P-103	VEHICULAR GRASS PAVE PRODUCT	6,145 SF	
	SITE FURNISHINGS		
S-101	BENCH	5	
S-102	FLAGPOLE	1	
S-103	LITTER RECEPTACLE	10	
S-104	PLANTER	8	
S-105	BIKE RACK	6	

KMB architects
906 Columbia Street SW, Suite 400
Olympia, Washington 98501
811 First Ave, Suite 500
Seattle, Washington 98104
www.KMB-architects.com
360.352.8883

KMB Project # 23069

AHBL
TACOMA · SEATTLE · SPOKANE · TRI-CITIES
1200 6th Avenue, Suite 1620 Seattle, WA 98101
206.267.2425 TEL 206.267.2429 FAX www.ahbl.com WEB

VANCOUVER WASHINGTON TEMPLE
THE CHURCH OF JESUS CHRIST OF LATER-DAY SAINTS

1819 SE BYBEE ROAD
CAMAS, WA 98607

ORIGINAL SHEET SIZE = 30 x 42
HALF SIZE REDUCTIONS = 15 x 21

REVISIONS:

DATE:
2024.08.09

LAND USE PERMIT

SHEET NO.
L108
MATERIALS PLAN

Exhibit 7 SPRV24-1001

PLANTING CODE SUMMARY TABLE

CAMAS MUNICIPAL CODE	CALCULATIONS	REQUIRED	PROVIDED
CMC 18.13.060.C PARKING AREAS: PARKING LOTS SHALL INCLUDE A MINIMUM RATIO OF ONE TREE PER SIX PARKING SPACES	306 TOTAL PARKING SPACES 306 / 6 = 51 PARKING TREES	51 TREES	87 TREES
CMC 18.13.050.C.1 STANDARDS FOR LANDSCAPE, TREE AND VEGETATION PLANS: REQUIRED LANDSCAPING SHALL BE A MINIMUM OF 60% NATIVE VEGETATION OR DROUGHT TOLERANT VEGETATION.		60% NATIVE/NORTHWEST ADAPTED VEGETATION	60% NATIVE/NORTHWEST ADAPTED VEGETATION
CMC 18.13.050.C.1 STANDARDS FOR LANDSCAPE, TREE AND VEGETATION PLANS: REQUIRED LANDSCAPING SHALL BE A MINIMUM OF 50% EVERGREEN		50% EVERGREEN LANDSCAPE	50% EVERGREEN LANDSCAPE

NOTES

1. SEE SHEETS L101 - L103 FOR TREE RETENTION INFORMATION.
2. SEE SHEETS L111 - L115 FOR PLANTING PLANS.
3. SEE SHEET L116 FOR PLANTING SCHEDULE.
4. SEE SHEET L117 FOR SOILS PLAN.
5. SEE SHEET L502 FOR PLANTING DETAILS.

GENERAL LANDSCAPE NOTES

1. PLANTING SHALL CONFORM TO ALL CLARK COUNTY CODE REQUIREMENTS, INCLUDING PRESERVATION OF ADEQUATE INTERSECTION SIGHT DISTANCE LINES/ TRIANGULAR AREAS.

2. INSTALL AUTOMATIC UNDERGROUND IRRIGATION SYSTEM AS SPECIFIED IN ALL NEW AND RENOVATED LANDSCAPE AREAS.

3. THE CONTRACTOR SHALL VERIFY ALL PLANT MATERIAL QUANTITIES PRIOR TO INSTALLATION. ANY PLANT MATERIAL QUANTITIES LISTED ARE FOR THE CONVENIENCE OF THE CONTRACTOR. ACTUAL NUMBER OF SYMBOLS SHALL HAVE PRIORITY OVER QUANTITY DESIGNATED. THE CONTRACTOR SHALL BE RESPONSIBLE FOR COUNTING THE TOTAL NUMBER OF PLANTS INDICATED ON THE PLANS AND ESTIMATING GROUNDCOVER QUANTITIES.

4. THE CONTRACTOR SHALL FURNISH AND PAY FOR ALL CONTAINER OR FIELD GROWN TREES, SHRUBS AND GROUNDCOVERS, INCLUDING SEEDED AND SODDED TURF, HYDROMULCHES AND FLATTED GROUNDCOVERS. THE CONTRACTOR SHALL ALSO BE RESPONSIBLE AND PAY FOR: PLANTING OF ALL PLANT MATERIALS; THE SPECIFIED GUARANTEE OF ALL PLANT MATERIALS; THE STAKING AND GUYING OF TREES AND THE CONTINUOUS PROTECTION OF ALL PLANT MATERIALS UPON THEIR ARRIVAL AT THE SITE.

5. PLANTING EXTENTS APPROXIMATE, CONTRACTOR RESPONSIBLE FOR REPLANTING ALL AREAS DISTURBED BY CONSTRUCTION.

6. SEE SE BYBEE ROAD REALIGNMENT PERMIT DRAWINGS DATED JULY 2024 FOR LANDSCAPE STREET FRONTAGE IMPROVEMENTS.

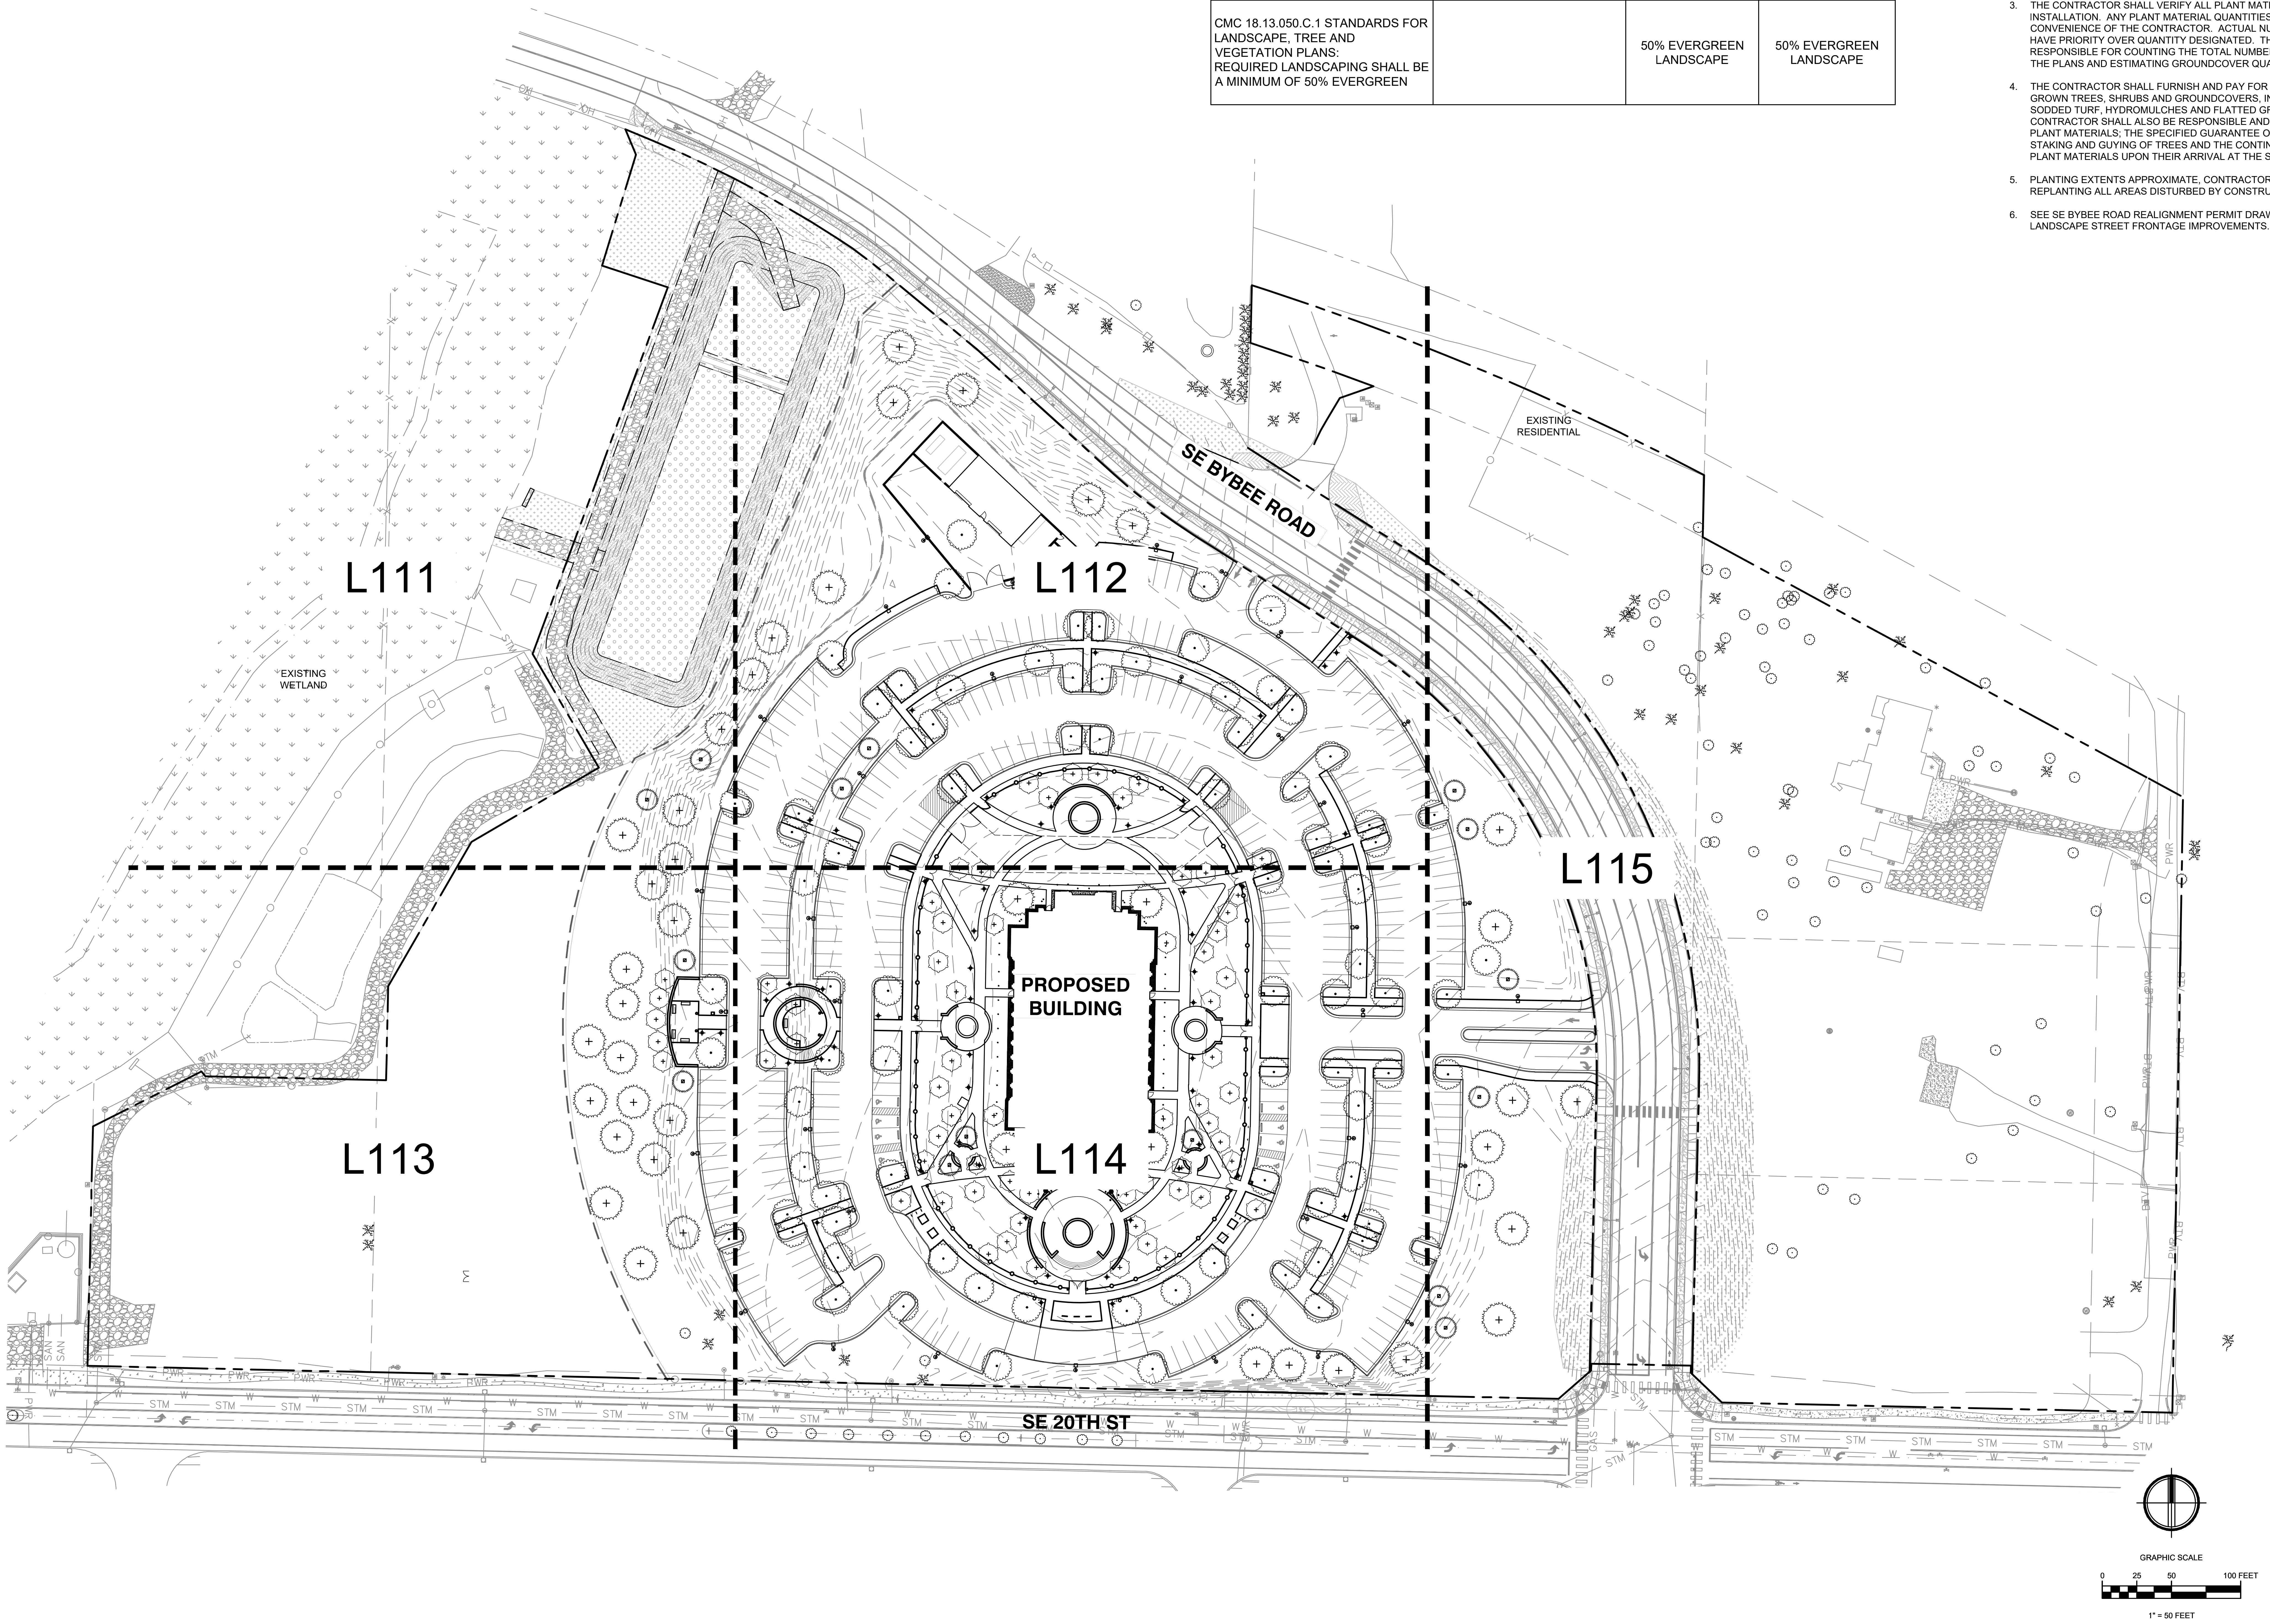

KMB architects
906 Columbia Street SW, Suite 400
Olympia, Washington 98501
811 First Ave, Suite 500
Seattle, Washington 98104
www.KMB-architects.com
360.352.8883

KMB Project # 23069

AHBL
TACOMA · SEATTLE · SPOKANE · TRI-CITIES
1200 6th Avenue, Suite 1620 Seattle, WA 98101
206.267.2425 TEL 206.267.2429 FAX www.ahbl.com WEB

VANCOUVER WASHINGTON TEMPLE
THE CHURCH OF JESUS CHRIST OF LATER-DAY SAINTS
1819 SE BYBEE ROAD
CAMAS, WA 98607

ORIGINAL SHEET SIZE = 30 x 42
HALF SIZE REDUCTIONS = 15 x 21

REVISIONS:

DATE:
2024.08.09

LAND USE PERMIT

SHEET NO.
L110
OVERALL PLANTING PLAN

Exhibit 7 SPRV24-1001

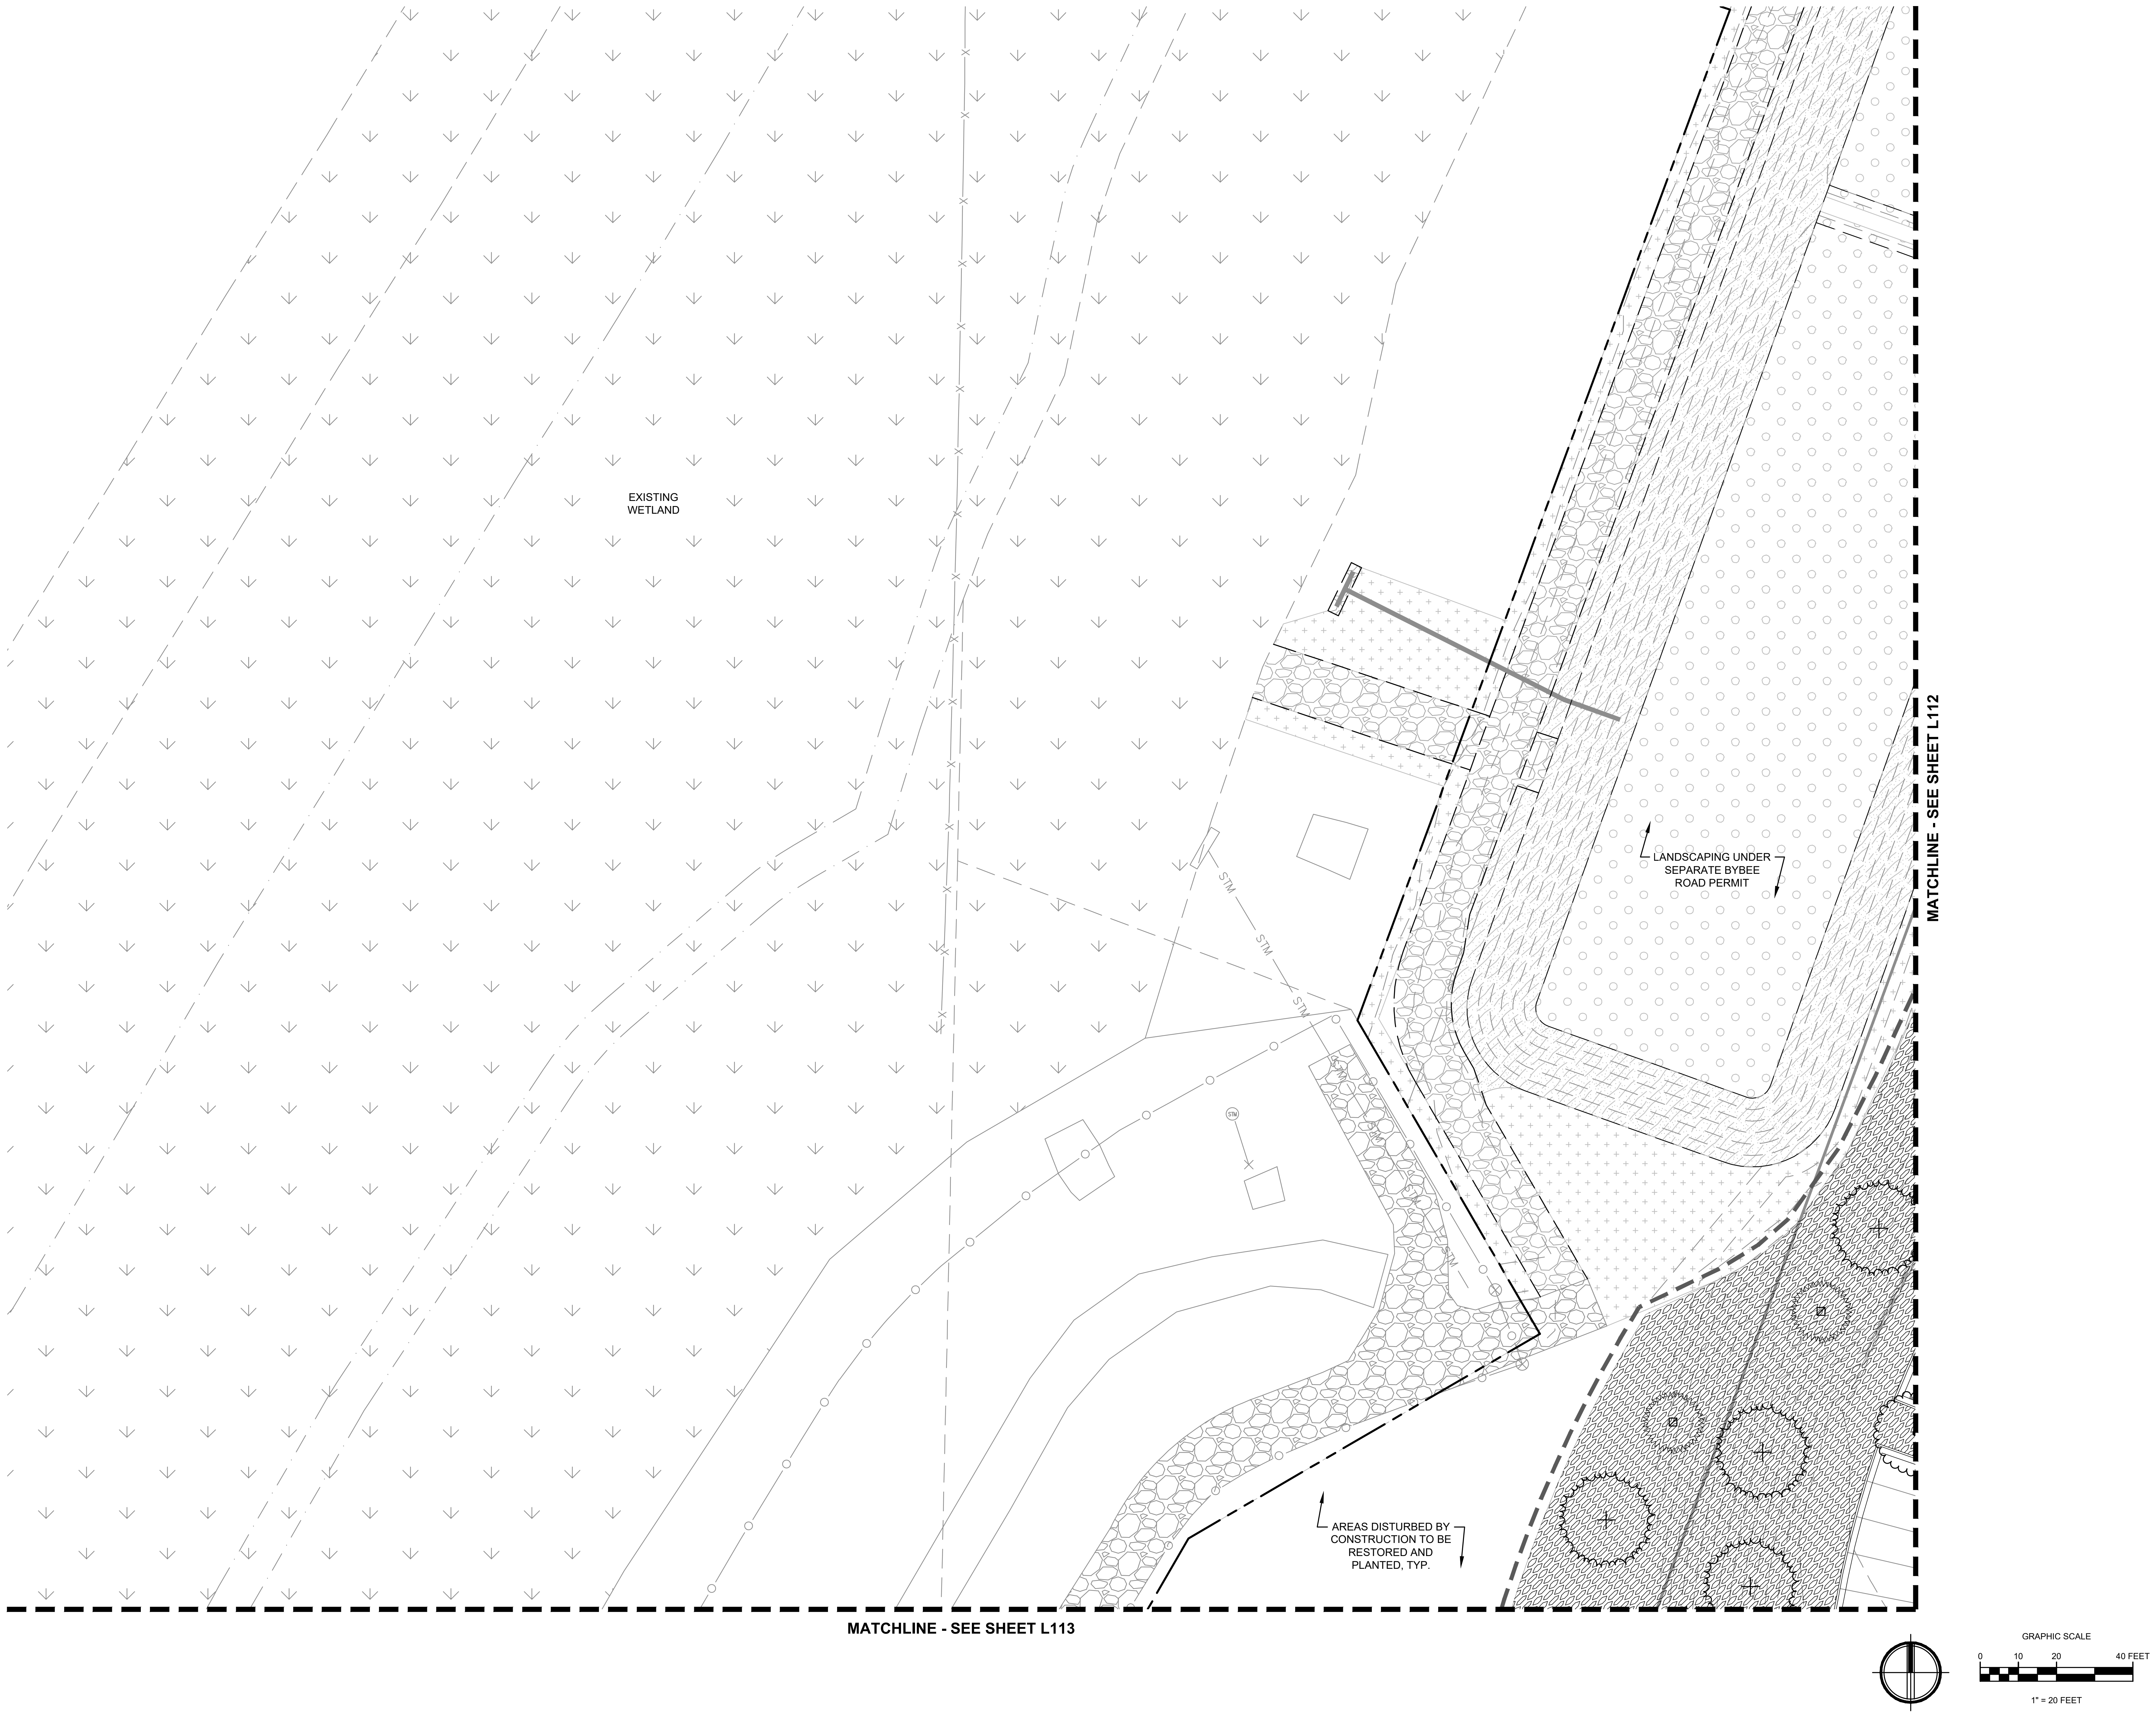
EXISTING WETLAND
STM
STM
STM
LANDSCAPING UNDER SEPARATE BYBEE ROAD PERMIT
AREAS DISTURBED BY CONSTRUCTION TO BE RESTORED AND PLANTED, TYP.
MATCHLINE - SEE SHEET L112
MATCHLINE - SEE SHEET L113
GRAPHIC SCALE
0
10
20
40 FEET
1" = 20 FEET

LEGEND

- — – – — PROPERTY LINE
- ▬ ▬ ▬ ▬ LIMITS OF WORK
- EDGING
- – – – – PROPOSED GRADING CONTOUR, SEE CIVIL
- ✳ ○ EXISTING TREE TO REMAIN

KMB architects
906 Columbia Street SW, Suite 400
Olympia, Washington 98501
811 First Ave, Suite 500
Seattle, Washington 98104
www.KMB-architects.com
360.352.8883

KMB Project # 23069

AHBL
TACOMA · SEATTLE · SPOKANE · TRI-CITIES
1200 6th Avenue, Suite 1620 Seattle, WA 98101
206.267.2425 TEL 206.267.2429 FAX www.ahbl.com WEB

VANCOUVER WASHINGTON TEMPLE
THE CHURCH OF JESUS CHRIST OF LATER-DAY SAINTS

1819 SE BYBEE ROAD
CAMAS, WA 98607

ORIGINAL SHEET SIZE = 30 x 42
HALF SIZE REDUCTIONS = 15 x 21

REVISIONS:

DATE:
2024.08.09

LAND USE PERMIT

SHEET NO.

L111

PLANTING PLAN

Exhibit 7 SPRV24-1001

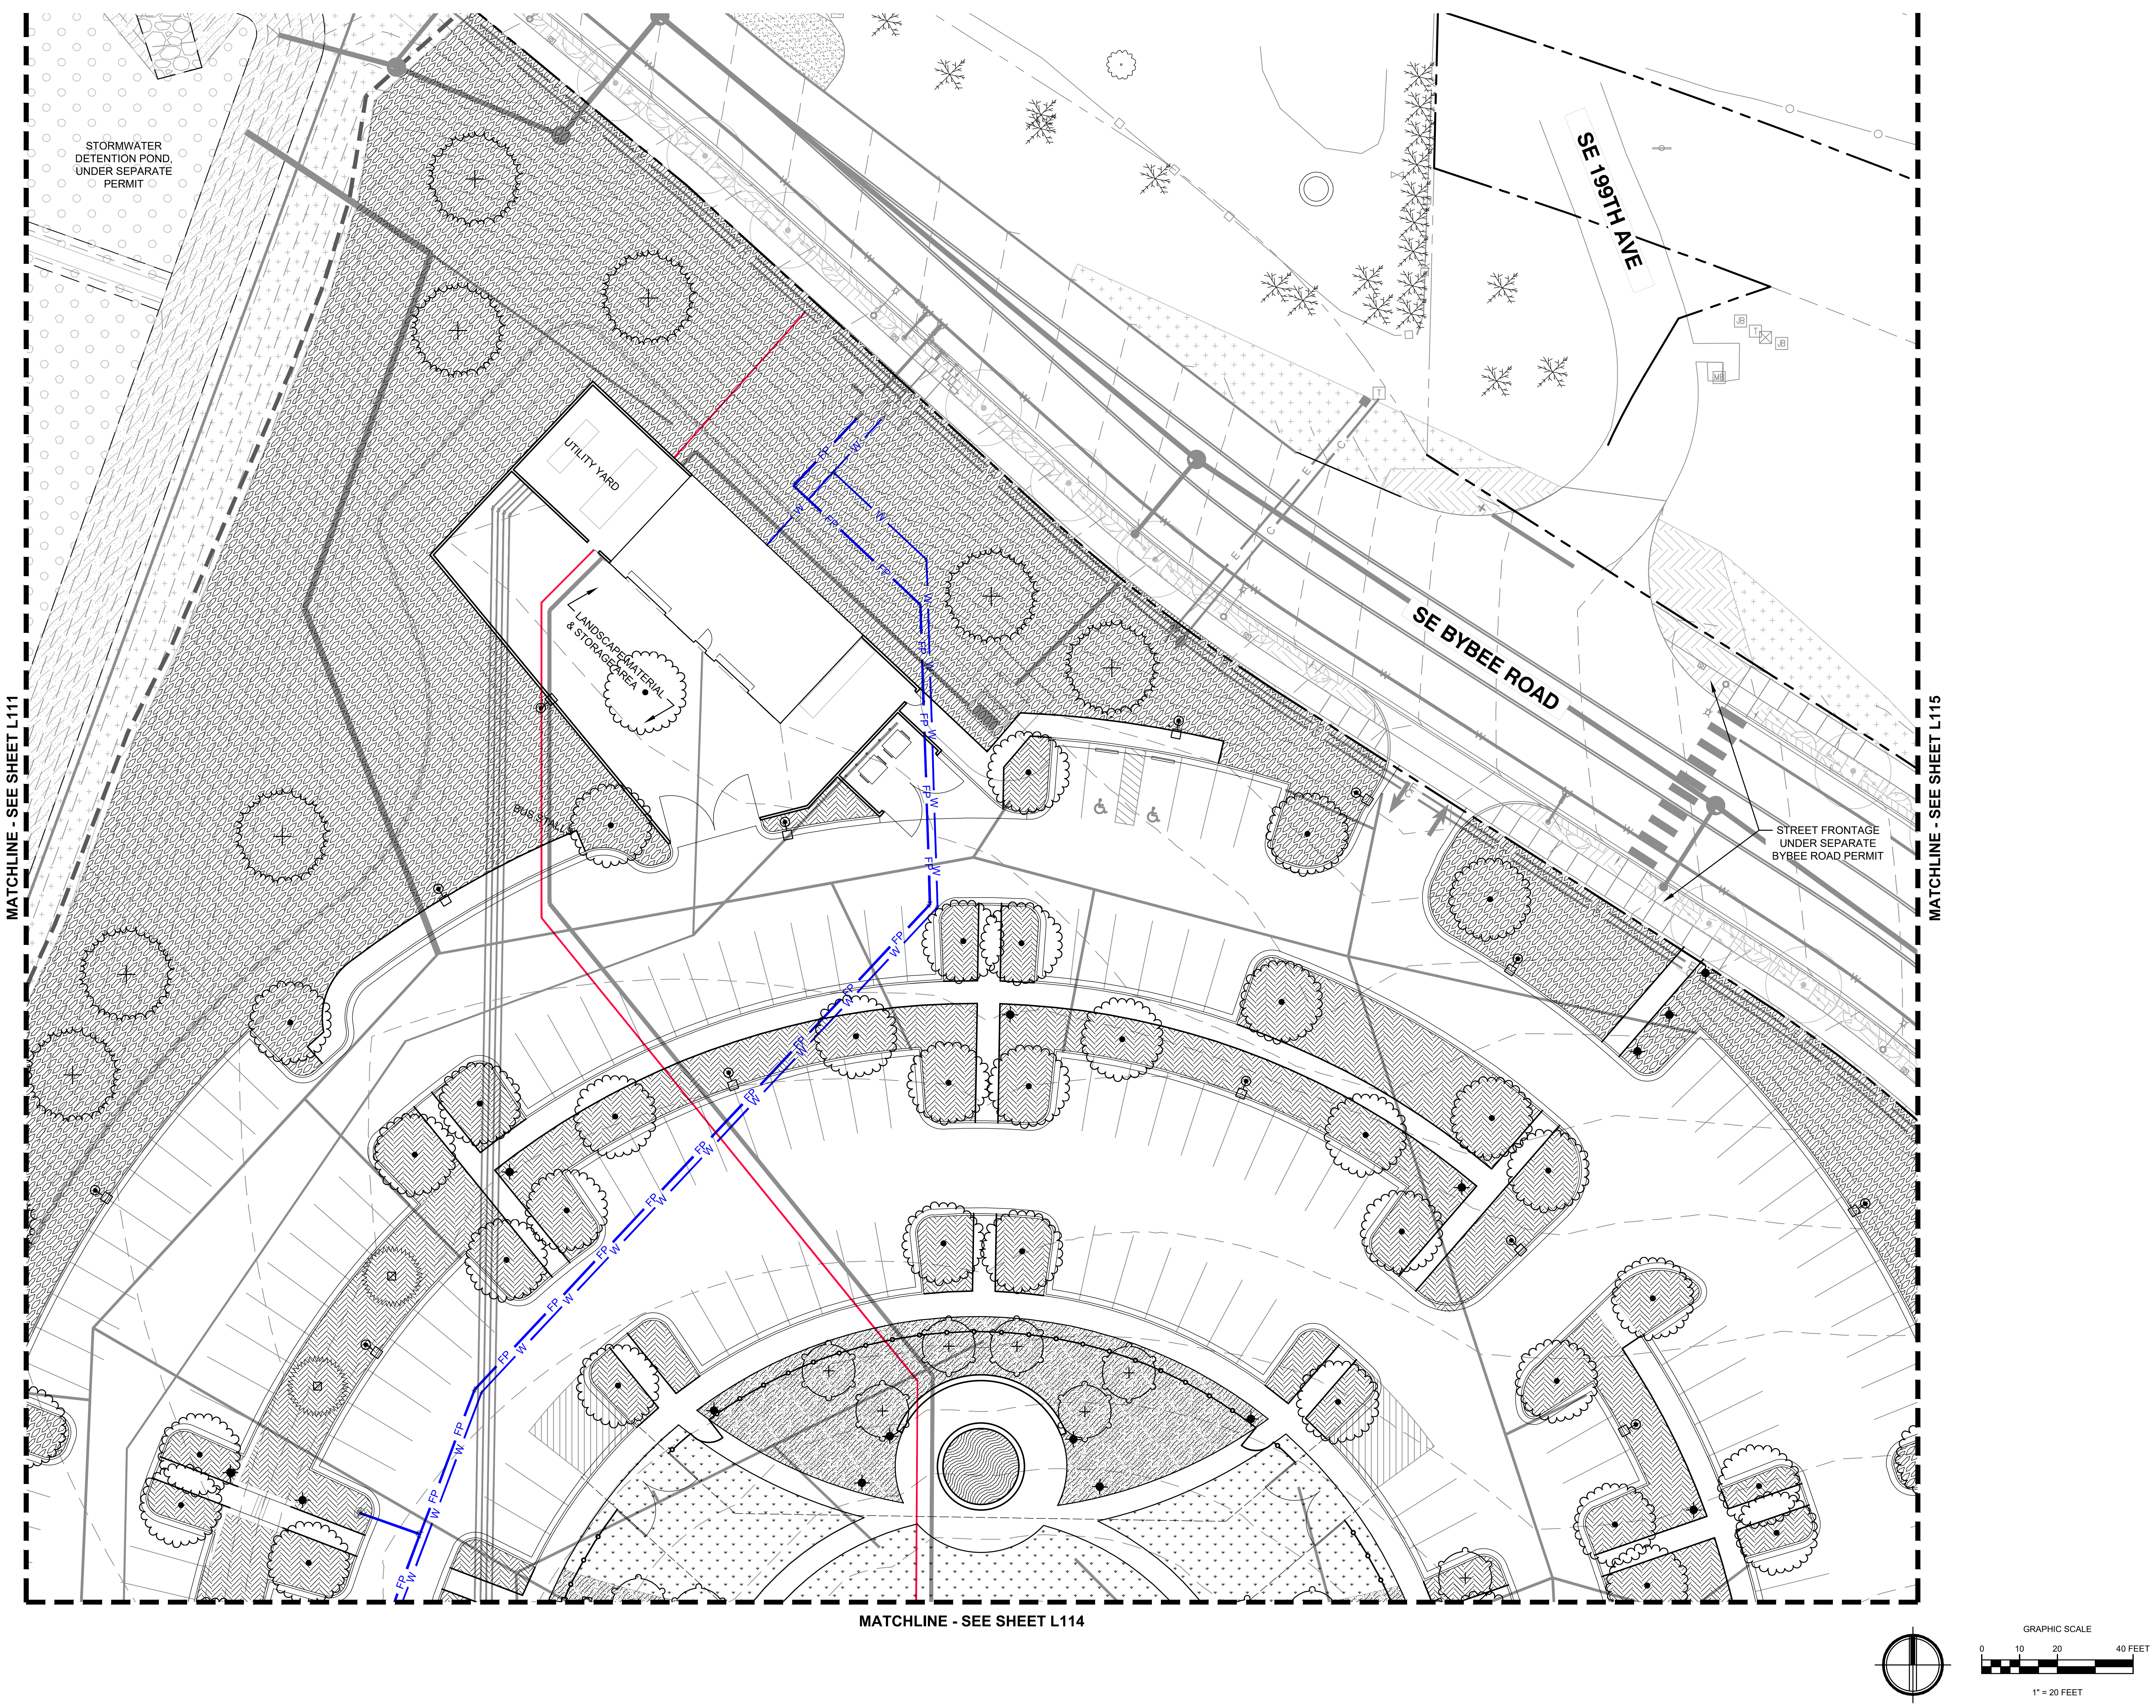
STORMWATER DETENTION POND, UNDER SEPARATE PERMIT
UTILITY YARD
LANDSCAPE MATERIAL & STORAGE AREA
BUS STALL
SE BYBEE ROAD
SE 199TH AVE
STREET FRONTAGE UNDER SEPARATE BYBEE ROAD PERMIT
FP
W
MATCHLINE - SEE SHEET L111
MATCHLINE - SEE SHEET L115
MATCHLINE - SEE SHEET L114
GRAPHIC SCALE
0
10
20
40 FEET
1" = 20 FEET

LEGEND

- — - - — PROPERTY LINE
- ▬ ▬ ▬ LIMITS OF WORK
- EDGING
- — — — PROPOSED GRADING CONTOUR, SEE CIVIL
- ✳ ○ EXISTING TREE TO REMAIN

KMB architects

906 Columbia Street SW, Suite 400
Olympia, Washington 98501
811 First Ave, Suite 500
Seattle, Washington 98104
www.KMB-architects.com
360.352.8883

KMB Project # 23069

AHBL
TACOMA • SEATTLE • SPOKANE • TRI-CITIES
1200 6th Avenue, Suite 1620 Seattle, WA 98101
206.267.2425 TEL 206.267.2429 FAX www.ahbl.com WEB

VANCOUVER WASHINGTON TEMPLE
THE CHURCH OF JESUS CHRIST OF LATER-DAY SAINTS

1819 SE BYBEE ROAD
CAMAS, WA 98607

ORIGINAL SHEET SIZE = 30 x 42
HALF SIZE REDUCTIONS = 15 x 21

REVISIONS:

DATE:
2024.08.09

LAND USE PERMIT

SHEET NO.
L112
PLANTING PLAN

Exhibit 7 SPRV24-1001

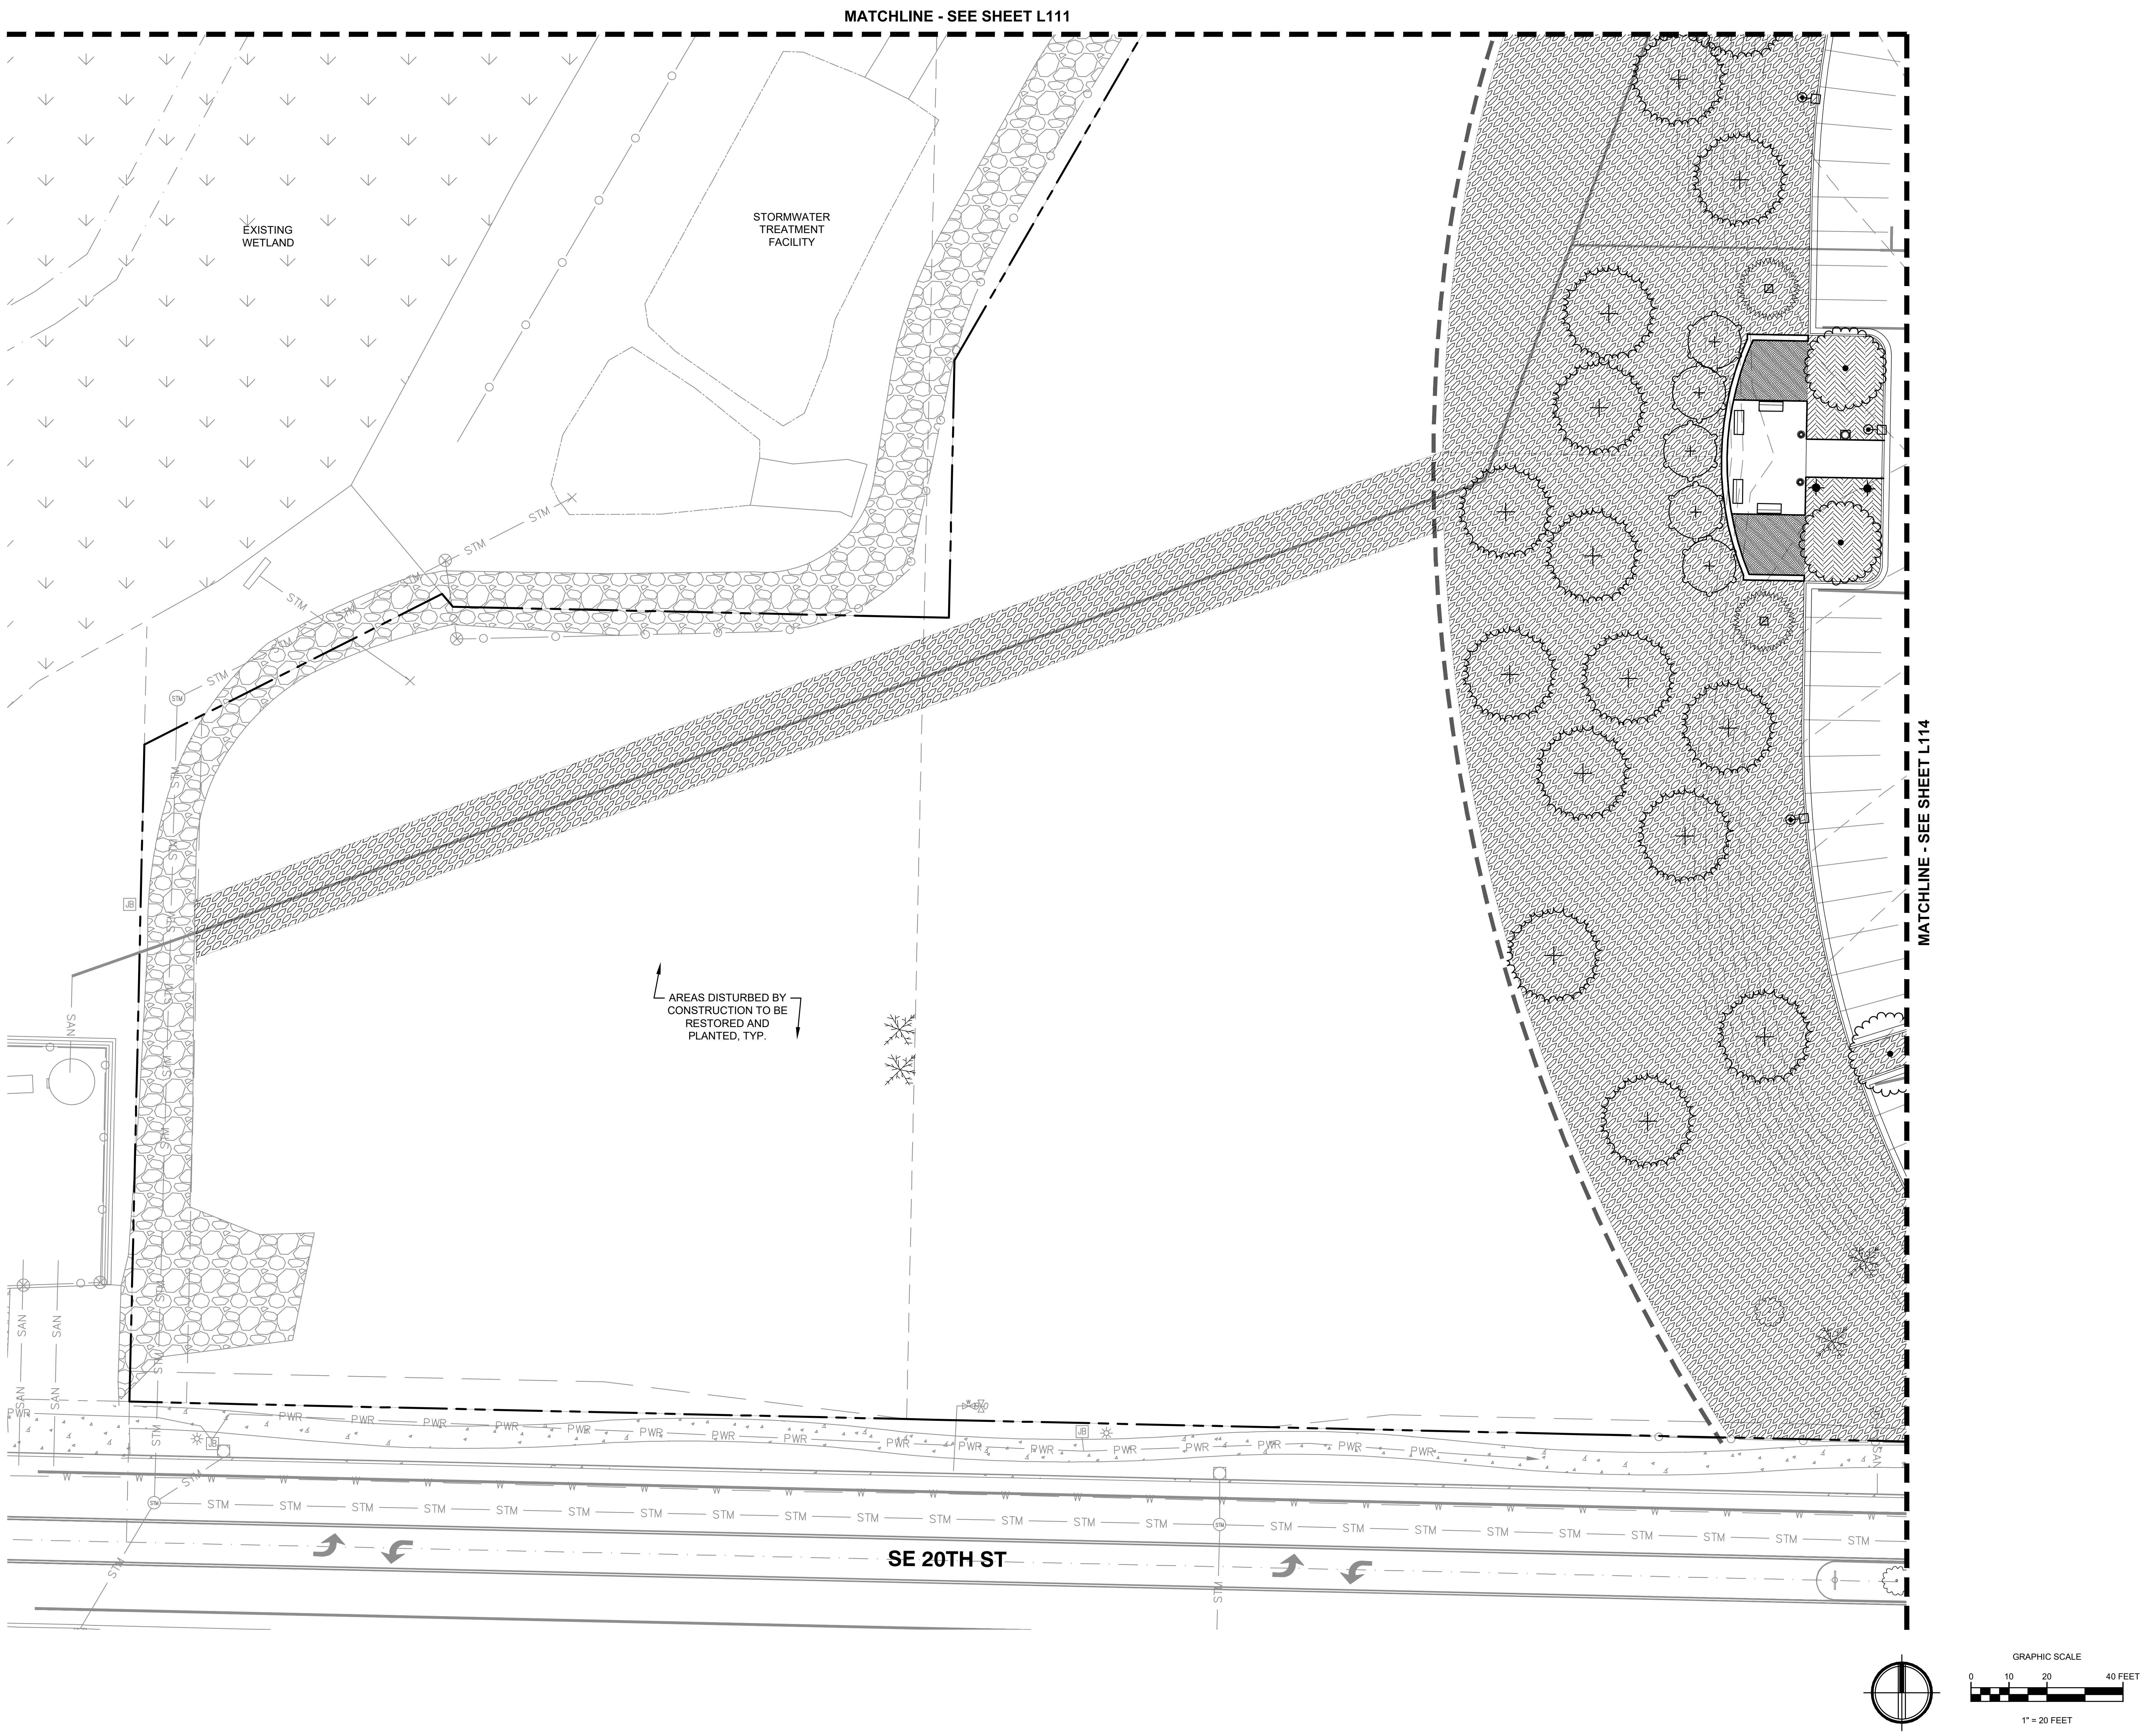
MATCHLINE - SEE SHEET L111
EXISTING WETLAND
STORMWATER TREATMENT FACILITY
STM
AREAS DISTURBED BY CONSTRUCTION TO BE RESTORED AND PLANTED, TYP.
MATCHLINE - SEE SHEET L114
SAN
PWR
SE 20TH ST
GRAPHIC SCALE
0
10
20
40 FEET
1" = 20 FEET

LEGEND

— — — —	PROPERTY LINE
▬ ▬ ▬ ▬	LIMITS OF WORK
	EDGING
— — — —	PROPOSED GRADING CONTOUR, SEE CIVIL
✳ ○	EXISTING TREE TO REMAIN

KMB
architects
906 Columbia Street SW, Suite 400
Olympia, Washington 98501
811 First Ave, Suite 500
Seattle, Washington 98104
www.KMB-architects.com
360.352.8883

KMB Project # 23069

AHBL
TACOMA • SEATTLE • SPOKANE • TRI-CITIES
1200 6th Avenue, Suite 1620 Seattle, WA 98101
206.267.2425 TEL 206.267.2429 FAX www.ahbl.com WEB

VANCOUVER WASHINGTON TEMPLE
THE CHURCH OF JESUS CHRIST OF LATER-DAY SAINTS

1819 SE BYBEE ROAD
CAMAS, WA 98607

ORIGINAL SHEET SIZE = 30 x 42
HALF SIZE REDUCTIONS = 15 x 21

REVISIONS:

DATE:
2024.08.09

LAND USE PERMIT

SHEET NO.

L113
PLANTING PLAN

Exhibit 7 SPRV24-1001

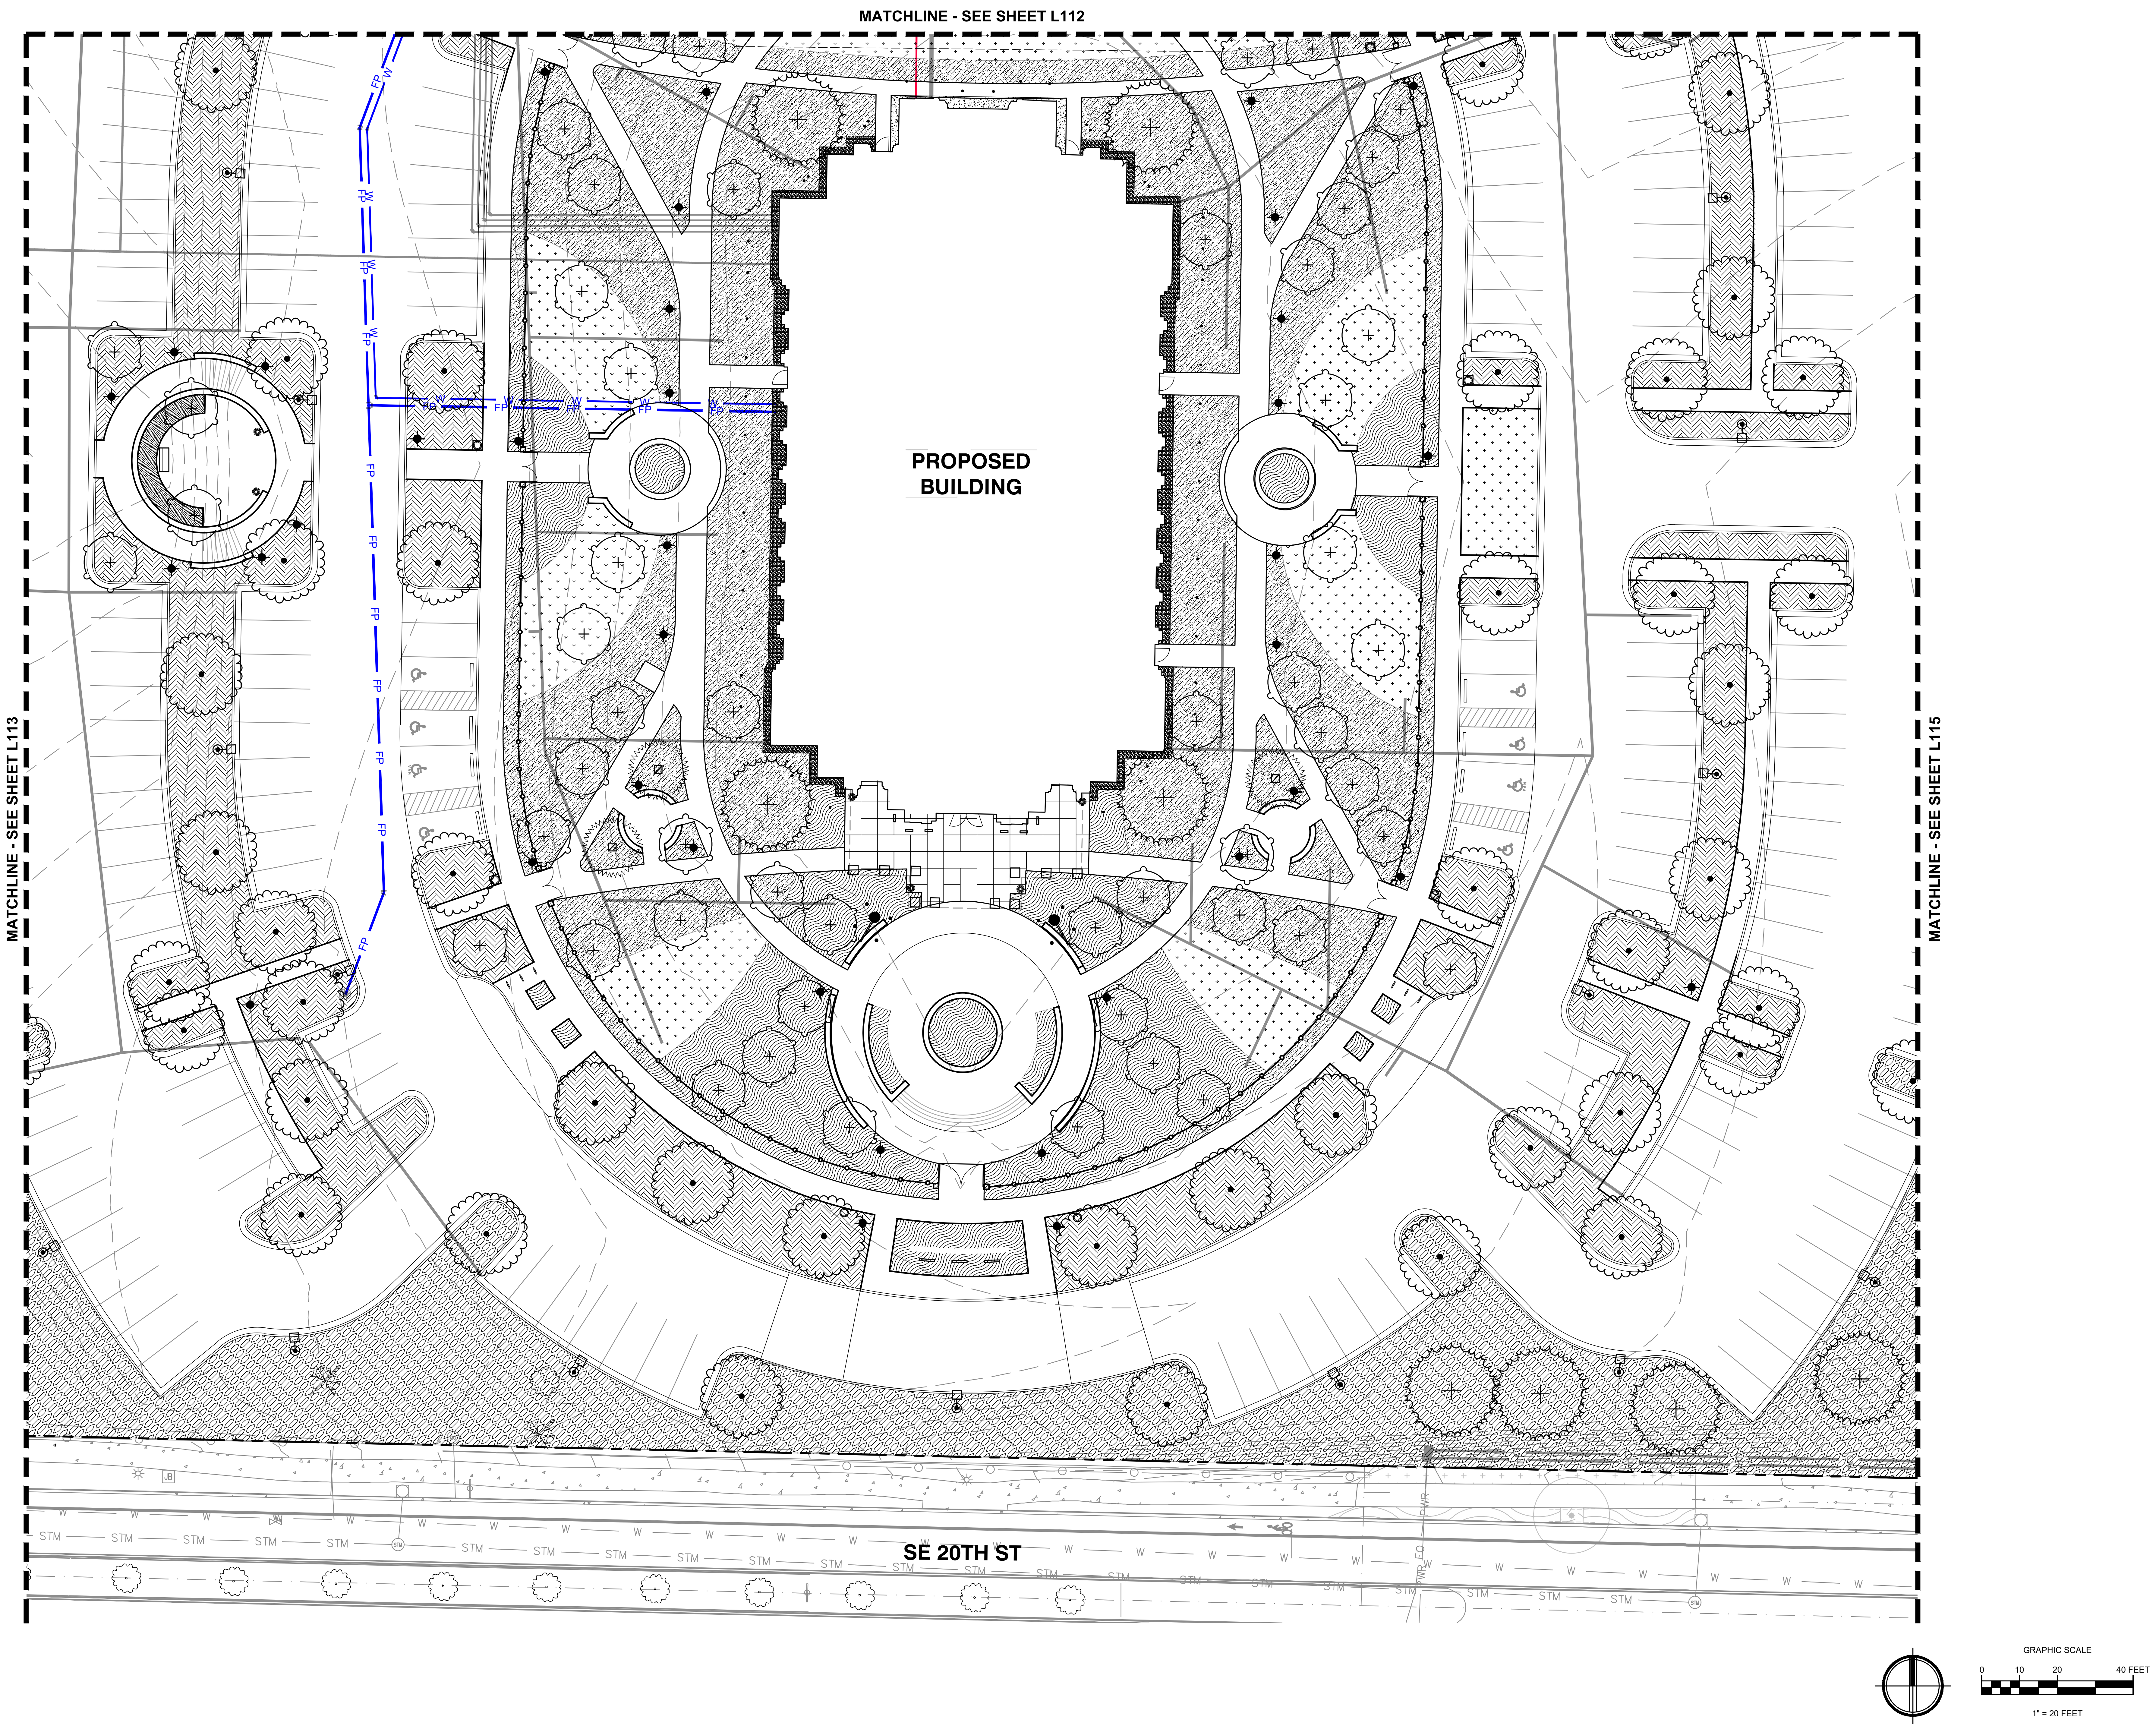
MATCHLINE - SEE SHEET L112
MATCHLINE - SEE SHEET L113
MATCHLINE - SEE SHEET L115
PROPOSED BUILDING
SE 20TH ST
FP
W
STM
GRAPHIC SCALE
0
10
20
40 FEET
1" = 20 FEET

LEGEND

- PROPERTY LINE
- LIMITS OF WORK
- EDGING
- PROPOSED GRADING CONTOUR, SEE CIVIL
- EXISTING TREE TO REMAIN

KMB architects
906 Columbia Street SW, Suite 400
Olympia, Washington 98501
811 First Ave, Suite 500
Seattle, Washington 98104
www.KMB-architects.com
360.352.8883

KMB Project # 23069

AHBL
TACOMA • SEATTLE • SPOKANE • TRI-CITIES
1200 6th Avenue, Suite 1620 Seattle, WA 98101
206.267.2425 TEL 206.267.2429 FAX www.ahbl.com WEB

VANCOUVER WASHINGTON TEMPLE
THE CHURCH OF JESUS CHRIST OF LATER-DAY SAINTS

1819 SE BYBEE ROAD
CAMAS, WA 98607

ORIGINAL SHEET SIZE = 30 x 42
HALF SIZE REDUCTIONS = 15 x 21

REVISIONS:

DATE:
2024.08.09

LAND USE PERMIT

SHEET NO.
L114
PLANTING PLAN

Exhibit 7 SPRV24-1001

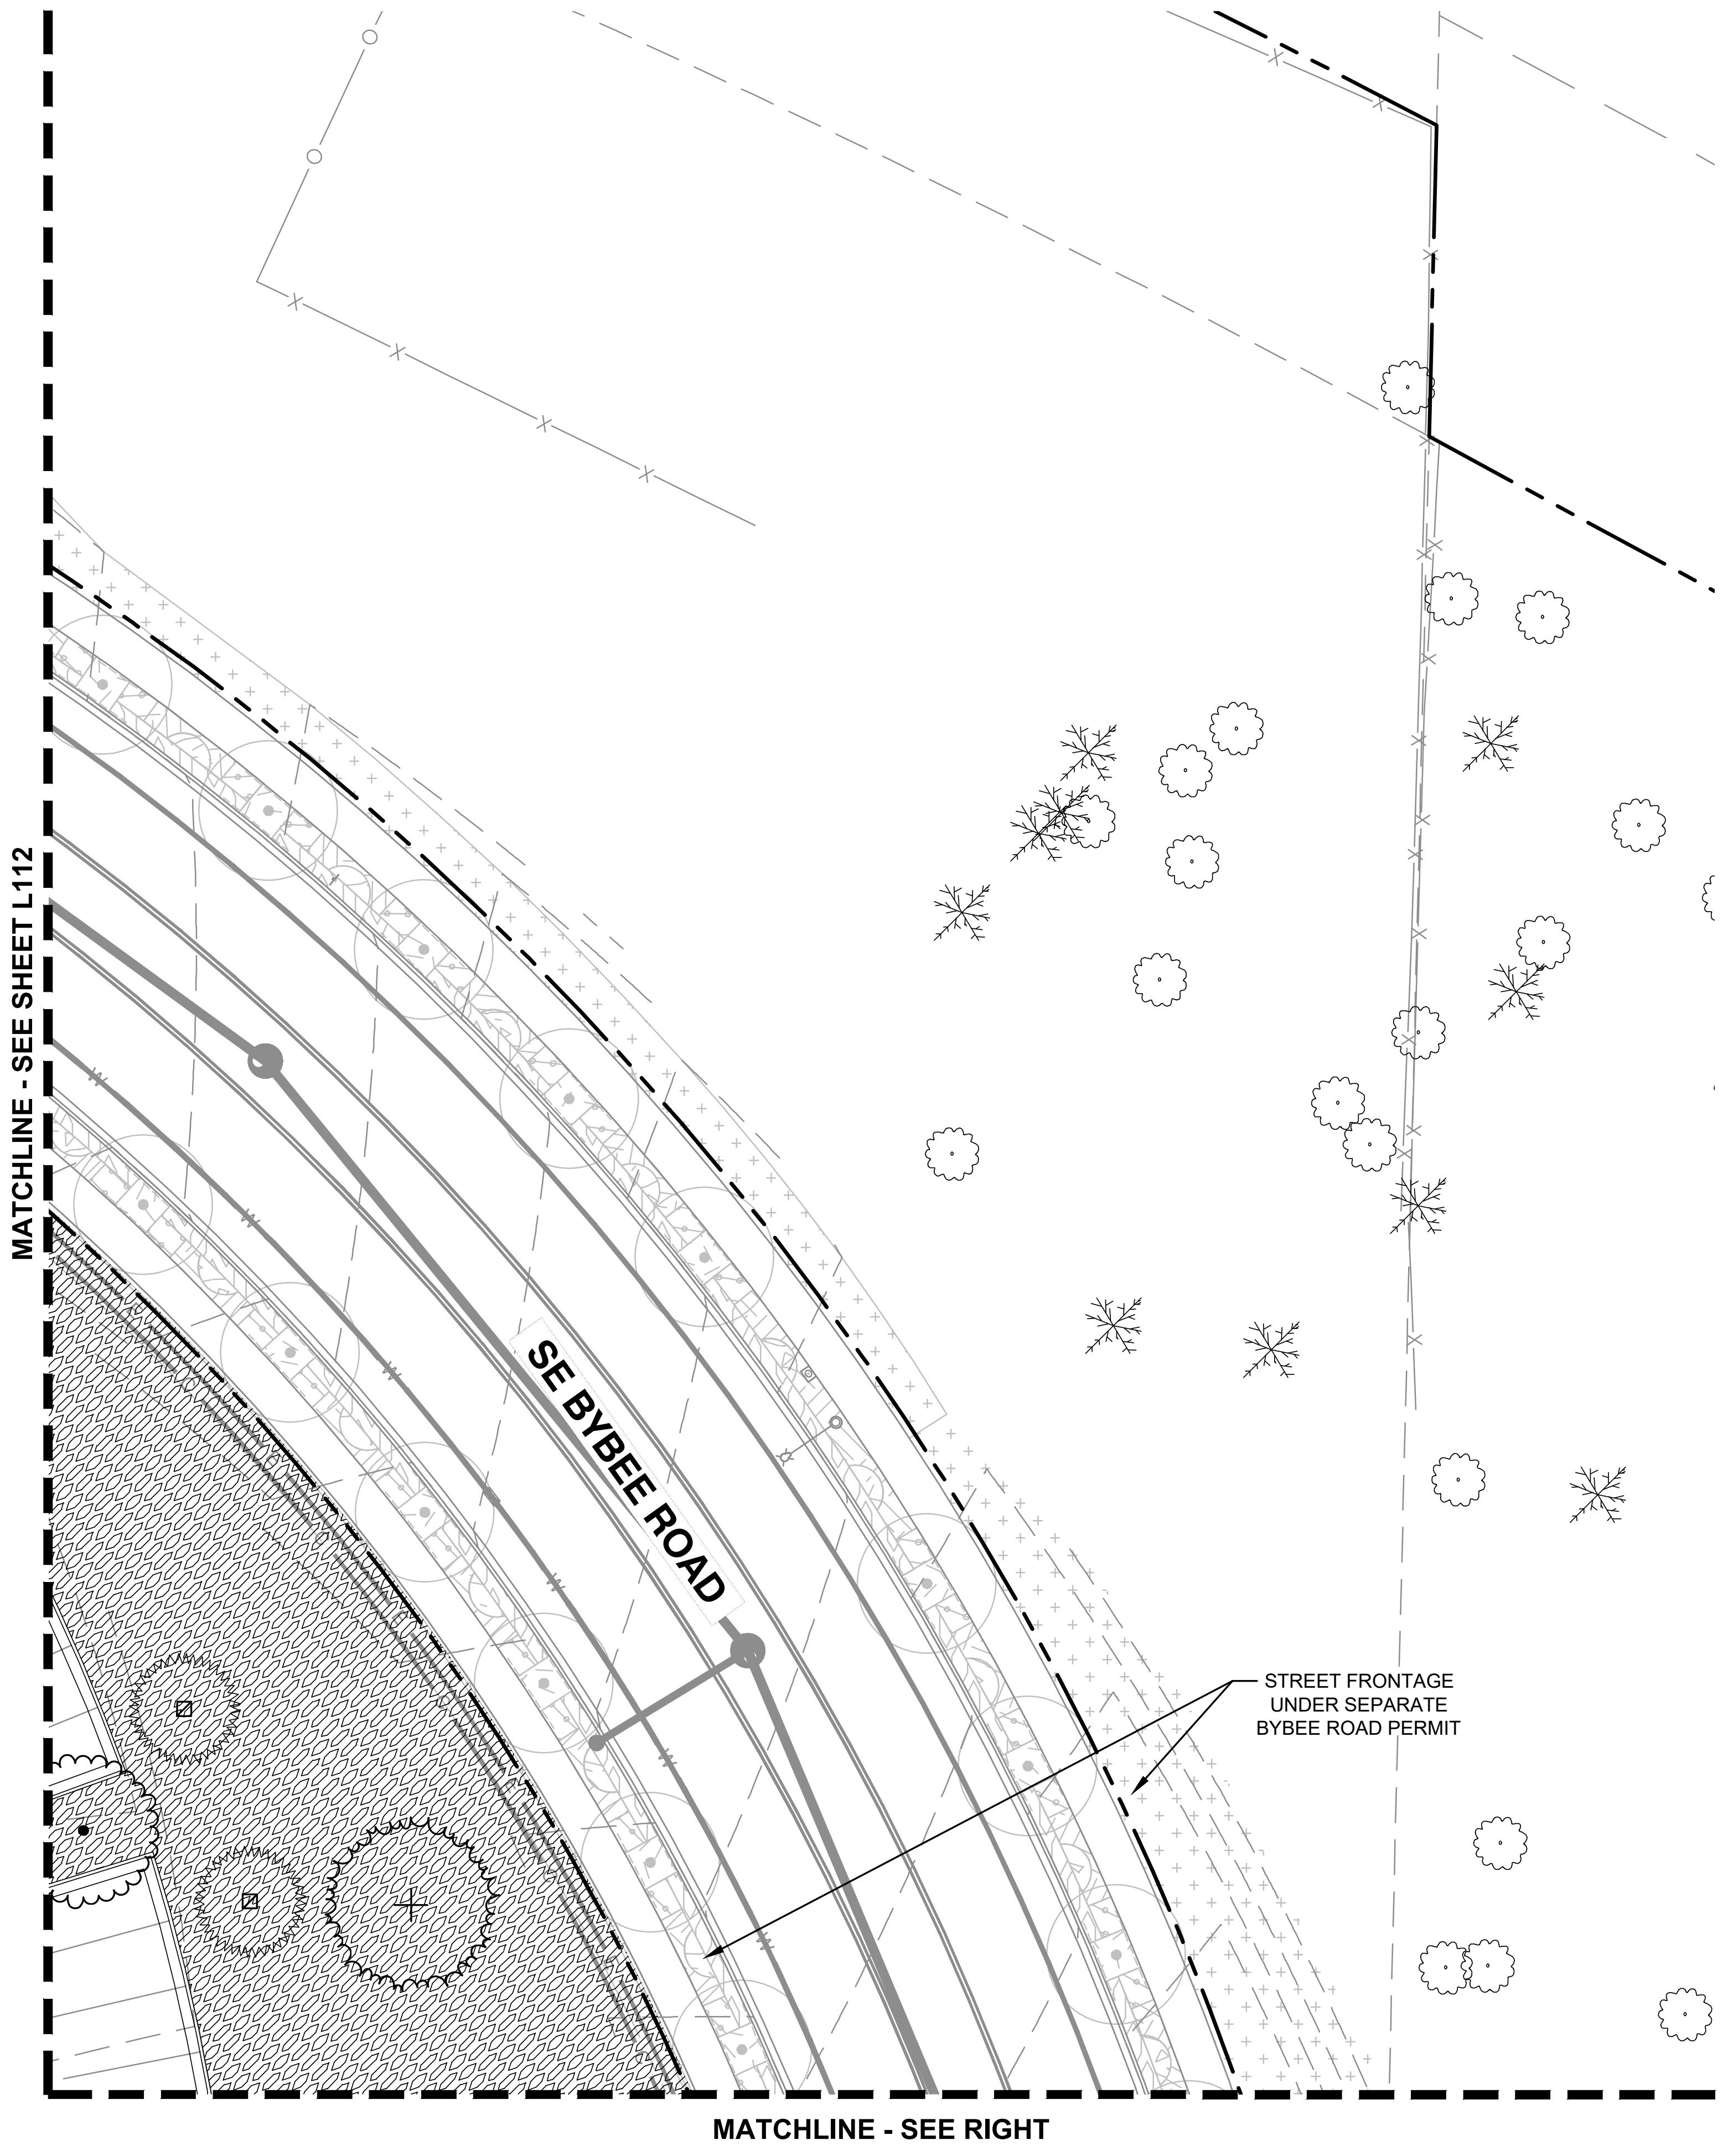
MATCHLINE - SEE SHEET L112
SE BYBEE ROAD
STREET FRONTAGE UNDER SEPARATE BYBEE ROAD PERMIT
MATCHLINE - SEE RIGHT

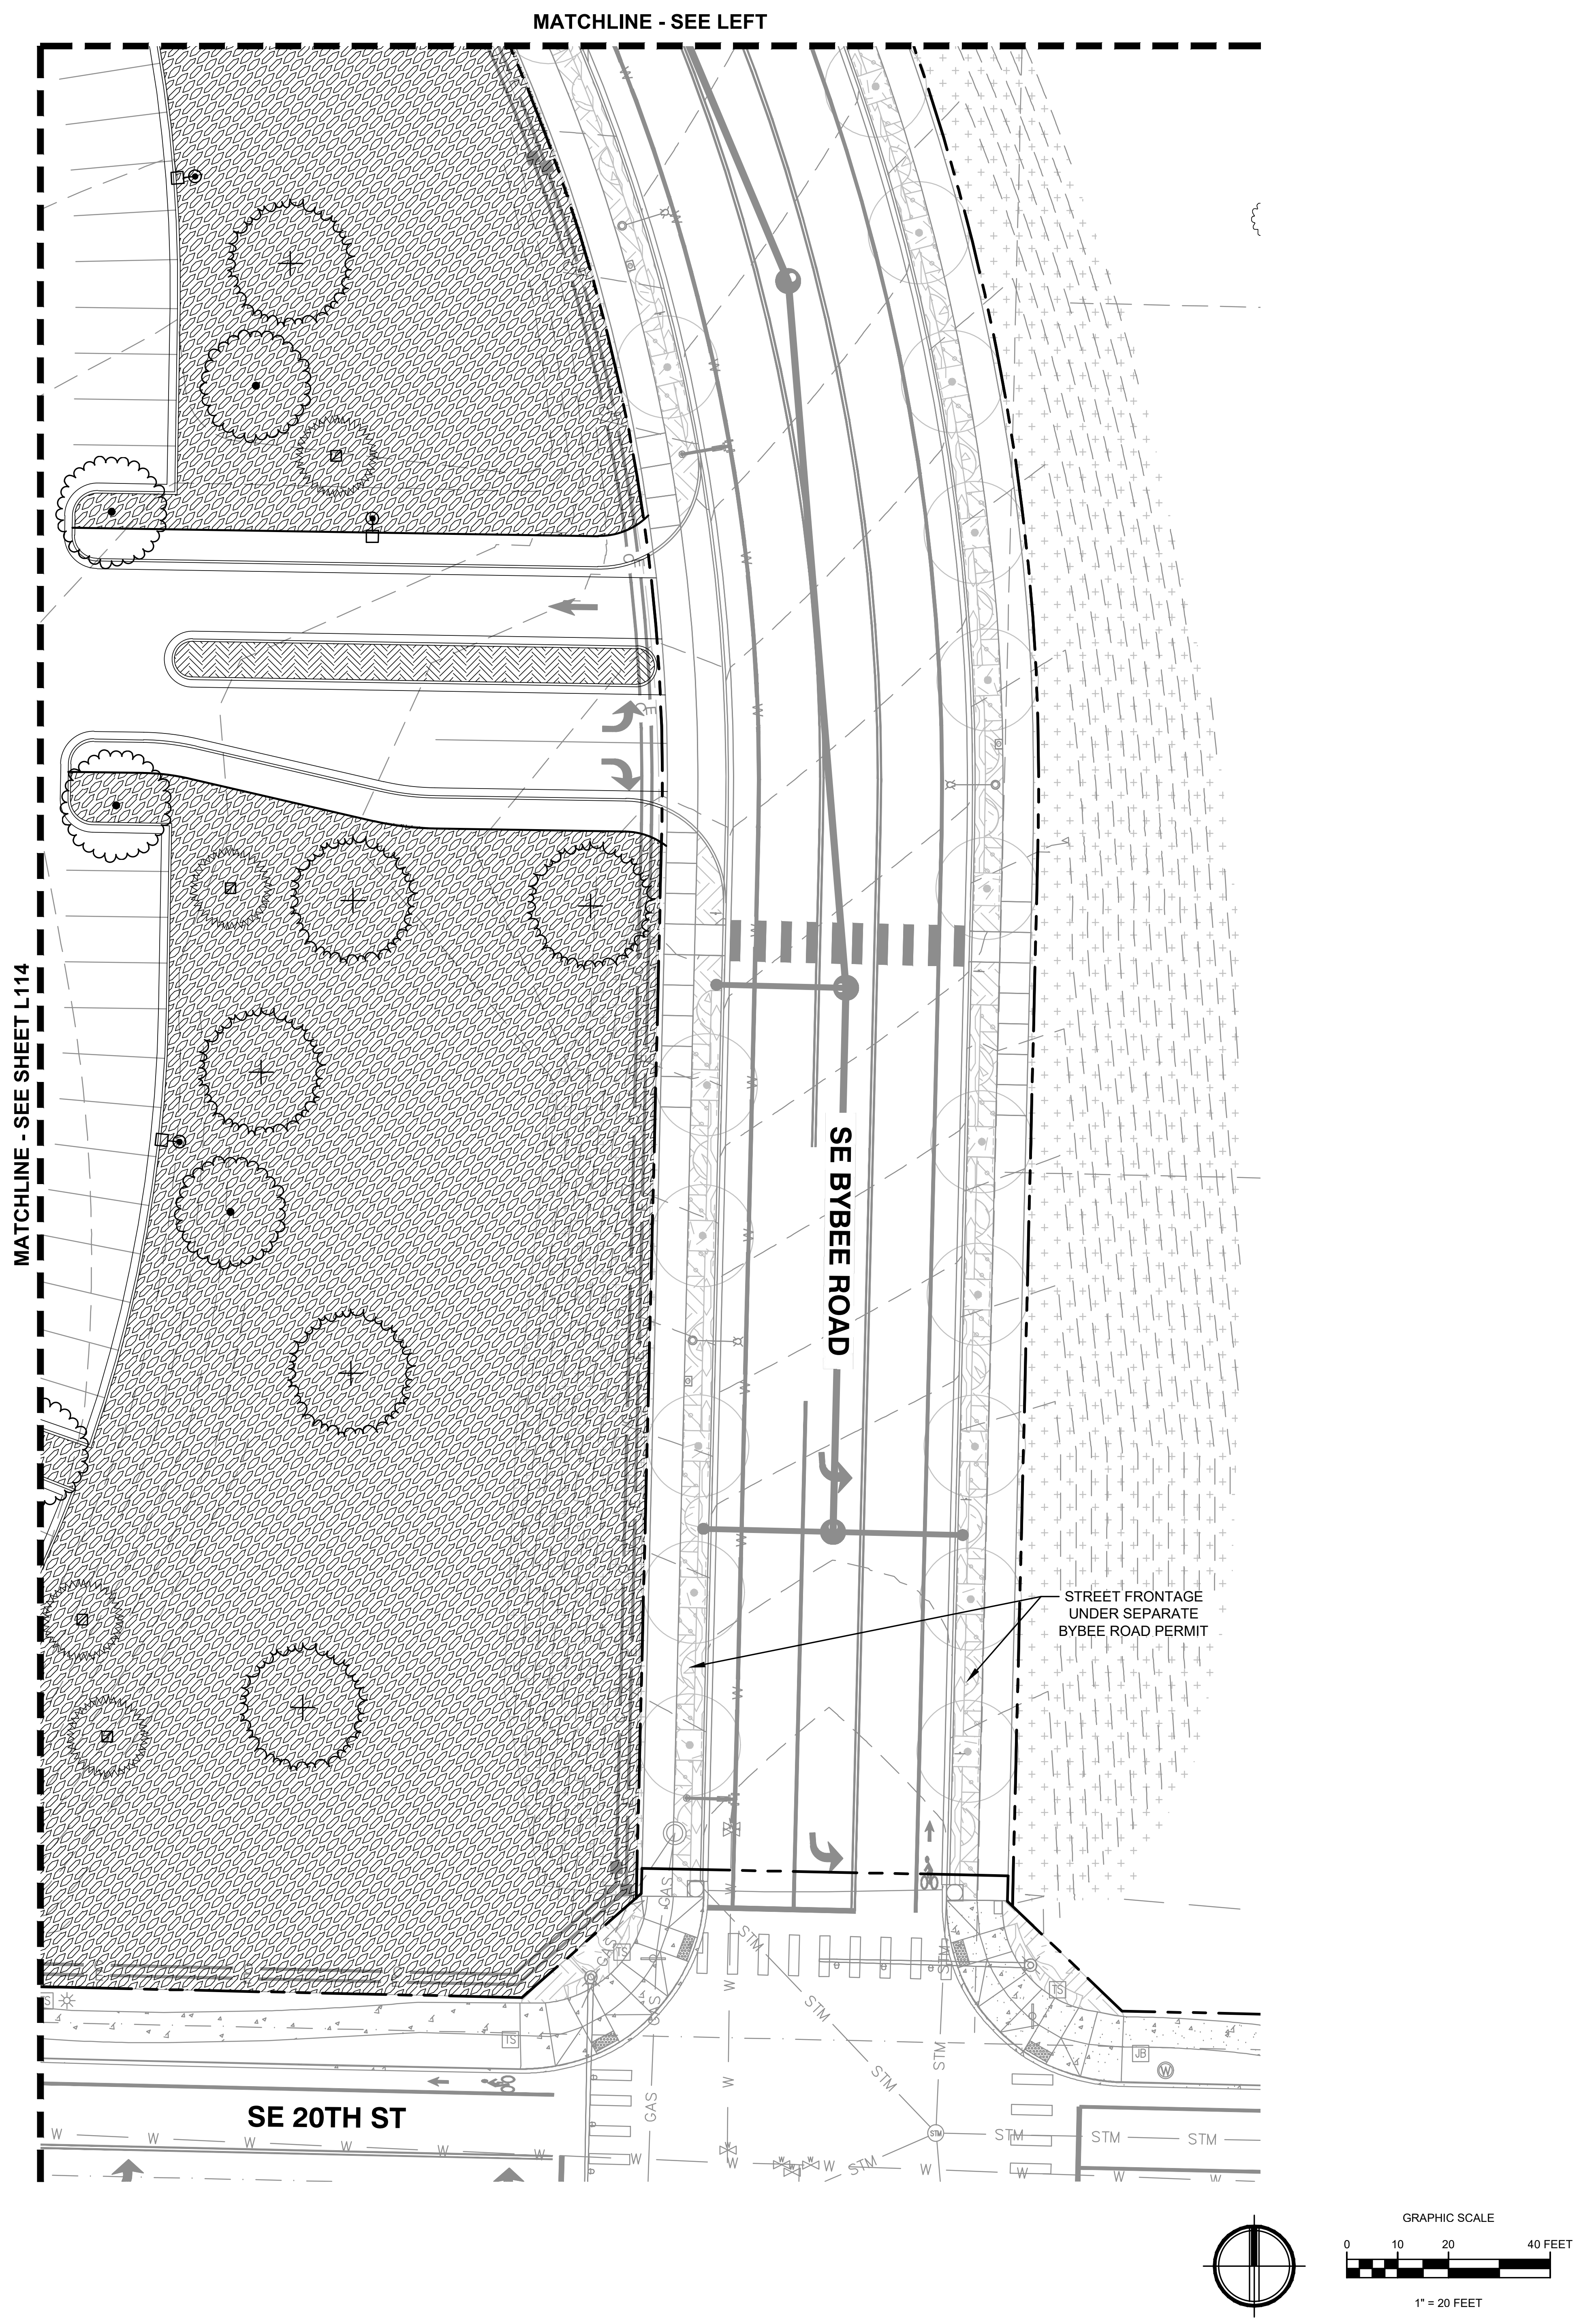
MATCHLINE - SEE LEFT
MATCHLINE - SEE SHEET L114
SE BYBEE ROAD
STREET FRONTAGE UNDER SEPARATE BYBEE ROAD PERMIT
SE 20TH ST
GRAPHIC SCALE
0
10
20
40 FEET
1" = 20 FEET

LEGEND

— — — —	PROPERTY LINE
▬ ▬ ▬ ▬	LIMITS OF WORK
	EDGING
— — — —	PROPOSED GRADING CONTOUR, SEE CIVIL
✳ ○	EXISTING TREE TO REMAIN

KMB architects
906 Columbia Street SW, Suite 400
Olympia, Washington 98501
811 First Ave, Suite 500
Seattle, Washington 98104
www.KMB-architects.com
360.352.8883

KMB Project # 23069

AHBL
TACOMA • SEATTLE • SPOKANE • TRI-CITIES
1200 6th Avenue, Suite 1620 Seattle, WA 98101
206.267.2425 TEL 206.267.2429 FAX www.ahbl.com WEB

VANCOUVER WASHINGTON TEMPLE
THE CHURCH OF JESUS CHRIST OF LATER-DAY SAINTS

1819 SE BYBEE ROAD
CAMAS, WA 98607

ORIGINAL SHEET SIZE = 30 x 42
HALF SIZE REDUCTIONS = 15 x 21

REVISIONS:

DATE:
2024.08.09

LAND USE PERMIT

SHEET NO.
L115
PLANTING PLAN

Exhibit 7 SPRV24-1001

PLANT SCHEDULE

SYMBOL	CODE	BOTANICAL NAME	COMMON NAME	CALIPER/HEIGHT	QTY
TREES					
⊙		PARKING LOT TREE			87
	AX	ACER TRUNCATUM X PLATANOIDES 'WARRENRED'	PACIFIC SUNSET® MAPLE	1.5" CAL MIN.	
	UP	ULMUS X 'MORTON GLOSSY'	TRIUMPH™ ELM	1.5" CAL MIN.	
	ZS	ZELKOVA SERRATA	JAPANESE ZELKOVA	1.5" CAL MIN.	
⊕		WOODLAND REPLACEMENT TREE			41
	AM	ARBUTUS MENZIESII	PACIFIC MADRONE	1.5" CAL MIN.	
	PD	PSEUDOTSUGA MENZIESII	DOUGLAS FIR	5` HT MIN	
⊕		ORNAMENTAL COURTYARD TREE			65
	MS	MAGNOLIA STELLATA	STAR MAGNOLIA	1 GAL	
	ME	MAGNOLIA X 'GENIE'	GENIE MAGNOLIA	1 GAL	
	SM	STEWARTIA MONADELPHA	TALL STEWARTIA	1 GAL	
⊠		ORNAMENTAL EVEGREEN			15
	CD2	CALOCEDRUS DECURRENS	INCENSE CEDAR	6` HT MIN.	
	CN	CHAMAECYPARIS OBTUSA 'NANA'	DWARF HINOKI FALSE CYPRESS	1 GAL	
	JK	JUNIPERUS CHINENSIS 'KAIZUKA'	HOLLYWOOD JUNIPER	1 GAL	
	PO	PICEA OMORIKA	SERBIAN SPRUCE	1 GAL	

SYMBOL	CODE	BOTANICAL NAME	COMMON NAME	PLANT SIZE	SPACING	QTY
GROUND COVERS						
⬚		LAWN				13,297 SF
▨		PARKING LOT PLANTING				34,458 SF
	CA	CALAMAGROSTIS X ACUTIFLORA 'AVALANCHE'	AVALANCHE FEATHER REED GRASS	1 GAL	20% @ 24" o.c.	1,789
	CW	CISTUS X HYBRIDUS	WHITE ROCKROSE	3 GAL	20% @ 48" o.c.	446
	ES	ERICA CARNEA 'SPRINGWOOD WHITE'	WHITE SPRING WINTER HEATH	1 GAL	20% @ 36" o.c.	797
	LB	LONICERA NITIDA 'BAGGESEN'S GOLD'	BOXLEAF HONEYSUCKLE	2 GAL	20% @ 36" o.c.	797
	VC	VINCA MINOR `BOWLES`	BOWLES` COMMON PERIWINKLE	1 GAL	20% @ 36" o.c.	797
▧		OUTER WOODLAND PLANTING				137,075 SF
	CL	CAMASSIA LEICHTLINII	GREAT CAMAS	1 GAL	8% @ 36" o.c.	1,266
	CO	CAREX OBNUPTA	SLOUGH SEDGE	1 GAL	7% @ 16" o.c.	5,608
	DC	DESCHAMPSIA CESPITOSA `NORTHERN LIGHTS`	NORTHERN LIGHTS HAIR GRASS	1 GAL	7% @ 24" o.c.	2,492
	DW	DICENTRA FORMOSA	WESTERN BLEEDING-HEART	1 GAL	8% @ 36" o.c.	1,266
	FV	FRAGARIA VIRGINIANA	WILD STRAWBERRY	1 GAL	8% @ 18" o.c.	5,065
	HD2	HOLODISCUS DISCOLOR	OCEANSPRAY	5 GAL	7% @ 48" o.c.	622
	MC3	MAHONIA AQUIFOLIUM `COMPACTA`	COMPACT OREGON GRAPE	1 GAL	7% @ 36" o.c.	1,108
	MR2	MAHONIA REPENS	CREEPING MAHONIA	1 GAL	8% @ 18" o.c.	5,065
	OR	OXALIS OREGANA	REDWOOD SORREL	1 GAL	8% @ 24" o.c.	2,848
	PM4	POLYSTICHUM MUNITUM	WESTERN SWORD FERN	1 GAL	8% @ 18" o.c.	5,065
	RM	RHODODENDRON MACROPHYLLUM	PACIFIC RHODODENDRON	5 GAL	8% @ 48" o.c.	713
	RS	RIBES SANGUINEUM	RED FLOWERING CURRANT	3 GAL	8% @ 48" o.c.	713
	SH	SALIX HOOKERIANA	DUNE WILLOW	2 GAL	8% @ 48" o.c.	713
▩		ENTRANCE/PLAZA PLANTING				9,991 SF
	AM2	ARBUTUS UNEDO 'COMPACTA'	COMPACT STRAWBERRY TREE	2.5" PLUG		9,991 SF
	CQ	CAMASSIA QUAMASH	SMALL CAMAS	2.5" PLUG		9,991 SF
	CS	CAMELLIA SASANQUA 'SETSUGEKKA'	SETSUGEKKA CAMELLIA	2.5" PLUG		9,991 SF
	CY	CAMELLIA SASANQUA 'YULETIDE'	YULETIDE CAMELLIA	2.5" PLUG		9,991 SF
	DA	DAPHNE ODORA 'AUREOMARGINATA'	GOLD-EDGED WINTER DAPHNE	2.5" PLUG		9,991 SF
	EW	ERICA X DARLEYENSIS `WHITE PERFECTION`	WHITE PERFECTION DARLEY HEATH	1 GAL	5% @ 24" o.c.	130
	GK	GERANIUM X CANTABRIGIENSE 'KARMINA'	BIOKOVO CRANESBILL	2.5" PLUG		9,991 SF
	HD	HAMAMELIS X INTERMEDIA 'DIANE'	DIANE WITCH HAZEL	2.5" PLUG		9,991 SF
	HA	HELLEBORUS ARGUTIFOLIUS	CORSICAN HELLEBORE	2.5" PLUG		9,991 SF
	HI	HYDRANGEA INTEGRIFOLIA	EVERGREEN CLIMBING HYDRANGEA	2.5" PLUG		9,991 SF
	HO	HYDRANGEA QUERCIFOLIA 'SNOW QUEEN'	SNOW QUEEN OAKLEAF HYDRANGEA	2.5" PLUG		9,991 SF
	II	IRIS DOUGLASIANA	DOUGLAS IRIS	2.5" PLUG		9,991 SF
	LC	LONICERA CILIOSA	ORANGE HONEYSUCKLE	2.5" PLUG		9,991 SF
	PT	PITTOSPORUM TENUIFOLIUM 'TASMAN RUFFLES'	TASMAN RUFFLES TAWHIWHI	2.5" PLUG		9,991 SF
	PC	PROSTANTHERA CUNEATA	ALPINE MINT BUSH	2 GAL	5% @ 36" o.c.	59
	RN	ROSA X 'NOARE'	FLOWER CARPET RED GROUNDCOVER ROSE	2.5" PLUG		9,991 SF
	SH2	SARCOCOCCA HOOKERIANA HUMILIS	TRAILING SWEETBOX	2.5" PLUG		9,991 SF
	VP	VERONICA PEDUNCULARIS 'GEORGIA BLUE'	GEORGIA BLUE SPEEDWELL	2.5" PLUG		9,991 SF
▦		CENTRAL CIRCLE PLANTING				24,195 SF
	AM2	ARBUTUS UNEDO 'COMPACTA'	COMPACT STRAWBERRY TREE	2.5" PLUG		24,195 SF
	CQ	CAMASSIA QUAMASH	SMALL CAMAS	2.5" PLUG		24,195 SF
	CS	CAMELLIA SASANQUA 'SETSUGEKKA'	SETSUGEKKA CAMELLIA	2.5" PLUG		24,195 SF
	CC	CYRTOMIUM CARYOTIDEUM	HOLLY FERN	2.5" PLUG		24,195 SF
	DB	DRYOPTERIS ERYTHROSORA 'BRILLIANCE'	BRILLIANCE AUTUMN FERN	2.5" PLUG		24,195 SF
	EW	ERICA X DARLEYENSIS `WHITE PERFECTION`	WHITE PERFECTION DARLEY HEATH	1 GAL	8% @ 24" o.c.	500
	IC	IRIS SIBIRICA 'CAESAR'S BROTHER'	CAESAR'S BROTHER SIBERIAN IRIS	2.5" PLUG		24,195 SF
	OR2	OXALIS OREGANA	REDWOOD SORREL	1 GAL	8% @ 24" o.c.	500
	PE	PHLOX SUBULATA 'EMERALD BLUE'	EMERALD BLUE CREEPING PHLOX	2.5" PLUG		24,195 SF
	PC	PROSTANTHERA CUNEATA	ALPINE MINT BUSH	2 GAL	8% @ 36" o.c.	225
	RN	ROSA X 'NOARE'	FLOWER CARPET RED GROUNDCOVER ROSE	2.5" PLUG		24,195 SF
	SJ	STYRAX JAPONICUS	JAPANESE SNOWBELL	2.5" PLUG		24,195 SF

KMB architects
906 Columbia Street SW, Suite 400
Olympia, Washington 98501
811 First Ave, Suite 500
Seattle, Washington 98104
www.KMB-architects.com
360.352.8883

KMB Project # 23069

AHBL
TACOMA · SEATTLE · SPOKANE · TRI-CITIES
1200 6th Avenue, Suite 1620 Seattle, WA 98101
206.267.2425 TEL 206.267.2429 FAX www.ahbl.com WEB

VANCOUVER WASHINGTON TEMPLE
THE CHURCH OF JESUS CHRIST OF LATER-DAY SAINTS
1819 SE BYBEE ROAD
CAMAS, WA 98607

ORIGINAL SHEET SIZE = 30 x 42
HALF SIZE REDUCTIONS = 15 x 21

REVISIONS:

DATE:
2024.08.09

LAND USE PERMIT

SHEET NO.
L116
PLANT SCHEDULE

SOIL NOTES

1. SOIL INSTALLATION SHALL CONFORM TO ALL CITY OF CAMAS REQUIREMENTS.
2. SOIL EXTENTS APPROXIMATE, CONTRACTOR RESPONSIBLE FOR REPLANTING ALL AREAS DISTURBED BY CONSTRUCTION.
3. SEE L502 FOR PLANTING DETAILS.

SOIL PREPARATION SCHEDULE

SYMBOL	DESCRIPTION	QTY
⁘	8" DEPTH SOIL, SEED AREAS	11,607 SF
▦	12" DEPTH SOIL, SHRUB AND GROUNDCOVERS	202,270 SF

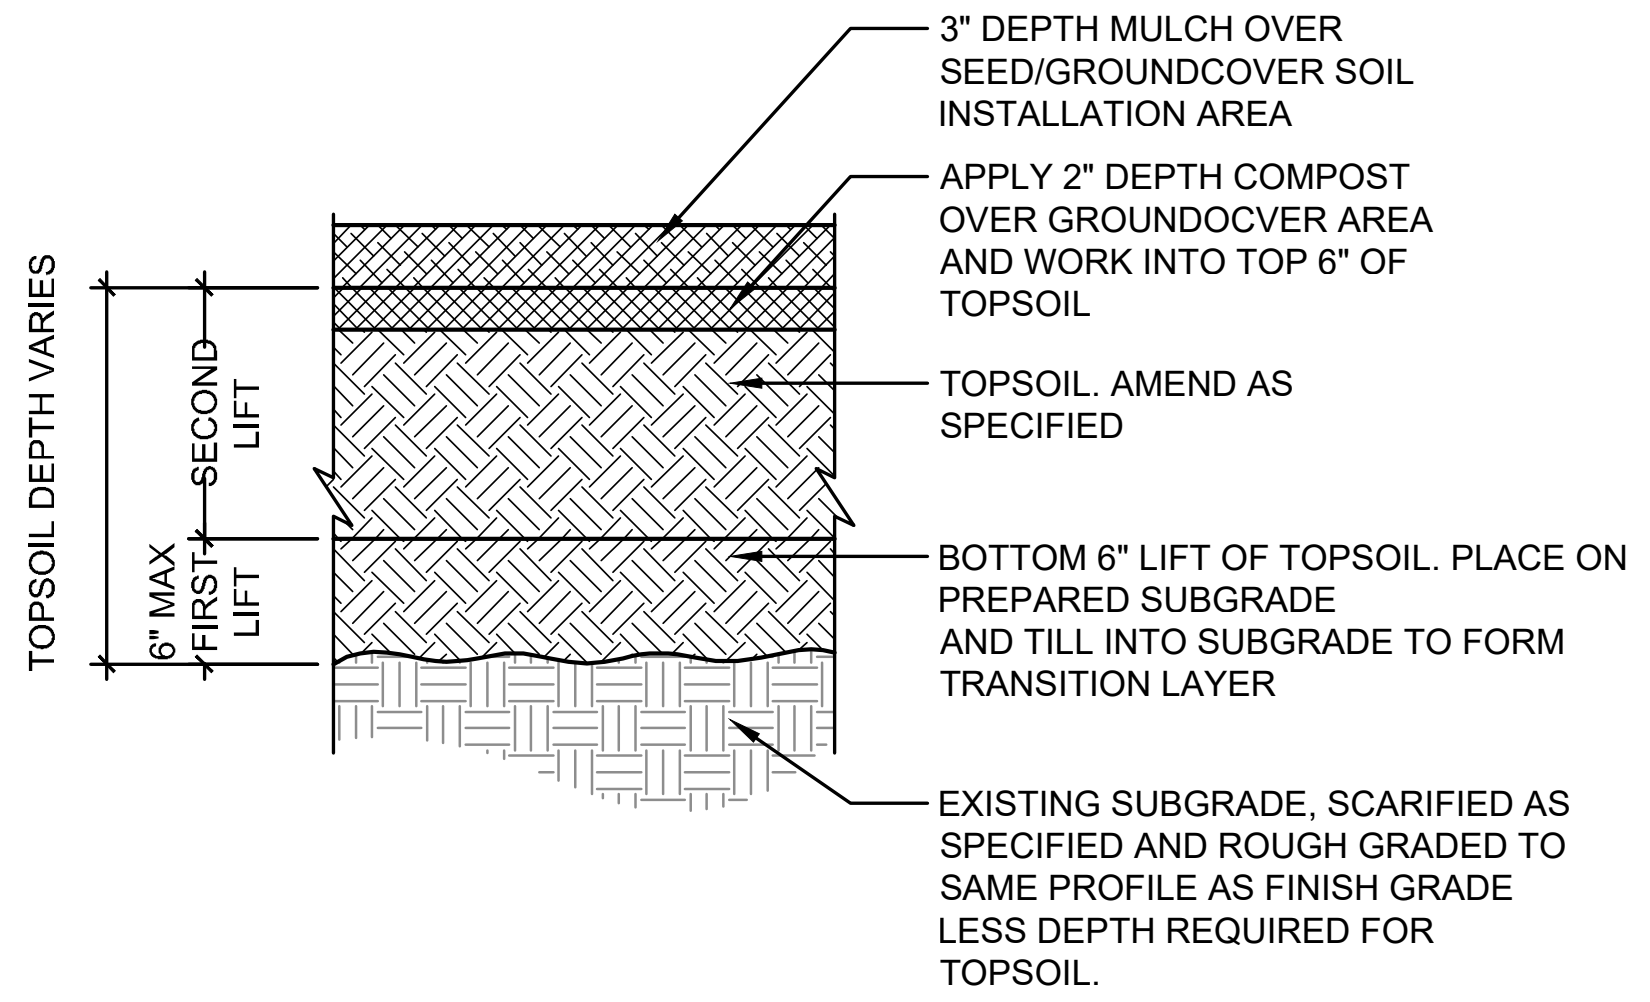
3" DEPTH MULCH OVER SEED/GROUNDCOVER SOIL INSTALLATION AREA
APPLY 2" DEPTH COMPOST OVER GROUNDOCVER AREA AND WORK INTO TOP 6" OF TOPSOIL
TOPSOIL. AMEND AS SPECIFIED
BOTTOM 6" LIFT OF TOPSOIL. PLACE ON PREPARED SUBGRADE AND TILL INTO SUBGRADE TO FORM TRANSITION LAYER
EXISTING SUBGRADE, SCARIFIED AS SPECIFIED AND ROUGH GRADED TO SAME PROFILE AS FINISH GRADE LESS DEPTH REQUIRED FOR TOPSOIL.
TOPSOIL DEPTH VARIES
SECOND LIFT
6" MAX FIRST LIFT

① SOIL PREPARATION BMP T5.13

1" = 1'-0" P-2023-LDS-28

NOTES:
1. ALL WORK BELOW THE DRIP LINE OF EXISTING TREES SHALL BE BY HAND.
2. PRIOR TO SURFACE PREPARATION, OUTLINE OF EACH BED SHALL BE STAKED BY CONTRACTOR IN ORDER FOR LANDSCAPE ARCHITECT TO REVIEW MULCHING AND PLANTING PLAN AT START OF WORK, TO MINIMIZE IMPACT TO EXISTING ROOT ZONE.

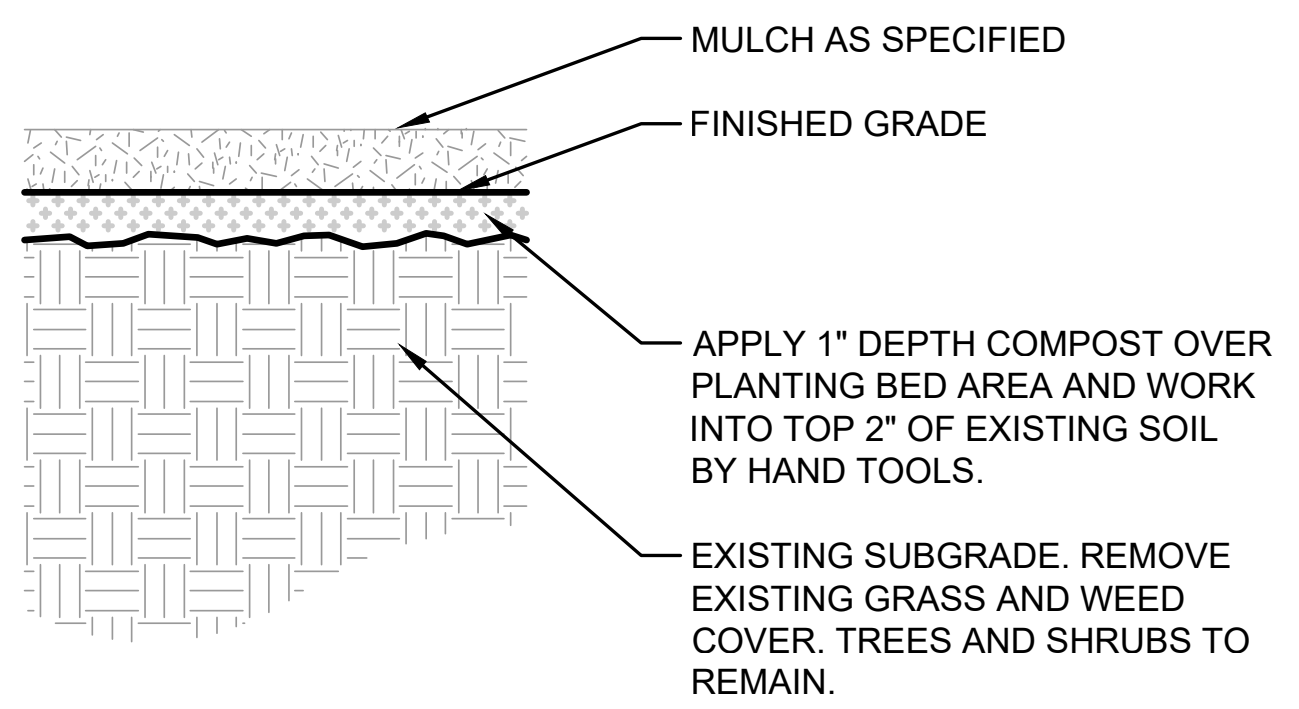
MULCH AS SPECIFIED
FINISHED GRADE
APPLY 1" DEPTH COMPOST OVER PLANTING BED AREA AND WORK INTO TOP 2" OF EXISTING SOIL BY HAND TOOLS.
EXISTING SUBGRADE. REMOVE EXISTING GRASS AND WEED COVER. TREES AND SHRUBS TO REMAIN.

② SOIL PREPARATION AT EXISTING TREES

1" = 1'-0" P-2023-LDS-04

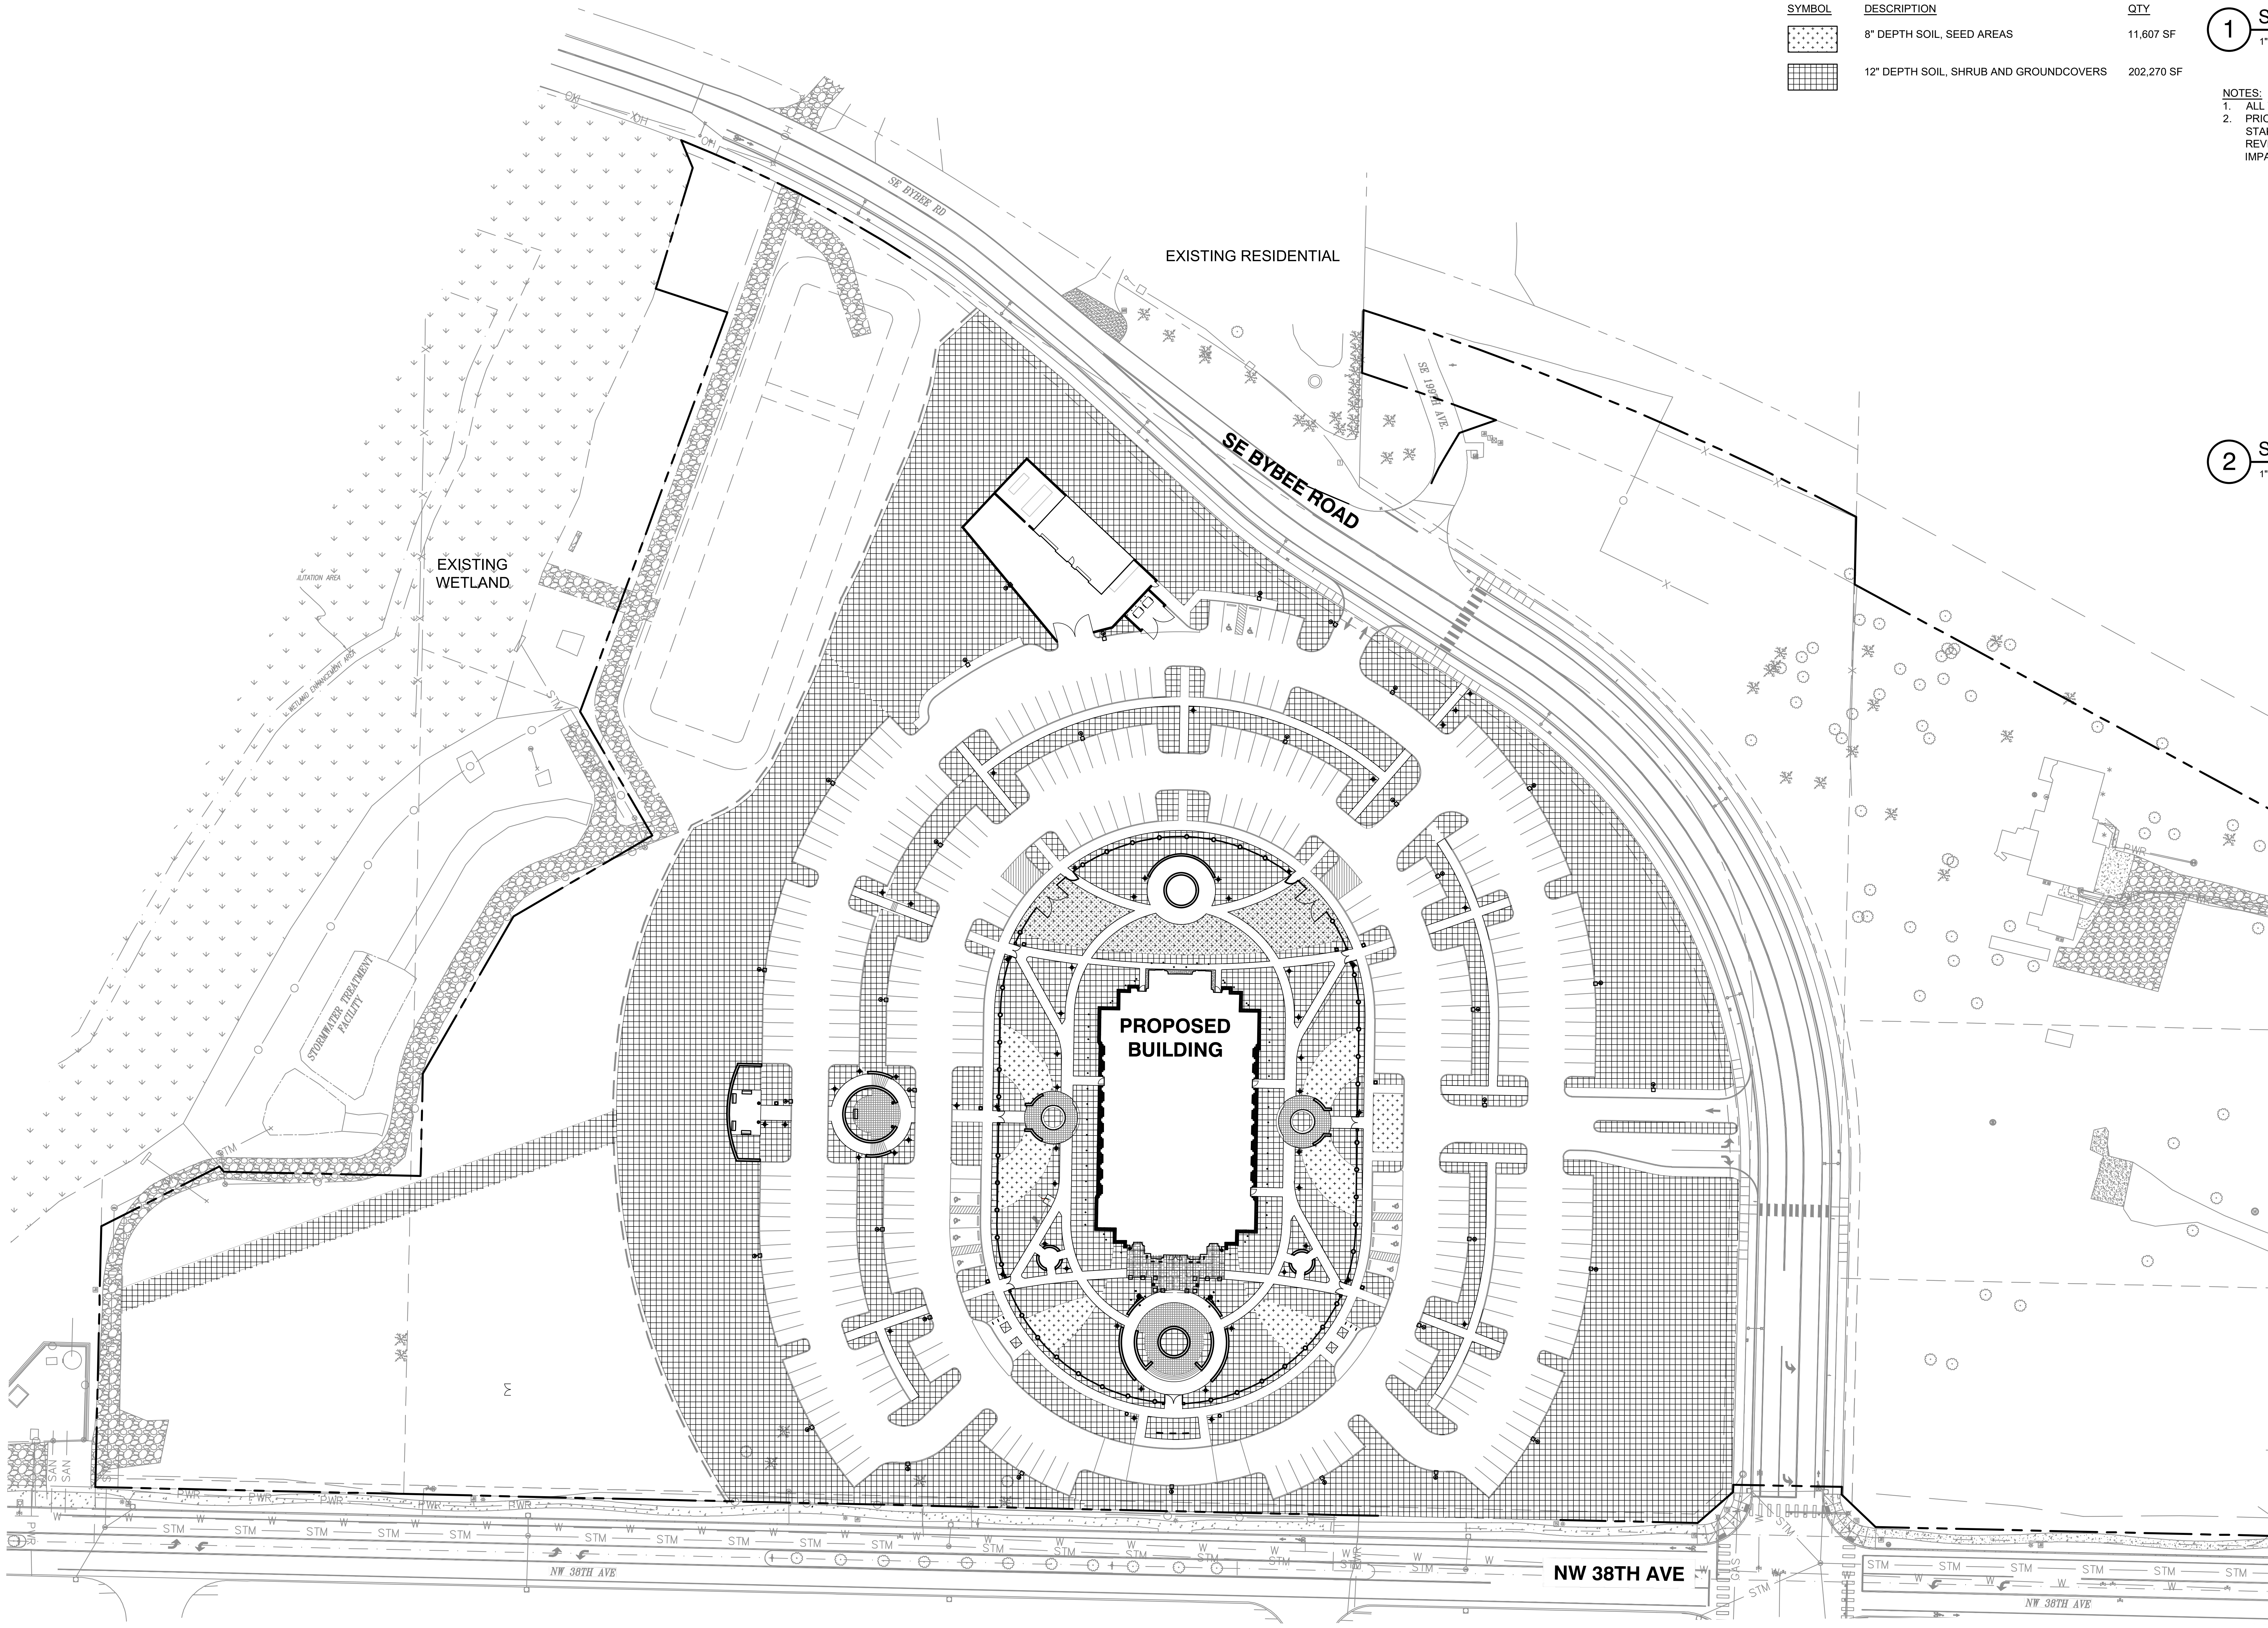
EXISTING RESIDENTIAL
SE BYBEE ROAD
SE BYBEE RD
EXISTING WETLAND
STORMWATER TREATMENT FACILITY
PROPOSED BUILDING
NW 38TH AVE
STM
W

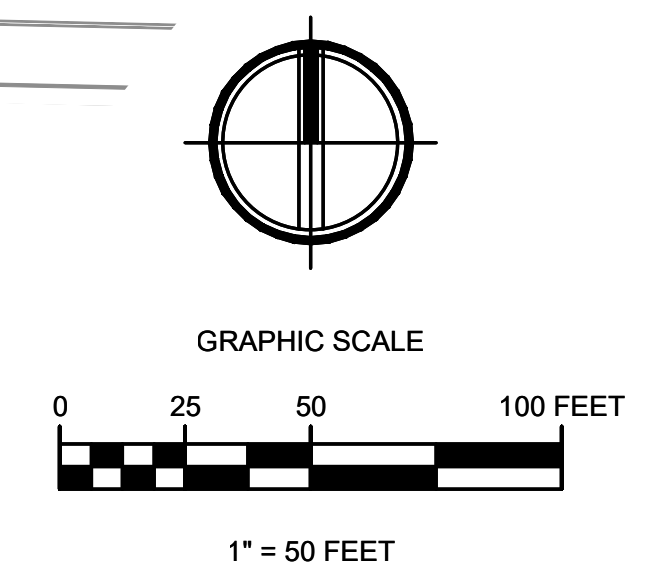
GRAPHIC SCALE
0
25
50
100 FEET
1" = 50 FEET

KMB architects
906 Columbia Street SW, Suite 400
Olympia, Washington 98501
811 First Ave, Suite 500
Seattle, Washington 98104
www.KMB-architects.com
360.352.8883

KMB Project # 23069

AHBL
TACOMA · SEATTLE · SPOKANE · TRI-CITIES
1200 6th Avenue, Suite 1620 Seattle, WA 98101
206.267.2425 TEL 206.267.2429 FAX www.ahbl.com WEB

VANCOUVER WASHINGTON TEMPLE
THE CHURCH OF JESUS CHRIST OF LATER-DAY SAINTS

1819 SE BYBEE ROAD
CAMAS, WA 98607

ORIGINAL SHEET SIZE = 30 x 42
HALF SIZE REDUCTIONS = 15 x 21

REVISIONS:

DATE:
2024.08.09

LAND USE PERMIT

SHEET NO.
L117
SOILS PLAN

Exhibit 7 SPRV24-1001

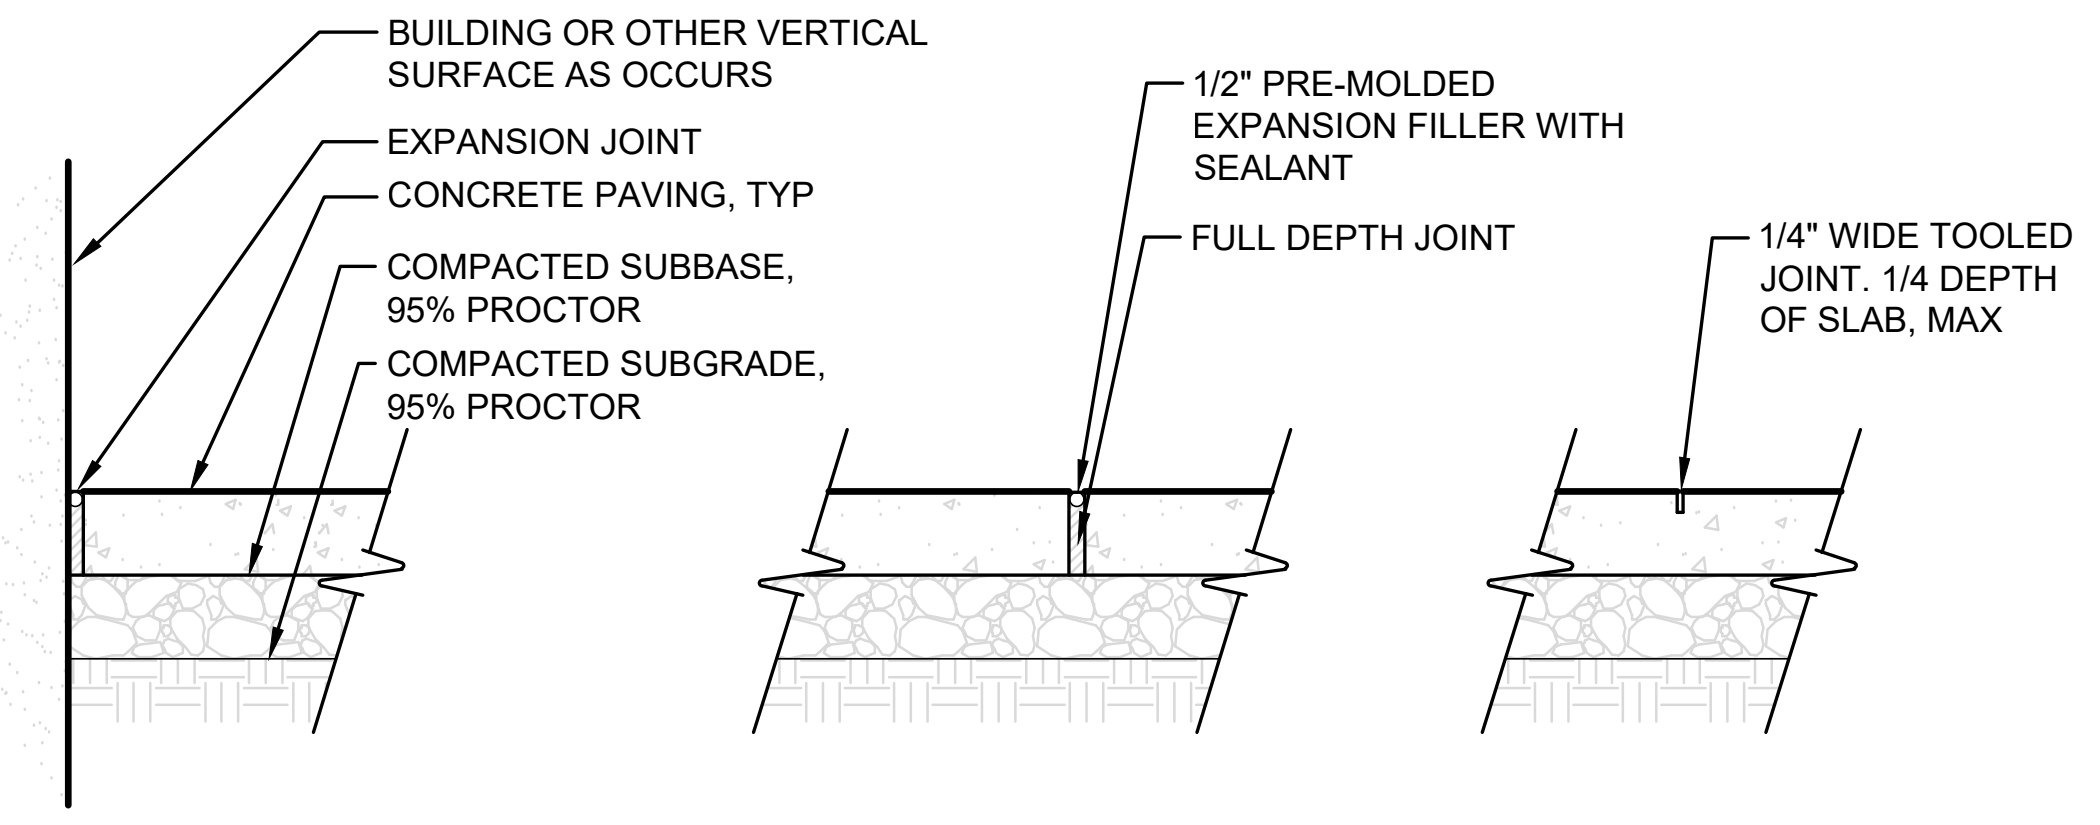
BUILDING OR OTHER VERTICAL SURFACE AS OCCURS
EXPANSION JOINT
CONCRETE PAVING, TYP
COMPACTED SUBBASE, 95% PROCTOR
COMPACTED SUBGRADE, 95% PROCTOR
1/2" PRE-MOLDED EXPANSION FILLER WITH SEALANT
FULL DEPTH JOINT
1/4" WIDE TOOLED JOINT. 1/4 DEPTH OF SLAB, MAX

VERTICAL EDGE CONDITION

EXPANSION JOINTS

CONTRACTION JOINTS

1 CONCRETE PAVING

1" = 1'-0"

P-2023-LDS-67

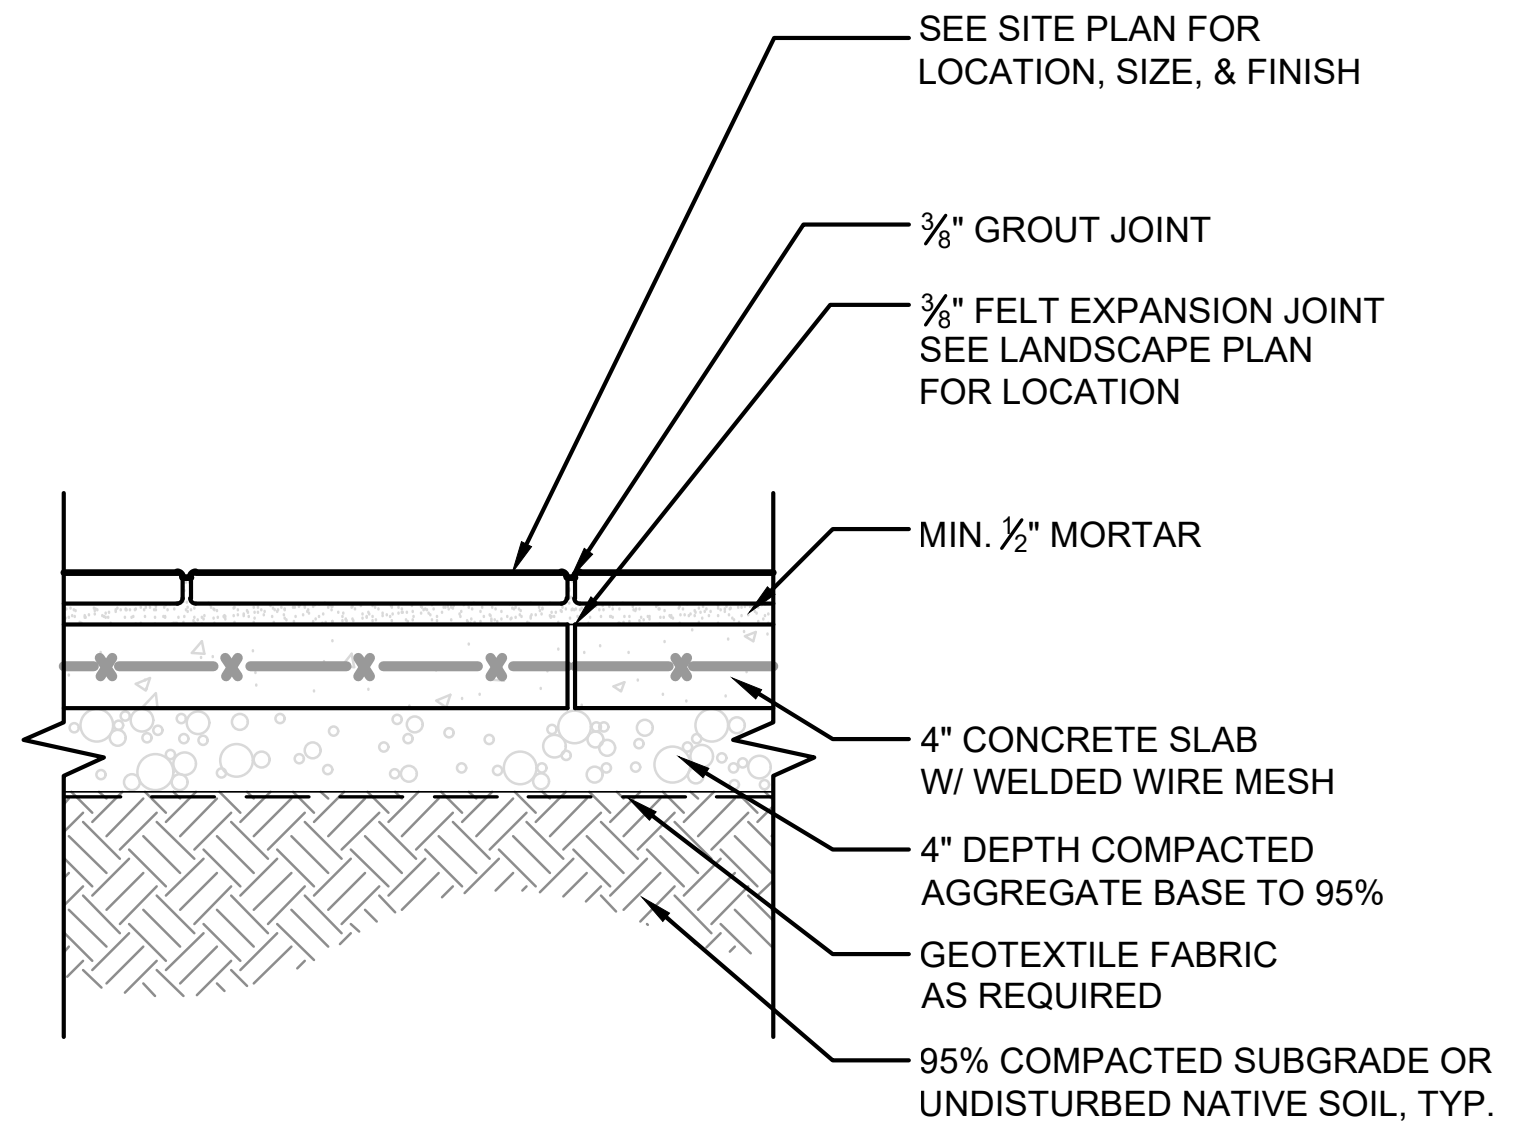
SEE SITE PLAN FOR LOCATION, SIZE, & FINISH
3/8" GROUT JOINT
3/8" FELT EXPANSION JOINT SEE LANDSCAPE PLAN FOR LOCATION
MIN. 1/2" MORTAR
4" CONCRETE SLAB W/ WELDED WIRE MESH
4" DEPTH COMPACTED AGGREGATE BASE TO 95%
GEOTEXTILE FABRIC AS REQUIRED
95% COMPACTED SUBGRADE OR UNDISTURBED NATIVE SOIL, TYP.

2 STONE PAVER ON 4" CONCRETE SLAB

1" = 1'-0"

P-2023-LDS-10

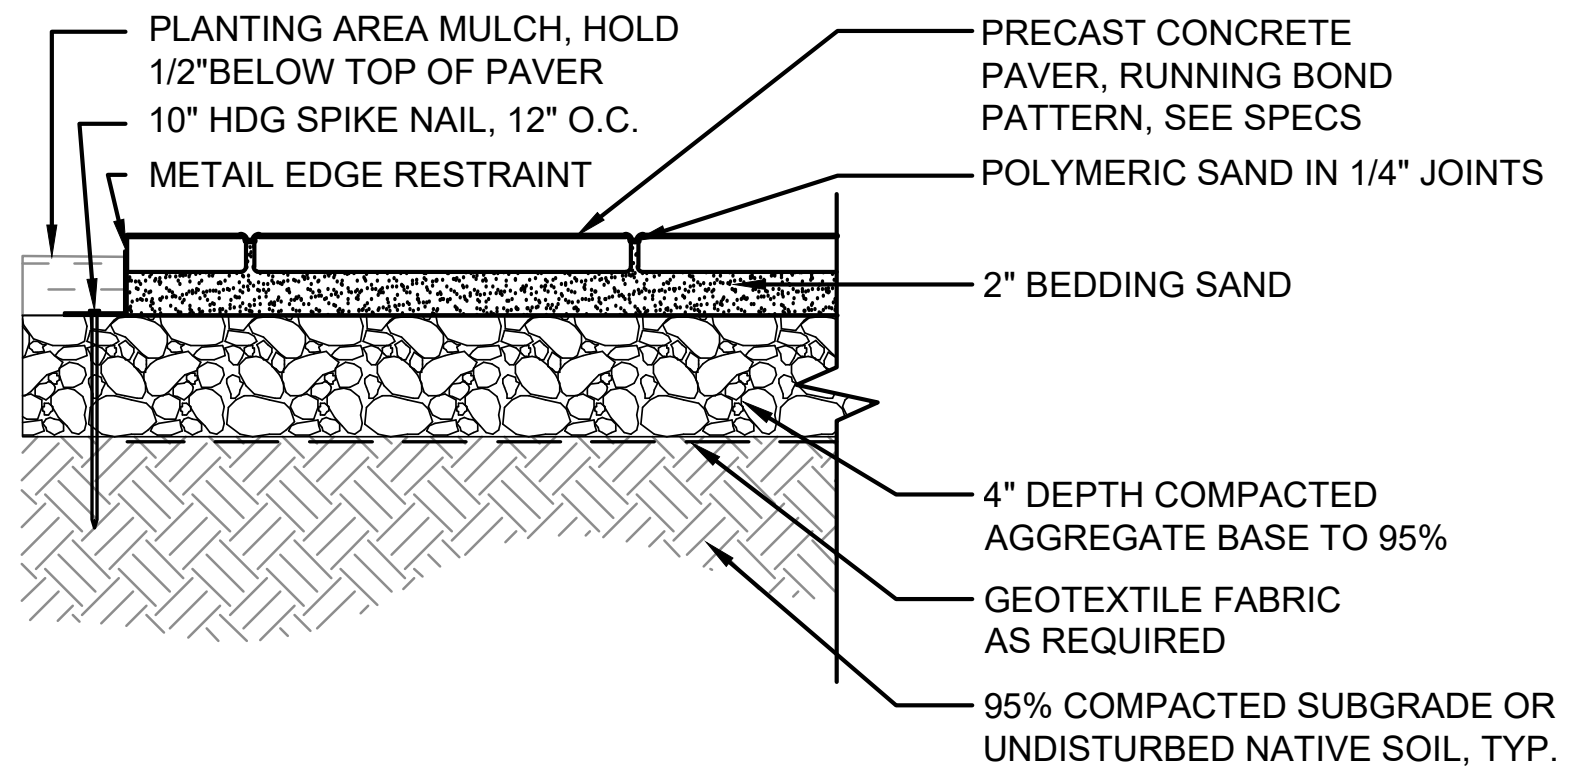
PLANTING AREA MULCH, HOLD 1/2"BELOW TOP OF PAVER
10" HDG SPIKE NAIL, 12" O.C.
METAIL EDGE RESTRAINT
PRECAST CONCRETE PAVER, RUNNING BOND PATTERN, SEE SPECS
POLYMERIC SAND IN 1/4" JOINTS
2" BEDDING SAND
4" DEPTH COMPACTED AGGREGATE BASE TO 95%
GEOTEXTILE FABRIC AS REQUIRED
95% COMPACTED SUBGRADE OR UNDISTURBED NATIVE SOIL, TYP.

3 SAND SET PRECAST PAVER

1" = 1'-0"

P-2023-LDS-91

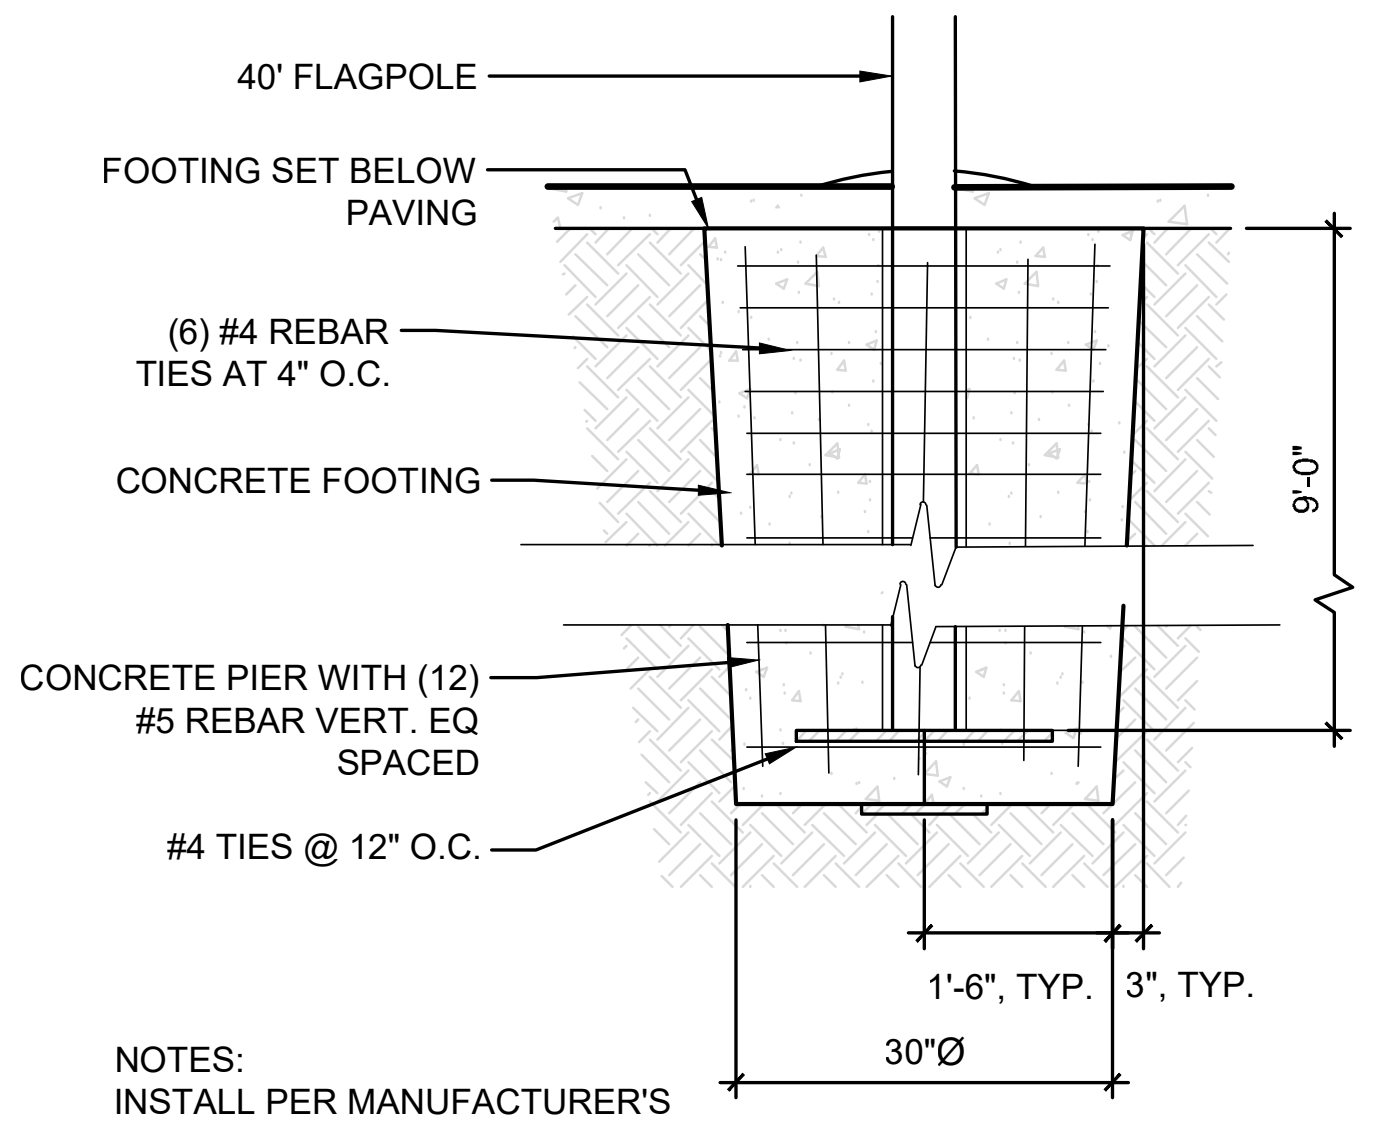
40' FLAGPOLE
FOOTING SET BELOW PAVING
(6) #4 REBAR TIES AT 4" O.C.
CONCRETE FOOTING
CONCRETE PIER WITH (12) #5 REBAR VERT. EQ SPACED
#4 TIES @ 12" O.C.
9'-0"
1'-6", TYP.
3", TYP.
30"Ø

NOTES:
INSTALL PER MANUFACTURER'S
INSTRUCTIONS.

4 FLAGPOLE

1/2" = 1'-0"

KMB architects
906 Columbia Street SW, Suite 400
Olympia, Washington 98501
811 First Ave, Suite 500
Seattle, Washington 98104
www.KMB-architects.com
360.352.8883

KMB Project # 23069

AHBL
TACOMA · SEATTLE · SPOKANE · TRI-CITIES
1200 6th Avenue, Suite 1620 Seattle, WA 98101
206.267.2425 TEL 206.267.2429 FAX www.ahbl.com WEB

VANCOUVER WASHINGTON TEMPLE
THE CHURCH OF JESUS CHRIST OF LATER-DAY SAINTS
1819 SE BYBEE ROAD
CAMAS, WA 98607

ORIGINAL SHEET SIZE = 30 x 42
HALF SIZE REDUCTIONS = 15 x 21

REVISIONS:

DATE:
2024.08.09

LAND USE PERMIT

SHEET NO.
L501
MATERIALS DETAILS

Exhibit 7 SPRV24-1001

NOTES:
1. TREES PLANTED TOO DEEP WITHOUT EXPOSING ROOT FLARE WILL BE REJECTED AND SHALL BE REMOVED AND REPLANTED AT PROPER DEPTH.
2. REPLACEMENT OR REPLANTING OF REJECTED TREES WILL BE DONE AT THE CONTRACTOR'S EXPENSE.
3. REMOVE EXCESS SOIL THAT MAY HAVE ACCUMULATED ABOVE THE TRUNK FLARE PRIOR TO DIGGING AT NURSERY. EXPOSE AND LOCATE TRUNK FLARE PRIOR TO PLANTING.
4. PRUNE ANY GIRDLING OR ADVENTITIOUS ROOTS PRIOR TO BACKFILLING.

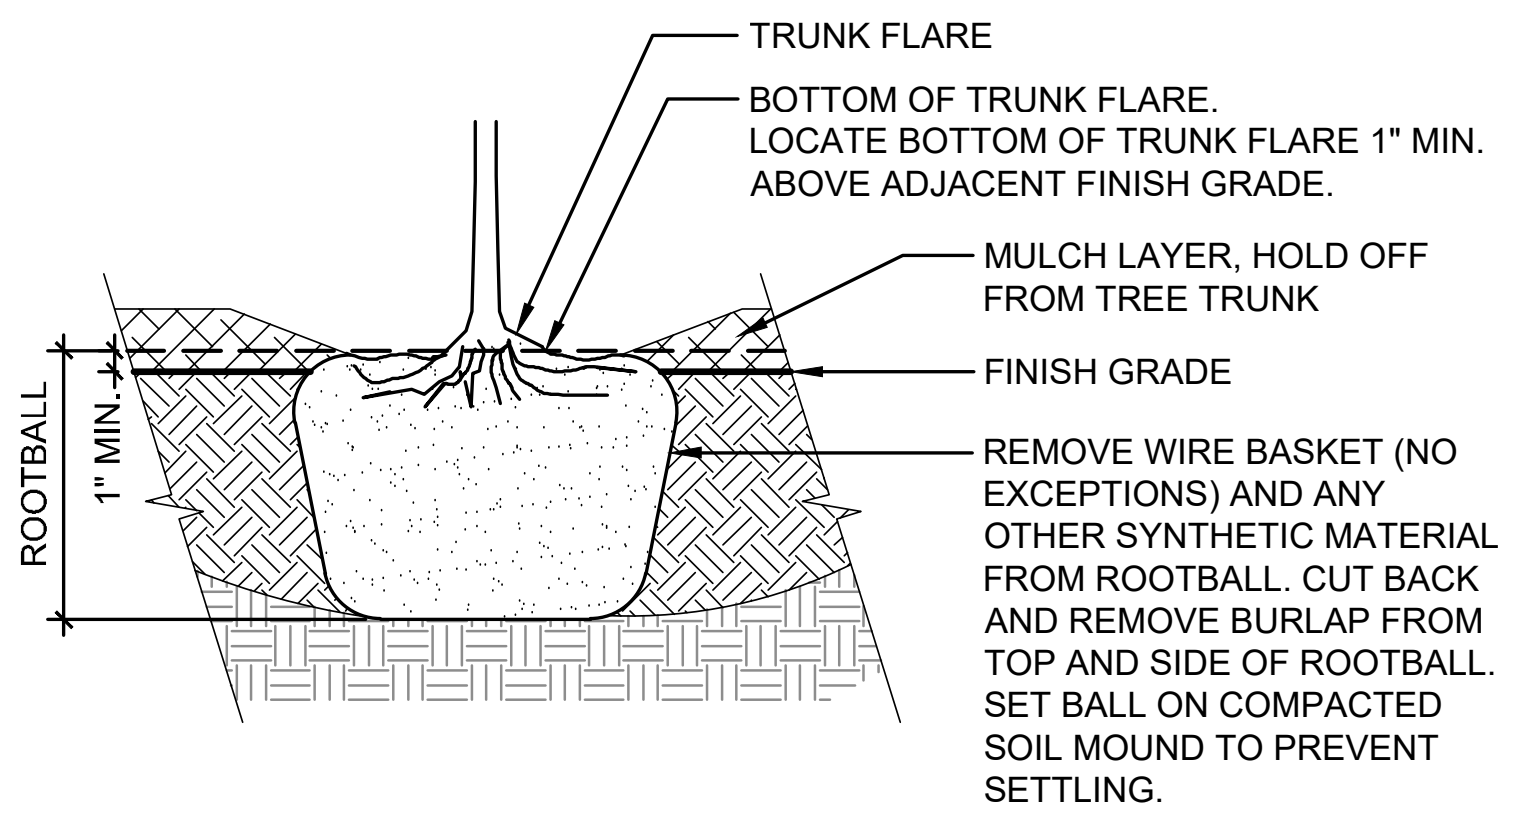
TRUNK FLARE
BOTTOM OF TRUNK FLARE. LOCATE BOTTOM OF TRUNK FLARE 1" MIN. ABOVE ADJACENT FINISH GRADE.
MULCH LAYER, HOLD OFF FROM TREE TRUNK
FINISH GRADE
REMOVE WIRE BASKET (NO EXCEPTIONS) AND ANY OTHER SYNTHETIC MATERIAL FROM ROOTBALL. CUT BACK AND REMOVE BURLAP FROM TOP AND SIDE OF ROOTBALL. SET BALL ON COMPACTED SOIL MOUND TO PREVENT SETTLING.
ROOTBALL
1" MIN.

1 ROOTBALL

1" = 1'-0"

P-2023-LDS-02

NOTE:
1. TREES NOT PLANTED IN CONFORMANCE WITH THIS DETAIL WILL BE REJECTED BY THE LANDSCAPE ARCHITECT. REPLACEMENT OF REJECTED TREES WILL BE DONE AT THE CONTRACTOR'S EXPENSE.

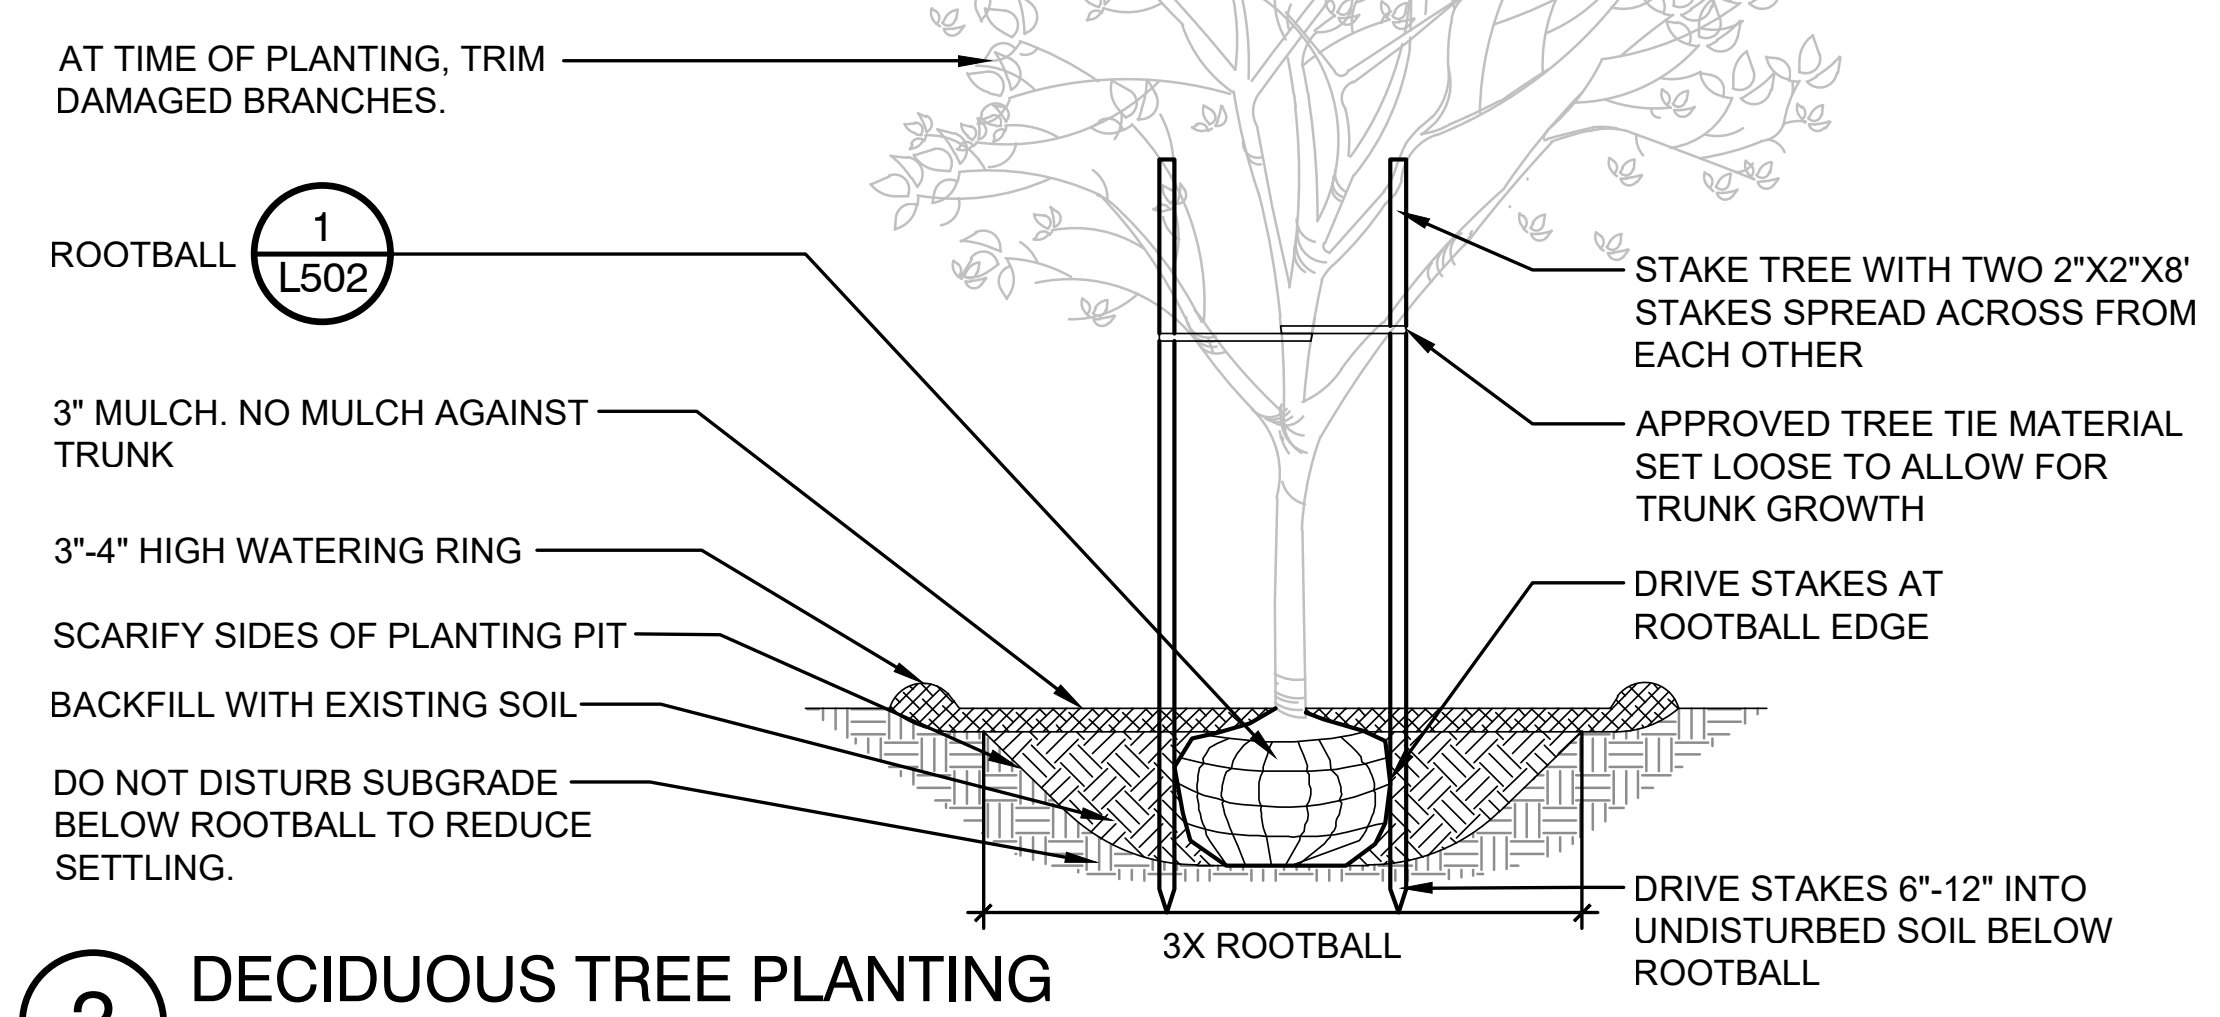
AT TIME OF PLANTING, TRIM DAMAGED BRANCHES.
ROOTBALL
1
L502
3" MULCH. NO MULCH AGAINST TRUNK
3"-4" HIGH WATERING RING
SCARIFY SIDES OF PLANTING PIT
BACKFILL WITH EXISTING SOIL
DO NOT DISTURB SUBGRADE BELOW ROOTBALL TO REDUCE SETTLING.
STAKE TREE WITH TWO 2"X2"X8' STAKES SPREAD ACROSS FROM EACH OTHER
APPROVED TREE TIE MATERIAL SET LOOSE TO ALLOW FOR TRUNK GROWTH
DRIVE STAKES AT ROOTBALL EDGE
DRIVE STAKES 6"-12" INTO UNDISTURBED SOIL BELOW ROOTBALL
3X ROOTBALL

2 DECIDUOUS TREE PLANTING

3/8" = 1'-0"

P-2023-LDS-70

NOTES:
1. TREES NOT PLANTED IN CONFORMANCE WITH THIS DETAIL WILL BE REJECTED BY THE LANDSCAPE ARCHITECT. REPLACEMENT OF REJECTED TREES WILL BE DONE AT THE CONTRACTOR'S EXPENSE.
2. PLANTING INCLUDES REMOVAL OF STAKES ONE YEAR AFTER INSTALLATION.

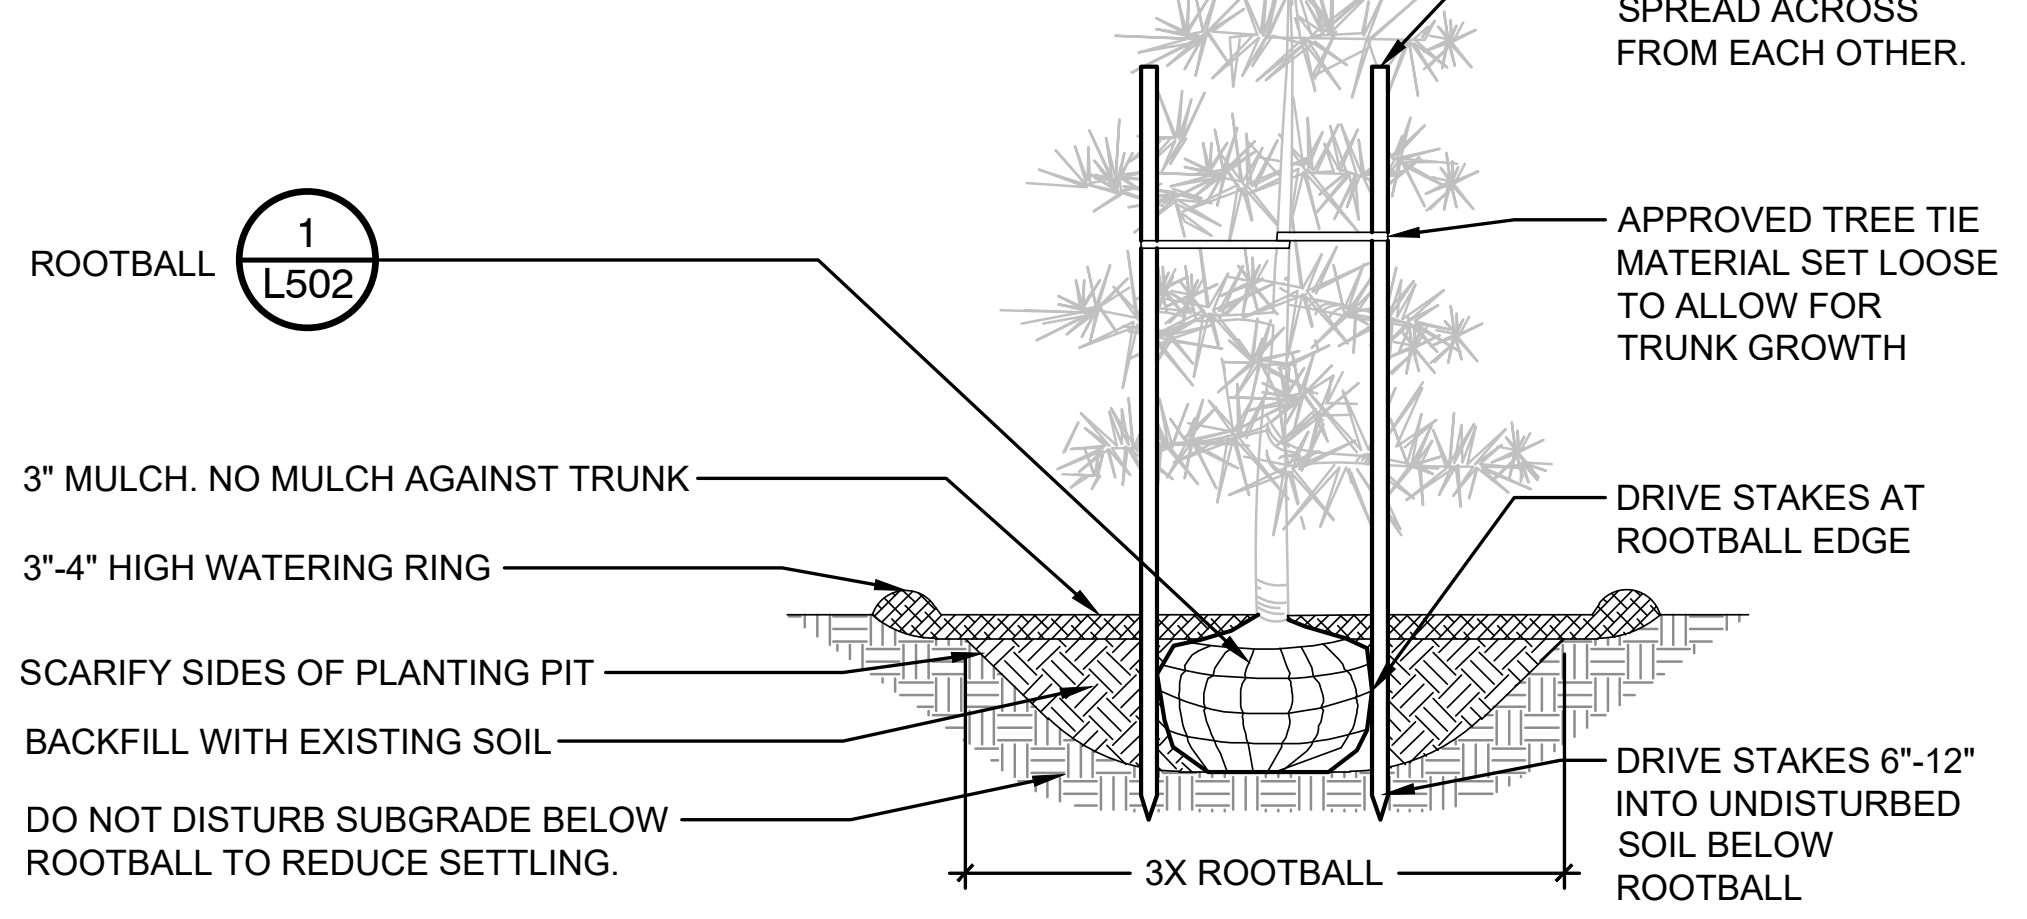
AT TIME OF PLANTING, TRIM DAMAGED BRANCHES.
STAKE TREE WITH TWO 2"X2"X8' STAKES SPREAD ACROSS FROM EACH OTHER.
ROOTBALL
1
L502
APPROVED TREE TIE MATERIAL SET LOOSE TO ALLOW FOR TRUNK GROWTH
3" MULCH. NO MULCH AGAINST TRUNK
3"-4" HIGH WATERING RING
DRIVE STAKES AT ROOTBALL EDGE
SCARIFY SIDES OF PLANTING PIT
BACKFILL WITH EXISTING SOIL
DO NOT DISTURB SUBGRADE BELOW ROOTBALL TO REDUCE SETTLING.
DRIVE STAKES 6"-12" INTO UNDISTURBED SOIL BELOW ROOTBALL
3X ROOTBALL

3 CONIFEROUS TREE PLANTING

3/8" = 1'-0"

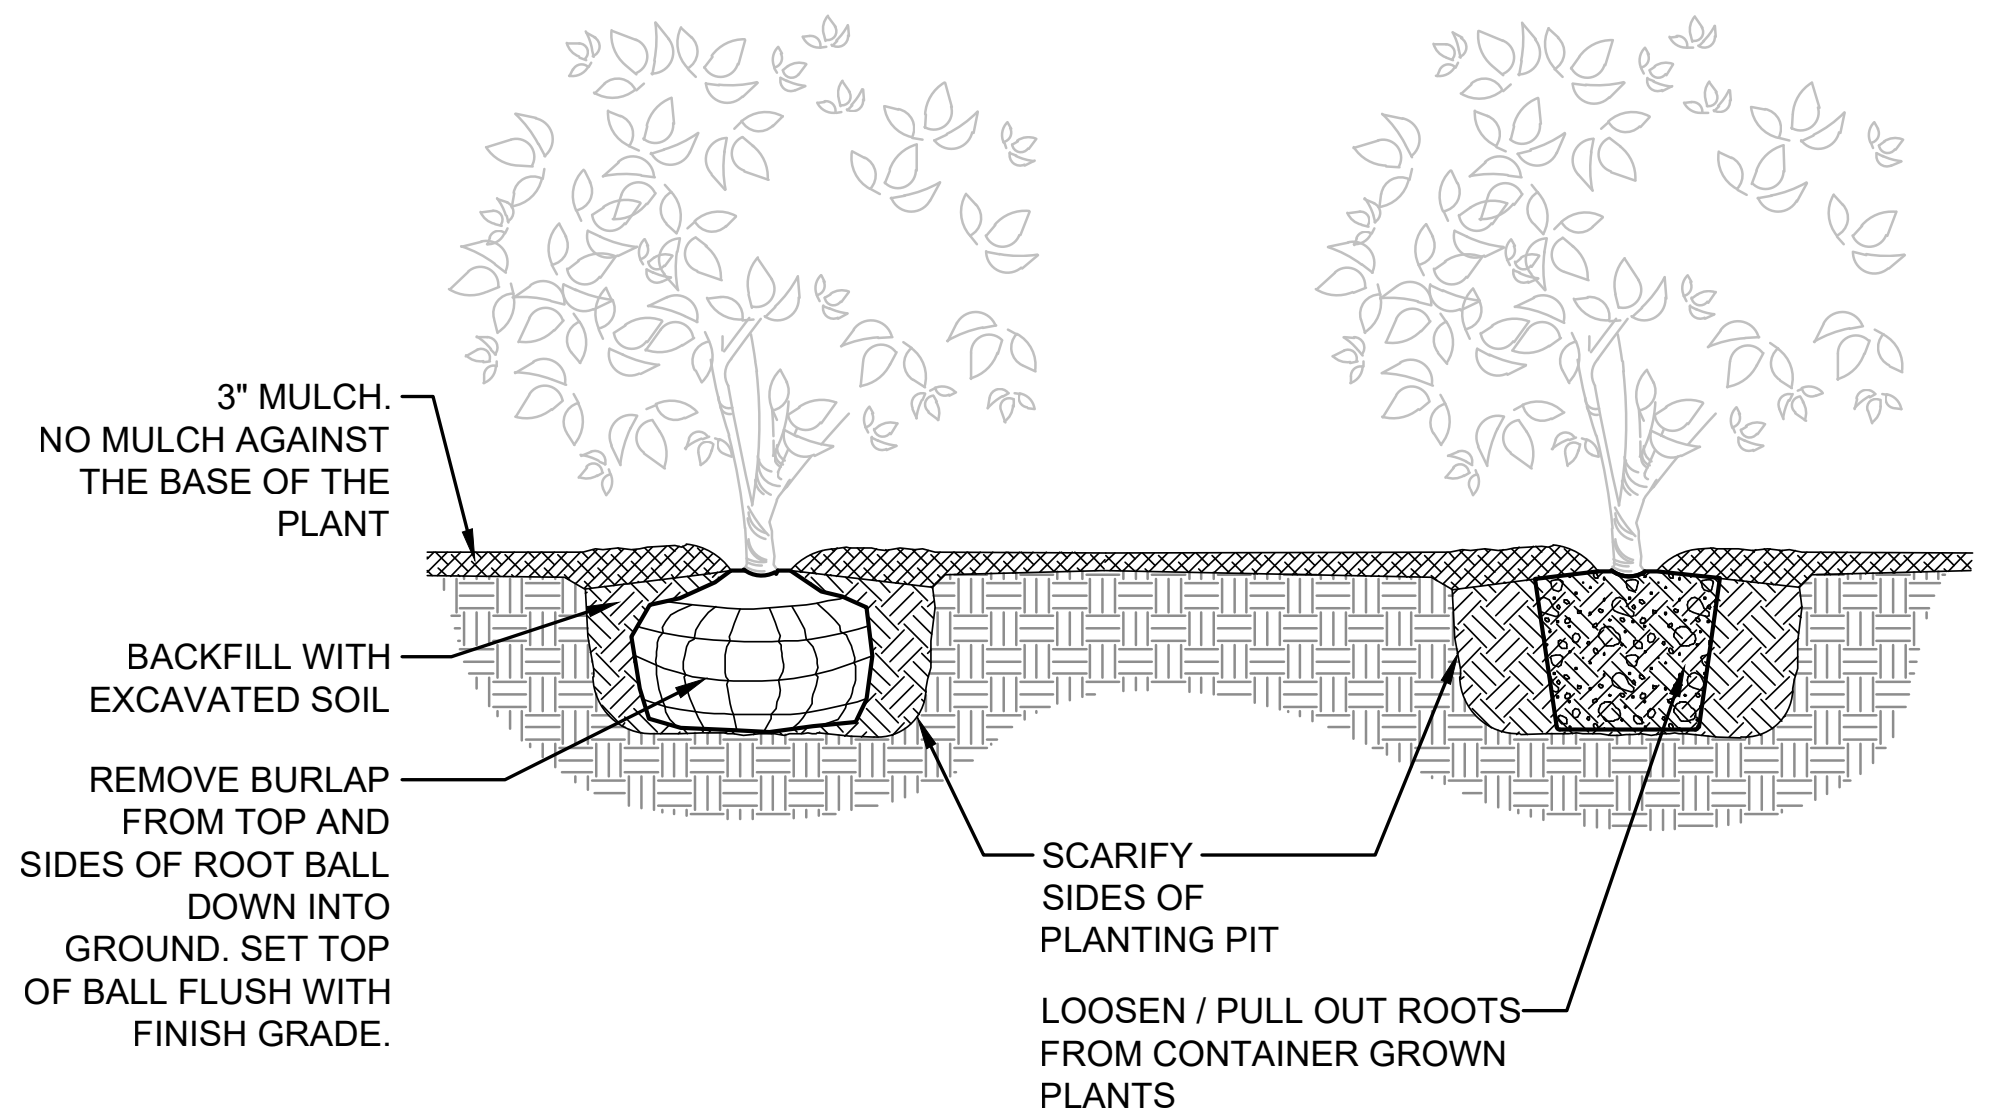
3" MULCH. NO MULCH AGAINST THE BASE OF THE PLANT
BACKFILL WITH EXCAVATED SOIL
REMOVE BURLAP FROM TOP AND SIDES OF ROOT BALL DOWN INTO GROUND. SET TOP OF BALL FLUSH WITH FINISH GRADE.
SCARIFY SIDES OF PLANTING PIT
LOOSEN / PULL OUT ROOTS FROM CONTAINER GROWN PLANTS

4 SHRUB PLANTING

NTS

P-2023-LDS-01

NOTE:
1. ALL GROUNDCOVER TO BE PLANTED AT EQUAL TRIANGULAR SPACING PER O.C. SPACING ON LEGEND.

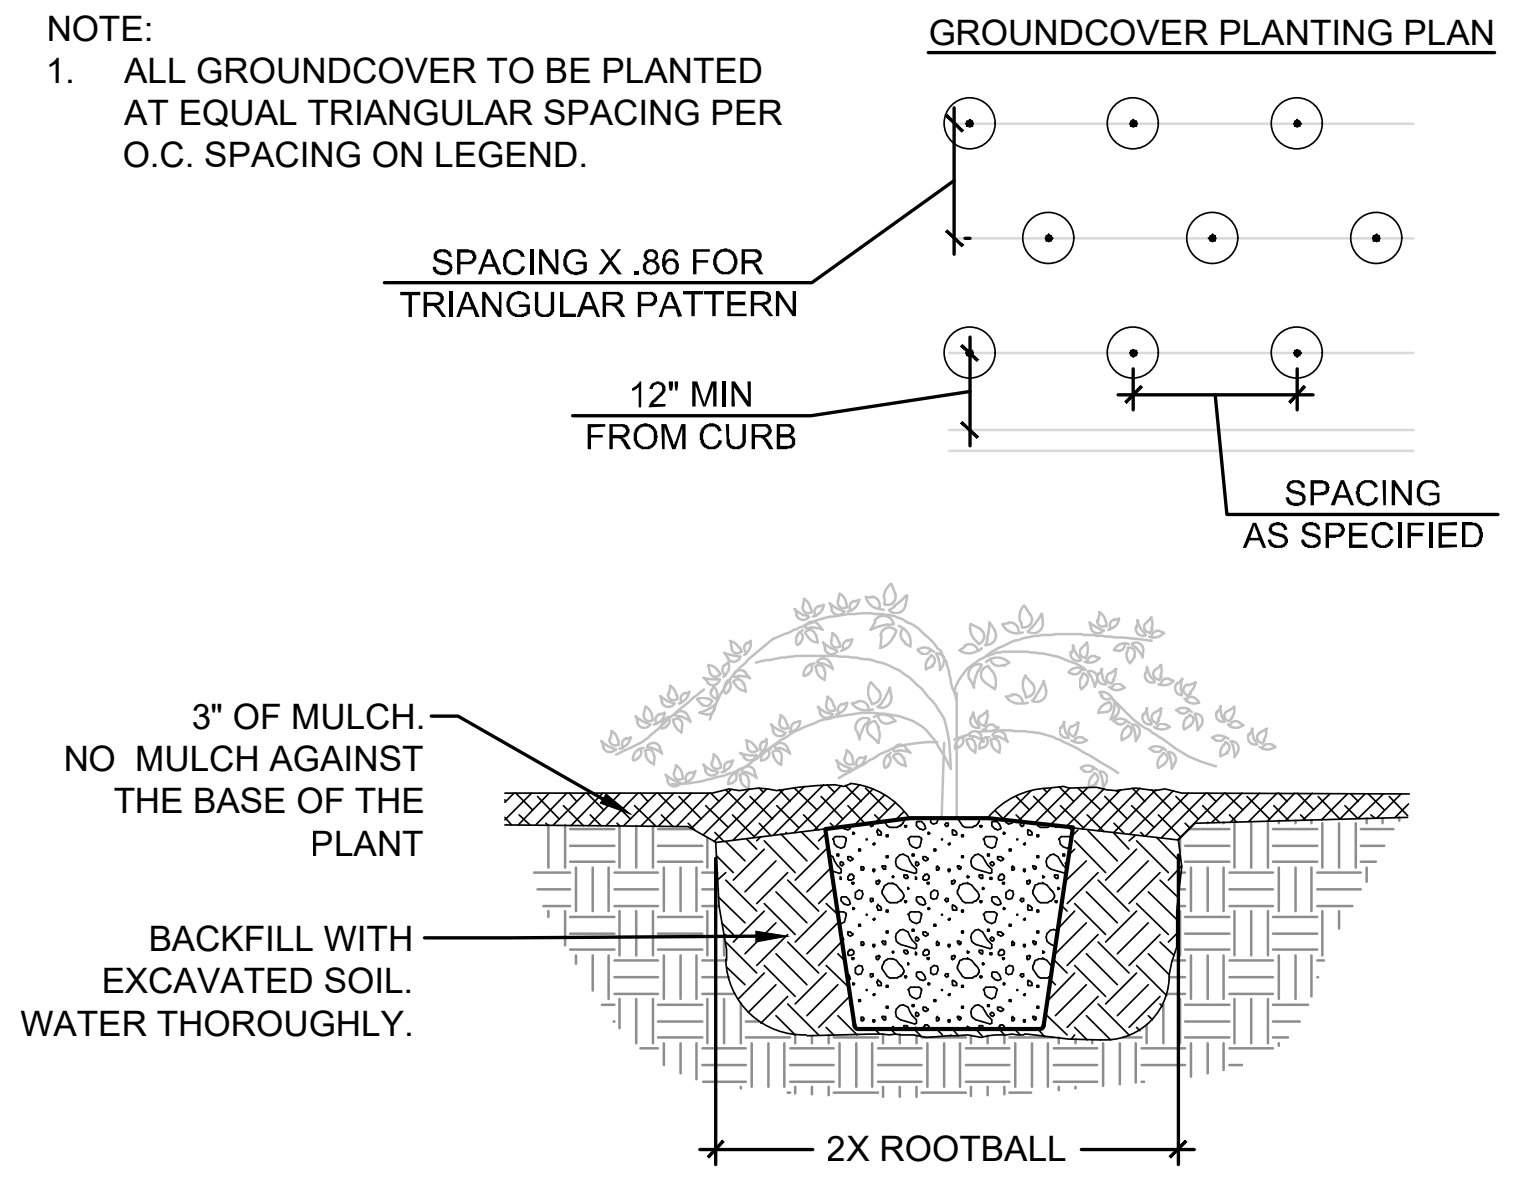
GROUNDCOVER PLANTING PLAN
SPACING X .86 FOR TRIANGULAR PATTERN
12" MIN FROM CURB
SPACING AS SPECIFIED
3" OF MULCH. NO MULCH AGAINST THE BASE OF THE PLANT
BACKFILL WITH EXCAVATED SOIL. WATER THOROUGHLY.
2X ROOTBALL

5 GROUNDCOVER PLANTING

1/2" = 1'-0"

P-2023-LDS-66

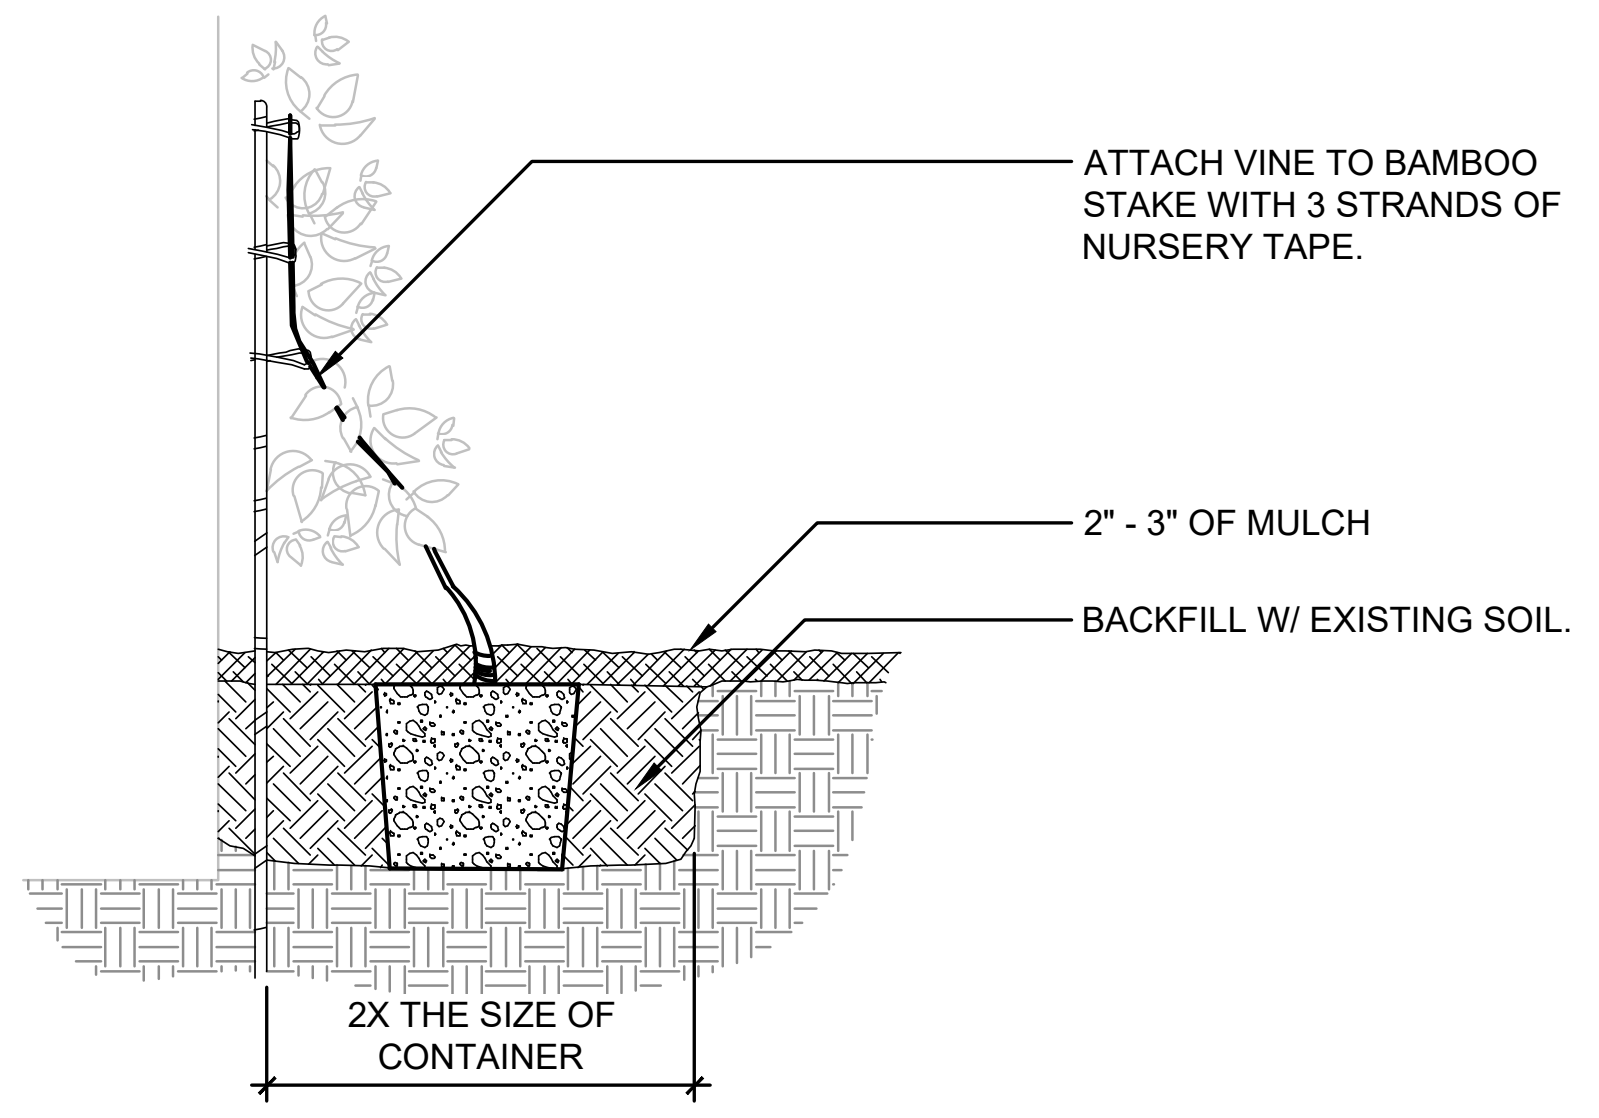
ATTACH VINE TO BAMBOO STAKE WITH 3 STRANDS OF NURSERY TAPE.
2" - 3" OF MULCH
BACKFILL W/ EXISTING SOIL.
2X THE SIZE OF CONTAINER

NOTES:
1. REFER TO SPECS FOR ADD'L INFORMATION.
2. BAMBOO STAKES SHALL BE REMOVED AFTER 1 YEAR.

6 VINE PLANTING

3/4" = 1'-0"

P-2023-LDS-60

NOTE:
INSTALL EDGING PER MANUFACTURER'S SPECIFICATIONS WITH TOP OF EDGING 1/4" TO 1/2" ABOVE COMPACTED FINISH GRADE (TURF SIDE).

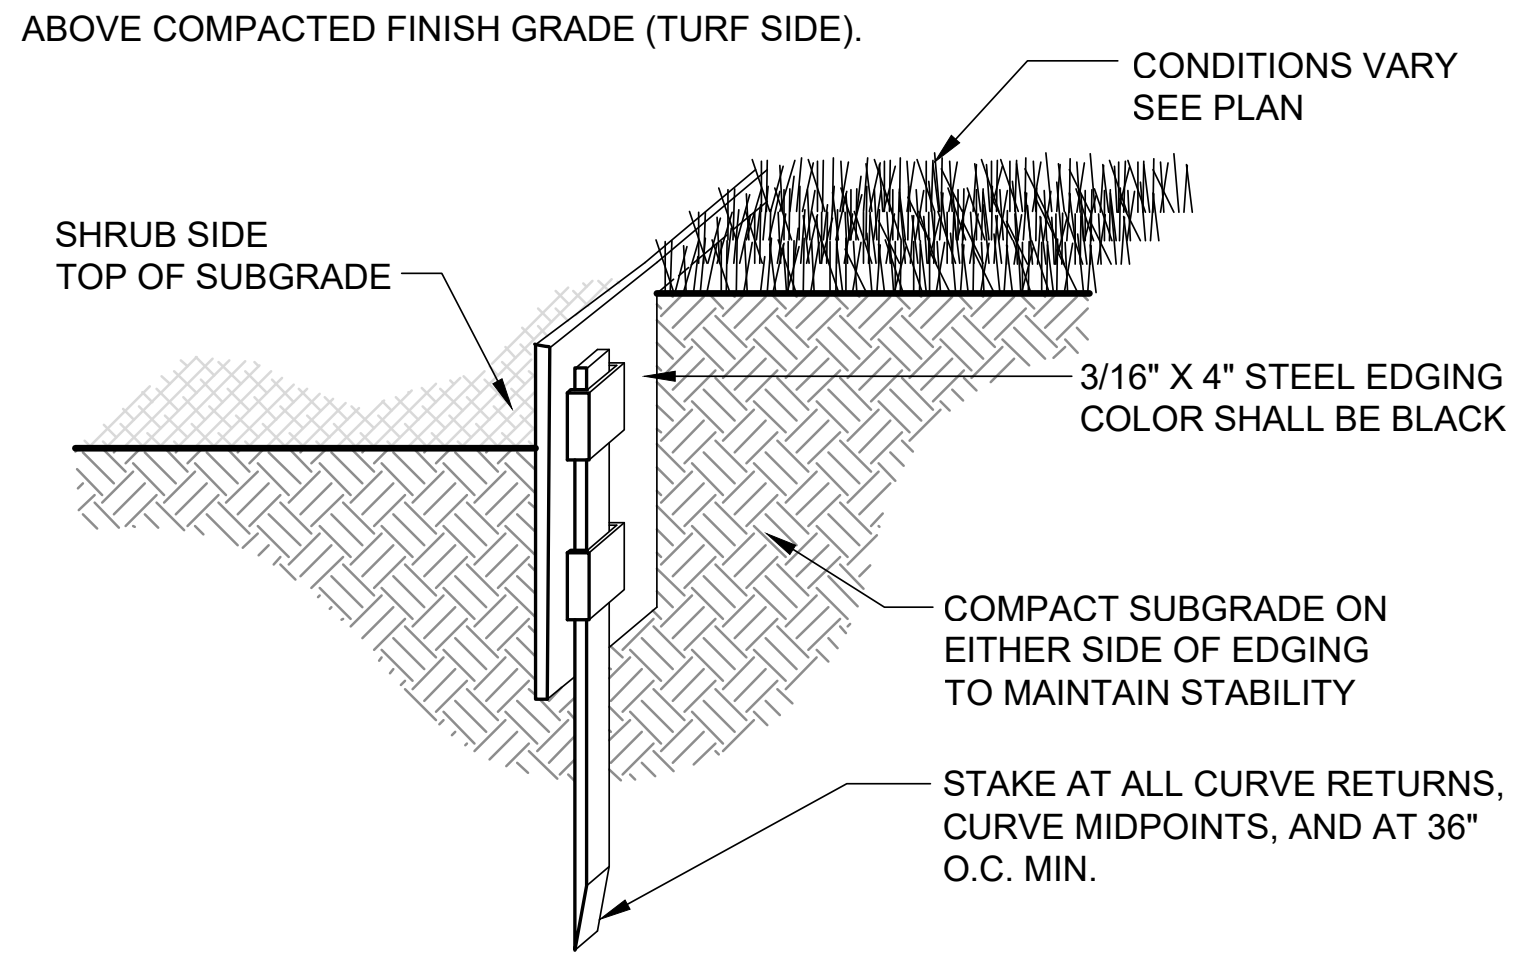
CONDITIONS VARY SEE PLAN
SHRUB SIDE TOP OF SUBGRADE
3/16" X 4" STEEL EDGING COLOR SHALL BE BLACK
COMPACT SUBGRADE ON EITHER SIDE OF EDGING TO MAINTAIN STABILITY
STAKE AT ALL CURVE RETURNS, CURVE MIDPOINTS, AND AT 36" O.C. MIN.

7 STEEL LANDSCAPE EDGING

1" = 1'-0"

DETAIL-FILE

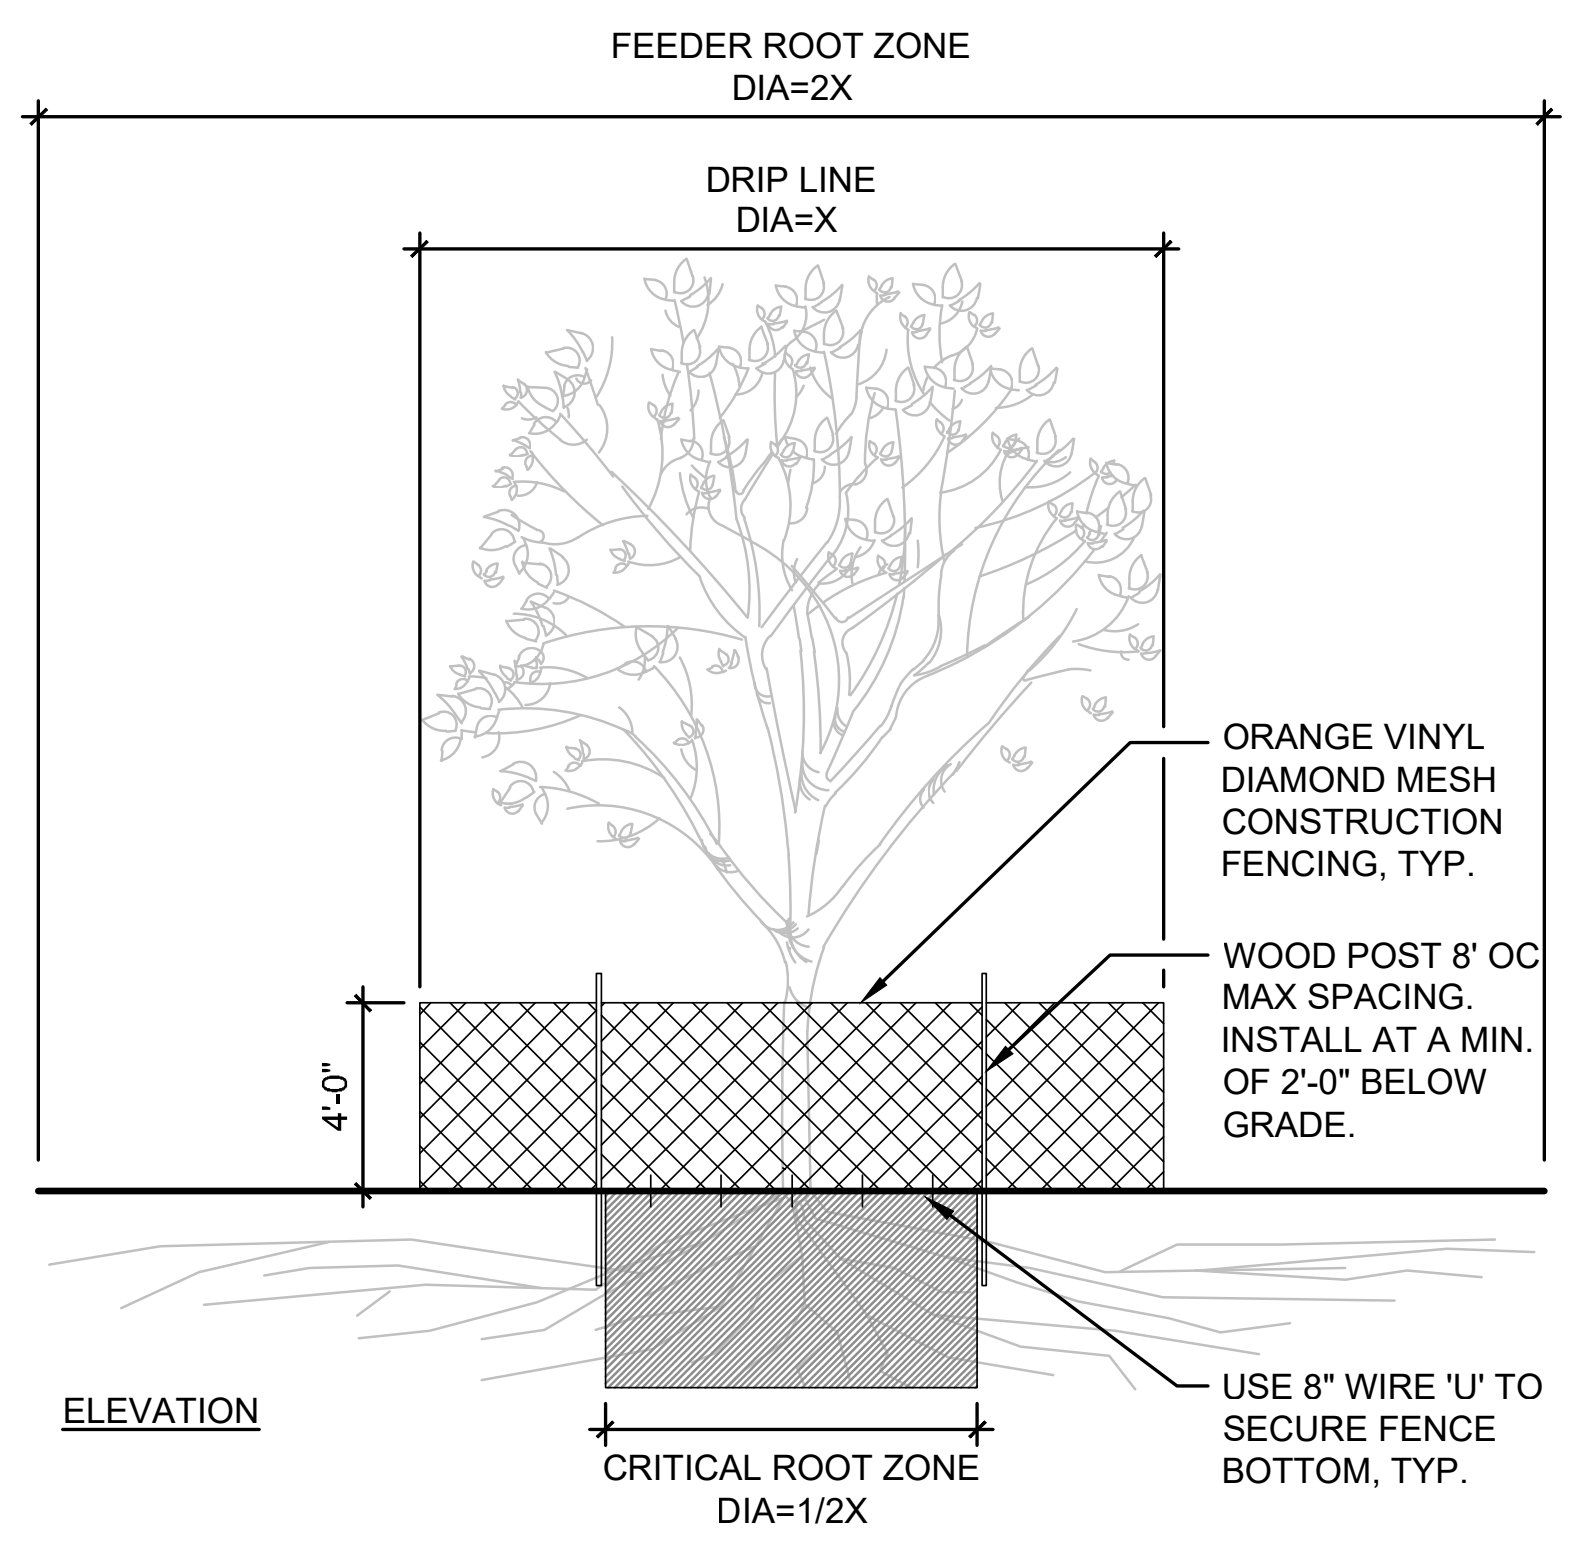
FEEDER ROOT ZONE DIA=2X
DRIP LINE DIA=X
ORANGE VINYL DIAMOND MESH CONSTRUCTION FENCING, TYP.
WOOD POST 8' OC MAX SPACING. INSTALL AT A MIN. OF 2'-0" BELOW GRADE.
4'-0"
ELEVATION
CRITICAL ROOT ZONE DIA=1/2X
USE 8" WIRE 'U' TO SECURE FENCE BOTTOM, TYP.

FENCING/ROOT PROTECTION

1. FENCING TO BE PROVIDED AND MAINTAINED AT CANOPY DRIP LINE.
2. TREE PROTECTION FENCE SHOULD BE MAINTAINED THROUGHOUT GRADING AND CONSTRUCTION AND SHALL NOT BE REMOVED UNTIL FINAL ACCEPTANCE.
3. ALL BRUSH CLEANUP WITHIN DRIP LINE SHOULD BE COMPLETED BY HAND TO PREVENT DISTURBANCE OF NATIVE GROUND COVERS.
4. NO WIRES, CABLES, OR OTHER DEVICES SHALL BE ATTACHED TO PROTECTED TREES DURING CONSTRUCTION.
5. CONTRACTOR SHALL REFER TO PLANS AND SPECIFICATIONS FOR ADDITIONAL INFORMATION.

TRENCHING/EXCAVATION

CRITICAL ROOT ZONE
1. NO DISTURBANCE ALLOWED WITHOUT SITE-SPECIFIC INSPECTION AND APPROVAL OF METHODS TO MINIMIZE ROOT DAMAGE.

DRIP LINE
1. LANDSCAPE ARCHITECT'S APPROVAL REQUIRED FOR USE/ACCESS WITHIN DRIP LINE.
2. NO SOIL DISTURBANCE OR ACTIVITY ALLOWED WITHIN FENCED AREAS, SUCH AS MATERIAL STORAGE/STOCKPILING, PARKING, EXCAVATION, DUMPING OR WASHING.
3. ANY TRENCHING SUBJECT TO FIELD INSPECTION AND APPROVAL BY LANDSCAPE ARCHITECT.

FEEDER ROOT ZONE
1. OPERATION OF HEAVY EQUIPMENT AND/OR STOCKPILING OF MATERIALS SUBJECT TO LANDSCAPE ARCHITECT'S APPROVAL.
2. MINIMIZE TRENCH WIDTH WHEN USING HEAVY EQUIPMENT. SURFACE PROTECTION* MEASURES MAY BE REQUIRED.
3. LIMIT ANY DISTURBANCE TO MAXIMUM 1/3 OF FEEDER ROOT ZONE.
4. IF ROOTS GREATER THAN 2 INCH FOUND OUTSIDE OF FENCING, PROTECT BY HAND EXCAVATION AND, IF NECESSARY, CUT CLEANLY AND KEEP MOIST.
5. USE 3 INCHES OR DEEPER WOOD CHIP MULCH OUTSIDE FENCED AREAS TO PROTECT FEEDER ROOTS.

*SURFACE PROTECTION MEASURES
6-8" MULCH LAYER, 3/4"PLYWOOD, OR STEEL PLATES

8 TREE PROTECTION DETAIL

3/16" = 1'-0"

DETAIL-FILE

KMB architects
906 Columbia Street SW, Suite 400
Olympia, Washington 98501
811 First Ave, Suite 500
Seattle, Washington 98104
www.KMB-architects.com
360.352.8883

KMB Project # 23069

AHBL
TACOMA · SEATTLE · SPOKANE · TRI-CITIES
1200 6th Avenue, Suite 1620 Seattle, WA 98101
206.267.2425 TEL 206.267.2429 FAX www.ahbl.com WEB

VANCOUVER WASHINGTON TEMPLE
THE CHURCH OF JESUS CHRIST OF LATER-DAY SAINTS
1819 SE BYBEE ROAD
CAMAS, WA 98607

ORIGINAL SHEET SIZE = 30 x 42
HALF SIZE REDUCTIONS = 15 x 21

REVISIONS:

DATE:
2024.08.09

LAND USE PERMIT

SHEET NO.
L502
PLANTING DETAILS

Exhibit 7 SPRV24-1001

Watermark