


Symbol	Qty	Label	Arrangement	Total Lamp Lumens	LLF	Description
F2	1	F2	SINGLE	N.A.	0.913	ABL # EPANL 2x2 4000LM 80CRI 39K
PL3-Q	2	PL3-Q	4 @ 90 DEGREES	N.A.	0.913	ABL # DSX2 LED P5 40K T4M MVOLT
PL4	3	PL4	SINGLE	N.A.	0.913	ABL # DSX2 LED P5 40K T4M MVOLT
PL4-T	1	PL4-T	BACK-BACK	N.A.	0.913	ABL # DSX2 LED P5 40K T4M MVOLT
PL4-Y	2	PL4-Y	2 @ 90 DEGREES	N.A.	0.913	ABL # DSX2 LED P5 40K T4M MVOLT
WPA	10	WPA	SINGLE	N.A.	0.913	WPATWH LED ALO 40K T3M ELCW

Label	CalcType	Units	Avg	Max	Min	AvgMin	MaxMin
20' Beyond Property Line	Illuminance	Fc	0.12	1.7	0.0	N.A.	N.A.
Site_Planar	Illuminance	Fc	5.68	29.1	1.0	5.68	29.10
To Property Line	Illuminance	Fc	0.34	23.2	0.0	N.A.	N.A.

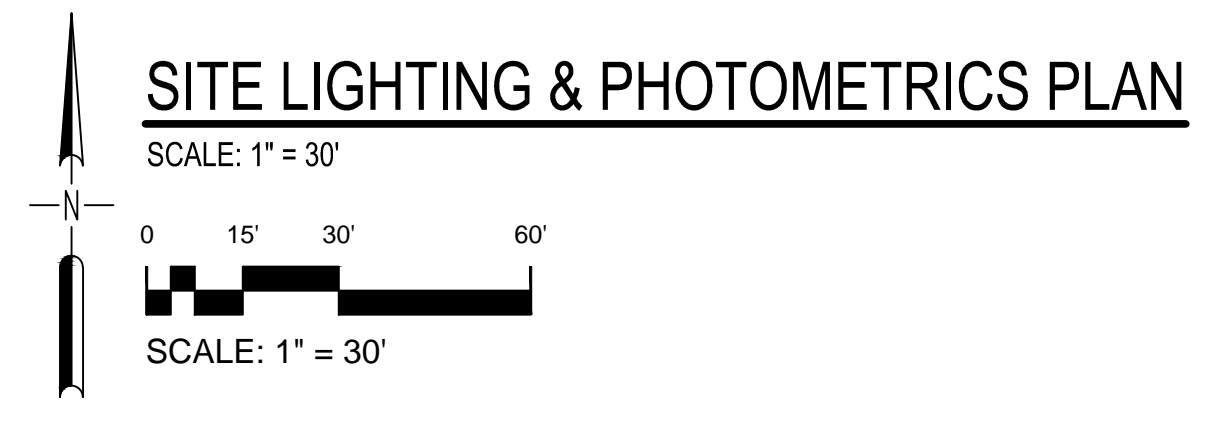

REV/DATE	BY	DESCRIPTION

PROJECT NUMBER:	1940
DRAWN BY:	RAD
CHECKED BY:	TEL
ISSUE DATE:	

NOT FOR CONSTRUCTION

LAST SAVED/PLT FILE PRINTED BY: RAD, DUKE 1/10/2023 12:32:29 PM (1940) - NH User: rad@clgk.com - photometrics.dwg