

Filename: \\Ldg-1\f\Projects\19012\19012-00\Pdata\DTA LANDSCAPE.dwg Plot Time: 4/4/2022 11:35:14 AM

<u>32 EXTERIOR IMPROVEMENTS</u> DESCRIPTION		DETAIL
STEEL EDGING	145 LF	
32 EXTERIOR IMPROVEMENTS DESCRIPTION		DETAIL
TRIPLE HAMMERED HARDWOOD MULCH (3" THICK)	258.17 CY	
ROCK DESCRIPTION		DETAIL
TAN CREEK STONE - 3-4" SIZE (WITH FILTER FABRIC)	22.6 CY	
	DESCRIPTION STEEL EDGING 32 EXTERIOR IMPROVEMENTS DESCRIPTION TRIPLE HAMMERED HARDWOOD MULCH (3" THICK) ROCK DESCRIPTION TAN CREEK STONE - 3-4" SIZE	DESCRIPTIONQTYSTEEL EDGING145 LF32 EXTERIOR IMPROVEMENTS DESCRIPTIONQTYTRIPLE HAMMERED HARDWOOD MULCH (3" THICK)258.17 CYROCK DESCRIPTIONQTYTAN CREEK STONE - 3-4" SIZE22.6 CY

PLANTING NOTES:

- 1. MATERIALS LIST WAS PREPARED FOR ESTIMATING PURPOSES, CONTRACTOR SHALL MAKE OWN QUANTITY TAKE-OFF USING DRAWINGS AND SPECIFICATIONS TO DETERMINE QUANTITIES TO HIS SATISFACTION, REPORTING PROMPTLY ANY DISCREPANCIES WHICH MAY EFFECT BIDDING ROOT TYPES MAY BE FREELY SUBSTITUTED IN CASE OF BALLED AND BURLAPPED OR CONTAINER GROWN. ALL PLANT MATERIAL MUST ADHERE TO ANSI Z60.1-2004 (AMERICAN STANDARD FOR NURSERY STOCK) SPECIFICATIONS FOR ROOT BALLS AND CONTAINER SIZES CONTRACTOR TO VERIFY THAT ALL PLANT MATERIALS ARE AVAILABLE AS SPECIFIED WHEN BID/PROPOSAL IS SUBMITTED. UNLESS SPECIFICALLY NOTED, ALL PLANTS SHALL BE OF SPECIMEN QUALITY, EXCEPTIONALLY HEAVY, SYMMETRICAL, AND SO TRAINED OR FAVORED IN DEVELOPMENT AND APPEARANCE AS TO BE UNQUESTIONABLY AND OUTSTANDINGLY SUPERIOR IN FORM, COMPACTNESS AND SYMMETRY. THEY SHALL BE SOUND, HEALTHY, VIGOROUS, WELL BRANCHED AND DENSELY FOLIATED WHEN IN LEAF; FREE OF DISEASE AND INSECTS, EGGS OR LARVAE; AND SHALL HAVE HEALTHY, WELL-DEVELOPED ROOT SYSTEMS. THEY SHALL BE FREE FROM PHYSICAL DAMAGE OR OTHER CONDITIONS THAT WOULD PREVENT VIGOROUS GROWTH SUBSTITUTIONS OF PLANT MATERIALS WILL NOT BE PERMITTED UNLESS AUTHORIZED IN WRITING BY THE LANDSCAPE ARCHITECT. IF PROOF IS SUBMITTED IN WRITING THAT A PLANT SPECIFIED IS NOT OBTAINABLE, CONSIDERATION WILL BE GIVEN TO THE NEAREST AVAILABLE SIZE OR SIMILAR VARIETY, WITH A CORRESPONDING ADJUSTMENT OF THE CONTRACT PLANTS SHALL CONFORM TO THE MEASUREMENTS SPECIFIED, EXCEPT TAT PLANTS LARGER THAN THOSE SPECIFIED MAY BE USED IF APPROVED BY THE LANDSCAPE ARCHITECT IN WRITING. USE OF LARGER PLANTS SHALL NOT INCREASE THE CONTRACT PRICE. IF LARGER PLANTS ARE APPROVED, THE ROOT BALL SHALL BE INCREASED IN PROPORTION TO THE SIZE OF THE PLAN ROOT FLARE OF PLANT MATERIAL MUST BE AT OR SLIGHTLY HIGHER THAN EXISTING GRADE. PULL MULCH BACK 6 IN. FROM 7. ROOT FLARE. TREES WITH MULTIPLE LEADERS, UNLESS SPECIFIED, WILL BE REJECTED. TREES WITH A DAMAGED OR CROOKED LEADER, 8. BARK ABRASIONS, SUNSCALD, DISFIGURING KNOTS, INSECT DAMAGE, CUTS OF LIMBS OVER 20 MM (3/4 IN.) IN DIAMETER THAT ARE NOT COMPLETELY CLOSED OR FLUSH PRUNING CUTS THAT DO NOT PRESERVE THE COLLAR AT THE BRANCH WILL **BE REJECTED** 9. TREE PLANTING DETAILS AND SPECIAL PROVISIONS FOR PLANTING MUST BE FOLLOWED. DETAILS ARE PROVIDED ON TH SHEET 10. CONTRACTOR SHALL TEST SOIL pH AND CONDITIONS FOR ALL SOD AREAS TO INSURE THAT PROPER SOIL REQUIREMENT ARE MET FOR THE SODDED LAWN. SOIL SHALL BE AMENDED BY CONTRACTOR AS INDICATED BY SOIL TEST AND SPECIFICATIONS TO ACHIEVE PROPER SOIL CONDITIONS. ALL PLANT BEDS TO RECEIVE 3" DEEP HARDWOOD MULCH, PULLED 6" AWAY FROM THE TRUNK CONTRACTOR TO MAINTAIN THE PLANTINGS AND CONTROL WEEDS IN MULCH AREAS THROUGH THE DURATION OF CONSTRUCTION UNTIL FINAL ACCEPTANCE. ALL PLANT BED AND SOD AREAS TO RECEIVE 100% IRRIGATION COVERAGE IN THE PLANT SCHEDULE, PLANTS NOTED AS "SPECIMEN", SHALL BE SELECTED BY THE LANDSCAPE ARCHITECT AT THE NURSERY OR PHOTOS OF THE PLANTING STOCK SHALL BE SUBMITTED TO THE LANDSCAPE ARCHITECT FOR APPROVAL PREEMERGENT HERBICIDE SHALL BE APPLIED TO PLANTING AREAS PRIOR TO LANDSCAPE INSTALLATION AND ACCORD TO MANUFACTURER'S INSTRUCTIONS. PLANT BED SHALL BE TESTED FOR pH AND AMENDED PRIOR TO INSTALLATION. ALL PLANT MATERIAL SHALL CONFORM TO STANDARD SET FORTH BY "AMERICAN STANDARDS FOR NURSERY STOCK" A 17. Z60.1-2004 PUBLISHED BY THE AMERICAN NURSERY AND LANDSCAPE ASSOCIATION. ALL PLANT MATERIAL SHALL BE PROTECTED DURING TRANSPORT AND DELIVERY TO JOB SITE WITH SHADE CLOTH OR OT 18. ACCEPTABLE MEANS OF WINDBURN PREVENTION. ANY SUBSTITUTIONS IN SIZE AND/OR PLANT MATERIAL MUST BE APPROVED BY THE LANDSCAPE ARCHITECT BEFORE PLANTING CAN BEGIN. ALL TREES MUST BE STRAIGHT TRUNK, FULL HEADED, AND MEET ALL REQUIREMENTS SPECIFIED. PRIOR TO CONSTRUCTION, THE CONTRACTOR IS RESPONSIBLE FOR LOCATING ALL UNDERGROUND UTILITIES AND SHAL AVOID DAMAGE TO ALL UTILITIES DURING CONSTRUCTION. SHOULD THE CONTRACTOR CAUSE DAMAGE TO ANY UTIL NECESSARY REPAIRS SHALL BE MADE AS QUICKLY AS PRACTICABLE, AT CONTRACTOR'S EXPENSE. ALL ELEMENTS OF LANDSCAPING SHALL BE INSTALLED SO AS TO MEET ALL APPLICABLE ORDINANCES AND CODES 22. REQUIREMENTS. 23. CONTRACTOR SHALL ASSURE DRAINAGE AND PERCOLATION OF PLANTING PITS PRIOR TO INSTALLATION OF PLANT MATERIAL. CONTRACTOR IS RESPONSIBLE FOR THE REPLACEMENT OF ALL PLANTS LOST DUE TO INADEQUATE DRAINAG CONDITIONS BALLED AND BURLAP MATERIAL SHALL HAVE THE TOP ONE HALF (1/2) OF THE BURLAP AND STRAPS REMOVED. CONTRACTORS SHALL REFER TO THE LANDSCAPE PLANTING DETAILS, PLANTS LISTS, GENERAL NOTES AND THE PLANTING SPECIFICATIONS FOR COMPLETE LANDSCAPE PLANTING INSTRUCTIONS.
- 26. TURF GRASS SHALL BE PLANTED AFTER ALL PLANTS ARE INSTALLED AND MULCHED. SEED AND/OR SOD BED PREPARATIO BY MEANS OF PULVERIZATION TO LOOSEN SOIL. SMOOTH AND FINE GRADE AREA REMOVING ANY ROCKS, ROOTS, TR AND CLODS OVER ENTIRE AREA.
- THE CONTRACTOR IS RESPONSIBLE FOR MAINTAINING IN FULL ALL PLANTING AREAS (INCLUDING WATERING, SPRAYING MULCHING, MOWING, FERTILIZING, ETC.) UNTIL THE OWNER AND LANDSCAPE ARCHITECT ACCEPT CONSTRUCTION IN AT THE END FOR THE ESTABLISHED PERIOD. 28. CONTRACTOR TO GUARANTEE PLANT MATERIAL FOR 12 MONTHS ESTABLISHMENT PERIOD FOLLOWING DATE OF COMPLETED CONSTRUCTION.

IRRIGATION NOTES

THE CONTRACTOR TO PROVIDE AN IRRIGATION SYSTEM THAT CONFORMS TO THE FOLLOWING STANDARDS AND THE ACCOMPANYII SPECIFICATIONS

THE CONTRACTOR SHALL:

- CONTRACTOR SHALL PROVIDE AN IRRIGATION LAYOUT PLAN FOR OWNER APPROVAL BEFORE CONSTRUCTION. 1 SET OF AS-BUILT IRRIGATION DRAWINGS AFTER CONSTRUCTION IS COMPLETE AND APPROVED BY OWNER.
- ENSURE ALL LANDSCAPE SHRUB AREAS ARE DRIP IRRIGATED.
- PROVIDE 2 SETS OF AS-BUILT IRRIGATION DRAWINGS AFTER CONSTRUCTION IS COMPLETE AND APPROVED BY THE OWNER. PROVIDE APPROVED BACKFLOW PREVENTER AND COORDINATE THE INSTALLATION OF 1" METER SERVICE FOR IRRIGATION SYS UNLESS OTHERWISE PROVIDED BY THE G.C.
- PROVIDE AUTOMATIC TIMER CONTROL AND RELATED ITEMS SUCH AS RAIN/FREEZE SENSOR AS SPECIFIED. ENSURE THAT ALL TRENCHING IS OUTSIDE OF TREE DRIP LINE IF POSSIBLE AND NO ROCKS, DEBRIS OR SHARP OBJECTS SHALL BE BACKFILLED IN THE TRENCH.
- FLUSH ALL PIPING PRIOR TO INSTALLATION OF SPRINKLERS.
- COORDINATE THE LOCATION AND INSTALL ALL IRRIGATION SLEEVES UNDER ALL PAVEMENT PRIOR TO PAVING (MIN. SCHEDU 4" SLEEVE)
- 10. REVIEW AND FAMILIARIZE A REPRESENTATIVE OF THE OWNER WITH ALL SETTINGS AND FEATURES OF THE IRRIGATION SYSTEM. DOCUMENTATION SUCH AS MANUALS SHALL BE PROVIDED TO THE OWNER AT THIS TIME.
- PROVIDE A 1 YEAR WARRANTY OF PRODUCTS AND WORKMANSHIP TO INCLUDE WINTERIZING AND FOLLOWING STARTUP AS REQUIRED BY LOCATION.
- 12. CLEAN UP AND DISPOSE OF ALL DEBRIS, WASTE AND EXCESS CONSTRUCTION MATERIALS PRIOR TO FINAL ACCEPTANCE OF TH SYSTEM BY THE OWNER. THE IRRIGATION SYSTEM SHALL

Call before you dig.

PROVIDE 100% COVERAGE OF ALL NEW PLANT BEDS & SOD AREAS . HAVE ALL VALVES LOCATED IN PLANTED BEDS IF POSSIBLE.

Sheet Number

L1

L2

- HAVE A MINIMUM OF 18" OF COVER ON ALL MAINLINES AND A MINIMUM OF 12" OF COVER ON ALL LATERALS.
- SHALL NOT HAVE ANY SPRAY HEADS OR PIPING IN SCOOT RIGHTS OF WAY

AGE, CUTS OF LIMBS OVER 20 MM (% IN.) IN DIAMETER HAT DO NOT PRESERVE THE COLLAR AT THE BRANCH WILL G MUST BE FOLLOWED. DETAILS ARE PROVIDED ON THIS OD AREAS TO INSURE THAT PROPER SOIL REQUIREMENTS ONTRACTOR AS INDICATED BY SOIL TEST AND TO 6" AWAY FROM THE TRUNK. EDS IN MULCH AREAS THROUGH THE DURATION OF COVERAGE . E SELECTED BY THE LANDSCAPE ARCHITECT AT THE FED TO THE LANDSCAPE ARCHITECT FOR APPROVAL. S PRIOR TO LANDSCAPE INSTALLATION AND ACCORDING STALLATION. BY "AMERICAN STANDARDS FOR NURSERY STOCK" ANSI APE ASSOCIATION. AND DELIVERY TO JOB SITE WITH SHADE CLOTH OR OTHER PROVED BY THE LANDSCAPE ARCHITECT BEFORE L REQUIREMENTS SPECIFIED. OR LOCATING ALL UNDERGROUND UTILITIES AND SHALL WE DITE CONTRACTOR CAUSE DAMAGET TO ANY UTILITIES	DUNCAN TERR DUNCAN HILL ROAD CITY OF HENDERSO
ULD THE CONTRACTOR CAUSE DAMAGE TO ANY UTILITIES, LE, AT CONTRACTOR'S EXPENSE. MEET ALL APPLICABLE ORDINANCES AND CODES PLANTING PITS PRIOR TO INSTALLATION OF PLANT T OF ALL PLANTS LOST DUE TO INADEQUATE DRAINAGE (1/2) OF THE BURLAP AND STRAPS REMOVED. ALLS, PLANTS LISTS, GENERAL NOTES AND THE PLANTING CTIONS. AND MULCHED. SEED AND/OR SOD BED PREPARATIONS INE GRADE AREA REMOVING ANY ROCKS, ROOTS, TRASH, L PLANTING AREAS (INCLUDING WATERING, SPRAYING, LANDSCAPE ARCHITECT ACCEPT CONSTRUCTION IN FULL SESTABLISHMENT PERIOD FOLLOWING DATE OF	I and scape architecture 647 E Main St/Spartanburg, St 28502 phone 864,5660/fax 884.562.3808 LandArtDesignGroup.com / Infr@Bandartdesigngroup.com
O THE FOLLOWING STANDARDS AND THE ACCOMPANYING WNER APPROVAL BEFORE CONSTRUCTION. COMPLETE AND APPROVED BY OWNER. CTION IS COMPLETE AND APPROVED BY THE OWNER. INSTALLATION OF 1" METER SERVICE FOR IRRIGATION SYSTEM RAIN/FREEZE SENSOR AS SPECIFIED. LE AND NO ROCKS, DEBRIS OR SHARP OBJECTS SHALL BE JNDER ALL PAVEMENT PRIOR TO PAVING (MIN. SCHEDULE 40, L SETTINGS AND FEATURES OF THE IRRIGATION SYSTEM. ALL WNER AT THIS TIME. O INCLUDE WINTERIZING AND FOLLOWING STARTUP AS RUCTION MATERIALS PRIOR TO FINAL ACCEPTANCE OF THE	SHEET TITLE: OVERALL LANDSCAPE PLAN JOB #: 19012-00 DATE: 04/01/22 DRAWN: BB/EV APPROVED: TP 01/01/25 OF APPROVED: TP
eet List Table Sheet Title OVERALL LANDSCAPE PLAN AMENITY AND BUILDING PLAN	

Z

RTM

 \triangleleft

Δ

s A

ШО

∏


7


Ζ

 \Box

OVERALL	LANDSCAP	e pla	N

Sheet List Table



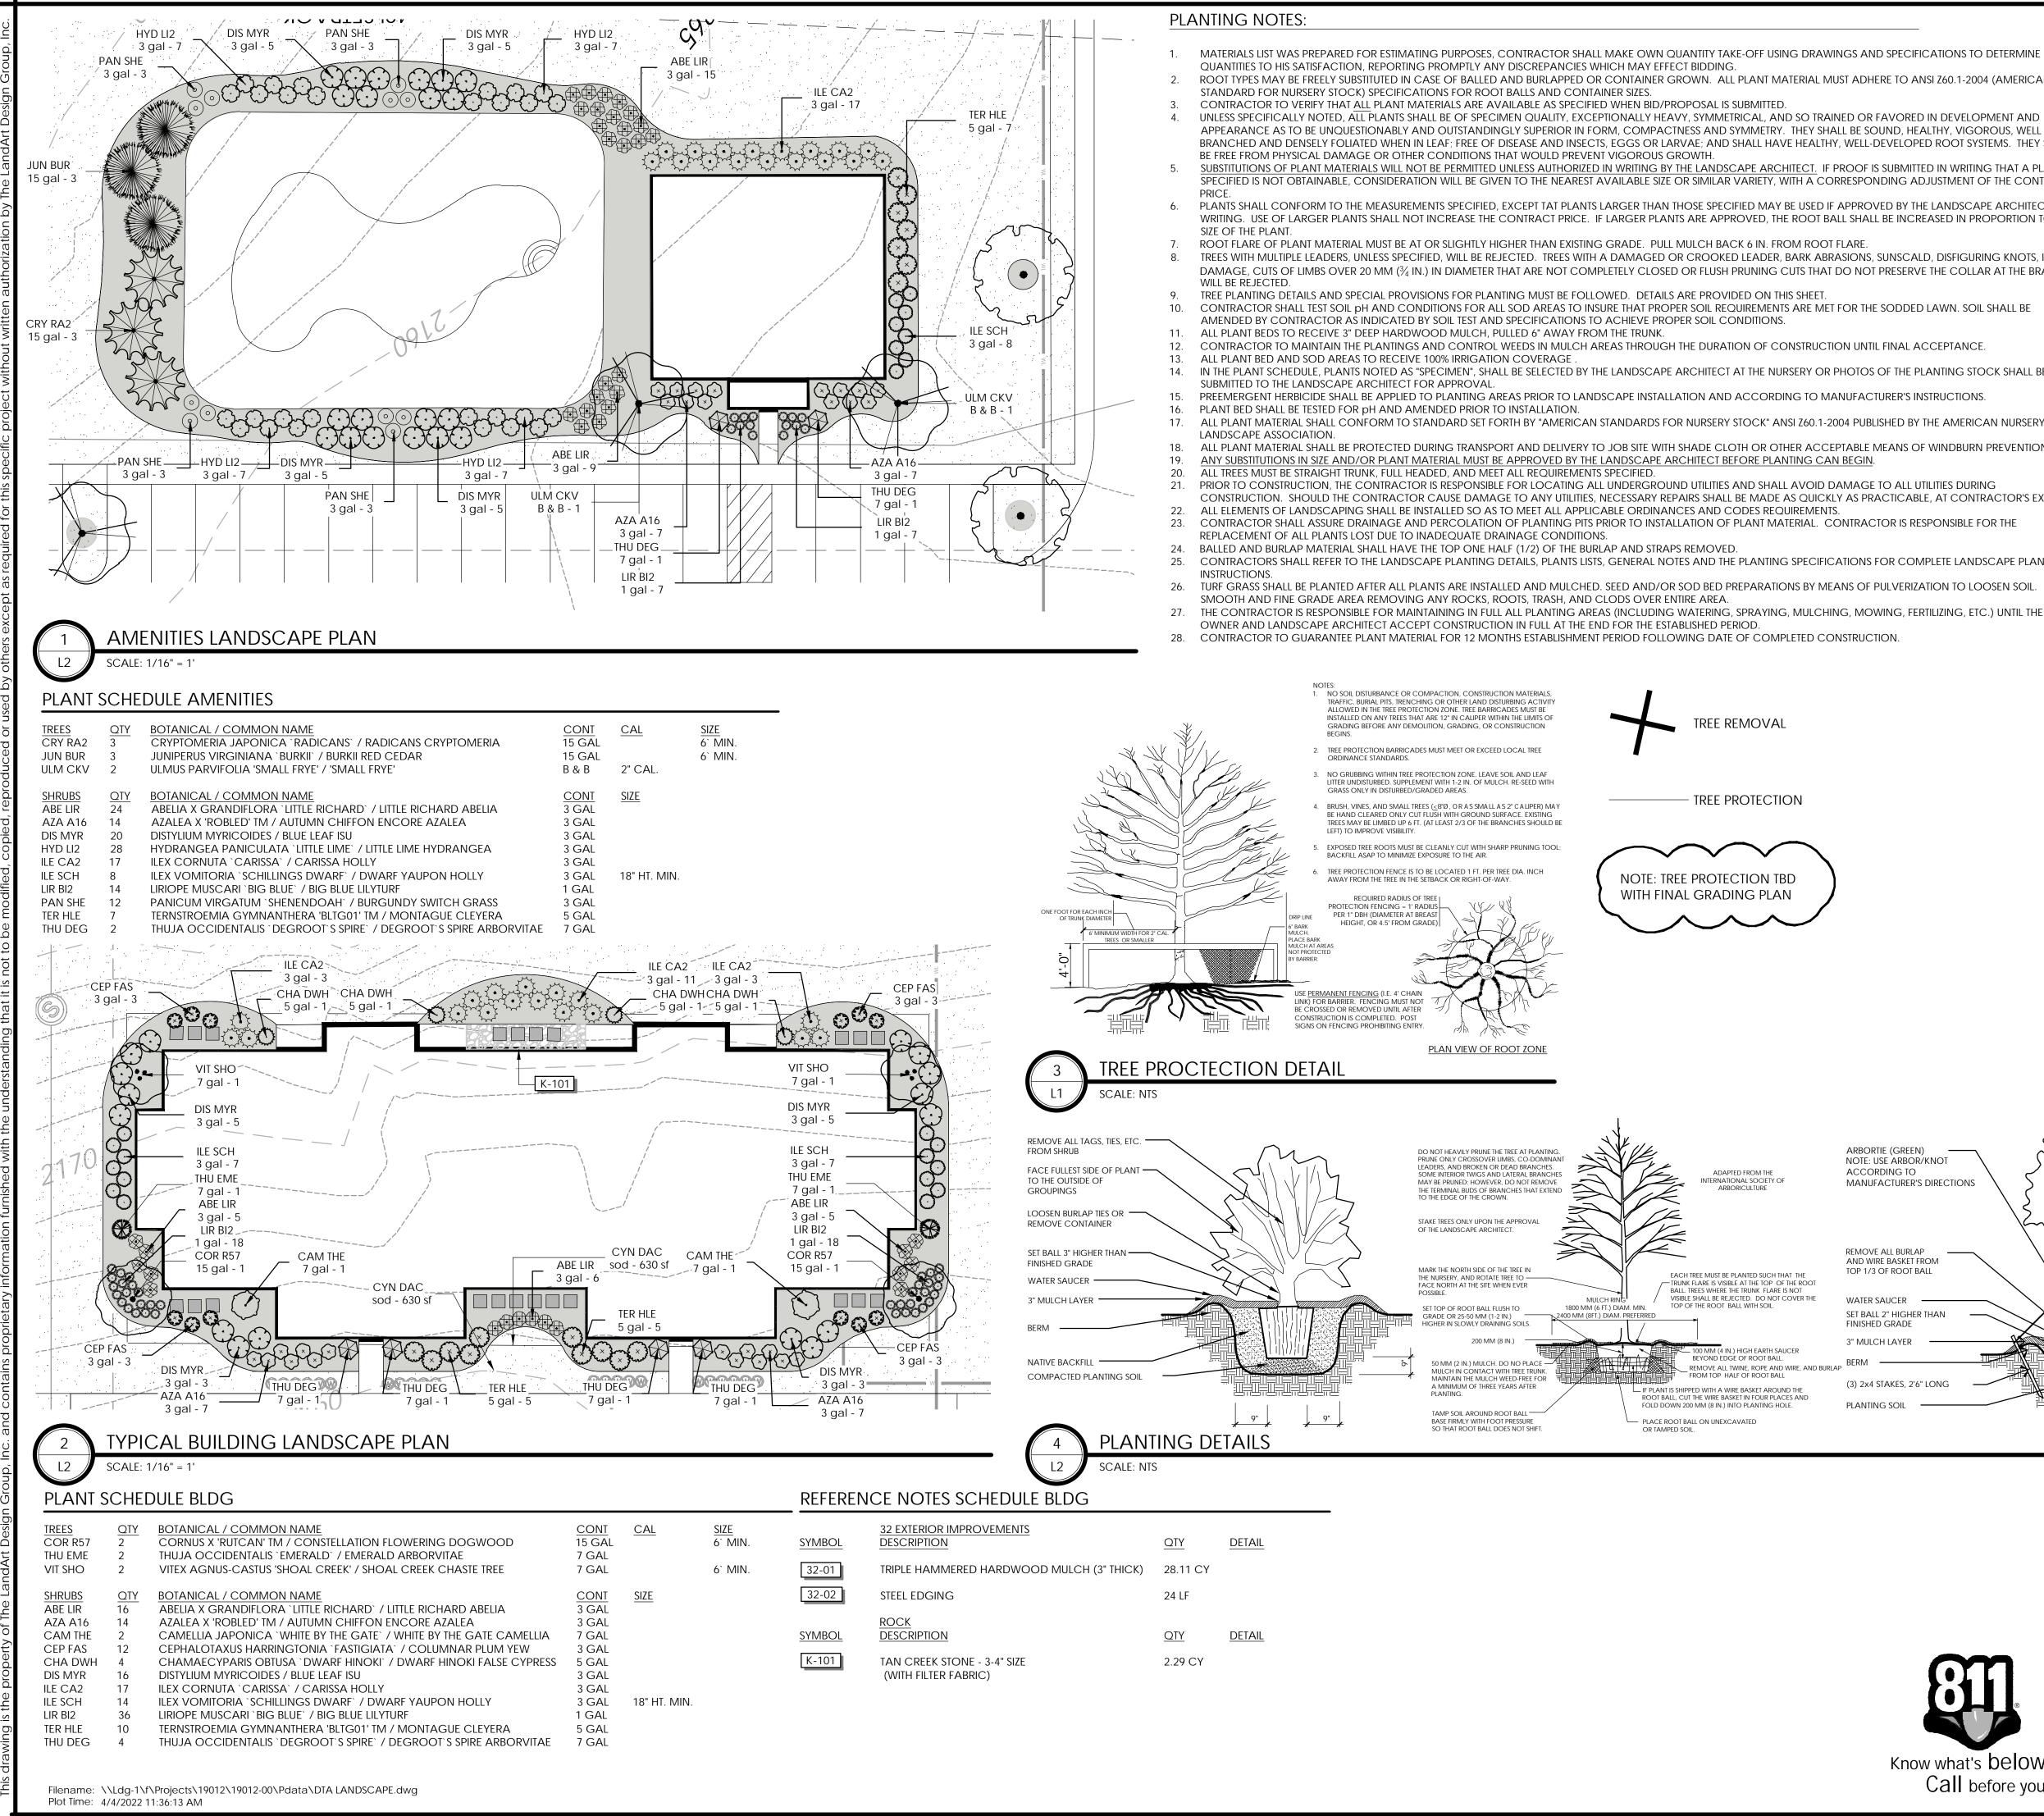

- 1. MATERIALS LIST WAS PREPARED FOR ESTIMATING PURPOSES, CONTRACTOR SHALL MAKE OWN QUANTITY TAKE-OFF USING DRAWINGS AND SPECIFICATIONS TO DETERMINE
- ROOT TYPES MAY BE FREELY SUBSTITUTED IN CASE OF BALLED AND BURLAPPED OR CONTAINER GROWN. ALL PLANT MATERIAL MUST ADHERE TO ANSI Z60.1-2004 (AMERICAN
- UNLESS SPECIFICALLY NOTED, ALL PLANTS SHALL BE OF SPECIMEN QUALITY, EXCEPTIONALLY HEAVY, SYMMETRICAL, AND SO TRAINED OR FAVORED IN DEVELOPMENT AND APPEARANCE AS TO BE UNQUESTIONABLY AND OUTSTANDINGLY SUPERIOR IN FORM, COMPACTNESS AND SYMMETRY. THEY SHALL BE SOUND, HEALTHY, VIGOROUS, WELL BRANCHED AND DENSELY FOLIATED WHEN IN LEAF; FREE OF DISEASE AND INSECTS, EGGS OR LARVAE; AND SHALL HAVE HEALTHY, WELL-DEVELOPED ROOT SYSTEMS. THEY SHALL
- SUBSTITUTIONS OF PLANT MATERIALS WILL NOT BE PERMITTED UNLESS AUTHORIZED IN WRITING BY THE LANDSCAPE ARCHITECT. IF PROOF IS SUBMITTED IN WRITING THAT A PLANT SPECIFIED IS NOT OBTAINABLE, CONSIDERATION WILL BE GIVEN TO THE NEAREST AVAILABLE SIZE OR SIMILAR VARIETY, WITH A CORRESPONDING ADJUSTMENT OF THE CONTRACT
- PLANTS SHALL CONFORM TO THE MEASUREMENTS SPECIFIED, EXCEPT TAT PLANTS LARGER THAN THOSE SPECIFIED MAY BE USED IF APPROVED BY THE LANDSCAPE ARCHITECT IN WRITING. USE OF LARGER PLANTS SHALL NOT INCREASE THE CONTRACT PRICE. IF LARGER PLANTS ARE APPROVED, THE ROOT BALL SHALL BE INCREASED IN PROPORTION TO THE
- ROOT FLARE OF PLANT MATERIAL MUST BE AT OR SLIGHTLY HIGHER THAN EXISTING GRADE. PULL MULCH BACK 6 IN. FROM ROOT FLARE. TREES WITH MULTIPLE LEADERS, UNLESS SPECIFIED, WILL BE REJECTED. TREES WITH A DAMAGED OR CROOKED LEADER, BARK ABRASIONS, SUNSCALD, DISFIGURING KNOTS, INSECT DAMAGE, CUTS OF LIMBS OVER 20 MM (¾ IN.) IN DIAMETER THAT ARE NOT COMPLETELY CLOSED OR FLUSH PRUNING CUTS THAT DO NOT PRESERVE THE COLLAR AT THE BRANCH
- CONTRACTOR SHALL TEST SOIL PH AND CONDITIONS FOR ALL SOD AREAS TO INSURE THAT PROPER SOIL REQUIREMENTS ARE MET FOR THE SODDED LAWN. SOIL SHALL BE
- IN THE PLANT SCHEDULE, PLANTS NOTED AS "SPECIMEN", SHALL BE SELECTED BY THE LANDSCAPE ARCHITECT AT THE NURSERY OR PHOTOS OF THE PLANTING STOCK SHALL BE
- PREEMERGENT HERBICIDE SHALL BE APPLIED TO PLANTING AREAS PRIOR TO LANDSCAPE INSTALLATION AND ACCORDING TO MANUFACTURER'S INSTRUCTIONS.
- ALL PLANT MATERIAL SHALL CONFORM TO STANDARD SET FORTH BY "AMERICAN STANDARDS FOR NURSERY STOCK" ANSI Z60.1-2004 PUBLISHED BY THE AMERICAN NURSERY AND
- ALL PLANT MATERIAL SHALL BE PROTECTED DURING TRANSPORT AND DELIVERY TO JOB SITE WITH SHADE CLOTH OR OTHER ACCEPTABLE MEANS OF WINDBURN PREVENTION. ANY SUBSTITUTIONS IN SIZE AND/OR PLANT MATERIAL MUST BE APPROVED BY THE LANDSCAPE ARCHITECT BEFORE PLANTING CAN BEGIN.
- PRIOR TO CONSTRUCTION, THE CONTRACTOR IS RESPONSIBLE FOR LOCATING ALL UNDERGROUND UTILITIES AND SHALL AVOID DAMAGE TO ALL UTILITIES DURING CONSTRUCTION. SHOULD THE CONTRACTOR CAUSE DAMAGE TO ANY UTILITIES, NECESSARY REPAIRS SHALL BE MADE AS QUICKLY AS PRACTICABLE, AT CONTRACTOR'S EXPENSE CONTRACTOR SHALL ASSURE DRAINAGE AND PERCOLATION OF PLANTING PITS PRIOR TO INSTALLATION OF PLANT MATERIAL. CONTRACTOR IS RESPONSIBLE FOR THE
- CONTRACTORS SHALL REFER TO THE LANDSCAPE PLANTING DETAILS, PLANTS LISTS, GENERAL NOTES AND THE PLANTING SPECIFICATIONS FOR COMPLETE LANDSCAPE PLANTING
- TURF GRASS SHALL BE PLANTED AFTER ALL PLANTS ARE INSTALLED AND MULCHED. SEED AND/OR SOD BED PREPARATIONS BY MEANS OF PULVERIZATION TO LOOSEN SOIL

LE HAMMERED HARDWOOD MULCH (3" THICK)	28.11 CY	
EL EDGING	24 LF	
<u>CK</u> CRIPTION		Detail
I CREEK STONE - 3-4" SIZE	2.29 CY	

IRRIGATION NOTES

THE CONTRACTOR TO PROVIDE AN IRRIGATION SYSTEM THAT CONFORMS TO THE FOLLOWING STANDARDS AND THE ACCOMPANYING SPECIFICATIONS .

THE CONTRACTOR SHALL

CONTRACTOR SHALL PROVIDE AN IRRIGATION LAYOUT PLAN FOR OWNER APPROVAL BEFORE CONSTRUCTION. 1 SET OF AS-BUILT IRRIGATION DRAWINGS AFTER CONSTRUCTION IS COMPLETE AND

APPROVED BY OWNER. ENSURE ALL LANDSCAPE SHRUB AREAS ARE DRIP IRRIGATED.

PROVIDE 2 SETS OF AS-BUILT IRRIGATION DRAWINGS AFTER CONSTRUCTION IS

COMPLETE AND APPROVED BY THE OWNER. PROVIDE APPROVED BACKFLOW PREVENTER AND COORDINATE THE INSTALLATION OF 1" METER SERVICE FOR IRRIGATION SYSTEM UNLESS OTHERWISE PROVIDED BY THE GC

 \mathbf{S}

. Z Ш

 \geq

RT

4

Δ

 \triangleleft

 \triangleleft

RR

4

 \bigcirc

Ζ

 \square

 \Box

SHEET TITLE AMENITY AND

JOB #:

DATE: 04/01/22

19012-00

DRAWN:

APPROVED:

BB/EV

BUILDING PLAN

 $\mathbf{\alpha}$

 \square

Ζ

 \square

PROVIDE AUTOMATIC TIMER CONTROL AND RELATED ITEMS SUCH AS RAIN/FREEZE SENSOR AS SPECIFIED. ENSURE THAT ALL TRENCHING IS OUTSIDE OF TREE DRIP LINE IF POSSIBLE AND NO ROCKS, DEBRIS OR SHARP OBJECTS SHALL BE BACKFILLED IN THE TRENCH.

FLUSH ALL PIPING PRIOR TO INSTALLATION OF SPRINKLERS. COORDINATE THE LOCATION AND INSTALL ALL IRRIGATION SLEEVES UNDER ALL PAVEMENT PRIOR TO PAVING (MIN. SCHEDULE 40, 4" SLEEVE).

REVIEW AND FAMILIARIZE A REPRESENTATIVE OF THE OWNER WITH ALL SETTINGS AND FEATURES OF THE IRRIGATION SYSTEM. ALL DOCUMENTATION SUCH AS MANUALS SHALL BE PROVIDED TO THE OWNER AT THIS TIME.

11. PROVIDE A 1 YEAR WARRANTY OF PRODUCTS AND WORKMANSHIP TO INCLUDE WINTERIZING AND FOLLOWING STARTUP AS REQUIRED BY LOCATION. CLEAN UP AND DISPOSE OF ALL DEBRIS, WASTE AND EXCESS CONSTRUCTION 12 MATERIALS PRIOR TO FINAL ACCEPTANCE OF THE SYSTEM BY THE OWNER. THE IRRIGATION SYSTEM SHALL:

PROVIDE 100% COVERAGE OF ALL NEW PLANT BEDS & SOD AREAS . HAVE ALL VALVES LOCATED IN PLANTED BEDS IF POSSIBLE. HAVE A MINIMUM OF 18" OF COVER ON ALL MAINLINES AND A MINIMUM OF 12" OF

COVER ON ALL LATERALS. SHALL NOT HAVE ANY SPRAY HEADS OR PIPING IN SCDOT RIGHTS OF WAY


ARBORTIE (GREEN) NOTE: USE ARBOR/KNOT ACCORDING TO MANUFACTURER'S DIRECTIONS REMOVE ALL BURLAP MAX. 4 STEMS AND WIRE BASKET FROM TOP 1/3 OF ROOT BALL WATER SAUCER -SET BALL 2" HIGHER THAN 3" MULCH LAYER (3) 2x4 STAKES, 2'6" LONG 12" W.C. 12" W.C. 24" MEDIAN 24" MEDIAN

LANDSCAPE ARCHITECT: The LandArt Design Group, Inc. P.O. Box 3161 Spartanburg, SC 29304 Phone: (864) 585-7500 Fax: (864) 585-3808 Tipton Pitts, ASLA tip@landartdesigngroup.com





AMENITIY AND BUILDING PLAN

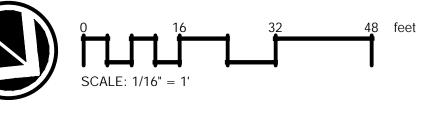

SHEET	
L	2
	OF 2
•	

0 0 4 0