

Aspen M&M Studio

Aspen M&M Studio

Quote #: 6HES5WF

A Proposal for Window and Door Products prepared for:

Shipping Address:

GBS BUILDING SUPPLY-HENDERSONVILLE
215 HOWARD GAP RD
FLETCHER, NC 28732-9206

This report was generated on 8/26/2025 5:23:24 PM using the Marvin Order Management System, version 0004.17.00 (Current). Price in USD. Unit availability and price are subject to change. Dealer terms and conditions may apply.

Featuring products from:


MARVIN 

LINE ITEM QUOTES

The following is a schedule of the windows and doors for this project. For additional unit details, please see Line Item Quotes. Additional charges, tax or Terms and Conditions may apply. Detail pricing is per unit.

Line #1	Mark Unit:	Net Price:		
Qty: 1		Ext. Net Price:	USD	

MARVIN 

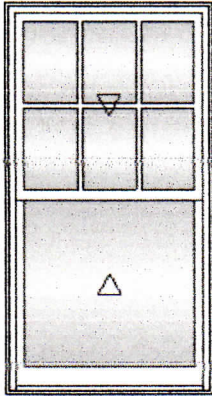

As Viewed From The Exterior

Entered As: FS

MO 37" X 67 1/2"

FS 36 1/2" X 67 1/4"

RO 37 1/2" X 67 3/4"

Egress Information

Width: 32 29/32" Height: 28 9/16"

Net Clear Opening: 6.53 SqFt

Performance Information

U-Factor: 0.3

Solar Heat Gain Coefficient: 0.27

Visible Light Transmittance: 0.46

Condensation Resistance: 55

CPD Number: MAR-N-425-23552-00001

Performance Grade

Licensee #1127

AAMA/WDMA/CSA 101/I.S.2/A440-17

LC-PG50 1149X2223 mm (45.3X87.5 in)

Water Resistance: 7.52 psf

LC-PG50 DP +50/-50

FL17635

Bronze Clad Exterior

Bare Pine Interior

Ultimate Double Hung G2

Frame Size 36 1/2" X 67 1/4"

Rough Opening 37 1/2" X 67 3/4"

Top Sash

Bronze Clad Sash Exterior

Bare Pine Sash Interior

IG

Low E2 w/Argon

Black Perimeter and Spacer Bar

7/8" SDL - With Spacer Bar - Black

Rectangular - Special Cut 3W2H

Bronze Clad Ext - Bare Pine Int

Ogee Interior Glazing Profile

Bottom Sash

Bronze Clad Sash Exterior

Bare Pine Sash Interior

IG - 1 Lite

Low E2 w/Argon

Black Perimeter Bar

Ogee Interior Glazing Profile

Beige Interior Weather Strip Package

Black Exterior Weather Strip Package

Bronze Sash Lock

Bronze Top Sash Strike Plate Assembly Color

Extruded Aluminum Screen

Bronze Surround

Bright View Mesh

***Screen/Combo Ship Loose

4 9/16" Jambs

Nailing Fin

***Note: Unit Availability and Price is Subject to Change

Line #2	Mark Unit:	Net Price:		
Qty: 1		Ext. Net Price:	USD	

MARVIN 

Bronze Clad Exterior

Bare Pine Interior

2W1H - Rectangle Assembly

Assembly Frame Size

78 1/2" X 67 1/4"

Assembly Rough Opening

79 1/2" X 67 3/4"


Unit: A1

Ultimate Double Hung G2

Basic Frame 39 1/4" X 67 1/4"

Rough Opening 40 1/4" X 67 3/4"

Top Sash

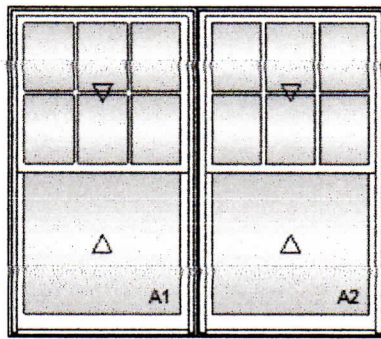

As Viewed From The Exterior

Entered As: FS

MO 79" X 67 1/2"

FS 78 1/2" X 67 1/4"

RO 79 1/2" X 67 3/4"

Egress Information A1, A2

Width: 35 21/32" Height: 28 9/16"

Net Clear Opening: 7.07 SqFt

Performance Information A1

U-Factor: 0.3

Solar Heat Gain Coefficient: 0.27

Visible Light Transmittance: 0.46

Condensation Resistance: 55

CPD Number: MAR-N-425-23552-00001

Performance Information A2

U-Factor: 0.3

Solar Heat Gain Coefficient: 0.27

Visible Light Transmittance: 0.46

Condensation Resistance: 55

CPD Number: MAR-N-425-23552-00001

Performance Information OA

Performance Grade A1, A2

Licensee #1127

AAMA/WDMA/CSA 101/I.S.2/A440-17

LC-PG50 1149X2223 mm (45.3X87.5 in)

Water Resistance: 7.52 psf

LC-PG50 DP +50/-50

FL17635

Performance Grade Mull

Licensee #1127

AAMA 450-10

LC-50 1149X1816 mm (45.26X71.51 in)

Water Resistance: 7.52 psf

LC-50 DP 50

Performance Grade Overall Assembly

Water Resistance: 9.82 psf

LC-50 DP

Bronze Clad Sash Exterior

Bare Pine Sash Interior

IG

Low E2 w/Argon

Black Perimeter and Spacer Bar

7/8" SDL - With Spacer Bar - Black

Rectangular - Special Cut 3W2H

Bronze Clad Ext - Bare Pine Int

Ogee Interior Glazing Profile

Bottom Sash

Bronze Clad Sash Exterior

Bare Pine Sash Interior

IG - 1 Lite

Low E2 w/Argon

Black Perimeter Bar

Ogee Interior Glazing Profile

Beige Interior Weather Strip Package

Black Exterior Weather Strip Package

Bronze Sash Lock

Bronze Top Sash Strike Plate Assembly Color

Extruded Aluminum Screen

Bronze Surround

Bright View Mesh

***Screen/Combo Ship Loose

Unit: A2

Ultimate Double Hung G2

Basic Frame 39 1/4" X 67 1/4"

Rough Opening 40 1/4" X 67 3/4"

Top Sash

Bronze Clad Sash Exterior

Bare Pine Sash Interior

IG

Low E2 w/Argon

Black Perimeter and Spacer Bar

7/8" SDL - With Spacer Bar - Black

Rectangular - Special Cut 3W2H

Bronze Clad Ext - Bare Pine Int

Ogee Interior Glazing Profile

Bottom Sash

Bronze Clad Sash Exterior

Bare Pine Sash Interior

IG - 1 Lite

Low E2 w/Argon

Black Perimeter Bar

Ogee Interior Glazing Profile

Beige Interior Weather Strip Package

Black Exterior Weather Strip Package

Bronze Sash Lock

Bronze Top Sash Strike Plate Assembly Color

Extruded Aluminum Screen

Bronze Surround

Bright View Mesh

***Screen/Combo Ship Loose

Standard Mull Charge

4 9/16" Jambs

Nailing Fin


***Note: This configuration meets a minimum structural performance of DP 20 through either physical testing or calculations in accordance with AAMA 450 and building code requirements. Mull certification ratings may vary from individual unit certification ratings. Reference the mulling chapter of the ADM for additional information.

***Note: Unit Availability and Price is Subject to Change

Line #3	Mark Unit:	Net Price:		
Qty: 2		Ext. Net Price:	USD	



Bronze Clad Exterior
Bare Pine Interior
2W1H - Rectangle Assembly

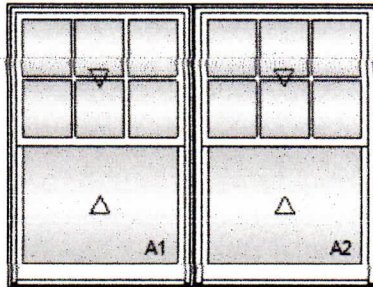

As Viewed From The Exterior

Entered As: FS

MO 79" X 58 3/4"

FS 78 1/2" X 58 1/2"

RO 79 1/2" X 59"

Egress Information A1, A2

Width: 35 21/32" Height: 24 3/16"

Net Clear Opening: 5.99 SqFt

Performance Information A1

U-Factor: 0.3

Solar Heat Gain Coefficient: 0.27

Visible Light Transmittance: 0.46

Condensation Resistance: 55

CPD Number: MAR-N-425-23552-00001

Performance Information A2

U-Factor: 0.3

Solar Heat Gain Coefficient: 0.27

Visible Light Transmittance: 0.46

Condensation Resistance: 55

CPD Number: MAR-N-425-23552-00001

Performance Information OA

Performance Grade A1, A2

Licensee #1127

AAMA/WDMA/CSA 101/I.S.2/A440-17

LC-PG50 1149X2223 mm (45.3X87.5 in)

Water Resistance: 7.52 psf

LC-PG50 DP +50/-50

FL17635

Performance Grade Mull

Licensee #1127

AAMA 450-10

LC-PG65 1149X1613 mm (45.26X63.51 in)

Water Resistance: 7.52 psf

LC-PG65 DP 65

Performance Grade Overall Assembly

Water Resistance: 7.52 psf

LC-PG50 DP +50/-50

Assembly Frame Size

78 1/2" X 58 1/2"

Assembly Rough Opening

79 1/2" X 59"

Unit: A1

Ultimate Double Hung G2

Basic Frame 39 1/4" X 58 1/2"

Rough Opening 40 1/4" X 59"

Top Sash

Bronze Clad Sash Exterior

Bare Pine Sash Interior

IG

Low E2 w/Argon

Black Perimeter and Spacer Bar

7/8" SDL - With Spacer Bar - Black

Rectangular - Special Cut 3W2H

Bronze Clad Ext - Bare Pine Int

Ogee Interior Glazing Profile

Bottom Sash

Bronze Clad Sash Exterior

Bare Pine Sash Interior

IG - 1 Lite

Low E2 w/Argon

Black Perimeter Bar

Ogee Interior Glazing Profile

Beige Interior Weather Strip Package

Black Exterior Weather Strip Package

Bronze Sash Lock

Bronze Top Sash Strike Plate Assembly Color

Extruded Aluminum Screen

Bronze Surround

Bright View Mesh

***Screen/Combo Ship Loose

Unit: A2

Ultimate Double Hung G2

Basic Frame 39 1/4" X 58 1/2"

Rough Opening 40 1/4" X 59"

Top Sash

Bronze Clad Sash Exterior

Bare Pine Sash Interior

IG

Low E2 w/Argon

Black Perimeter and Spacer Bar

7/8" SDL - With Spacer Bar - Black

Rectangular - Special Cut 3W2H

Bronze Clad Ext - Bare Pine Int

Ogee Interior Glazing Profile

Bottom Sash

Bronze Clad Sash Exterior

Bare Pine Sash Interior

IG - 1 Lite

Low E2 w/Argon

Black Perimeter Bar

Ogee Interior Glazing Profile

Beige Interior Weather Strip Package

Black Exterior Weather Strip Package

Bronze Sash Lock

Bronze Top Sash Strike Plate Assembly Color

Extruded Aluminum Screen

Bronze Surround

Bright View Mesh

***Screen/Combo Ship Loose

Standard Mull Charge

4 9/16" Jamb


Nailing Fin

***Note: This configuration meets a minimum structural performance of DP 20 through either physical testing or calculations in accordance with AAMA 450 and building code requirements. Mull certification ratings may vary from individual unit certification ratings. Reference the mulling chapter of the ADM for additional information.

***Note: Unit Availability and Price is Subject to Change

Line #4	Mark Unit:	Net Price:		
Qty: 1		Ext. Net Price:	USD	

MARVIN

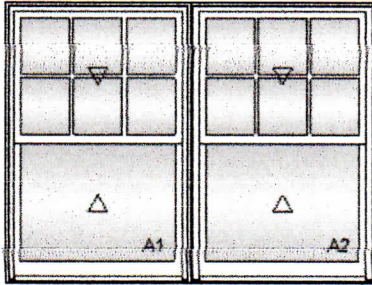

As Viewed From The Exterior

Entered As: FS

MO 79" X 58 3/4"

FS 78 1/2" X 58 1/2"

RO 79 1/2" X 59"

Egress Information A1, A2

Width: 35 21/32" Height: 24 3/16"

Net Clear Opening: 5.99 SqFt

Performance Information A1

U-Factor: 0.3

Solar Heat Gain Coefficient: 0.27

Visible Light Transmittance: 0.46

Condensation Resistance: 55

CPD Number: MAR-N-425-23552-00001

Performance Information A2

U-Factor: 0.3

Solar Heat Gain Coefficient: 0.27

Visible Light Transmittance: 0.46

Condensation Resistance: 55

CPD Number: MAR-N-425-23552-00001

Performance Information OA

Performance Grade A1, A2

Licensee #1127

AAMA/WDMA/CSA 101/I.S.2/A440-17

LC-PG50 1149X2223 mm (45.3X87.5 in)

Water Resistance: 7.52 psf

LC-PG50 DP +50/-50

FL17635

Performance Grade Mull

Licensee #1127

AAMA 450-10

LC-PG65 1149X1613 mm (45.26X63.51 in)

Water Resistance: 7.52 psf

LC-PG65 DP 65

Performance Grade Overall Assembly

Water Resistance: 7.52 psf

LC-PG50 DP +50/-50

Bronze Clad Exterior

Bare Pine Interior

2W1H - Rectangle Assembly

Assembly Frame Size

78 1/2" X 58 1/2"

Assembly Rough Opening

79 1/2" X 59"

Unit: A1

Ultimate Double Hung G2

Basic Frame 39 1/4" X 58 1/2"

Rough Opening 40 1/4" X 59"

Top Sash

Bronze Clad Sash Exterior

Bare Pine Sash Interior

IG

Tempered Low E2 w/Argon

Black Perimeter and Spacer Bar

7/8" SDL - With Spacer Bar - Black

Rectangular - Special Cut 3W2H

Bronze Clad Ext - Bare Pine Int

Ogee Interior Glazing Profile

Bottom Sash

Bronze Clad Sash Exterior

Bare Pine Sash Interior

IG - 1 Lite

Tempered Low E2 w/Argon

Black Perimeter Bar

Ogee Interior Glazing Profile

Beige Interior Weather Strip Package

Black Exterior Weather Strip Package

Bronze Sash Lock

Bronze Top Sash Strike Plate Assembly Color

Extruded Aluminum Screen

Bronze Surround

Bright View Mesh

***Screen/Combo Ship Loose

Unit: A2

Ultimate Double Hung G2

Basic Frame 39 1/4" X 58 1/2"

Rough Opening 40 1/4" X 59"

Top Sash

Bronze Clad Sash Exterior

Bare Pine Sash Interior

IG

Tempered Low E2 w/Argon

Black Perimeter and Spacer Bar

7/8" SDL - With Spacer Bar - Black

Rectangular - Special Cut 3W2H

Bronze Clad Ext - Bare Pine Int

Ogee Interior Glazing Profile

Bottom Sash

Bronze Clad Sash Exterior

Bare Pine Sash Interior

IG - 1 Lite

Tempered Low E2 w/Argon

Black Perimeter Bar

Ogee Interior Glazing Profile

Beige Interior Weather Strip Package

Black Exterior Weather Strip Package

Bronze Sash Lock


Bronze Top Sash Strike Plate Assembly Color

Extruded Aluminum Screen

Bronze Surround
Bright View Mesh
***Screen/Combo Ship Loose
Standard Mull Charge
4 9/16" Jambs
Nailing Fin
***Note: This configuration meets a minimum structural performance of DP 20 through either physical testing or calculations in accordance with AAMA 450 and building code requirements. Mull certification ratings may vary from individual unit certification ratings. Reference the mulling chapter of the ADM for additional information.
***Note: Unit Availability and Price is Subject to Change

Line #5	Mark Unit:	Net Price:		
Qty: 1		Ext. Net Price:	USD	

MARVIN

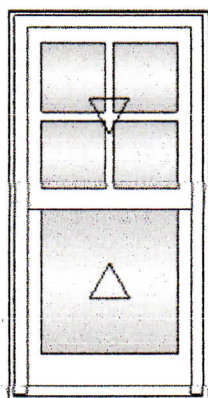

As Viewed From The Exterior


Entered As: FS
MO 20 3/4" X 39"
FS 20 1/4" X 38 3/4"
RO 21 1/4" X 39 1/4"
Egress Information
Width: 16 21/32" Height: 14 5/16"
Net Clear Opening: 1.66 SqFt
Performance Information
U-Factor: 0.3
Solar Heat Gain Coefficient: 0.27
Visible Light Transmittance: 0.46
Condensation Resistance: 55
CPD Number: MAR-N-425-23552-00001
Performance Grade
Licensee #1127
AAMA/WDMA/CSA 101/I.S.2/A440-17
LC-PG50 1149X2223 mm (45.3X87.5 in)
Water Resistance: 7.52 psf
LC-PG50 DP +50/-50
FL17635

Bronze Clad Exterior
Bare Pine Interior
Ultimate Double Hung G2
Frame Size 20 1/4" X 38 3/4"
Rough Opening 21 1/4" X 39 1/4"
Top Sash
Bronze Clad Sash Exterior
Bare Pine Sash Interior
IG
Low E2 w/Argon
Black Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Black
Rectangular - Special Cut 2W2H
Bronze Clad Ext - Bare Pine Int
Ogee Interior Glazing Profile
Bottom Sash
Bronze Clad Sash Exterior
Bare Pine Sash Interior
IG - 1 Lite
Low E2 w/Argon
Black Perimeter Bar
Ogee Interior Glazing Profile
Beige Interior Weather Strip Package
Black Exterior Weather Strip Package
Bronze Sash Lock
Bronze Top Sash Strike Plate Assembly Color
Aluminum Screen
Bronze Surround
Bright View Mesh
***Screen/Combo Ship Loose
4 9/16" Jambs
Nailing Fin
***Note: Unit Availability and Price is Subject to Change

Line #6	Mark Unit:	Net Price:		1,600.93
Qty: 1		Ext. Net Price:	USD	1,600.93

MARVIN

Bronze Clad Exterior
Bare Pine Interior
Ultimate Double Hung Picture G2
Frame Size 20 1/4" X 38 3/4"
Rough Opening 21 1/4" X 39 1/4"
Bronze Clad Sash Exterior
Bare Pine Sash Interior

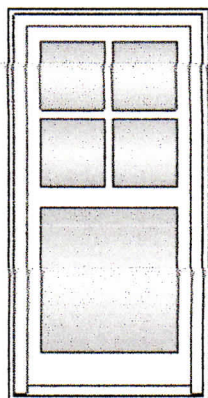

As Viewed From The Exterior

IG
Low E2 w/Argon
Black Perimeter and Spacer Bar
1 15/16" Simulated Rail Rectangular
Standard 1.0:2.0
7/8" SDL - With Spacer Bar - Black
Top Cut 2W2H - Bottom Cut 1W1H
5 Rect Lites
Bronze Clad Ext - Bare Pine Int
Ogee Interior Glazing Profile
Beige Interior Weather Strip Package
Black Exterior Weather Strip Package
4 9/16" Jambs
Nailing Fin
***Note: Unit Availability and Price is Subject to Change

Entered As: FS

MO 20 3/4" X 39"

FS 20 1/4" X 38 3/4"

RO 21 1/4" X 39 1/4"

Egress Information

No Egress Information available.

Performance Information

U-Factor: 0.3

Solar Heat Gain Coefficient: 0.25

Visible Light Transmittance: 0.42

Condensation Resistance: 61

CPD Number: MAR-N-427-06786-00001

Performance Grade

Licensee #1127

AAMA/WDMA/CSA/101/ I.S.2/A440-08

CW-PG50 1556X2629 mm (61.3X103.5 in)


Water Resistance: 7.52 psf

CW-PG50 DP +50/-50

FL17635

Line #7	Mark Unit:	Net Price:		
Qty: 1		Ext. Net Price:	USD	

MARVIN 

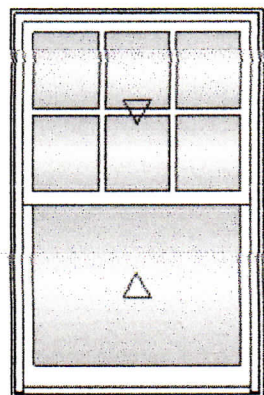

As Viewed From The Exterior

Bronze Clad Exterior
Bare Pine Interior
Ultimate Double Hung G2
Frame Size 36 1/2" X 55 1/2"
Standard CN Height 24
Rough Opening 37 1/2" X 56"
Top Sash
Bronze Clad Sash Exterior
Bare Pine Sash Interior
IG
Low E2 w/Argon
Black Perimeter and Spacer Bar
7/8" SDL - With Spacer Bar - Black
Rectangular - Special Cut 3W2H
Bronze Clad Ext - Bare Pine Int
Ogee Interior Glazing Profile
Bottom Sash
Bronze Clad Sash Exterior
Bare Pine Sash Interior
IG - 1 Lite
Low E2 w/Argon
Black Perimeter Bar
Ogee Interior Glazing Profile
Beige Interior Weather Strip Package
Black Exterior Weather Strip Package
Bronze Sash Lock
Bronze Top Sash Strike Plate Assembly Color
Extruded Aluminum Screen

Entered As: FS

MO 37" X 55 3/4"

FS 36 1/2" X 55 1/2"

RO 37 1/2" X 56"

Egress Information

Width: 32 29/32" Height: 22 11/16"

Net Clear Opening: 5.18 SqFt

Performance Information

U-Factor: 0.3
Solar Heat Gain Coefficient: 0.27
Visible Light Transmittance: 0.46
Condensation Resistance: 55
CPD Number: MAR-N-425-23552-00001

Performance Grade

Licensee #1127
AAMA/WDMA/CSA 101/I.S.2/A440-17
LC-PG50 1149X2223 mm (45.3X87.5 in)
Water Resistance: 7.52 psf
LC-PG50 DP +50/-50
FL17635

Bronze Surround
Bright View Mesh
***Screen/Combo Ship Loose
4 9/16" Jamb
Nailing Fin
***Note: Unit Availability and Price is Subject to Change

Project Subtotal Net Price: USD
6.750% Sales Tax: USD
Project Total Net Price: USD



PRODUCT AND PERFORMANCE INFORMATION

NFRC Ratings:

NFRC energy ratings may vary depending on the exact configuration of glass thickness used on the unit. NFRC energy values and ratings may change over time due to ongoing product changes, updated test results or requirements. NFRC values and ratings are finalized on the date of manufacture.

The National Fenestration Rating Council (NFRC) has developed and operates a uniform rating system for the energy performance of fenestration products, including windows, doors and skylights. For additional information regarding this rating system, see www.nfrc.org.

Code (residential, building or energy) Compliance:

Determining the suitability and compliance with state, provincial, local, or other applicable building codes or standards, including energy codes, is the responsibility of the buyer, user, architect, contractor, installer, and/or other construction professional.