

## FEATURES & SPECIFICATIONS

**INTENDED USE** — Typical applications include corridors, lobbies, conference rooms and private offices.

**CONSTRUCTION** — Galvanized steel mounting/plaster frame; galvanized steel junction box with bottom-hinged access covers and spring latches. Reflectors are retained by torsion springs.

Vertically adjustable mounting brackets with commercial bar hangers provide 3-3/4" total adjustment.

Two combination 1/2"-3/4" and four 1/2" knockouts for straight-through conduit runs. Capacity: 8 (4 in, 4 out). No. 12 AWG conductors, rated for 90°C.

Accommodates 12"-24" joist spacing.

Passive cooling thermal management for 25°C standard; high ambient (40°C) option available. Light engine and drivers are accessible from above or below ceiling.

Max ceiling thickness 1-1/2".

**OPTICS** — LEDs are binned to a 3-step MacAdam Ellipse; 80 CRI minimum. 90 CRI optional.

LED light source concealed with diffusing optical lens.

General illumination lighting with 1.0 S/MH and 55° cutoff to source and source image.

Self-flanged anodized reflectors in specular, semi-specular, or matte diffuse finishes. Also available in white and black painted reflectors.

**A+ CAPABLE LUMINAIRE** — This item is an A+ capable luminaire, which has been designed and tested to provide consistent color appearance and out-of-the-box control compatibility with simple commissioning when used with Acuity Brands controls products. All configurations of this luminaire are calibrated and tested to meet the Acuity Brands' specifications for chromatic consistency – including color rendering, color fidelity and color temperature tolerance around standard CIE chromaticity coordinates. To learn more about A+ standards, specifications, and testing visit [www.acuitybrands.com/aplus](http://www.acuitybrands.com/aplus).

**UGR** — UGR is zero for fixtures aimed at nadir with a cut-off equal to or less than 60deg, per CIE 117-1996 Discomfort Glare in Interior Lighting.

**ELECTRICAL** — Multi-volt (120-277V, 50/60Hz) 0-10V dimming drivers mounted to junction box, 10% or 1% minimum dimming level available.

0-10V dimming fixture requires two (2) additional low-voltage wires to be pulled.

**LUMEN MAINTENANCE** — 70% lumen maintenance at 60,000 hours. L70/60,000 hours

**LISTINGS** — Certified to US and Canadian safety standards. Wet location standard (covered ceiling). IP55 rated. ENERGY STAR® certified product. Drivers are RoHS compliant

**GOVERNMENT PROCUREMENT** — BAA – Product with the BAA option qualifies as a domestic end product under the Buy American Act as implemented in the FAR and DFARS. Product with the BAA option also qualifies as manufactured in the United States under DOT Buy America regulations.

BABA – Build America Buy America: Product with the BAA option also qualifies as produced in the United States under the definitions of the Build America, Buy America Act.

Please refer to [www.acuitybrands.com/buy-american](http://www.acuitybrands.com/buy-american) for additional information.

**WARRANTY** — 5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed.

Complete warranty terms located at: [www.acuitybrands.com/support/warranty/terms-and-conditions](http://www.acuitybrands.com/support/warranty/terms-and-conditions)

**Note:** Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.

## PERFORMANCE DATA

LDN6 3500K AR LSS 80CRI			
Nominal Lumens	Lumens	Wattage	Lm/W
500	527.9	5.8	90.5
750	758.1	8.9	85.1
1000	950.1	10.4	91.0
1500	1514	17.5	86.4
2000	2006	22.5	89.1
2500	2504	28.3	88.6
3000	3021	34.8	86.9
4000	4008	44.3	90.6
5000	4975	57.7	86.3

### Notes


- Tested in accordance with IESNA LM-79-08.
- Tested to current IES and NEMA standards under stabilized laboratory conditions.
- CRI: 80 typical.



Catalog Number
Notes
Type <b>OA</b>

# LDN6 STATIC WHITE

**6" Open and Wallwash LED  
Non-IC  
New Construction Downlight**

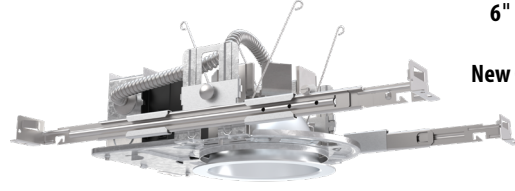


Open Trim




Wallwash Trim

## DISTRIBUTIONS

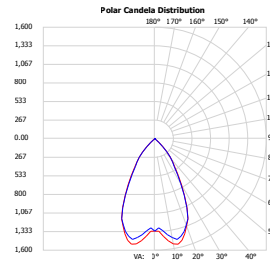



Open

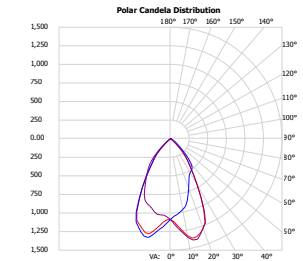

Wallwash

## DIMENSIONS

### LDN6 500-3000 Lumens

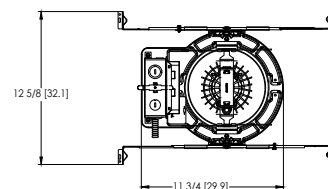

Aperture:  $\varnothing$  6-1/4" [15.9]  
Ceiling Cutout:  $\varnothing$  7-1/8" [18.1] Self-flanged  
Overlap Trim:  $\varnothing$  7-1/2" [19.1]

See page 4 for other fixture dimensions

ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

Example: LDN6 35/15 L06 AR LSS MVOLT EZ10

LDN6	40/15	L06		BR	-	TRBL	MVOLT
Series	Color temperature	Lumens ‡	Trim Style	Trim Color	Trim Finish	Flange Color ‡	Voltage
LDN6 6" round	27/ 2700K 30/ 3000K 35/ 3500K 40/ 4000K 50/ 5000K	05 500 lumens 07 750 lumens 10 1000 lumens 15 1500 lumens 20 2000 lumens 25 2500 lumens 30 3000 lumens 40 4000 lumens 50 5000 lumens	L06 Downlight LW6 Wallwash	AR Clear WR ‡ White BR ‡ Black TCPC ‡ Custom painted trim TRALTBD ‡ RAL painted trim	LSS Semi-specular LD Matte diffuse LS Specular	TRW White painted flange TRBL Black painted flange FCPC Custom painted flange only FRALTBD RAL painted flange only	MVOLT Multi-volt 120 120V 277 277V 347 ‡ 347V

GZ1	Emergency ‡		Control Input ‡		Options
<b>Driver</b>	<b>Emergency ‡</b>		<b>Control Input ‡</b>		<b>Options</b>
GZ10 0-10V driver dims to 10%	(blank)	No Emergency Needed	(blank)	No Control Input Needed	HAO ‡ High ambient option (40°C)
GZ1 0-10V driver dims to 1%	EL	Battery pack (10W constant power), non-T20 compliant, integral test switch	JOT	Wireless room control with "Just One Touch" pairing	CP ‡ Chicago Plenum
D10 Minimum dimming 10% driver for use with JOT	ELR	Battery pack (10W constant power), non-T20 compliant, remote test switch	NPP16D	nLight® network power/relay pack with 0-10V dimming for non-eldoLED drivers (GZ10, GZ1).	RRL___ RELOC®-ready luminaire connectors enable a simple and consistent factory installed option across all ABL luminaire brands. Refer to RRL for complete nomenclature. Available only in RRLA, RRLB, RRLAE, and RRLC12S.
D1 Minimum dimming 1% driver for use with JOT	ELSD	Self-diagnostic battery pack (10W constant power), non-T20 compliant, integral test switch	NPP16DER	nLight® network power/relay pack with 0-10V dimming for non-eldoLED drivers (GZ10, GZ1). ER controls fixtures on emergency circuit.	BAA Buy America(n) Act and/or Build America Buy America Qualified
EZ1 0-10V eldoLED driver with smooth and flicker-free deep dimming performance down to 1% eldoLED DALI SOLDRIVE dim to dark	ELRSD	Self-diagnostic battery pack (10W constant power), non-T20 compliant, remote test switch	NPS80EZ	nLight® dimming pack controls 0-10V eldoLED drivers (EZ1).	90CRI High CRI (90+)
EDAB eldoLED DALI SOLDRIVE dim to dark	E10WCP	Battery pack (10W constant power), T20 compliant, integral test switch	NPS80EZER	nLight® dimming pack controls 0-10V eldoLED drivers (EZ1). ER controls fixtures on emergency circuit.	SF ‡ Single fuse
	E10WCPR	Battery pack (10W constant power), T20 compliant, remote test switch	N80	nLight™ Lumen Compensation	
	E10WRSTAR	Emergency battery pack, 10W with remote test switch and Iota STAR technology	NLTAIR2	nLight® Air enabled	
			NLTAIRER2	nLight® AIR Dimming Pack Wireless Controls. Controls fixtures on emergency circuit, not available with battery pack options	
			NLTAIREM2	nLight® AIR Dimming Pack Wireless Controls. UL924 Emergency Operation, via power interrupt detection. Available with battery pack options.	

‡ Option Value Ordering Restrictions

Option value	Restriction
Lumens	Overall height varies based on lumen package; refer to dimensional chart.
WR, BR	Not available with finishes.
347	Not available with emergency options.
SF	Must specify voltage 120V or 277V.
TRW, TRBL	Available with clear (AR) reflector only.
EL, ELR, ELSD, ELRSD, E10WCP, E10WCPR	12.5" of plenum depth or top access required for battery pack maintenance.
NPP16D, NPP16DER, NPS80EZ, NPS80EZER	Specify voltage. ER for use with generator supply EM power. Will require an emergency hot feed and normal hot feed. See UL 924 Sequence of Operation table.
N80	Fixture begins at 80% light level. Must be specified with NPS80EZ or NPS80EZ ER. Only available with EZ1 drivers.
NLTAIR, NLTAIR2, NLTAIRER2, NLTAIREM2	Not available with CP, NPS80EZ, NPS80EZER, NPP16D, NPP16DER or N80 options. not recommended for metal ceiling installations.
HAO	Fixture height is 6.5" for all lumen packages with HAO.
CP	Must specify voltage for 3000lm and above. 5000lm with marked spacing 24 L x 24 W x 14 H. Not available with emergency battery pack option.
JOT	Must specify D10 or D1 driver. Not available with nLight options. Not available with CP. Not recommended for metal ceiling installation. Not for use with emergency backup power systems other than battery packs.
Reloc® Options	Refer to RRL specification sheet on acuitybrands.com for further details.
RRLAE	Commercial fixtures should disconnect the TSPL before unplugging the RRL so it does not go into discharge mode.
RRLC12S	RRLC12S option is to be used with the OnePass OCU, OCS, OD, OFC and OD for 0-24V integrated single-circuit or 0-10V low voltage controls applications. Not available with integral dimming sensors.
TRALTBD, FRALTBD	RALTBD for pricing only. Replace with applicable RAL number and finish when ready to order. See the RAL BROCHURE for available color options.
TCPC, FCPC	CPC options for pricing only. Custom color chip needs to be sent in to your Customer Resolution specialist before order can be processed. Click HERE for more details
E10WRSTAR	Not available with wet location, EC1, EC6, QDS, CP, 347V, NPS80EZ ER, NLTAIRER2, NLTAIREM2, AL03 & AL04 w/DALI, OR 2000-4500 lumens w/JOT. Top access installation or 17.5" plenum clearance required for roomside installation. Not available with integral test switch

Accessories: Order as separate catalog number.		
<a href="#">EAC ISSM 375</a>	Compact interruptible emergency AC power system	SCA6 Sloped Ceiling Adapter. Degree of slope must be specified (5D, 10D, 15D, 20D, 25D, 30D). Ex: SCA6 10D
<a href="#">EAC ISSM 125</a>	Compact interruptible emergency AC power system	
GRA68 JZ	Oversized trim ring with 8" outside diameter	



Items marked by a shaded background qualify for the Design Select program and ship in 15 days or less. To learn more about Design Select, visit [www.acuitybrands.com/designselect](http://www.acuitybrands.com/designselect). \*See ordering tree for details

(Maximum order quantity for design select lead times is 112.)

## Emergency Battery Pack Options - Field Installable

Battery Model Number	Wattage	Runtime (Minutes)	Lumen Output* @ 120 Lumens/Watt	Other
<a href="#">ILB CP07 2H A</a>	7W	120	840	Storm Shelter / 2 Hour Runtime
<a href="#">ILB CP10 A</a>	10W	90	1200	
<a href="#">ILBLP CP10 HE SD A+</a>	10W	90	1200	Title 20, Self Diagnostic
<a href="#">ILBLP CP15 HE SD A+</a>	15W	90	1800	Title 20, Self Diagnostic
<a href="#">ILB CP20 HE A</a>	20W	90	2400	Title 20
<a href="#">ILB CP20 HE SD A</a>	20W	90	2400	Title 20, Self Diagnostic
<a href="#">ILBHI CP10 HE SD A+</a>	10W	90	1200	347-480V AC Input, Title 20, Self Diagnostic
<a href="#">ILBHI CP15 HE SD A+</a>	15W	90	1800	347-480V AC Input, Title 20, Self Diagnostic

All the above are UL Listed products that are certified for field install external/remote to the fixture.

\*Minimum delivered lumen output to assist in product selection for increased fixture mounting height.


The CP10 delivered emergency illumination outperforms legacy 1400 lumen fluorescent emergency ballast.

Please contact us at [techsupport@iotaengineering.com](mailto:techsupport@iotaengineering.com) for any Emergency Battery related questions.


## PHOTOMETRY

Distribution Curve      Distribution Data      Output Data      Illuminance Data at 30" Above Floor for a Single Luminaire


**LDN6 35/10 L06AR**, input watts: 10.44, delivered lumens: 987.10, LM/W = 94.54, spacing criterion at 0= 1.02, test no. ISF 30716P262.

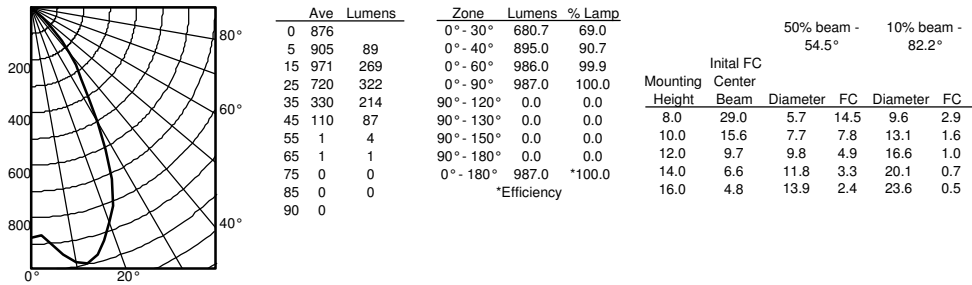

**LDN6 35/15 L06AR**, input watts: 17.52, delivered lumens: 1572.9, LM/W = 89.77, spacing criterion at 0= 1.02, test no. ISF 30716P265.

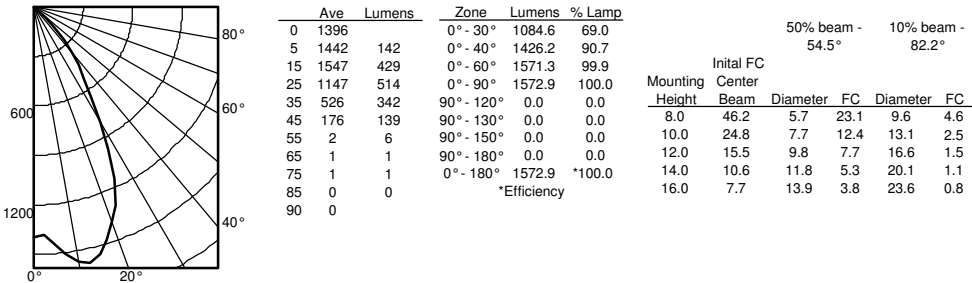

**LDN6 35/30 L06AR**, input watts: 34.75, delivered lumens: 3138.5, LM/W = 90.31, spacing criterion at 0= 1.02, test no. ISF 30716P274.

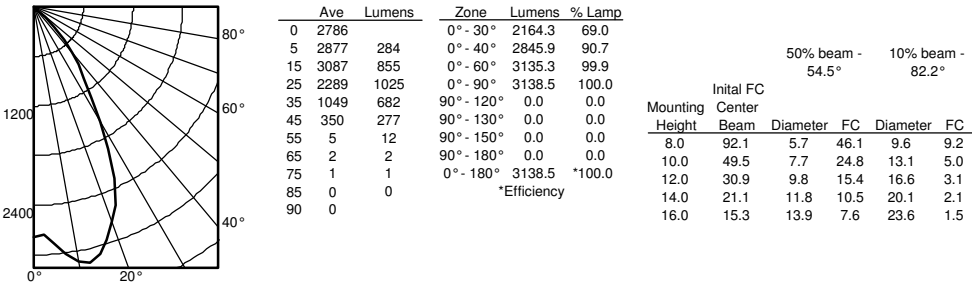

### HOW TO ESTIMATE DELIVERED LUMENS IN EMERGENCY MODE

Use the formula below to estimate the delivered lumens in emergency mode

**Delivered Lumens = 1.25 x P x LPW**

P = Output power of emergency driver. P = 10W for PS1055CP

LPW = Lumen per watt rating of the luminaire. This information is available on the ABL luminaire spec sheet.

The LPW rating is also available at [Designlight Consortium](http://Designlight Consortium).

#### Notes

- Tested in accordance with IESNA LM-79-08.
- Tested to current IES and NEMA standards under stabilized laboratory conditions.
- CRI: 80 typical.

### LUMEN OUTPUT MULTIPLIERS - FINISH

	Clear (AR)	White (WR)	Black (BR)
Specular (LS)	1.0	N/A	N/A
Semi-specular (LSS)	0.950	N/A	N/A
Matte diffuse (LD)	0.85	N/A	N/A
Painted	N/A	0.87	0.73

### LUMEN OUTPUT MULTIPLIERS - CRI

80	1.0
90	0.874



### LUMEN OUTPUT MULTIPLIERS - CCT

	2700K	3000K	3500K	4000K	5000K
80CRI	0.950	0.966	1.000	1.025	1.101

# LDN6



\* All dimensions are inches (centimeters) unless otherwise noted.

## LDN6 500-3000 Lumens

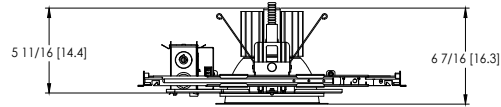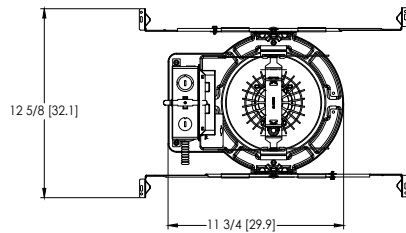



Aperture:  $\varnothing$  6-1/4" [15.9]  
 Ceiling Cutout:  $\varnothing$  7-1/8" [18.1] Self-flanged  
 Overlap Trim:  $\varnothing$  7-1/2" [19.1]

## LDN6 4000-5000 Lumens

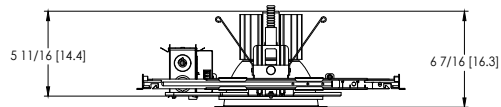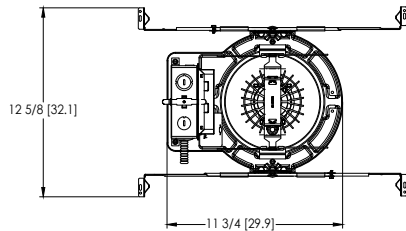



Marked Spacing: 24" x 24" x 10"  
 Aperture:  $\varnothing$  6-1/4" [15.9]  
 Ceiling Cutout:  $\varnothing$  7-1/8" [18.1] Self-flanged  
 Overlap Trim:  $\varnothing$  7-1/2" [19.1]

## LDN6 CP

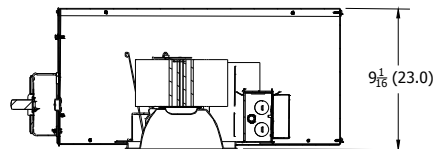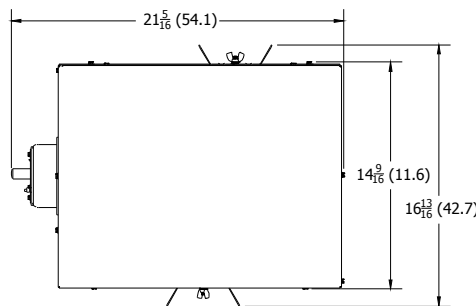

Aperture: 6-1/4 (15.9)  
 Ceiling Opening: 7-1/8 (18.1)  
 Overlap Trim: 7-1/2 (19.1)

## LDN6 EL

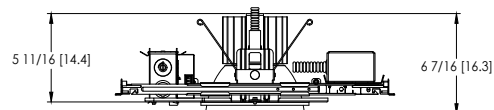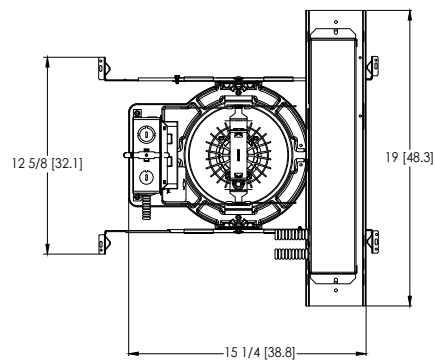

Marked Spacing above 3000lm: 24" x 24" x 10"  
 Aperture:  $\varnothing$  6-1/4" [15.9]  
 Ceiling Cutout:  $\varnothing$  7-1/8" [18.1] Self-flanged  
 Overlap Trim:  $\varnothing$  7-1/2" [19.1]

## ADDITIONAL DATA



The Sensor Switch JOT enabled solution offers a wireless, app-free approach to single room lighting control. JOT enabled products use Bluetooth® Low Energy (BLE) technology to enable wireless dimming and switching.

### Diagram



LDN6 Series



Sensor Switch  
WSXA JOT

1. **Power:** Install JOT enabled fixtures and controls as instructed.
2. **Pair:** Insert the pairing tool into the pinhole on the wall switch; press and hold any button for 6 seconds.
3. **Play:** Once paired, each fixture will individually dim down to 10% brightness. All products will be fully functional.

COMPATIBLE 0-10V WALL-MOUNT DIMMERS		
MANUFACTURER	PART NO.	POWER BOOSTER AVAILABLE
Lutron®	Diva® DVTV	
	Diva® DVSCTV	
	Nova T® NTFTV	
	Nova® NFTV	
Leviton®	AWSMT-7DW	CN100
	AWSMG-7DW	PE300
	AMRMG-7DW	
	Leviton Centura Fluorescent Control System	
	IllumaTech® IP7 Series	
Synergy®	ISD BC	RDMFC
	SLD LPCS	
	Digital Equinox (DEQ BC)	
Douglas Lighting Controls	WPC-5721	
Entertainment Technology	Tap Glide TG600FAM120 (120V)	
	Tap Glide Heatsink TGH1500FAM120 (120V)	
	Oasis OA2000FAMU	
Honeywell	EL7315A1019	EL7305A1010 (optional)
	EL7315A1009	
HUNT Dimming	Preset slide: PS-010-IV and PS-010-WH	
	Preset slide: PS-010-3W-IV and PS-010-3W-WH	
	Preset slide, controls FD-010: PS-IFC-010-IV and PS-IFC-010-WH-120/277V	
	Preset slide, controls FD-010: PS-IFC-010-3W-IV and PS-IFC-010-3W-WH-120/277V	
	Remote mounted unit: FD-010	
Lehigh Electronic Products	Solitaire	PBX
PDM Electrical Products	WPC-5721	
Starfield Controls	TR61 with DALI interface port	RT03 DALI.net Router
WattStopper®	LS-4 used with LCD-101 and LCD-103	

## EXAMPLE

Group Fixture Control\*

\*Application diagram applies for fixtures with eldoLED drivers only.


**nPS 80 EZ** Dimming/Control Pack (qty: 2 required)

**nPODM 2P DX** Dual On/Off/Dim Push-Button WallPod

**nCM ADCX** Daylight Sensor with Automatic Dimming Control

**nCM PDT 9** Dual Technology Occupancy Sensor

**Description:** This design provides a dual on/off/dim wall station that enables manual control of the fixtures in Row A and Row B separately. Additionally, a daylight harvesting sensor is provided so the lights in Row B can be configured to dim automatically when daylight is available. An occupancy sensor turns off all lights when the space is vacant.

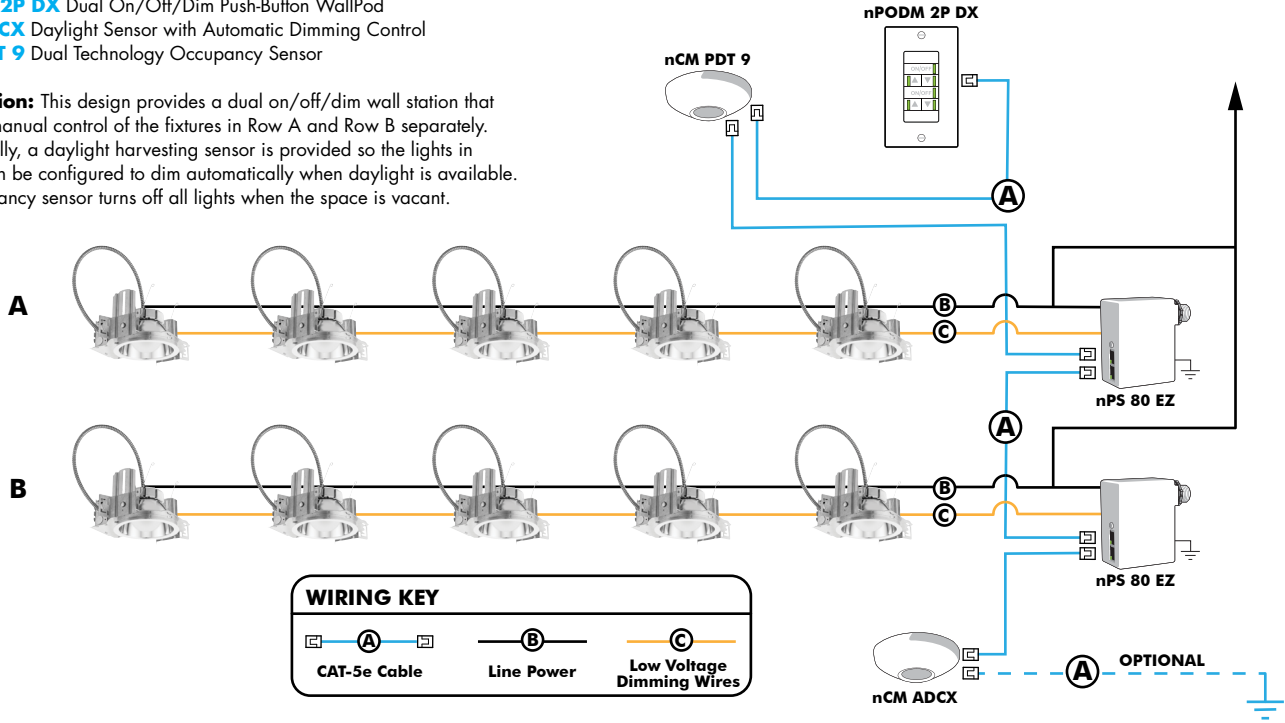

## Choose Wall Controls

nLight offers multiple styles of wall controls - each with varying features and user experience.



**Push-Button Wallpod**  
Traditional tactile buttons and LED user feedback



**Graphic Wallpod**  
Full color touch screen provides a sophisticated look and feel

## nLight® Wired Controls Accessories:

Order as separate catalog number. Visit [www.acuitybrands.com/products/controls/nlight](http://www.acuitybrands.com/products/controls/nlight) for complete listing of nLight controls.

WallPod Stations	Model number	Occupancy sensors	Model Number
On/Off	nPODM (Color)	Small motion 360°, ceiling (PIR/dual Tech)	nCM 9 / nCM PDT 9
On/Off & Raise/Lower	nPOD DX (Color)	Large motion 360°, ceiling (PIR/dual tech)	nCM 10 / nCM PDT 10
Graphic Touchscreen	nPOD GFX (Color)	Wide View (PIR/dual tech)	nWV 16 / nWV PDT 16
<b>Photocell controls</b>	<b>Model Number</b>	Wall Switch w/ Raise/Lower (PIR/dual tech)	nWSX LV DX / nWSX PDT LV DX
Dimming	nCM ADCX	<b>Cat-5 cables (plenum rated)</b>	<b>Model Number</b>
		10', CAT5 10FT	CAT5 10FT J1
		15, CAT5 15FT	CAT5 15FT J1

## nLight® AIR Control Accessories:

Order as separate catalog number. Visit [www.acuitybrands.com/products/controls/nlightair](http://www.acuitybrands.com/products/controls/nlightair).

Wall switches	Model number
On/Off single pole	rPODB [color]
On/Off two pole	rPODB 2P [color]
On/Off & raise/lower single pole	rPODB DX [color]
On/Off & raise/lower two pole	rPODB 2P DX [color]
On/Off & raise/lower single pole	rPODBZ DX WH <sup>1</sup>

### Notes

- 1 Can only be ordered with the RES7Z zone control sensor version.

## UL924 Sequence of Operation

The below information applies to all nLight AIR devices with an EM option.

- EM devices will remain at their high-end trim and ignore wireless lighting control commands, unless a normal-power-sensed (NPS) broadcast is received at least every 8 seconds.
- Using the CLAIRITY+ mobile app, EM devices must be associated with a group that includes a normal power sensing device to receive NPS broadcasts.
- Only non-emergency rPP20, rLSXR, rSBOR, rSDGR, and nLight AIR luminaires with version 3.4 or later firmware can provide normal power sensing for EM devices. See specification sheets for control devices and luminaires for more information on options that support normal power sensing.

## nLight AIR

nLight AIR is the ideal solution for retrofit or new construction spaces where adding communication is cost prohibitive. The integrated nLight AIR rPP20 Power Pack is part of each Lithonia LDN Luminaire. These individually addressable controls offer the ultimate in flexibility during initial setup and for space repurposing.



### Simple as 1,2,3


1. Install the nLight® AIR fixtures with embedded smart sensor
2. Install the wireless battery-powered wall switch
3. With CLAIRITY app, pair the fixtures with the wall switch and if desired, customize the sensor settings for the desired outcome





PROJECT NAME: \_\_\_\_\_ QUANTITY: \_\_\_\_\_ TYPE: \_\_\_\_\_

ORDERING CODE: \_\_\_\_\_

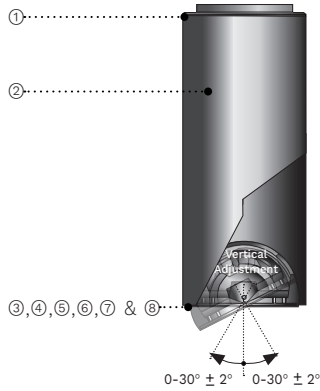

- ① Cast aluminum ventilated top cover with ceiling mounting plate.
- ② Seamless extruded aluminum cylindrical housing.
- ③ Fully sealed cast aluminum down light assembly.
- ④ Sealed cast aluminum lens frame.
- ⑤ Clear tempered glass lens.
- ⑥ Faceted specular aluminum reflector.
- ⑦ Light module with  $\pm 30^\circ$  tilting mechanism allowing forward and back light adjustability. Optional fully adjustable  $360^\circ$  rotation. Regressed light module available as an option.
- ⑧ All stainless steel hardware.



SY610



## MATERIALS

Syrios is made of corrosion resistant 356 aluminum alloy with a copper (CU) content of less than 0.1%. The main housing is made of seamless extruded aluminum, with an integrally sealed LED light module designed for optimal heat dissipation, and lighting performance. Syrios is standard with a unique proprietary design allowing the sealed LED module to tilt within the cylindrical housing. The top cast aluminum cover includes ventilation slots allowing air circulation and cooling of assembly.

## ELECTRICAL DRIVER

Driver is 0-10V dimming-ready (dims to 10%) with: 120-277 multi-volt compatibility (50-60Hz), operating temperature range of  $-40^\circ\text{C}/-40^\circ\text{F}$  to  $55^\circ\text{C}/131^\circ\text{F}$ , output over voltage protection, output over current protection and output short circuit protection with auto-recovery.

## LED LIGHT ENGINE

Offered in 2700K/3000K/3500K/4000K CCT with 80 CRI. 70% LED lumen maintenance at 60,000 hours (L70/B50) based on IESNA LM-80-08 LED extrapolated life, calculated per IESNA TM-21-21. Optional true amber LED for turtle sensitive areas. Wavelengths: 585nm to 597nm.

## FINISH

Five-stage preparation process including preheating of cast aluminum parts for air extraction, and an environmentally friendly alloy sealant. Polyester powder coating is applied through an electrostatic process and oven cured for long term finish.

## CERTIFICATION

UL Certified to Canadian and U.S. safety standards. Certified for use in wet locations. Rated IP65. Photometric testing performed by an independent laboratory in accordance with IES LM-79-08 standards at  $25^\circ\text{C}$ . Actual performance may differ as a result of end-user environment and application.

## WARRANTY


5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: <https://www.luminis.com/technical/warranty/>

## MOUNTING

The mounting plate is designed to fit on a 4" (102mm) octagonal electrical box using 3.5" (89mm) C/C mounting holes. Fixture must be installed on a finished ceiling for exterior applications and/or exposed to inclement weather.

## MEASUREMENTS

Maximum weight: 7.9 lbs (3.6 kg)

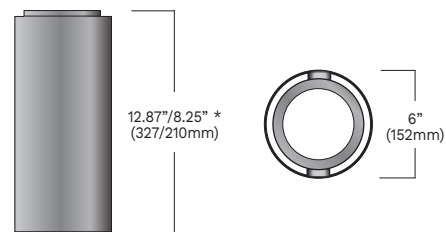


\* For low wattage models (L1L15 thru L1L25) luminaire height is 8.25" (210mm)

## LUMINIS.COM

Toll free: (866) 586-4647 | Fax: (514) 683-8872 | Email: [info@luminis.com](mailto:info@luminis.com)  
 260 Labrosse, Pointe-Claire (QC) Canada H9R 5L5

SY610  
 Rev. 03/06/24

**ORDERING CODE**

SY610	L1L15	VWD	40K	MVOLT
*SERIES	*LIGHT OUTPUT	*DISTRIBUTION	*CCT <sup>5</sup>	*VOLTAGE
<b>SY610</b> 	<u>Static White</u> <b>L1L15</b> 1599 lm / 15w <sup>1</sup> <b>L1L25</b> 2543 lm / 26w <sup>1</sup> <b>L1L40</b> 4102 lm / 48w <u>True Amber</u> <b>L1LK2A</b> 263 lm / 11w <sup>1,2</sup> Delivered lumens calculated at 4000K/80CRI except for amber. Flood optic distribution. Typical power consumption. Refer to LCF table for outputs at other CCTs.	<b>NR</b> Narrow optic 15° <b>FLD</b> Flood optic 30° <b>VWD</b> Very wide optic 52°	<b>27K</b> 2700K <b>30K</b> 3000K <b>35K</b> 3500K <b>40K</b> 4000K <b>AMB</b> 585nm to 597nm	<b>120</b> 120V <b>277</b> 277V <b>347</b> 347V6 <b>480</b> 480V6 <b>HVOLT</b> 347V-480V <sup>6</sup> <b>MVOLT</b> 120V-277V
	<u>Very Narrow Distribution</u> <b>L1L20NR</b> 1690 lm / 31w <sup>3</sup> Delivered lumens calculated at 4000K/80CRI. Very narrow optic distribution. Typical power consumption. Refer to LCF table for outputs at other CCTs.	<b>VNR</b> Very narrow optic 9° <sup>4</sup>		

LSL	--		--	A360	--
LENS/DIFFUSER	FUSE	EMERGENCY	LOUVERS	ADJUSTABILITY	REGRESSED
<b>LSL</b> Linear spread lens <b>SL</b> Solite lens <sup>7</sup>	<b>FS</b> Fuse	<b>REM7</b> Remote emergency battery, 90 min, 7W <sup>8</sup>	<b>HL</b> Hexcell louver	<b>A360</b> 360° adjustable rotation	<b>RG</b> Regressed light module <sup>9</sup>


BZT	--	--
*FINISH	WOOD FINISH <sup>12</sup>	ENVIRONMENT
<b>BKT</b> Jet black <b>BZT</b> Bronze <b>CHT</b> Champagne <b>DGT</b> Gun metal <b>GRT</b> Titanium gray <b>MST</b> Matte silver <b>SGT</b> Steel gray <b>WHT</b> Snow white  <b>CMC</b> Custom matched color <sup>10</sup> <b>RAL</b> RAL color <sup>11</sup>	<b>ADG</b> American douglas <b>BRC</b> Birch <b>CHN</b> Chestnut <b>CRY</b> Cherry <b>KNP</b> Knotty pine <b>MPL</b> Maple <b>OFL</b> Oak <b>RSW</b> Rosewood <b>TEK</b> Teak <b>WLN</b> Walnut	<b>MG</b> Marine grade paint <sup>13</sup> <b>NT</b> Natatorium suitable <sup>14</sup>

**NOTES**

- \*- Denotes a required field
- 1- Luminaire height is 8.25" (210mm).
- 2- Available only with AMB option.
- 3- Available only with VNR distribution option. Not available with 27K, 35K or AMB.
- 4- Field angle 18°.
- 5- For IDA certification compliance, luminaire must be ordered with 3000K or warmer.
- 6- For L1L15 and L1L25 347V models, luminaire height is 12.87" (327mm).
- 7- Lumen conversion factor (LCF) 0.9.
- 8- Remote mount 50ft - 12" square enclosure with access cover. The remote enclosure must be interior.
- 9- Cylindrical housing extended by 1" (25.4mm) for increased cut-off.
- 10- Contact factory to coordinate custom matching color.
- 11- Specify RAL number.
- 12- Faux wood finish not applied to lens frame, accessories or catenary parts (if selected). Additional delay required. Not compatible with marine grade paint.
- 13- Marine grade paint for harsh, coastal environment and exposure to salt water. Additional delay required please contact factory for info.
- 14- Available only in WHT and BKT finish.


TYPICAL PHOTOMETRY SUMMARY

SY610-L1L40-NR

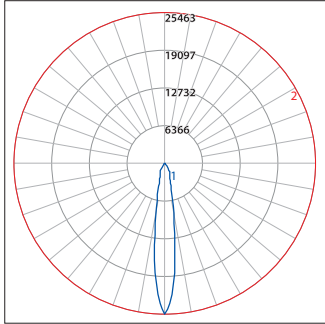


**Total Lms:** 3998 Lumens  
**Total Input Watts:** 48 W  
**Efficacy:** 83 Lumens/Watt  
**BUG:** B3-U0-G0  
**CCT/CRI:** 4000K/80  
**Maximum Candela:** 25463 @ 0°

SY610-L1L40-FLD

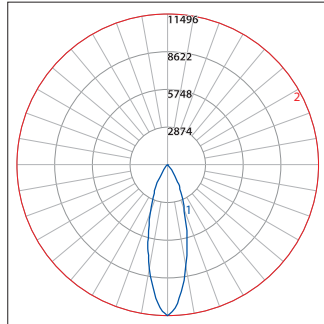


**Total Lms:** 4102 Lumens  
**Total Input Watts:** 48 W  
**Efficacy:** 85 Lumens/Watt  
**BUG:** B3-U0-G0  
**CCT/CRI:** 4000K/80  
**Maximum Candela:** 11496 @ 0°

SY610-L1L40-VWD

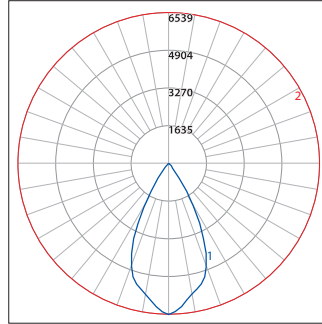

**Total Lms:** 4369 Lumens  
**Total Input Watts:** 48 W  
**Efficacy:** 91 Lumens/Watt  
**BUG:** B3-U0-G0  
**CCT/CRI:** 4000K/80  
**Maximum Candela:** 6539 @ 0°

SY610-L1L20NR-VNR

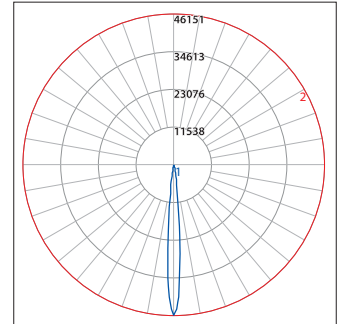

**Total Lms:** 1690 Lumens  
**Total Input Watts:** 31 W  
**Efficacy:** 55 Lumens/Watt  
**BUG:** B2-U0-G0  
**CCT/CRI:** 4000K/80  
**Maximum Candela:** 46151 @ 0°

LUMEN CONVERSION FACTOR (LCF)		
CCT	CRI	LCF
2700K	80	0.91
3000K	80	0.94
3500K	80	0.98
4000K	80	1.00


All Photometry shown use the 80CRI 4000K LEDs.  
 Please visit our web site [www.luminis.com](http://www.luminis.com) for complete I.E.S. file.

**LUMINIS.COM**

Toll free: (866) 586-4647 | Fax: (514) 683-8872 | Email: [info@luminis.com](mailto:info@luminis.com)  
 260 Labrosse, Pointe-Claire (QC) Canada H9R 5L5

PROJECT NAME: \_\_\_\_\_ QUANTITY: \_\_\_\_\_ TYPE: \_\_\_\_\_

ORDERING CODE: \_\_\_\_\_

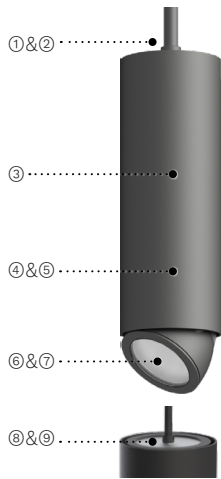

- ① Field adjustable stem or braided steel cable mounting.
- ② Sturdy galvanized steel mounting plate.
- ③ Seamless extruded aluminum cylindrical housing.
- ④ Asymmetric heatsink for perfect blend of clean aesthetic and efficient heat dissipation.
- ⑤ Sleek and durable sealed cast aluminum down light assembly.
- ⑥ 30° tilt and 355° rotation for light adjustability.
- ⑦ Faceted specular aluminum reflector offers smooth lighting and reduced glare (NR/FLD/VWD). While TIR collimator lens focuses light in a very narrow beam. Silicone lens.
- ⑧ Patented uplight light guide technology.
- ⑨ Tempered glass offers durability and water ingress protection.



SYP606-STM



SYP606-SPG

## MATERIALS

Syrios Pro is made of corrosion resistant 360 aluminum alloy with a copper (CU) content of less than 0.1%. The main housing is made of seamless 6063 extruded aluminum, with an integrally sealed LED light module designed for optimal heat dissipation, and lighting performance.

## ELECTRICAL DRIVER

Driver is 0-10V dimming-ready (dims to 1%) with: 120-277 multivolt (50-60Hz) or 347-480 high-volt (50-60Hz), operating temperature range of -30°C/-22°F to 45°C/113°F, output over voltage protection, output over current protection and output short circuit protection with auto-recovery.

## LED LIGHT ENGINE

Offered in 2700K/3000K/3500K/4000K CCT with 80 CRI. 70% LED lumen maintenance at 60,000 hours (L70B50) based on IESNA. LM-80-08 LED extrapolated life, calculated per IESNA TM-21-21. Optional true amber LED for turtle sensitive areas. Wavelengths: 585nm to 597nm. RGBW with white CCT available in 3000K and 4000K. Quad chip technology, enabling optimal color mixing under each individual optic.

## FINISH

Five-stage preparation process including preheating of cast aluminum parts for air extraction, and an environmentally friendly alloy sealant. Polyester powder coating is applied through an electrostatic process and oven cured for long term finish.

## CERTIFICATION

UL Certified to Canadian and U.S. safety standards. Certified for use in wet locations. Rated IP65. Photometric testing performed by an independent laboratory in accordance with IES LM-79-08 standards at 25°C. Actual performance may differ as a result of end-user environment and application.

## WARRANTY


5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: <https://www.acuitybrands.com/support/warranty/terms-and-conditions>

## MOUNTING


The mounting plate is designed to fit on a 4" (102mm) octagonal electrical box using 3.5" (89mm) C/C mounting holes.

## MEASUREMENTS

Maximum weight: 15 lbs (6.8 kg)

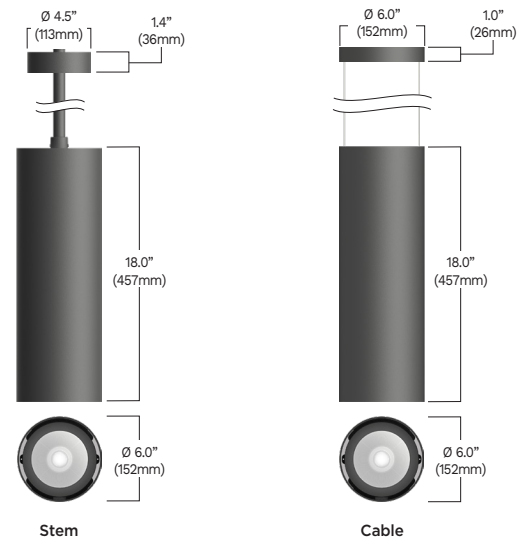

**ORDERING CODE**

SYP606	L1L45	LD5	UL1L22	BAT	40K	MVOLT	
*SERIES	*DOWNLIGHT OUTPUT	*DOWNLIGHT DISTRIBUTION	*UPLIGHT OUTPUT	*UPLIGHT DISTRIBUTION	CCT	*VOLTAGE	
 <p><b>SYP606</b></p>	<u>Static White</u> <b>L1L20</b> 2249 lm / 21w <b>L1L35</b> 3732 lm / 39w <b>L1L50</b> 4756 lm / 56w <u>RGBW</u> <b>L1RGBW<sup>1</sup></b> 349 lm / 46w <u>True Amber</u> <b>L1LK2A</b> 562 lm / 9w Delivered lumens calculated at 4000K/80CRI except for RGBW and amber. Flood optic distribution. Typical power consumption. Refer to LCF table for outputs at other CCTs.	<b>NR</b> Narrow optic 11° <b>FLD</b> Flood optic 30° <b>VWD</b> Very wide optic 55°	<u>Static White</u> <b>UL1L20</b> 2249 lm / 21w <b>UL1L35</b> 3732 lm / 39w <b>UL1L50</b> 4756 lm / 56w <u>RGBW</u> <b>UL1RGBW<sup>1</sup></b> 349 lm / 46w <u>True Amber</u> <b>UL1LK2A</b> 562 lm / 9w Delivered lumens calculated at 4000K/80CRI except for RGBW and amber. Flood optic distribution. Typical power consumption. Refer to LCF table for outputs at other CCTs.	<b>UNR</b> Uplight narrow optic 11° <b>UFLD</b> Uplight flood optic 30° <b>UVWD</b> Uplight very wide optic 55°	<b>27K</b> 2700K <b>30K</b> 3000K <b>35K</b> 3500K <b>40K</b> 4000K	<b>120</b> 120V <b>277</b> 277V <b>347</b> 347V <b>480</b> 480V <b>HVOLT</b> 347V-480V <b>MVOLT</b> 120V-277V	
	<u>Static White</u> <b>L1L25</b> 2403 lm / 19w <b>L1L45</b> 4400 lm / 39w <b>L1L60</b> 5607 lm / 56w <u>True Amber</u> <b>L1LK3A</b> 662 lm / 9w Delivered lumens calculated at 4000K/80CRI except for amber. Type V distribution. Typical power consumption. Refer to LCF table for outputs at other CCTs.	<b>LD1</b> Type I distribution <b>LD2</b> Type II distribution <b>LD3</b> Type III distribution <b>LD5</b> Type V distribution	<u>Batwing Distribution</u> <b>UL1L22</b> 2052 lm / 25w <b>UL1L31</b> 3085 lm / 41w Delivered lumens calculated at 4000K/80CRI at other CCTs.	<b>BAT</b> Batwing			
	<u>Very Narrow Distribution</u> <b>L1L06</b> 661 lm / 15w Delivered lumens calculated at 4000K/80CRI. Very narrow optic distribution. Typical power consumption. Refer to LCF table for outputs at other CCTs.	<b>VNR</b> Very narrow optic 6°	<u>Very Narrow Distribution</u> <b>UL1L06</b> 661 lm / 15w Delivered lumens calculated at 4000K/80CRI. Very narrow optic distribution. Typical power consumption. Refer to LCF table for outputs at other CCTs.	<b>UVNR</b> Uplight very narrow optic 6°			Required field for all outputs except True amber.

ESL	UESL	--	--	STM	84IN	--	--
DOWNLIGHT LENS	UPLIGHT LENS	DOWNLIGHT LOUVERS	UPLIGHT LOUVERS	*MOUNTING	*SUSPENSION LENGTH	CONDUIT COVER	MOUNTING ACCESSORY
<b>ESL</b> Elliptical spread lens <sup>2,4</sup> <b>SL</b> Solite lens <sup>3,4</sup>	<b>UESL</b> Uplight elliptical spread lens <sup>2,5</sup> <b>USL</b> Uplight solite lens <sup>3,5</sup>	<b>HL</b> Hexcell louver	<b>UHL</b> Uplight hexcell louver	<b>SPG</b> Black power cord with aircraft cable <b>STM</b> Field-cutttable hang straight suspension stem	<b>12IN</b> 12" <b>24IN</b> 24" <b>36IN</b> 36" <b>48IN</b> 48" <b>60IN</b> 60" Available up to 240" in 12" increments.	<b>SWK</b> Decorative cover for 3/4" conduit junction box	<b>STC</b> Set of 3 stabilizer cables <sup>6</sup>


--	--	--	--	BZT	--	--
CONTROLS	DUAL SWITCHING	SURGE PROTECTOR	EMERGENCY	*FINISH	WOOD FINISH <sup>12</sup>	ENVIRONMENT
<b>NLTAIR2</b> nLight AIR 2.0 wireless control <sup>7</sup>	<b>DS</b> Dual circuit switching <sup>8</sup>	<b>SP</b> Surge protector	<b>REM7</b> Remote emergency battery, 90 min, 7W <sup>9</sup>	<b>BKT</b> Jet black <b>BZT</b> Bronze <b>CHT</b> Champagne <b>DGT</b> Gun metal <b>GRT</b> Titanium gray <b>MST</b> Matte silver <b>SGT</b> Steel gray <b>WHT</b> Snow white <b>CMC</b> Custom matched color <sup>10</sup> <b>RAL</b> RAL color <sup>11</sup>	<b>ADG</b> American douglas <b>BRC</b> Birch <b>CHN</b> Chestnut <b>CRY</b> Cherry <b>KNP</b> Knotty pine <b>MPL</b> Maple <b>OFL</b> Oak <b>RSW</b> Rosewood <b>TEK</b> Teak <b>WLN</b> Walnut	<b>MG</b> Marine grade paint <sup>13</sup> <b>NT</b> Natatorium suitable <sup>14</sup>

NOTES

- \*- Denotes a required field
- 1- Available only with 30K, 40K. Not available with 347, 480 or HVOLT.
- 2- 37" x 80".
- 3- Lumen conversion factor (LCF) 0.9.
- 4- Not available with HL.
- 5- Not available with UHL.
- 6- Available only with STM.
- 7- Not available with 480V, HVOLT.
- 8- Not available with NLTAIR2, REM7.
- 9- Remote mount 50ft - 12" (305mm) square enclosure with access cover. Powers downlight only. The remote enclosure must be interior (cable by others). Not available with 347V, 480V, HVOLT, NLTAIR2.
- 10- Contact factory to coordinate custom matching color.
- 11- Specify RAL number.
- 12- Faux wood finish not applied to driver housing, lens frame or accessories. Additional delay required. Not compatible with marine grade paint or natatorium suitable.
- 13- Marine grade paint for harsh, coastal environment and exposure to salt water. Additional delay required.
- 14- Available only in WHT and BKT.


### TYPICAL PHOTOMETRY SUMMARY

SYP606-L1L06-VNR

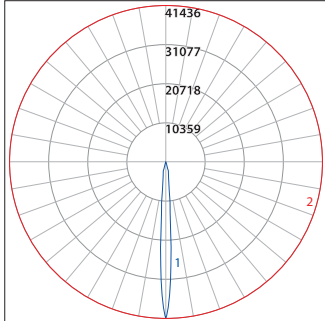


**Total Lms:** 661 Lumens  
**Total Input Watts:** 15 W  
**Efficacy:** 44.1 Lumens/Watt  
**BUG:** B1-U0-G0  
**CCT/CRI:** 4000K/80  
**Maximum Candela:** 41436 @ 0°

SYP606-L1L50-NR

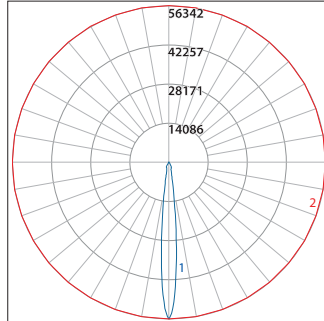


**Total Lms:** 4631 Lumens  
**Total Input Watts:** 56 W  
**Efficacy:** 82.7 Lumens/Watt  
**BUG:** B3-U0-G0  
**CCT/CRI:** 4000K/80  
**Maximum Candela:** 56342 @ 0°

SYP606-L1L50-FLD

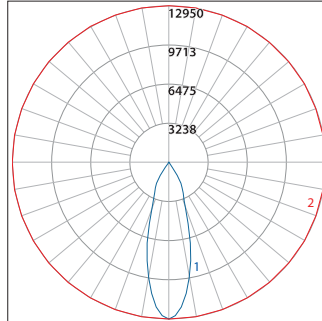


**Total Lms:** 4756 Lumens  
**Total Input Watts:** 56 W  
**Efficacy:** 84.9 Lumens/Watt  
**BUG:** B3-U0-G0  
**CCT/CRI:** 4000K/80  
**Maximum Candela:** 12950 @ 0°

SYP606-L1L50-FLD-ESL

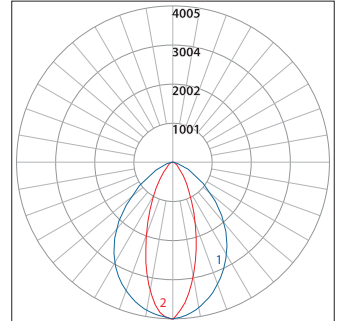


**Total Lms:** 4327 Lumens  
**Total Input Watts:** 56 W  
**Efficacy:** 77.3 Lumens/Watt  
**BUG:** B3-U0-G1  
**CCT/CRI:** 4000K/80  
**Maximum Candela:** 4004 @ 0°

SYP606-L1L50-FLD-HL

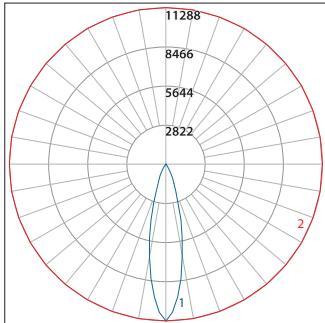


**Total Lms:** 2724 Lumens  
**Total Input Watts:** 56 W  
**Efficacy:** 48.6 Lumens/Watt  
**BUG:** B3-U0-G0  
**CCT/CRI:** 4000K/80  
**Maximum Candela:** 11288 @ 0°

SYP606-L1L50-VWD

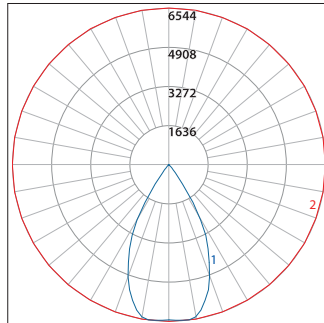


**Total Lms:** 4901 Lumens  
**Total Input Watts:** 56 W  
**Efficacy:** 87.5 Lumens/Watt  
**BUG:** B3-U0-G0  
**CCT/CRI:** 4000K/80  
**Maximum Candela:** 6544 @ 0°H/7.5°V

SYP606-L1L60-LD1

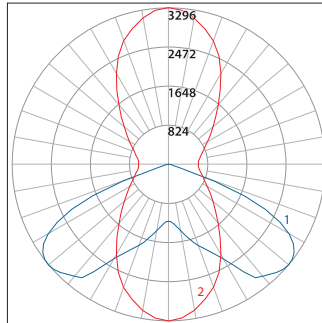


**Total Lms:** 5930 Lumens  
**Total Input Watts:** 56 W  
**Efficacy:** 105.9 Lumens/Watt  
**BUG:** B2-U0-G1  
**CCT/CRI:** 4000K/80  
**Maximum Candela:** 3296 @ 90°H/50°V

SYP606-L1L60-LD2

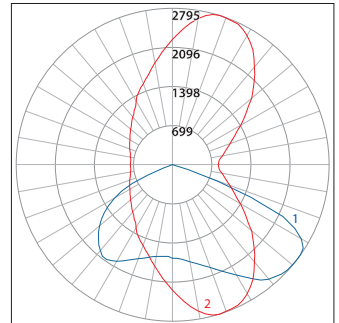


**Total Lms:** 6049 Lumens  
**Total Input Watts:** 56 W  
**Efficacy:** 108 Lumens/Watt  
**BUG:** B2-U0-G1  
**CCT/CRI:** 4000K/80  
**Maximum Candela:** 2795 @ 72.5°H/52.5°V

SYP606-L1L60-LD3

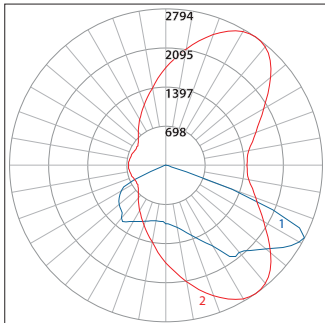


**Total Lms:** 5884 Lumens  
**Total Input Watts:** 56 W  
**Efficacy:** 105.1 Lumens/Watt  
**BUG:** B2-U0-G1  
**CCT/CRI:** 4000K/80  
**Maximum Candela:** 2794 @ 55°H/62.5°V

SYP606-L1L60-LD5

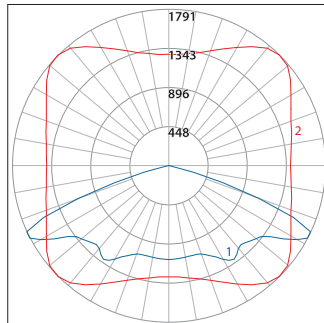

**Total Lms:** 5607 Lumens  
**Total Input Watts:** 56 W  
**Efficacy:** 100.1 Lumens/Watt  
**BUG:** B2-U0-G1  
**CCT/CRI:** 4000K/80  
**Maximum Candela:** 1791 @ 135°H/62.5°V

SYP606-L1L30-BATWING

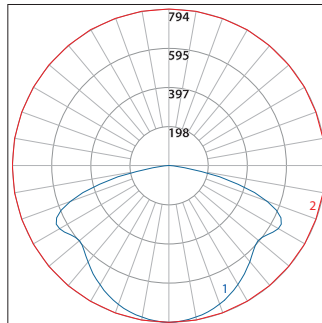

**Total Lms:** 3085 Lumens  
**Total Input Watts:** 41 W  
**Efficacy:** 75.2 Lumens/Watt  
**BUG:** -  
**CCT/CRI:** 4000K/80  
**Maximum Candela:** 794 @ 0°

LUMEN CONVERSION FACTOR (LCF)		
CCT	CRI	LCF
2700K	80	0.91
3000K	80	0.94
3500K	80	0.98
4000K	80	1.00

All Photometry shown use the 80CRI 4000K LEDs.  
 Please visit our web site [www.luminis.com](http://www.luminis.com) for complete I.E.S. file.

**OPTION DETAILS**

**SWK**  
 Adaptor box for surface 3/4" conduit feed (4 sides plus back entry).

**NLTAIR2**  
 nLight AIR 2.0 wireless control mounted on canopy and black antenna.  
 NOTE: Shown with cable (SPG) option.

**REM7**  
 Remote mount 120/277V emergency battery pack (1110 lm/90 min). Test switch provided within enclosure with 5" (127mm) leads.

**STM**  
 Standard heavy duty 45° hang straight swivel, with  $\varnothing$  4.5" (114mm) canopy and universal mounting plate.

**STC**  
 Set of three stabilizer cables. For stem mount only.

# IMAGE™

OW1291\_ OW1293\_ OW1295\_ OW1297

Outdoor Wall



[Visalighting.com/products/Image](http://Visalighting.com/products/Image)

Type:

Project:

Location:




## DIMENSIONS<sup>1</sup>

Depth is measured from wall to front of fixture

L = Length W = Width D = Depth


	OW1291	OW1293	OW1295	OW1297
<b>L</b>	20-3/8" (518 mm)	25-7/8" (657 mm)	36-7/8" (937 mm)	47-7/8" (1216 mm)
<b>W</b>	7-1/4" (184 mm)			
<b>D</b>	4" (102 mm)			

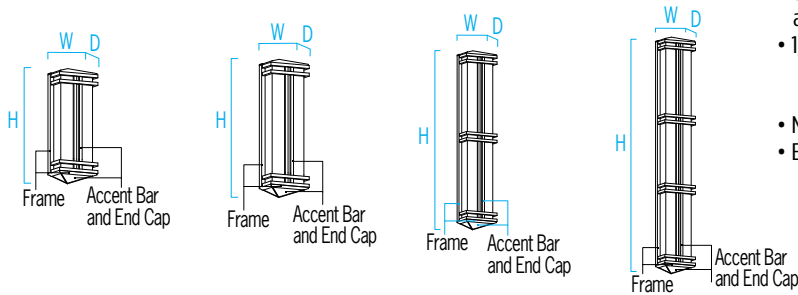


## FEATURES

- Integral driver
- Modular design for replacement of LED source and driver
- Removable cam-action hinged frame for ease of maintenance
- Vertical mounting standard (horizontal mounting optional)
- Mounts over standard electrical junction box (by others) with provided hardware.
- Extruded aluminum backplate, die-cast end caps, vertical center accent and frame side rails. Solid metal formed accent bars, gasketed and sealed construction
- 1/8" thick white acrylic diffuser
  - F1 rated, UV stable
  - UL-94 HB Flame Class rated
- No VOC powder coat paint finish
- ETL listed for wet location mounting 4' above grade

## RELATIVE SCALE DRAWING

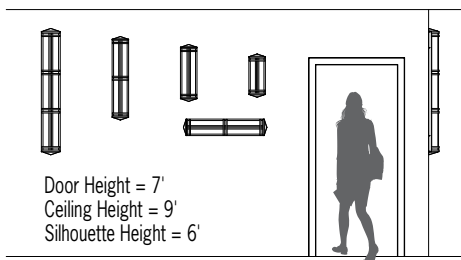

## PHOTOMETRICS

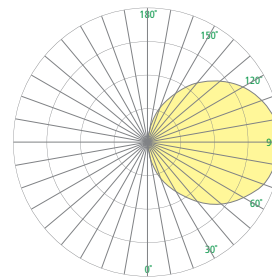

XPS



ADA Compliant



ETL Listed



5 Year Warranty



# IMAGE (cont.)

OW1291\_OW1293\_OW1295\_OW1297

Outdoor Wall



Fill in shaded boxes using information listed below

OW1293	L40K(L)	-	MVOLT	BMAT	BMAT	-	
<b>MODEL<sup>1</sup></b> OW1291 OW1293 OW1295 OW1297  See page 1	<b>SOURCE<sup>2</sup></b> <ul style="list-style-type: none"> <li>L30K(H)</li> <li>L30K(L)</li> <li>L35K(H)</li> <li>L35K(L)</li> <li>L40K(H)</li> <li>L40K(L)</li> </ul>		<b>VOLTAGE</b> MVOLT	<b>FRAME FINISH</b>  See last page for finish order codes	<b>ACCENT BAR AND END CAP FINISH</b>  See last page for finish order codes		<b>OPTION(S)<sup>3</sup></b> HM XPS

**SOURCE<sup>2</sup>** (Select one)

Dimmable 0-10V to 1%, Minimum 80CRI, within 3-step MacAdam

SOURCE	CCT	OW1291		OW1293		OW1295		OW1297	
		Delivered Lumens	Power (Watts)	Delivered Lumens	Power (Watts)	Delivered Lumens	Power (Watts)	Delivered Lumens	Power (Watts)
• L30K(H)	3000K	1200	15	1700	19	2500	29	3400	38
• L30K(L)	3000K	800	9	1100	13	1700	19	2300	25
L35K(H)	3500K	1200	15	1700	19	2500	29	3400	38
L35K(L)	3500K	800	9	1100	13	1700	19	2300	25
• L40K(H)	4000K	1300	15	1700	19	2600	29	3500	38
• L40K(L)	4000K	850	9	1100	13	1700	19	2300	25

**VOLTAGE**

<b>MVOLT</b>	120-277V, 50/60 Hz
--------------	--------------------

**OPTIONS<sup>3</sup>** (Multiple Selections Allowed)

⚠ Option availability may be interdependent with Other Options

<b>HM</b>	Horizontal mount (vertical is standard)
<b>XPS</b>	Express 10 day shipping. Items marked with a bullet (●) are not available with XPS

# IMAGE (cont.)

OW1291\_ OW1293\_ OW1295\_ OW1297

Outdoor Wall

## IMAGE PRODUCT FAMILY

<b>Indoor</b>	<b>Wall/Ceiling</b>	<b>20"</b>	• CV1901
		<b>26"</b>	• CV1903
		<b>37"</b>	• CV1905
		<b>48"</b>	• CV1907
<b>Outdoor</b>	<b>Wall</b>	<b>20"</b>	• OW1291
		<b>26"</b>	• OW1293
		<b>37"</b>	• OW1295
		<b>48"</b>	• OW1297

## SUGGESTED VARIATIONS

- Custom colors
- Custom bar arrangements/additions
- Fixture lengths

See [Visalighting.com/products/Image](https://visalighting.com/products/Image) for more information

# IMAGE (cont.)

OW1291\_ OW1293\_ OW1295\_ OW1297

Outdoor Wall



## FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#). For more information about our finishes visit [visalighting.com/finishes](https://visalighting.com/finishes)

### Powder Coat Paint Finishes (Standard) for Frame or Accent Bar and End Cap Finish


<b>AGGY</b> Agate Grey	<b>ALGN</b> Alpine Green	<b>BJBG</b> Baja Beige	<b>BMAT</b> Bronze Matte	<b>BRNZ</b> Bronze	<b>BSIL</b> Blade Silver	<b>CVBL</b> Cove Blue
<b>DEOR</b> Deoro Gold	<b>GLWT</b> Glacier White	<b>GSIL</b> Graphite Silver	<b>HRGR</b> Harbor Grey	<b>JTBK</b> Jet Black	<b>OCBL</b> Ocean Blue	<b>SHGR</b> Shoreline Grey
<b>SBGN</b> Sagebrush Green	<b>SLGR</b> Slate Grey	<b>SSTP</b> Sierra Taupe	<b>TRCN</b> Terracotta Canyon	<b>TRWT</b> Traffic White	<b>VBLK</b> Velvet Black	<b>VNRD</b> Vineyard Red

### Metal Finishes (Premium) for Accent Bar and End Cap only

<b>BSS</b> Brushed Stainless Steel	<b>PSS</b> Polished Stainless Steel

PROJECT NAME: \_\_\_\_\_ QUANTITY: \_\_\_\_\_ TYPE: \_\_\_\_\_

ORDERING CODE: \_\_\_\_\_

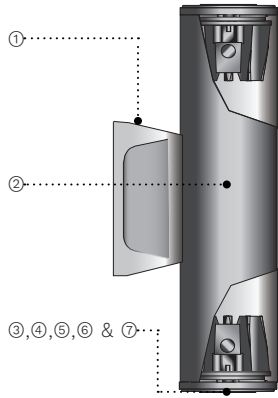

- ① Cast aluminum driver housing, includes galvanized steel wall mount pressure plate.
- ② Extruded aluminum cylindrical housing.
- ③ Fully sealed cast aluminum up/down light assembly.
- ④ Sealed cast aluminum lens frame.
- ⑤ Clear tempered glass lens.
- ⑥ Faceted specular aluminum reflector.
- ⑦ All stainless steel hardware.



SY302



## MATERIALS

Syrios is made of corrosion resistant 356 aluminum alloy with a copper (CU) content of less than 0.1%. The main housing is made of seamless extruded aluminum, with an integrally sealed LED light module designed for optimal heat dissipation, and lighting performance.

## ELECTRICAL DRIVER

Driver is 0-10V dimming-ready (dims to 10%) with: 120-277 multi-volt compatibility (50-60Hz), operating temperature range of -30°C/-22°F to 55°C/131°F, output over voltage protection, output over current protection and output short circuit protection with auto-recovery.

## LED LIGHT ENGINE

Offered in 2700K/3000K/3500K/4000K CCT with 80 CRI. 70% LED lumen maintenance at 60,000 hours (L70/B50) based on IESNA LM-80-08 LED extrapolated life, calculated per IESNA TM-21-21. Optional true amber LED for turtle sensitive areas. Wavelengths: 585nm to 597nm.

## FINISH

Five-stage preparation process including preheating of cast aluminum parts for air extraction, and an environmentally friendly alloy sealant. Polyester powder coating is applied through an electrostatic process and oven cured for long term finish.

## CERTIFICATION

UL Certified to Canadian and U.S. safety standards. Certified for use in wet locations. Rated IP65. Photometric testing performed by an independent laboratory in accordance with IES LM-79-08 standards at 25°C. Actual performance may differ as a result of end-user environment and application.

## WARRANTY


5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: <https://www.luminis.com/technical/warranty/>

## MOUNTING


The mounting plate is designed to fit on a 2X4" (51x102mm) rectangular electrical box using 3.156" (80mm) C/C mounting holes. Optional trimming plate for octagonal jbox (option MT4).

## MEASUREMENTS

Maximum weight: 3.8 lbs (2 kg)

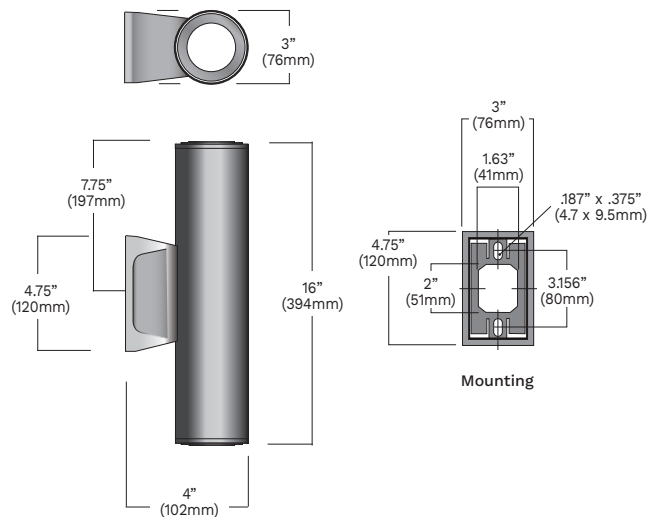

ORDERING CODE

SY302	L2L10	WDU	WDD	40K	MVOLT
*SERIES	*LIGHT OUTPUT	*UPLIGHT DISTRIBUTION	* DOWNLIGHT DISTRIBUTION	*CCT	*VOLTAGE
 <p><b>SY302</b></p> <p><u>Static White</u> <b>L2L10</b> 1849 lm / 25w</p> <p><u>True Amber</u> <b>L2LK2A</b> 247 lm / 22w<sup>1</sup></p> <p>Delivered lumens calculated at 4000K/80CRI except for amber. Flood optic distribution. Typical power consumption. Refer to LCF table for outputs at other CCTs.</p>		<p><b>FLDU</b> Flood optic 29° uplight</p> <p><b>WDU</b> Wide optic 42° uplight</p>	<p><b>FLDD</b> Flood optic 29° downlight</p> <p><b>WDD</b> Wide optic 42° downlight</p>	<p><b>27K</b> 2700K</p> <p><b>30K</b> 3000K</p> <p><b>35K</b> 3500K</p> <p><b>40K</b> 4000K</p> <p><b>AMB</b> 585nm to 597nm</p>	<p><b>120</b> 120V</p> <p><b>277</b> 277V</p> <p><b>MVOLT</b> 120V-277V</p>
	<p><u>Very Narrow Distribution</u> <b>L2L5NR</b> 1078 lm / 21w<sup>2</sup></p> <p>Delivered lumens calculated at 4000K/80CRI. Very narrow optic distribution. Typical power consumption. Refer to LCF table for outputs at other CCTs.</p>	<p><b>VNRU</b> Very narrow optic 9° uplight<sup>3</sup></p>	<p><b>VNRD</b> Very narrow optic 9° downlight<sup>3</sup></p>		

--	--	LSLU	LSLD	--	
CONDUIT COVER	MOUNTING ACCESSORY	UPLIGHT LENS	DOWNLIGHT LENS	FUSE	EMERGENCY
<p><b>SWK</b> Decorative cover for 3/4" conduit junction box</p>	<p><b>MT4</b> Trim plate for 4" octagonal J-box</p>	<p><b>LSLU</b> Linear spread lens uplight</p> <p><b>SLU</b> Solite lens uplight<sup>4</sup></p>	<p><b>LSLD</b> Linear spread lens downlight</p> <p><b>SLD</b> Solite lens downlight<sup>4</sup></p>	<p><b>FS</b> Fuse</p>	<p><b>REM7</b> Remote emergency battery, 90 min, 7W<sup>5</sup></p>


--	--	BZT	--	--
SHIELDING ACCESSORIES	LOUVERS	*FINISH	WOOD FINISH <sup>9</sup>	ENVIRONMENT
<p><b>SNTD</b> Snoot downlight<sup>6</sup></p> <p><b>SNTU</b> Snoot uplight<sup>6</sup></p> <p><b>SNTUD</b> Snoot uplight &amp; downlight<sup>6</sup></p>	<p><b>HLD</b> Hexcell louver downlight</p> <p><b>HLU</b> Hexcell louver uplight</p> <p><b>HLUD</b> Hexcell louver uplight &amp; downlight</p>	<p><b>BKT</b> Jet black</p> <p><b>BZT</b> Bronze</p> <p><b>CHT</b> Champagne</p> <p><b>DGT</b> Gun metal</p> <p><b>GRT</b> Titanium gray</p> <p><b>MST</b> Matte silver</p> <p><b>SGT</b> Steel gray</p> <p><b>WHT</b> Snow white</p> <p><b>CMC</b> Custom matched color<sup>7</sup></p> <p><b>RAL</b> RAL color<sup>8</sup></p>	<p><b>ADG</b> American douglas</p> <p><b>BRC</b> Birch</p> <p><b>CHN</b> Chestnut</p> <p><b>CRY</b> Cherry</p> <p><b>KNP</b> Knotty pine</p> <p><b>MPL</b> Maple</p> <p><b>OFL</b> Oak</p> <p><b>RSW</b> Rosewood</p> <p><b>TEK</b> Teak</p> <p><b>WLN</b> Walnut</p>	<p><b>MG</b> Marine grade paint<sup>10</sup></p> <p><b>NT</b> Natatorium suitable<sup>11</sup></p>

NOTES

- \*- Denotes a required field
- 1- Available only with AMB option.
- 2- Available only with VNR distribution option. Not available with 27K, 35K or AMB.
- 3- Field angle 21°.
- 4- Lumen conversion factor (LCF) 0.9.
- 5- Remote mount 50ft - 12" square enclosure with access cover. The remote enclosure must be interior. Battery powers downlight module unless otherwise specified (only one module is powered by the emergency battery).
- 6- To prevent reflections, interior painted black when a light color finish is selected (ex. WHT, MST, GRT and CHT). 1.5" (38mm) snoot.
- 7- Contact factory to coordinate custom matching color.
- 8- Specify RAL number.
- 9- Faux wood finish not applied to driver housing, lens frame or accessories. Additional delay required. Not compatible with marine grade paint.
- 10- Marine grade paint for harsh, coastal environment and exposure to salt water. Additional delay required please contact factory for info.
- 11- Available only in WHT and BKT finish.


## TYPICAL PHOTOMETRY SUMMARY

SY302-L2L10-FLD

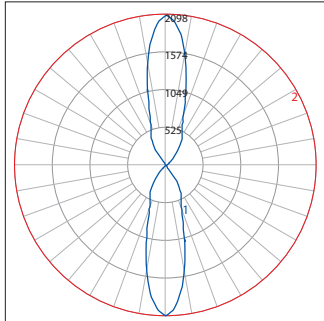


**Total Lms:** 1849 Lumens  
**Total Input Watts:** 25 W  
**Efficacy:** 74 Lumens/Watt  
**BUG:** B1-U4-G0  
**CCT/CRI:** 4000K/80  
**Maximum Candela:** 2098 @ 0°

SY302-L2L10-WD

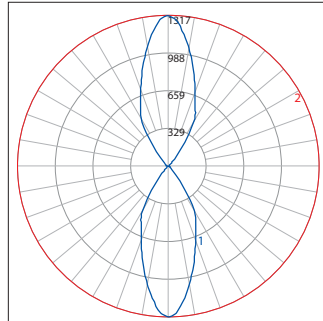

**Total Lms:** 1693 Lumens  
**Total Input Watts:** 25 W  
**Efficacy:** 68 Lumens/Watt  
**BUG:** B1-U4-G0  
**CCT/CRI:** 4000K/80  
**Maximum Candela:** 1317 @ 0°

SY302-L2L15NR-VNR

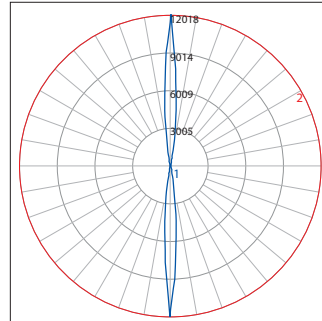

**Total Lms:** 1078 Lumens  
**Total Input Watts:** 21 W  
**Efficacy:** 50 Lumens/Watt  
**BUG:** B1-U4-G0  
**CCT/CRI:** 4000K/80  
**Maximum Candela:** 12018 @ 0°

### LUMEN CONVERSION FACTOR (LCF)

CCT	CRI	LCF
2700K	80	0.91
3000K	80	0.94
3500K	80	0.98
4000K	80	1.00

All Photometry shown use the 80CRI 4000K LEDs.  
 Please visit our web site [www.luminis.com](http://www.luminis.com) for complete I.E.S. file.


## LUMINIS.COM

Toll free: (866) 586-4647 | Fax: (514) 683-8872 | Email: [info@luminis.com](mailto:info@luminis.com)  
 260 Labrosse, Pointe-Claire (QC) Canada H9R 5L5

© 2024 The Luminaires Group Inc. All rights reserved. Specifications subject to change without notice.

PROJECT NAME: \_\_\_\_\_ QUANTITY: \_\_\_\_\_ TYPE: \_\_\_\_\_

ORDERING CODE: \_\_\_\_\_

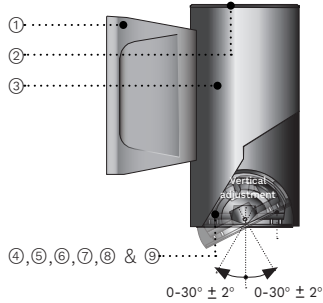

- ① Cast aluminum driver housing. Includes galvanized steel wall mount pressure plate.
- ② Cast aluminum ventilated top cover.
- ③ Seamless extruded aluminum cylindrical housing.
- ④ Fully sealed cast aluminum light assembly.
- ⑤ Sealed cast aluminum lens frame.
- ⑥ Clear tempered glass lens.
- ⑦ Faceted specular aluminum reflector.
- ⑧ Light module with  $\pm 30^\circ$  tilting mechanism allowing forward and back light adjustability. Optional fully adjustable  $360^\circ$  rotation. Regressed light module available as an option.
- ⑨ All stainless steel hardware.



SY600



## MATERIALS

Syrios is made of corrosion resistant 356 aluminum alloy with a copper (CU) content of less than 0.1%. The main housing is made of seamless extruded aluminum, with an integrally sealed LED light module designed for optimal heat dissipation, and lighting performance. Syrios is standard with a unique proprietary design allowing the sealed LED module to tilt within the cylindrical housing. The top cast aluminum cover includes ventilation slots allowing air circulation and cooling of assembly.

## ELECTRICAL DRIVER

Driver is 0-10V dimming-ready (dims to 10%) with: 120-277 multi-volt compatibility (50-60Hz), operating temperature range of  $-40^\circ\text{C}/-40^\circ\text{F}$  to  $55^\circ\text{C}/131^\circ\text{F}$ , output over voltage protection, output over current protection and output short circuit protection with auto-recovery.

## LED LIGHT ENGINE

Offered in 2700K/3000K/3500K/4000K CCT with 80 CRI. 70% LED lumen maintenance at 60,000 hours (L70/B50) based on IESNA LM-80-08 LED extrapolated life, calculated per IESNA TM-21-21. Optional true amber LED for turtle sensitive areas. Wavelengths: 585nm to 597nm.

## FINISH

Five-stage preparation process including preheating of cast aluminum parts for air extraction, and an environmentally friendly alloy sealant. Polyester powder coating is applied through an electrostatic process and oven cured for long term finish.

## CERTIFICATION

UL Certified to Canadian and U.S. safety standards. Certified for use in wet locations. Rated IP65. Photometric testing performed by an independent laboratory in accordance with IES LM-79-08 standards at  $25^\circ\text{C}$ . Actual performance may differ as a result of end-user environment and application.

## WARRANTY


5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: <https://www.luminis.com/technical/warranty/>

## MOUNTING

The mounting plate is designed to fit on a 4" (102mm) octagonal electrical box using 3.5" (89mm) C/C mounting holes. Additional mounting holes are provided as per site requirements.

## MEASUREMENTS

Maximum weight: 9 lbs (4.1 kg)

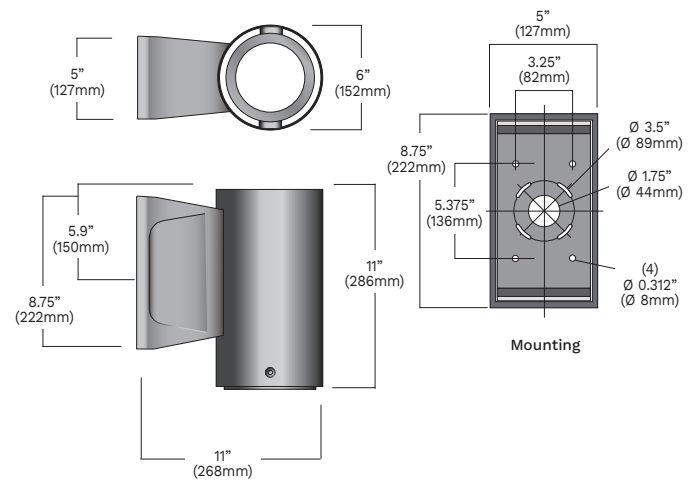


## LUMINIS.COM

Toll free: (866) 586-4647 | Fax: (514) 683-8872 | Email: [info@luminis.com](mailto:info@luminis.com)  
260 Labrosse, Pointe-Claire (QC) Canada H9R 5L5

SY600  
Rev. 04/15/24

ORDERING CODE

SY600	L1L25	VWD	40K	MVOLT	--
*SERIES	*LIGHT OUTPUT	*DISTRIBUTION	*CCT <sup>4</sup>	*VOLTAGE	CONDUIT COVER
<b>SY600</b> 	<u>Static White</u> <b>L1L15</b> 1599 lm / 15w <b>L1L25</b> 2543 lm / 26w <b>L1L40</b> 4102 lm / 48w  <u>True Amber</u> <b>L1LK2A</b> 263 lm / 11w <sup>1</sup>  Delivered lumens calculated at 4000K/80CRI except for amber. Flood optic distribution. Typical power consumption. Refer to LCF table for outputs at other CCTs.	<b>NR</b> Narrow optic 15° <b>FLD</b> Flood optic 30° <b>VWD</b> Very wide optic 52°	<b>27K</b> 2700K <b>30K</b> 3000K <b>35K</b> 3500K <b>40K</b> 4000K <b>AMB</b> 585nm to 597nm	<b>120</b> 120V <b>277</b> 277V <b>347</b> 347V <b>480</b> 480V <b>HVOLT</b> 347V-480V <b>MVOLT</b> 120V-277V	<b>SWK</b> Decorative cover for 3/4" conduit junction box
	<u>Very Narrow Distribution</u> <b>L1L20NR</b> 1690 lm / 31w <sup>2</sup>  Delivered lumens calculated at 4000K/80CRI. Very narrow optic distribution. Typical power consumption. Refer to LCF table for outputs at other CCTs.	<b>VNR</b> Very narrow optic 9° <sup>3</sup>			

--	LSL	--	--	
MOUNTING DIRECTION	LENS/DIFFUSER	FUSE	PHOTOCELL	EMERGENCY
<b>UP</b> Uplight position	<b>LSL</b> Linear spread lens <b>SL</b> Solite lens <sup>5</sup>	<b>FS</b> Fuse	<b>PH</b> Photocell <sup>6</sup>	<b>REM7</b> Remote emergency battery, 90 min, 7W <sup>7</sup>

--	--	--	BZT	--	--	--
LOUVERS	ADJUSTABILITY	REGRESSED	*FINISH	WOOD FINISH <sup>11</sup>	ENVIRONMENT	HEIGHT MATCHING
<b>HL</b> Hexcell louver	<b>A360</b> 360° adjustable rotation	<b>RG</b> Regressed light module <sup>8</sup>	<b>BKT</b> Jet black <b>BZT</b> Bronze <b>CHT</b> Champagne <b>DGT</b> Gun metal <b>GRT</b> Titanium gray <b>MST</b> Matte silver <b>SGT</b> Steel gray <b>WHT</b> Snow white  <b>CMC</b> Custom matched color <sup>9</sup> <b>RAL</b> RAL color <sup>10</sup>	<b>ADG</b> American douglas <b>BRC</b> Birch <b>CHN</b> Chestnut <b>CRY</b> Cherry <b>KNP</b> Knotty pine <b>MPL</b> Maple <b>OFL</b> Oak <b>RSW</b> Rosewood <b>TEK</b> Teak <b>WLN</b> Walnut	<b>MG</b> Marine grade paint <sup>12</sup> <b>NT</b> Natatorium suitable <sup>13</sup>	<b>UH</b> Uniform height matching SY602 <sup>14</sup>

NOTES

- \*- Denotes a required field
- 1- Available only with AMB option.
- 2- Available only with VNR distribution option. Not available with 27K, 35K or AMB.
- 3- Field angle 18°.
- 4- For IDA certification compliance, luminaire must be ordered with 3000K or warmer.
- 5- Lumen conversion factor (LCF) 0.9.
- 6- Not available with REM7, 347V, 480V or HVOLT.
- 7- Remote mount 50ft - 12" square enclosure with access cover. The remote enclosure must be interior.
- 8- Cylindrical housing extended by 1" (25.4mm) for increased cut-off.
- 9- Contact factory to coordinate custom matching color.
- 10- Specify RAL number.
- 11- Faux wood finish not applied to driver housing, lens frame or accessories. Additional delay required. Not compatible with marine grade paint.
- 12- Marine grade paint for harsh, coastal environment and exposure to salt water. Additional delay required please contact factory for info.
- 13- Available only in WHT and BKT finish.
- 14- Not available with A360 or RG.

LUMINIS.COM


Toll free: (866) 586-4647 | Fax: (514) 683-8872 | Email: info@luminis.com  
 260 Labrosse, Pointe-Claire (QC) Canada H9R 5L5

SY600  
Rev. 04/15/24




TYPICAL PHOTOMETRY SUMMARY

SY600-L1L40-NR

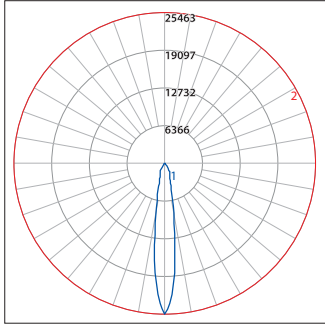


**Total Lms:** 3998 Lumens  
**Total Input Watts:** 48 W  
**Efficacy:** 83 Lumens/Watt  
**BUG:** B3-U0-G0  
**CCT/CRI:** 4000K/80  
**Maximum Candela:** 25463 @ 0°

SY600-L1L40-FLD

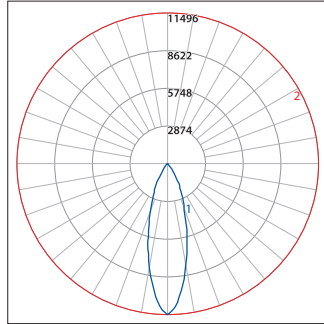


**Total Lms:** 4102 Lumens  
**Total Input Watts:** 48 W  
**Efficacy:** 85 Lumens/Watt  
**BUG:** B3-U0-G0  
**CCT/CRI:** 4000K/80  
**Maximum Candela:** 11496 @ 0°

SY600-L1L40-VWD

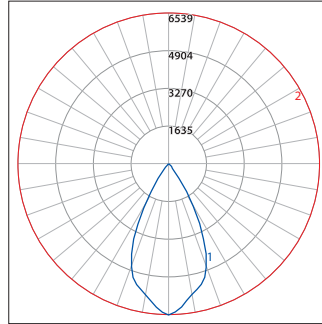

**Total Lms:** 4369 Lumens  
**Total Input Watts:** 48 W  
**Efficacy:** 91 Lumens/Watt  
**BUG:** B3-U0-G0  
**CCT/CRI:** 4000K/80  
**Maximum Candela:** 6539 @ 0°

SY600-L1L20NR-VNR

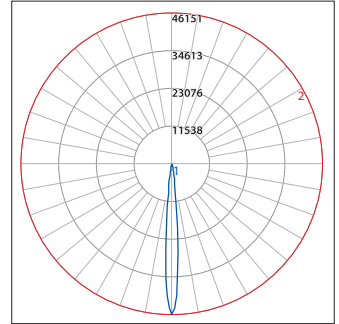

**Total Lms:** 1690 Lumens  
**Total Input Watts:** 31 W  
**Efficacy:** 55 Lumens/Watt  
**BUG:** B2-U0-G0  
**CCT/CRI:** 4000K/80  
**Maximum Candela:** 46151 @ 0°

LUMEN CONVERSION FACTOR (LCF)		
CCT	CRI	LCF
2700K	80	0.91
3000K	80	0.94
3500K	80	0.98
4000K	80	1.00

All Photometry shown use the 80CRI 4000K LEDs.  
 Please visit our web site [www.luminis.com](http://www.luminis.com) for complete I.E.S. file.

LUMINIS.COM


Toll free: (866) 586-4647 | Fax: (514) 683-8872 | Email: [info@luminis.com](mailto:info@luminis.com)  
 260 Labrosse, Pointe-Claire (QC) Canada H9R 5L5

PROJECT NAME:

QUANTITY:

TYPE: **OG**

ORDERING CODE:

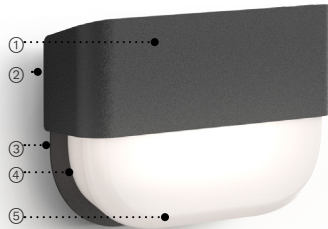

- ① Half-shield. Helps reduce uplight. Can be customized on demand.
- ② Sturdy and rustproof die casted A360 aluminium base.
- ③ Effortless installation featuring a concealed single screw for seamless appearance.
- ④ Sealed enclosure with durable gaskets.
- ⑤ Shatterproof and UV-stable translucent MDPE rotomolded diffuser that gives a soft general lambertian glow.



JA112



JA113



## MATERIALS

Jaki's base is made of corrosion resistant A360 heavy duty die casted aluminium alloy with a low copper (CU) content of less than 0.1%. The diffuser boasts a distinctive form and is made of UV-stable MDPE for an exceptional durability. Watertight and airtight housing made possible by stamped gasket known for its excellent resistance to weathering and UV exposure. Thick galvanized steel mounting plate that fits standard 4" (102mm) junction box.

## ELECTRICAL DRIVER

Driver is 0-10V dimming-ready (dims to 10%) with: 120-277 multi-volt compatibility (50-60Hz) operating temperature range of -30°C/-22°F to 50°C/-122°F, output over voltage protection, output over current protection and output short circuit protection with auto-recovery. 347V option is 0-10V dimming ready (min. dim 10%) with: 347 multivolt compatibility, operating temperature range of -40°C/-40°F to 55°C/131°F, over current and output short circuit protection.

## LED LIGHT ENGINE

Offered in 2700K, 3000K, 3500K & 4000K / 80CRI. 70% LED lumen maintenance at 60,000 hours (L70/B50) based on IESNA LM-80-08 LED extrapolated life, calculated per IESNA TM-21-21.

## FINISH

Five-stage preparation process includes preheating of cast aluminum parts for air extraction. Polyester powder coating is applied through an electrostatic process, and oven cured for long term finish.

## CERTIFICATION

UL Certified to Canadian and U.S. safety standards. Certified for use in wet locations. Rated IP65/IK10. Photometric testing performed by an independent laboratory in accordance with IES LM-79-08 standards at 25°C. Actual performance may differ as a result of end-user environment and application.

## SUSTAINABILITY

Composed primarily of aluminum and MDPE, 75% of the fixture can be recycled when it reaches the end of its life cycle. This fixture can be easily disassembled to facilitate recyclability.

## WARRANTY


5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: <https://www.luminis.com/technical/warranty/>

## MOUNTING


The mounting plate is designed to fit on a 4" (102mm) octagonal electrical box using 3.5" (89mm) C/C mounting holes.

## MEASUREMENTS

Maximum weight: 5.6 lbs (2.6 kg)

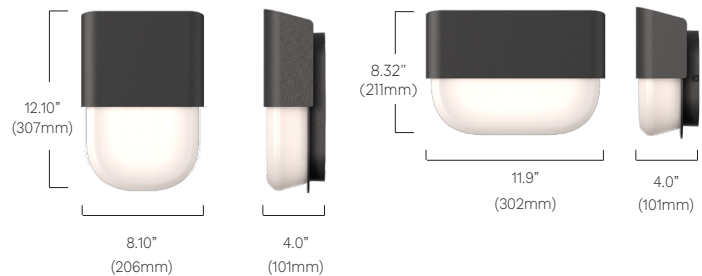

**ORDERING CODE**

JA112	L2L7	40K	MVOLT	--	--
*SERIES	*LIGHT OUTPUT	*CCT	*VOLTAGE	CONDUIT COVER	SURGE PROTECTOR
<b>JA112</b> 	<b>L2L5</b> 511 lm / 10w	<b>27K</b> 2700K	<b>120</b> 120V	<b>SWK</b> Decorative cover for 3/4" conduit junction box	<b>SP</b> Surge protector 10KV
	<b>L2L7</b> 732 lm / 16w	<b>30K</b> 3000K	<b>277</b> 277V		
		<b>35K</b> 3500K	<b>347</b> 347V		
		<b>40K</b> 4000K	<b>MVOLT</b> 120V-277V		
Delivered lumens calculated at 4000K/80CRI. Typical power consumption. Refer to LCF table for outputs at other CCTs.					

BZT	--	--
*FINISH	WOOD FINISHES <sup>3</sup>	ENVIRONMENT
<b>BKT</b> Jet black	<b>ADG</b> American douglas	<b>MG</b> Marine grade paint <sup>4</sup>
<b>BZT</b> Bronze	<b>BRC</b> Birch	<b>NT</b> Natatorium suitable <sup>5</sup>
<b>CHT</b> Champagne	<b>CHN</b> Chestnut	
<b>DGT</b> Gun metal	<b>CRY</b> Cherry	
<b>GRT</b> Titanium gray	<b>KNP</b> Knotty pine	
<b>MST</b> Matte silver	<b>MPL</b> Maple	
<b>SGT</b> Steel gray	<b>OFL</b> Oak	
<b>WHT</b> Snow white	<b>RSW</b> Rosewood	
<b>CMC</b> Custom matched color <sup>1</sup>	<b>TEK</b> Teak	
<b>RAL</b> RAL color <sup>2</sup>	<b>WLN</b> Walnut	

NOTES

\*- Denotes a required field

1- Contact factory to coordinate custom matching color.


2- Specify RAL number.

3- Faux wood finish applied only to the shield. Additional delay required. Not compatible with marine grade paint (MG) or natatorium suitable (NT)..

4- Marine grade paint for harsh, coastal environment and exposure to salt water. Additional delay required.

5- Available only in WHT and BKT

**ORDERING CODE**

*SERIES	*LIGHT OUTPUT	*CCT	*VOLTAGE	CONDUIT COVER	SURGE PROTECTOR
<b>JA113</b>  	<b>L2L5</b> 503 lm / 10w	<b>27K</b> 2700K	<b>120</b> 120V	<b>SWK</b> Decorative cover for 3/4" conduit junction box	<b>SP</b> Surge protector 10KV
	<b>L2L7</b> 705 lm / 16w	<b>30K</b> 3000K	<b>277</b> 277V		
		<b>35K</b> 3500K	<b>347</b> 347V		
		<b>40K</b> 4000K	<b>MVOLT</b> 120V-277V		
	Delivered lumens calculated at 4000K/80CRI. Typical power consumption. Refer to LCF table for outputs at other CCTs.				

*FINISH	WOOD FINISHES <sup>3</sup>	ENVIRONMENT
<b>BKT</b> Jet black	<b>ADG</b> American douglas	<b>MG</b> Marine grade paint <sup>4</sup>
<b>BZT</b> Bronze	<b>BRC</b> Birch	<b>NT</b> Natatorium suitable <sup>5</sup>
<b>CHT</b> Champagne	<b>CHN</b> Chestnut	
<b>DGT</b> Gun metal	<b>CRY</b> Cherry	
<b>GRT</b> Titanium gray	<b>KNP</b> Knotty pine	
<b>MST</b> Matte silver	<b>MPL</b> Maple	
<b>SGT</b> Steel gray	<b>OFL</b> Oak	
<b>WHT</b> Snow white	<b>RSW</b> Rosewood	
<b>CMC</b> Custom matched color <sup>1</sup>	<b>TEK</b> Teak	
<b>RAL</b> RAL color <sup>2</sup>	<b>WLN</b> Walnut	

NOTES

\*- Denotes a required field

1- Contact factory to coordinate custom matching color.

2- Specify RAL number.


3- Faux wood finish applied only to the sheild. Additional delay required. Not compatible with marine grade paint (MG) or natatorium suitable (NT).

4- Marine grade paint for harsh, coastal environment and exposure to salt water. Additional delay required.

5- Available only in WHT and BKT.


**TYPICAL PHOTOMETRY SUMMARY**

**JA112-L2L5**

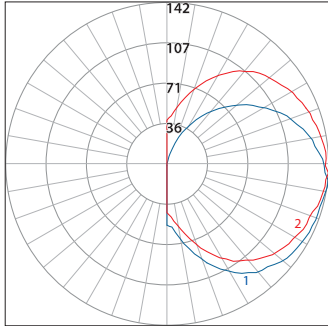


**Total Lms:** 511 Lumens  
**Total Input Watts:** 10 W  
**Efficacy:** 51 Lumens/Watt  
**BUG:** B0-U3-G1  
**CCT/CRI:** 4000K/80  
**Maximum Candela:** 142 @ 357.5°H/82.5°V

**JA112-L2L7**

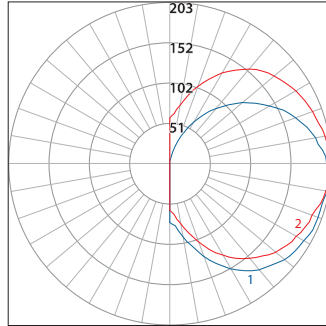


**Total Lms:** 732 Lumens  
**Total Input Watts:** 16 W  
**Efficacy:** 46 Lumens/Watt  
**BUG:** B0-U3-G1  
**CCT/CRI:** 4000K/80  
**Maximum Candela:** 203 @ 357.5°H/82.5°V

**JA113-L2L5**

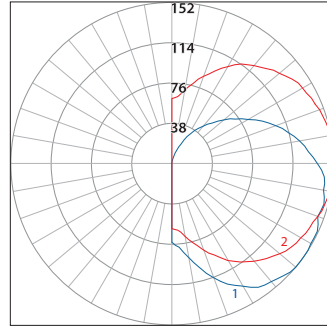

**Total Lms:** 503 Lumens  
**Total Input Watts:** 10 W  
**Efficacy:** 50 Lumens/Watt  
**BUG:** B0-U3-G1  
**CCT/CRI:** 4000K/80  
**Maximum Candela:** 152 @ 0°H/50°V

**JA113-L2L7**

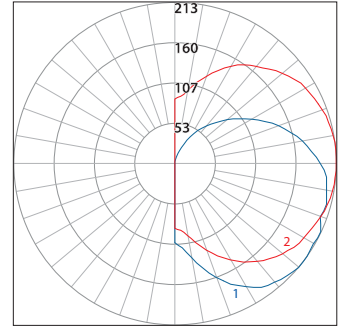


**Total Lms:** 705 Lumens  
**Total Input Watts:** 16 W  
**Efficacy:** 44 Lumens/Watt  
**BUG:** B0-U3-G1  
**CCT/CRI:** 4000K/80  
**Maximum Candela:** 213 @ 0°H/50°V

LUMEN CONVERSION FACTOR (LCF)		
CCT	CRI	LCF
2700K	80	0.91
3000K	80	0.94
3500K	80	0.98
4000K	80	1.00

All Photometry shown use the 80CRI 4000K LEDs.  
 Please visit our web site [www.luminis.com](http://www.luminis.com) for complete I.E.S. file.

## OPTION DETAILS

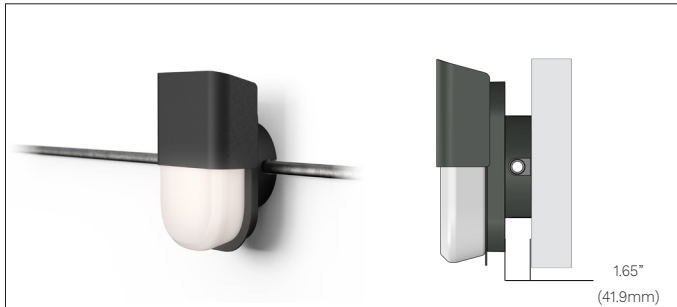

**SWK**

Surface wall mounting option for Ø4" weatherproof junction box (3/4" conduit trade size). Fixture can be installed horizontally or vertically. Conduit cover includes 4 knockout holes for installation adjustability. Weatherproof junction box, conduit and connectors by others. The SWK option adds 1.65" to the total depth of the product. (Not ADA compliant).



**WOOD FINISHES**

Available in 10 faux wood finishes. Applied to shield. Not compatible with marine grade finish.

## CUSTOM SHIELDS






Available upon request. Longer leadtime and extra costs may apply.



# RADEAN Bollard

## LED Site Luminaire

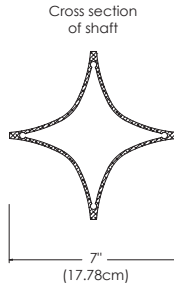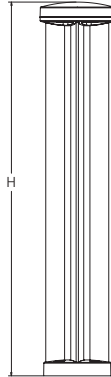

Catalog Number

Notes

Type **OH**

Hit the Tab key or mouse over the page to see all interactive elements.


### Specifications

- Diameter:** D = 8.25" (20.96cm)  
**Height:** H = 41.5" Standard (105.41cm)  
**Weight (max):** 20lbs (9.07Kg)

### Introduction

The Radean LED Bollard is an award-winning, energy-saving, long-life solution designed to perform the way a bollard should.

The Radean LED Bollard's rugged construction, durable finish and long-lasting LEDs will provide years of maintenance-free service.

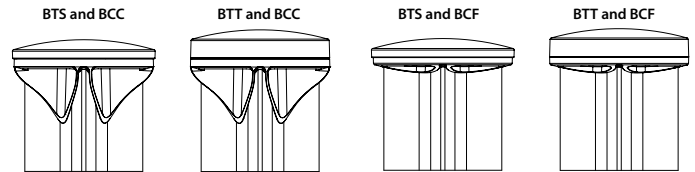

### Ordering Information

**EXAMPLE:** RADB LED P4 30K SYM MVOLT BTS BCCDNATXD DBLXD

RADB LED	P2	40K	SYM	MVOLT	DMG	BTT	
Series	Performance Package	Color temperature	Distribution	Voltage	Control options	Bollard top (required)	
RADB LED	P1 P2 P3 P4 P5 <sup>1</sup>	27K 2700 K 30K 3000 K 35K 3500 K 40K 4000 K 50K 5000 K	ASY Asymmetric <sup>2</sup> SYM Symmetric <sup>1</sup>	MVOLT <sup>3</sup> 120 208 <sup>3</sup> 240 <sup>3</sup> 277 347 480	PE Photoelectric cell, button type <sup>4,5</sup> DMG 0-10V dimming driver (no controls) E7WH Emergency battery backup, Certified in CA Title 20 MAEDBS1 <sup>6,7,8</sup> FAO Field adjustable output <sup>5</sup> PIR Motion sensor Bi-level <sup>3,5,6,7</sup>	<b>Slim Top</b> BTS Slim top, painted to match shaft <sup>5,9</sup> BTSDBLXD Slim top, white <sup>5,9</sup> BTSDLBXX Slim top, black texture <sup>5,9</sup> BTSDLBXX Slim top, black <sup>5,9</sup> BTSDBTXD Slim top, dark bronze textured <sup>5,9</sup> BTSDBBXD Slim top, dark bronze <sup>5,9</sup> BTSDBNATXD Slim top, natural aluminum textured <sup>5,9</sup> BTSDBNAXD Slim top, natural aluminum <sup>5,9</sup> BTSDBWHGXD Slim top, white textured <sup>9</sup>	<b>Tall Top</b> BTT Tall top painted to match shaft <sup>9</sup> BTDBLXD Tall top, black textured <sup>9</sup> BTDBLXD Tall top, black <sup>9</sup> BTDBBXXD Tall top, dark bronze textured <sup>9</sup> BTDBBXXD Tall top, dark bronze <sup>9</sup> BTDBNATXD Tall top, natural aluminum textured <sup>9</sup> BTDBNAXD Tall top, natural aluminum <sup>9</sup> BTDBWHGXD Tall top, white textured <sup>9</sup> BTDBWHXD Tall top, white <sup>9</sup>

BCF	--	DDBXD
Bollard crown (required)	Other options	Finish (required)
<b>Deep Crown</b> BCC Deep crown, painted to match shaft <sup>9</sup> BCCDWHXD Deep crown, white <sup>9</sup> BCCDBLXD Deep crown, black <sup>9</sup> BCCDBLXXD Deep crown, black textured <sup>9</sup> BCCDBBXXD Deep crown, dark bronze textured <sup>9</sup> BCCDBBXXD Deep crown, dark bronze <sup>9</sup> BCCDNATXD Deep crown, natural aluminum textured <sup>9</sup> BCCDNAXD Deep crown, natural aluminum <sup>9</sup> BCCDWHGXD Deep crown, white textured <sup>9</sup>	<b>Flat Crown</b> BCF Flat crown, painted to match shaft <sup>9</sup> BCFDBLXXD Flat crown, black textured <sup>9</sup> BCFDBLXXD Flat crown, black <sup>9</sup> BCFDDBTXD Flat crown, dark bronze textured <sup>9</sup> BCFDDBTXD Flat crown, dark bronze <sup>9</sup> BCFDNATXD Flat crown, natural aluminum textured <sup>9</sup> BCFDNAXD Flat crown, natural aluminum <sup>9</sup> BCFDWHGXD Flat crown, white textured <sup>9</sup> BCFDWHXD Flat crown, white <sup>9</sup>	<b>Finish (required)</b> DDBXD Dark bronze DBLXD Black DNAXD Natural aluminum DWHXD White DDBTXD Textured dark bronze DBLXXD Textured black DNATXD Textured natural aluminum DWHGXD Textured white

### Accessories

Ordered and shipped separately.

RADBAB U	Anchor bolts (4)	RKSRADB BCKIT (FINISH) U	Base cover with bolt caps
RADBABC DDBXD U	Replacement anchor bolt covers (specify finish) (4)	RK8RADB EMTESTMAG U	Emergency test stylus

### NOTES

- P5 only available in SYM distribution.
- ASY has only two illuminated quadrants driven at higher drive currents to generate similar output as the SYM-4-quadrant product.
- PIR not available with 208V or 240V.
- PE only available with ASY.
- PE, PIR and FAO not available with BTS.
- E7WH and PIR only available in full height. Not available with H24, H30 or H36.
- PIR not available with E7WH.
- E7WH is not available with 347V or 480V.
- Architectural and custom colors available (additional leadtimes and cost may apply).
- 42" Height is standard. H24, H30 and H36 have longer leadtimes.




COMMERCIAL OUTDOOR

One Lithonia Way • Conyers, Georgia 30012 • Phone: 1-800-705-SERV (7378) • [www.lithonia.com](http://www.lithonia.com)  
 © 2012-2024 Acuity Brands Lighting, Inc. All rights reserved.

RADB-LED  
Rev. 8/27/24

## Options

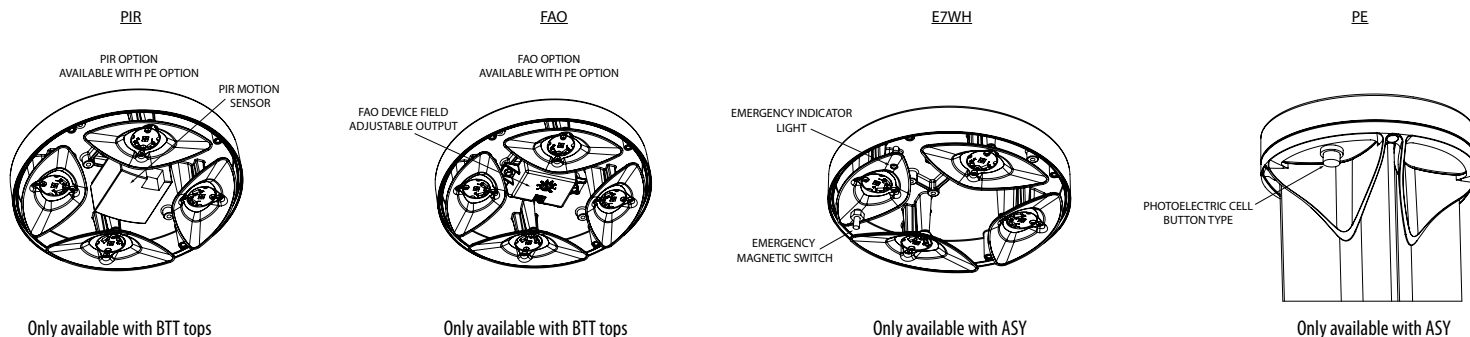

## Performance Data

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Actual performance may differ as a result of end-user environment and application. Actual wattage may differ by +/- 8% when operating between 120-480V +/- 10%.

### Performance Data DNAXD Finish\*

Light Engines	Performance Package	System Watts	2700K					3000K					3500K					4000K					5000K				
			Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
"Symmetric (4 light engines)"	P1	5	345	0	1	0	66	362	0	1	0	69	370	0	1	0	71	380	0	1	0	73	382	0	1	0	73
	P2	8	644	0	1	0	81	677	0	1	0	85	692	0	1	0	87	711	0	1	0	89	713	0	1	0	89
	P3	13	1036	1	1	0	77	1088	1	1	0	81	1112	1	1	0	83	1142	1	1	0	85	1146	1	1	0	85
	P4	19	1460	1	1	0	79	1534	1	1	0	83	1568	1	1	0	84	1610	1	1	0	87	1616	1	1	0	87
	P5	32	2314	1	1	0	72	2430	1	1	0	75	2484	1	1	0	77	2551	1	1	0	79	2561	1	1	0	79
"Asymmetric (2 light engines)"	P1	5	312	0	1	0	60	328	0	1	0	63	335	0	1	0	64	344	0	1	0	66	346	0	1	0	66
	P2	8	584	0	1	0	73	613	0	1	0	77	627	0	1	0	78	644	0	1	0	81	646	0	1	0	81
	P3	13	938	0	1	0	70	985	0	1	0	73	1007	0	1	0	75	1035	0	1	0	77	1038	0	1	0	77
	P4	19	1323	0	1	0	71	1390	0	1	0	75	1420	0	1	0	76	1459	0	1	0	78	1464	0	1	0	79

\*Note: Lumen output varies based on finish. Silver color shown, for black (worst) or white (best) photometry, see specific photometric files downloadable from [www.acuitybrands.com](http://www.acuitybrands.com)

### Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the platforms noted in a 25°C ambient, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Projected LED Lumen Maintenance				
	25,000	50,000	75,000	100,000
P1	0.94	0.89	0.85	0.80
P2	0.94	0.89	0.85	0.80
P3	0.94	0.89	0.85	0.80
P4	0.94	0.89	0.85	0.80
P5	0.94	0.89	0.85	0.80

### Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average temperatures from 0-40°C (32-104°F).


Ambient	LAT Factor	
0	32°F	1.03
5	41°F	1.03
10	50°F	1.02
15	59°F	1.01
20	68°F	1.01
25	77°F	1
30	86°F	0.99
35	95°F	0.99
40	104°F	0.98

### Electrical Load

	Current (Amp)						Current (Amp)			
	Watts @120V (W)	Watts @277V (W)	@120V (A)	@208V (A)	@240V (A)	@277V (A)	Watts (@347V)	Watts (@480V)	@347V (A)	@480V (A)
P1 ASY	5	6	0.0445	0.0299	0.0276	0.0262	10	10	0.0443	0.0319
P2 ASY	9	10	0.0751	0.0471	0.0429	0.0399	14	14	0.0505	0.0364
P3 ASY	14	15	0.1147	0.0699	0.0627	0.0571	18	18	0.0611	0.0441
P4 ASY	19	19	0.1586	0.0928	0.0819	0.0735	23	23	0.0709	0.0513
P1 SYM	5	6	0.0444	0.0301	0.0279	0.0265	9	9	0.0441	0.0319
P2 SYM	9	10	0.0734	0.0461	0.0421	0.0391	13	13	0.0502	0.0363
P3 SYM	13	14	0.112	0.067	0.0598	0.0544	18	18	0.0602	0.0435
P4 SYM	18	19	0.1535	0.0902	0.0796	0.0713	22	22	0.0691	0.0499
P5 SYM	31	31	0.2597	0.1527	0.1326	0.1149	35	36	0.1079	0.079



Isofootcandle plots for the RADB. Distances are in units of mounting height (3.5').

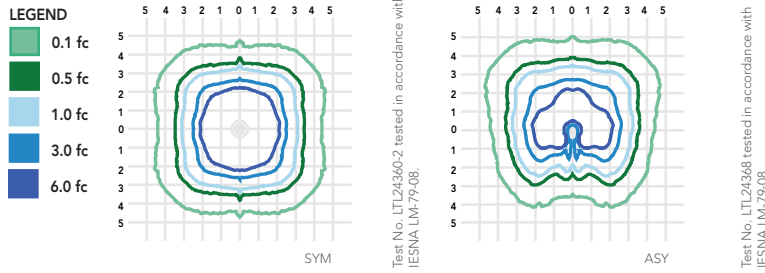

## FEATURES & SPECIFICATIONS

### INTENDED USE

The rugged construction and maintenance-free performance of the Radean LED Bollard is ideal for illuminating building entryways, walking paths and pedestrian plazas, as well as any other location requiring a low-mounting-height light source.

### CONSTRUCTION

One-piece extruded aluminum shaft with thick side walls for extreme durability, and die-cast reflector and top cap. Four 3/8" x 7" anchor bolts with double nuts and washers and 5-2/3" max. bolt circle template ensure stability. Overall height is 42" standard.

### FINISH

Exterior parts are protected by a zinc-infused super durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering for maximum retention of gloss and luster. A tightly controlled multi-stage process ensures a minimum 3-mil thickness for a finish that can withstand the elements without cracking or peeling. Available in both textured and non-textured finishes.

### OPTICS

Two optical distributions are available: symmetrical and asymmetrical. IP66 sealed LED light engine provides smoothly graduated illumination. Light engines are available in 2700K, 3000K, 3500K, 4000K or 5000K.

### ELECTRICAL

Light engines consist of high-efficacy LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life (L80/100,000 hours at P5 at 25°C). Class 2 electronic drivers are designed for an expected life of 100,000 hours with < 1% failure rate. Electrical components are mounted on a removable power tray.

### LISTINGS

CSA certified to U.S. and Canadian standards. Light engines are IP66 rated. Rated for -40°C minimum ambient. Emergency battery backup rated for -10°C minimum ambient. International Dark-Sky Association (IDA) Fixture Seal of Approval (FSA) is available for all products on this page utilizing 3000K color or less. U.S. Patent No. D912,850S


### GOVERNMENT PROCUREMENT

BAA – Buy America(n) Act: Product qualifies as a domestic end product under the Buy American Act as implemented in the FAR and DFARS. Product also qualifies as manufactured in the United States under DOT Buy America regulations.  
BABA – Build America Buy America: Product qualifies as produced in the United States under the definitions of the Build America, Buy America Act.  
Please refer to [www.acuitybrands.com/buy-american](http://www.acuitybrands.com/buy-american) for additional information.

### WARRANTY

Five-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: [www.acuitybrands.com/support/warranty/terms-and-conditions](http://www.acuitybrands.com/support/warranty/terms-and-conditions)

**Note:** Actual performance may differ as a result of end-user environment and application and color.  
All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

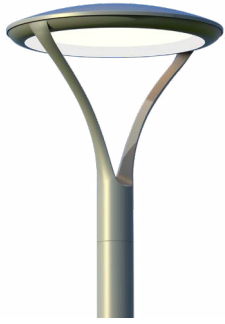

# Radean Post Top LED Area Luminaire



Catalog  
Number

Notes  
10' Total Height

Type  
OJ

Hit the Tab key or mouse over the page to see all interactive elements.

## Specifications

**EPA:** 1.02 ft<sup>2</sup>  
(0.105 m<sup>2</sup>)


**Length:** 24"  
(61cm)

**Width:** 24"  
(61cm)

**H1  
Luminaire  
Height:** 4"  
(10.16cm)

**H2  
Luminaire  
Height:** 26"  
(66.04cm)

**Weight:** 38lbs  
(17.24Kg)

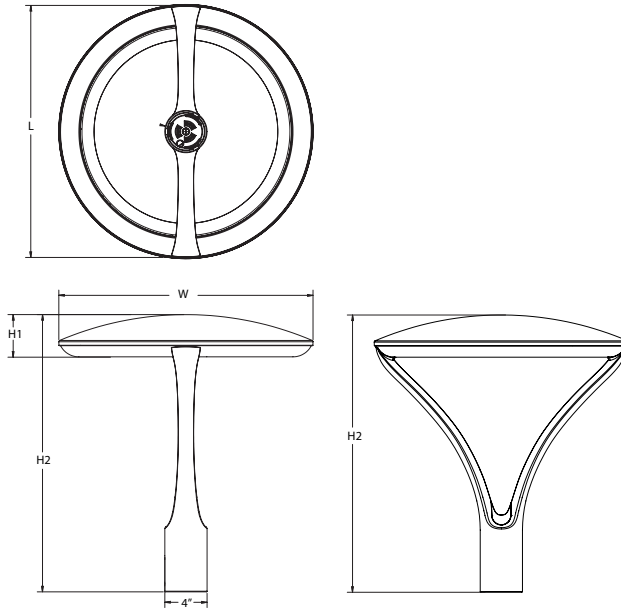

## Introduction

The architecturally-inspired shape of the RADEAN™ post top area luminaire embodies the grace and strength of the RADEAN family. The twin copper-core cast aluminum arms support the slender superstructure, creating a beautiful sculpture by day transforming into a beacon of comfort by night. Triangular arms redirect reflection maintaining its visually quiet appearance. With sleek lines and simple silhouettes, these LED luminaires use specialized lighting and visual comfort to transform common areas like courtyards, outdoor retail locations, universities and corporate campuses into pedestrian-friendly nighttime environments.

## Ordering Information

**EXAMPLE:** RADPT LED P3 30K SYM MVOLT PT4 PE DNAXD

RADPT LED	P1	40K	PATH	MVOLT	PT4
Series	Performance package	Color temperature	Distribution	Voltage	Mounting (required)
RADPT LED	P1 3,000 Lumens P2 5,000 Lumens P3 7,000 Lumens P4 10,000 Lumens P5 15,000 Lumens	27K 2700K 30K 3000K 35K 3500K 40K 4000K 50K 5000K	SYM Symmetric type V ASY Asymmetric type IV PATH Pathway Type III	MVOLT <sup>2</sup> 277 <sup>2</sup> 120 <sup>2</sup> 347 208 <sup>2</sup> 480 240 <sup>2</sup>	PT4 <sup>3</sup> Slips inside a 4" OD round metal pole RADPT20 Slips over a 2 3/8" diameter tenon (4" tall tenon required) RADPT25 Slips over a 2 7/8" diameter tenon (4" tall tenon required)

DMG	--	DDBXD
Control options	Other options	Finish (required)
<b>Shipped installed</b> NLTAIR2 nLight AIR 2.0 enabled <sup>4</sup> PE Button photocell <sup>4</sup> FAO Field adjustable output <sup>4</sup> DMG 0-10v dimming wires pulled outside fixture (for use with an external control, ordered separately) <sup>5</sup>	SF Single Fuse <sup>2</sup> DF Double Fuse <sup>2</sup> R90 Rotated optics <sup>6</sup>	<b>Shipped installed</b> HS Houseside shield <sup>7</sup> DDBXD Dark bronze DBLXD Black DNAXD Natural aluminum DWHXD White DDBTXD Textured dark bronze DBLTXD Textured black DNATXD Textured natural aluminum DWHGXD Textured white



COMMERCIAL OUTDOOR

One Lithonia Way • Conyers, Georgia 30012 • Phone: 1-800-705-SERV (7378) • [www.lithonia.com](http://www.lithonia.com)  
© 2011-2024 Acuity Brands Lighting, Inc. All rights reserved.

RADPT LED  
Rev. 03/27/24

## Ordering Information

### Accessories

Ordered and shipped separately.

RADHS	Houseside shield (shield is white)
RADCS DDBXD U	Decorative clamshell base for 4" RSS pole (specify finish)
RADFBC DDBXD U	Full base cover for 4" RSS pole (specify finish)

### NOTES


- 2700K and 3500K may require extended lead-times.
- MVOLT driver operates on any line voltage from 120-277V (50/60 Hz). Single fuse (SF) requires 120, 277 or 347 voltage option. Double fuse (DF) requires 208, 240 or 480 voltage option.
- Requires nominal 4" round straight metal pole.
- NLTAIR2 not available with PE or FAO. Must link to external nLight Air network. Does not include occupancy sensor. For more information refer to [RSBOR](#) pole mount sensor.
- DMG not available with NLTAIR2 or FAO.
- For left rotation, select R90 and rotate luminaire 180° on pole.
- Also available as a separate accessory; see Accessories information at left. HS not available with R90. Shield is field rotatable shield in 180° increments.

## Mounting

### PT4

### RADPT20 or RADPT25

RADPT20 and RADPT25 mounting require a 4" tall tenon (standard on Lithonia poles).

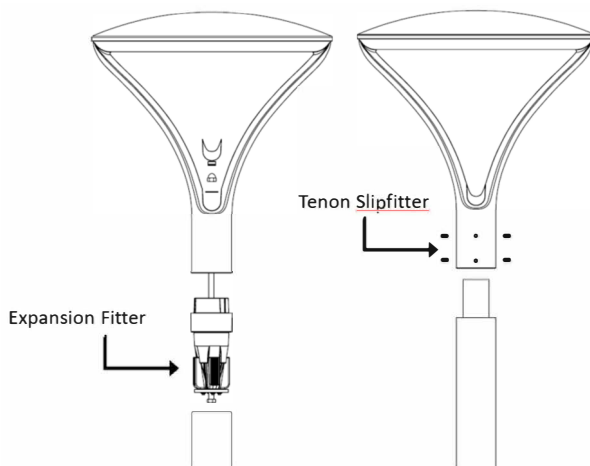


### Recommended Poles for use with RADEAN RADPT LED Luminaires.

Acuity Part Number	Description	For luminaires	Used with Mounting
RSS 10 4B PT DDBXD	10' Round Straight Steel - 4" O.D. - Open Top	RADPT LED	PT4
RSS 12 4B PT DDBXD	12' Round Straight Steel - 4" O.D. - Open Top	RADPT LED	PT4
RSS 14 4B PT DDBXD	14' Round Straight Steel - 4" O.D. - Open Top	RADPT LED	PT4
RSS 16 4B PT DDBXD	16' Round Straight Steel - 4" O.D. - Open Top	RADPT LED	PT4
RSS 18 4B PT DDBXD	18' Round Straight Steel - 4" O.D. - Open Top	RADPT LED	PT4
RSS 20 4B PT DDBXD	20' Round Straight Steel - 4" O.D. - Open Top	RADPT LED	PT4
RSS 25 4B PT DDBXD	25' Round Straight Steel - 4" O.D. - Open Top	RADPT LED	PT4
RSS 10 4B T20 DDBXD	10' Round Straight Steel - 4" O.D. - Tenon Top	RADPT LED	RADPT20
RSS 12 4B T20 DDBXD	12' Round Straight Steel - 4" O.D. - Tenon Top	RADPT LED	RADPT20
RSS 14 4B T20 DDBXD	14' Round Straight Steel - 4" O.D. - Tenon Top	RADPT LED	RADPT20
RSS 16 4B T20 DDBXD	16' Round Straight Steel - 4" O.D. - Tenon Top	RADPT LED	RADPT20
RSS 18 4B T20 DDBXD	18' Round Straight Steel - 4" O.D. - Tenon Top	RADPT LED	RADPT20
RSS 20 4B T20 DDBXD	20' Round Straight Steel - 4" O.D. - Tenon Top	RADPT LED	RADPT20
RSS 25 4B T20 DDBXD	25' Round Straight Steel - 4" O.D. - Tenon Top	RADPT LED	RADPT20

\* Customer must verify pole loading per required design criteria and specified wind speed. Consult pole specification sheet for additional details.

## Control Options

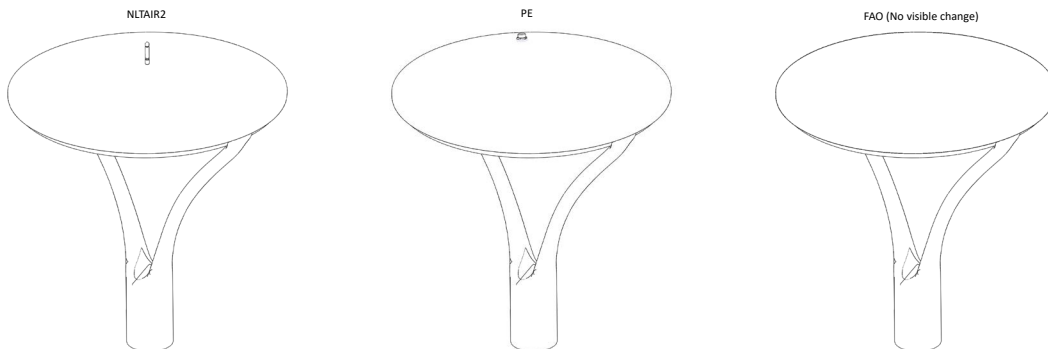

## Performance Data

### Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown. Contact factory for performance data on any configurations not shown here.

Performance Package	Input Wattage	Distribution	2700K					3000K					3500K					4000K					5000K				
			Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
P1	25	ASY	2,924	2	1	2	115	3,022	2	2	2	119	3,095	2	2	2	122	3,168	2	2	2	125	3,168	2	2	2	125
		PATH	2,529	2	1	2	100	2,613	2	2	2	103	2,676	2	2	2	105	2,739	2	2	2	108	2,739	2	2	2	108
		SYM	3,086	2	1	1	121	3,189	2	1	1	126	3,266	2	1	1	129	3,344	2	1	1	132	3,344	2	1	1	132
P2	38	ASY	4,521	3	2	3	119	4,672	3	2	3	123	4,785	3	2	3	126	4,898	3	2	3	129	4,898	3	2	3	129
		PATH	3,909	2	2	2	103	4,040	2	2	2	106	4,137	2	2	2	109	4,235	3	2	3	111	4,235	3	2	3	111
		SYM	4,772	2	2	1	126	4,931	3	2	1	130	5,050	3	2	1	133	5,169	3	2	1	136	5,169	3	2	1	136
P3	54	ASY	6,387	3	2	3	119	6,600	3	2	3	123	6,760	3	2	3	126	6,919	3	2	3	129	6,919	3	2	3	129
		PATH	5,523	3	2	3	103	5,707	3	2	3	106	5,845	3	2	3	109	5,983	3	2	3	112	5,983	3	2	3	112
		SYM	6,741	3	2	2	126	6,966	3	2	2	130	7,135	3	2	2	133	7,303	3	2	2	136	7,303	3	2	2	136
P4	86	ASY	10,150	4	2	4	118	10,489	4	2	4	122	10,742	4	2	4	125	10,996	4	2	4	128	10,996	4	2	4	128
		PATH	8,777	3	2	3	102	9,070	3	2	3	106	9,289	3	2	3	108	9,509	3	2	3	111	9,509	3	2	3	111
		SYM	10,713	3	2	2	125	11,071	3	2	2	129	11,338	3	2	2	132	11,606	3	2	2	135	11,606	3	2	2	135
P5	123	ASY	14,250	4	2	4	116	14,724	4	2	4	120	15,081	4	3	4	123	15,437	4	3	4	126	15,437	4	3	4	126
		PATH	12,322	4	2	4	101	12,733	4	3	4	104	13,041	4	3	4	106	13,349	4	3	4	109	13,349	4	3	4	109
		SYM	15,040	4	2	3	123	15,541	4	2	3	127	15,917	4	2	3	130	16,293	4	2	3	133	16,293	4	2	3	133

### Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient	LAT Factor	
0°C	32°F	1.06
5°C	41°F	1.05
10°C	50°F	1.04
15°C	59°F	1.02
20°C	68°F	1.01
<b>25°C</b>	<b>77°F</b>	<b>1.00</b>
30°C	86°F	0.99
35°C	95°F	0.98
40°C	104°F	0.96

### Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the **RADPT LED** platform in a **25°C ambient**, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.


	Projected LED Lumen Maintenance			
	0	25,000	50,000	100,000
P1	1.00	0.96	0.91	0.82
P2	1.00	0.96	0.91	0.82
P3	1.00	0.96	0.91	0.82
P4	1.00	0.96	0.91	0.82
P5	1.00	0.95	0.89	0.78

### Electrical Load

Lumen Package	LED Drive Current	Voltage	Wattage		Current (A)					
					120	208	240	277	347	480
P1	500	42.8	21.4	Input Current	0.22	0.13	0.11	0.1	0.08	0.06
				System Watts	26	26	26	27	25	26
P2	770	43	33.1	Input Current	0.33	0.19	0.16	0.14	0.11	0.08
				System Watts	39	39	39	39	38	38
P3	1100	43.2	47.5	Input Current	0.46	0.26	0.23	0.2	0.16	0.12
				System Watts	55	54	54	54	54	54
P4	900	87.3	78.6	Input Current	0.73	0.42	0.36	0.32	0.25	0.18
				System Watts	87	86	86	86	86	86
P5	1250	88.2	110.2	Input Current	1	0.58	0.5	0.44	0.35	0.25
				System Watts	120	119	119	119	120	120



Isofootcandle plots are considered to be representative of available optical distributions.

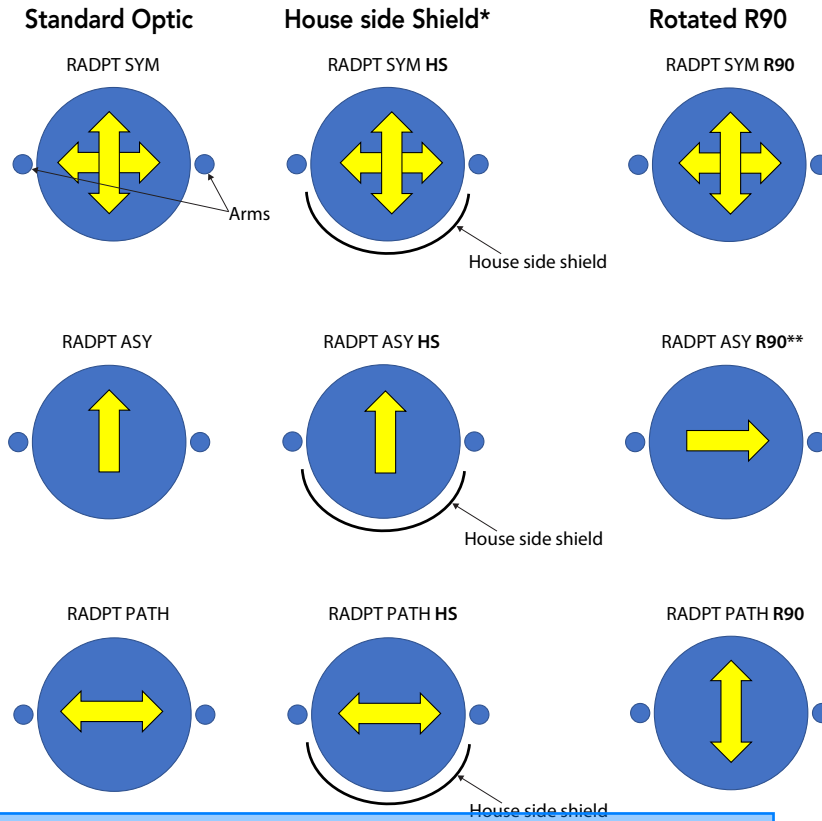

\*HS not available with R90  
 \*\*For L90, use R90 and rotate luminaire 180° on pole

## FEATURES & SPECIFICATIONS

### INTENDED USE

Pedestrian areas such as parks, campuses, pathways, courtyards and pedestrians malls.

### CONSTRUCTION

Single-piece die-cast aluminum housing with nominal wall thickness of 0.125" on a 6mm thick acrylic waveguide is fully gasketed with a single piece tubular silicone gasket.

### FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Standard Super Durable colors include dark bronze, black, natural aluminum and white. Available in textured and non-textured finishes.

### OPTICS

6MM thick acrylic waveguide with 360° flexible LED board. Available in 2700K, 3000K, 3500K, 4000K and 5000K (80CRI) CCT configurations.

### ELECTRICAL

Light engine consists of 96 high-efficacy LEDs mounted to a flexible circuit board and aluminum heat sink, ensuring optimal thermal management and long life. Fixtures ship standard with 0-10v dimming driver (order option DMG for connection to exterior controls). Class 1 electronic driver has a power factor >90%, THD <20%, and with an expected life of 100,000 hours with <1% failure rate. Serviceable 10kV surge protection device meets a minimum Category C Low for operation (per ANSI/IEEE C62.41.2).

### INSTALLATION

Standard post-top PT4 type mounting configuration fits into a 4" OD open pole top (round pole only). Alternate tenon (2-3/8" or 2-7/8") mounting also available and require 4" tall tenons.

### LISTINGS

CSA certified to U.S. and Canadian standards. Luminaire is IP65 rated. Rated for -40°C minimum ambient.

DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product. Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org/OPL](http://www.designlights.org/OPL) to confirm which versions are qualified.

International Dark-Sky Association (IDA) Fixture Seal of Approval (FSA) is available for all products on this page utilizing 3000K color or less. U.S. Patent No. D925,088S

### GOVERNMENT PROCUREMENT

BAA – Buy America(n) Act: Product qualifies as a domestic end product under the Buy American Act as implemented in the FAR and DFARS. Product also qualifies as manufactured in the United States under DOT Buy America regulations.

BABA – Build America Buy America: Product qualifies as produced in the United States under the definitions of the Build America, Buy America Act.

Please refer to [www.acuitybrands.com/buy-american](http://www.acuitybrands.com/buy-american) for additional information.

### WARRANTY

5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: [www.acuitybrands.com/support/warranty/terms-and-conditions](http://www.acuitybrands.com/support/warranty/terms-and-conditions)

**Note:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

Catalog Number
Notes
Type <b>OJ Pole</b>

## FEATURES & SPECIFICATIONS

**INTENDED USE** — These specifications are for USA standards only. Round Straight Steel is a general purpose light pole for up to 30-foot mounting heights. This pole provides a robust yet cost effective option for mounting area lights and floodlights.

### CONSTRUCTION

**Pole Shaft:** The pole shaft is of 0.120" uniform wall thickness and is made of a weldable-grade, hot-rolled, commercial-quality steel tubing with a minimum yield of 42,000 psi. Shaft is one-piece with a full-length longitudinal high-frequency electric resistance weld. Uniformly round in cross-section down length of shaft with no taper. Standard shaft diameters are 3", 4", 4.5" and 5". 6" diameter shaft available by quote. Shaft wall thickness of .180" is available with certain tube diameters.

**Pole Top:** Options include tenon top, drilled for side mount fixture, 4" tenon with drilling (includes extra handhole) and open top. Side drilled and open top poles include a removable press-fit, black, low density polyethylene top cap.

**Handhole:** A reinforced handhole with grounding provision is provided at 12" or 18" from the base end of the pole assembly on side A. Every handhole includes a cover and cover attachment hardware. 2.5" x 5" rectangular handhole is provided on pole.

**Base Cover:** A two-piece ABS round plastic full base cover is provided with each pole assembly. Additional base cover options are available upon factory request. Options include fabricated two-piece sheet steel. All base covers are finished to match pole.

**Anchor Base/Bolts:** Anchor base is fabricated from hot-rolled carbon steel plate that conforms with ASTM A36. Anchor bolts conform to ASTM F1554 Grade 55 and are provided with two hex nuts and two flat washers. Bolts have an "L" blend on one end. All anchor bolts are hot-dipped galvanized a minimum of 12" nominal on the threaded end. Anchor bolts are made of steel rod having a minimum yield strength of 55,000 psi and a yield strength of 75,000 psi to 95,000 psi.

**HARDWARE** — All structural fasteners are high-strength galvanized carbon steel. All non-structural fasteners are galvanized or zinc-plated carbon steel or stainless steel.

**FINISH** — Extra durable standard powder-coat finishes include Dark Bronze, White, Black, Medium Bronze and Natural Aluminum colors. Classic finishes include Sandstone, Charcoal Gray, Tennis Green, Bright Red and Steel Blue colors. Architectural Colors and Special Finishes are available by quote and include, but are not limited to Hot-dipped Galvanized, Paint over Hot-dipped Galvanized, RAL Colors, Custom Colors and Extended Warranty Finishes. Factory-applied primer paint finish is available for customer field-paint applications.

### GOVERNMENT PROCUREMENT

**BAA** — Buy America(n) Act: Product qualifies as a domestic end product under the Buy American Act as implemented in the FAR and DFARS. Product also qualifies as manufactured in the United States under DOT Buy America regulations.

**BABA** — Build America Buy America: Product qualifies as produced in the United States under the definitions of the Build America, Buy America Act.

Please refer to [www.acuitybrands.com/buy-american](http://www.acuitybrands.com/buy-american) for additional information.

**WARRANTY** — 1-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: [www.acuitybrands.com/support/warranty/terms-and-conditions](http://www.acuitybrands.com/support/warranty/terms-and-conditions)

**NOTE:** Actual performance may differ as a result of end-user environment and application. Specifications subject to change without notice.



Anchor Base Poles

# RSS

ROUND STRAIGHT STEEL



# RSS Round Straight Steel Pole

## ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

**Example:** RSS 20 4-5B DM19 DDBXD

RSS	8	4B	PT	STLHHC-FBCSTL2PC	DDBXD
Series	Nominal fixture mounting height	Nominal shaft base size/wall thickness <sup>1</sup>	Mounting <sup>2</sup>	Options	Finish
RSS	8'-30' (for 1/2 ft increments, add -6 to the pole height. <b>Ex:</b> 20-6 equals 20ft 6in.)  (See technical information table for complete ordering information.)	3B 3" 11ga (.120") 4B 4" 11ga (.120") 4-5B 4.5" 11ga (.120") 5B 5" 11ga (.120")  (See technical information table for complete ordering information.)	<b>Tenon mounting</b> PT Open top T20 2-3/8" O.D. (2" NPS) T25 2-7/8" O.D. (2-1/2" NPS) T30 3-1/2" O.D. (3" NPS) T35 4" O.D. (3-1/2" NPS) <u>KAC/KAD/KSE/KSE/KVR/ KVF Drill mounting<sup>3</sup></u> DM19 1 at 90° DM28 2 at 180° DM28PL 2 at 180° with one side plugged DM29 2 at 90° DM32 3 at 120° DM49 4 at 90° <u>CSX/DSX/RSX/AERIS™/OMERO™/ KAX Drill mounting<sup>3</sup></u> DM19AS 1 at 90° DM28AS 2 at 180° DM29AS 2 at 90° DM32AS 3 at 120° DM39AS 3 at 90° DM49AS 4 at 90° <u>RAD drill mounting<sup>3,4</sup></u> DM19RAD 1 at 90° DM28RAD 2 at 180° DM29RAD 2 at 90° DM32RAD 3 at 120° DM39RAD 3 at 90° DM49RAD 4 at 90° <u>ESX Drill mounting<sup>3</sup></u> DM19ESX 1 at 90° DM28ESX 2 at 180° DM29ESX 2 at 90° DM32ESX 3 at 120° DM39ESX 3 at 90° DM49ESX 4 at 90°	<b>Shipped installed</b> VD Vibration damper <sup>5</sup> HAXy Horizontal arm bracket (1 fixture) <sup>6,7</sup> FDLxy Festoon outlet less electrical <sup>6,8</sup> CPL12/xy 1/2" coupling <sup>6</sup> CPL34/xy 3/4" coupling <sup>6</sup> CPL1/xy 1" coupling <sup>6</sup> NPL12/xy 1/2" threaded nipple <sup>6</sup> NPL34/xy 3/4" threaded nipple <sup>6</sup> NPL1/xy 1" threaded nipple <sup>6</sup> EHHxy Extra handhole <sup>6,9</sup>  STLHHC Steel handhole cover (standard is plastic, finish is smooth) <sup>10</sup> FBCSTL2PC 2 Piece steel base cover (standard is plastic) <sup>10</sup> IC Interior coating <sup>11</sup> L/AB Less anchor bolts (Include when anchor bolts are not needed) TP Tamper resistant handhole cover fasteners NEC NEC 410.30 compliant gasketed handhole (Not UL Labeled) UL UL listed with label (Includes NEC compliant cover) BAA Buy America(n) Act Compliant <sup>12</sup> VM/original order# Match pole to prior order or project <sup>13</sup>	<b>Super durable paint colors</b> DDBXD Dark bronze DBLXD Black DNAXD Natural aluminum DWHXD White DSSXD Sandstone DGCXD Charcoal gray DTGXD Tennis green DBRXD Bright red DSBXD Steel blue DDBTXD Textured dark bronze DBLBXD Textured black DNATXD Textured natural aluminum DWHGXD Textured white  <b>Other finishes</b> GALV Galvanized finish <b>Architectural colors and special finishes<sup>14</sup></b> [PAINT] GALV Paint over galvanizing VP30 3 year warranty extension VP53 5 year warranty extension RAL#### Use designated Lithonia Lighting nomenclature in <a href="#">brochure</a>  Custom color Nomenclature assigned through Customer Care "Custom Color Process"

### NOTES:

- Wall thickness will be signified with a "B" (11 Gauge) or a "F" (7-Gauge) in nomenclature. "B" - .120" | "F" - .180"
- PT open top poles include top cap. When ordering tenon mounting and drill mounting for the same pole, specify as drilling option/tenon option. The combination includes a required extra handhole.  
*Example: DM28/T20.*
- Refer to the fixture spec sheet for the correct drilling template pattern and orientation compatibility.
- DM19RAD, DM28RAD and DM32RAD require a minimum top O.D. of 4". DM29RAD, DM39RAD and DM49RAD require a minimum top O.D. of 4.25".
- VD not available with 3" pole. On 4" and 5" poles, VD cannot be installed if provisions (EHH, FDL, NPL, CPL) are located higher than 2/3 of the pole's total height.  
*Example: Pole height is 25ft, A provision cannot be placed above 16ft.*
- Specify location and orientation when ordering option.  
**For "x":** Specify the height above the base of pole in feet or feet and inches; separate feet and inches with a "-".  
*Example: 5ft = 5 and 20ft 3in = 20-3*  
**For "y":** Specify orientation from handhole (A,B,C,D) Refer to the Handhole Orientation diagram below.  
*Example: 1/2" coupling at 5' 8", orientation C = CPL12/5-8C*
- Horizontal arm is 18" x 2-3/8" O.D. tenon standard, with radius curve providing 12" rise and 2-3/8" O.D. If ordering two horizontal arm at the same height, specify with HAXy.  
*Example: HA20BD.*
- FDL does not come with GFCI outlet or handhole cover. These must be supplied by contractor or electrician.
- Combination of tenon-top and drill mount includes extra handhole. EHH includes cover.
- Plastic hand hole cover and base covers come standard with all poles. Items ship separately. Additional parts can be ordered as replacements.
- Provides enhanced corrosion resistance. N/A with GALV.
- Use when mill certifications are required.
- Must add original order number. Not for replacement parts or post sales issues, contact tech support or post sales teams. VM is used to ensure poles match in appearance exactly from order to order, on a single project site. A common use case would be a multi-phase project with multiple orders.  
*Example: VM/010-36784*
- Must be quoted through AQD. Finishes do not require RFA. RAL colors available are shown in "Architectural Colors brochure". Lead times may be extended up to 2 weeks due to paint procurement.

### Accessories: Order as separate catalog number.

PL DT20	Plugs for ESX drillings
PL DT8	Plugs for DMxxAS drillings
FVD xxFT	Field installed vibration damper (snake style)

# RSS Round Straight Steel Pole

TECHNICAL INFORMATION — EPA (ft <sup>2</sup> ) with 1.3 gust										
Catalog number	Nominal shaft length (ft)*	Pole shaft size (in x ft)	Wall thickness (in)	80 mph	Max weight	90 mph	Max weight	100 mph	Max weight	Approximate ship weight (lbs.)
RSS 8 4-5B	8	4.5 x 8.0	0.120	24.7	630	19.7	495	16.0	430	55
RSS 10 3B	10	3.0 x 10.0	0.120	10.0	250	7.7	190	6.0	175	55
RSS 10 4B	10	4.0 x 10.0	0.120	19.1	480	15	375	12.2	305	70
RSS 10 4-5B	10	4.5 x 10.0	0.120	24.5	615	19.5	490	15.8	395	75
RSS 12 3B	12	3.0 x 12.0	0.120	7.7	195	5.8	145	4.4	130	60
RSS 12 4B	12	4.0 x 12.0	0.120	15.0	390	11.8	300	9.5	240	80
RSS 12 4-5B	12	4.5 x 12.0	0.120	19.8	495	15.7	395	12.7	320	85
RSS 14 3B	14	3.0 x 14.0	0.120	6.0	175	4.4	130	3.3	90	70
RSS 14 4B	14	4.0 x 14.0	0.120	12.2	305	9.4	250	7.6	195	90
RSS 14 4-5B	14	4.5 x 14.0	0.120	16.2	405	12.8	320	10.3	260	95
RSS 15 4-5B	15	4.5 x 15.0	0.120	12.0	300	9.5	250	7.5	200	96
RSS 16 3B	16	3.0 x 16.0	0.120	4.6	125	3.2	100	2.3	60	80
RSS 16 4B	16	4.0 x 16.0	0.120	9.6	250	7.4	185	5.9	150	100
RSS 16 4-5B	16	4.5 x 16.0	0.120	13.1	330	10.2	265	8.2	205	105
RSS 18 3B	18	3.0 x 18.0	0.120	3.4	90	2.3	60	1.4	70	90
RSS 18 4B	18	4.0 x 18.0	0.120	7.6	190	5.7	180	4.5	130	110
RSS 18 4-5B	18	4.5 x 18.0	0.120	10.5	265	8.2	210	6.5	165	115
RSS 20 3B	20	3.0 x 20.0	0.120	2.4	100	1.4	75	--	--	100
RSS 20 4B	20	4.0 x 20.0	0.120	6.0	150	4.45	150	3.45	125	120
RSS 20 4-5B	20	4.5 x 20.0	0.120	8.5	215	6.6	165	5.2	130	130
RSS 20 5B	20	5.0 x 20.0	0.120	11.75	300	9.1	230	7.25	180	145
RSS 22 4-5B	22	4.5 x 22.0	0.120	6.0	150	4.5	125	3.75	100	134
RSS 25 4B	25	4.0 x 25.0	0.120	2.85	100	1.95	75	1.35	75	145
RSS 25 4-5B	25	4.5 x 25.0	0.120	4.8	130	3.6	90	2.7	90	145
RSS 25 5B	25	5.0 x 25.0	0.120	7.25	180	5.5	150	4.25	150	180
RSS 30 4-5B	30	4.5 x 30.0	0.120	2.3	80	1.5	75	1.0	60	185
RSS 30 5B	30	5.0 x 30.0	0.120	4.2	150	3	125	2.25	100	210

NOTE: EPA values are based ASCE 7-93 wind map.

\*For 1/2 ft increments, add -6 to the pole height. Ex: 20-6 equals 20ft 6in.



# RSS Round Straight Steel Pole



## TECHNICAL INFORMATION — EPA (ft<sup>2</sup>) WITH 3-SECOND GUST PER AASHTO 2013

Series	Mounting Height (ft)*	Shaft Base Size	90 MPH	Max. weight	100 MPH	Max. weight	110 MPH	Max. weight	120 MPH	Max. weight	130 MPH	Max. weight	140 MPH	Max. weight	150 MPH	Max. weight	Approximate ship weight (lbs.)
RSS	8	4-5B	18.5	463	15	375	13	325	11	275	9.5	238	8	200	7	175	55
RSS	10	3B	6	150	5	125	4	100	3.5	88	2.5	63	2	50	2	50	55
RSS	10	4B	12	300	9.5	238	8	200	6.5	163	5.5	138	5	125	4.5	113	70
RSS	10	4-5B	15.5	388	12.5	313	10.5	263	9	225	7.5	188	6.5	163	6	150	75
RSS	12	3B	5	125	4	100	3	75	2.5	63	2	50	1.5	38	1	25	60
RSS	12	4B	10	250	8	200	6.5	163	5.5	138	4.5	113	4	100	3.5	88	80
RSS	12	4-5B	13	325	10.5	263	9	225	7.5	188	6.5	163	5.5	138	4.5	113	85
RSS	14	3B	4	100	3	75	2.5	63	2	50	1.5	38	1	25	0.5	13	70
RSS	14	4B	8.5	213	6.5	163	5.5	138	4	100	3.5	88	3	75	2.5	63	90
RSS	14	4-5B	11	275	9	225	7	175	6	150	5	125	4.5	113	4	100	95
RSS	15	4-5B	10	250	8	200	6.5	163	5.5	138	4.5	113	4	100	3.5	88	96
RSS	16	3B	3	75	2.5	63	1.5	38	1	25	0.5	13	0.5	13	-	-	80
RSS	16	4B	7	175	5.5	138	4	100	3	75	2.5	63	2	50	2	50	100
RSS	16	4-5B	9	225	7	175	6	150	5	125	4	100	3.5	88	3	75	105
RSS	18	3B	2.5	63	1.5	38	1	25	0.5	13	-	-	-	-	-	-	90
RSS	18	4B	5.5	138	4	100	3	75	2.5	63	2	50	1.5	38	1	25	110
RSS	18	4-5B	7.5	188	6	150	4.5	113	4	100	3	75	2.5	63	2	50	115
RSS	20	3B	2	50	1	25	0.5	13	-	-	-	-	-	-	-	-	100
RSS	20	4B	4.5	113	3	75	2	50	1.5	38	1	25	1	25	0.5	13	120
RSS	20	4-5B	6	150	4.5	113	3.5	88	3	75	2.5	63	2	50	1.5	38	130
RSS	20	5B	8	200	6.5	163	5.5	138	4.5	113	3.5	88	3	75	2.5	63	145
RSS	22	4-5B	5	125	3.5	88	2.5	63	2	50	1.5	38	1	25	1	25	134
RSS	25	4B	2.5	63	1	25	0.5	13	-	-	-	-	-	-	-	-	145
RSS	25	4-5B	3.5	88	2	50	1.5	38	1	25	0.5	13	-	-	-	-	145
RSS	25	5B	5	125	3.5	88	3	75	2	50	1.5	38	1.5	38	1	25	180
RSS	30	4-5B	1.5	38	-	-	-	-	-	-	-	-	-	-	-	-	185
RSS	30	5B	2.5	63	1.5	38	1	25	0.5	13	-	-	-	-	-	-	210

**NOTE:** AASHTO 2013 criteria is the most conservative existing EPA calculation. For poles not showing EPA values under AASHTO 2013, EPA values may exist under commercial criteria (see table above).

\*For 1/2 ft increments, add -6 to the pole height. Ex: 20-6 equals 20ft 6in.


## BASE DETAIL

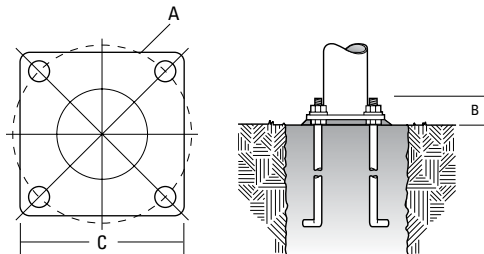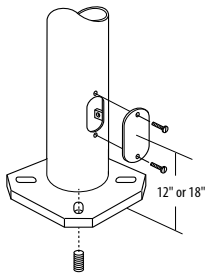

## ANCHORAGE AND TEMPLATE INFORMATION

Shaft base size	Bolt circle A	Bolt projection B	Base square C	Template description	Anchor bolt description	Bolt size (in. x in. x in.)
3"	7.5" - 8.5"	3.50"-3.75"	10.50"	ABTEMPLATE PJ50041	AB18-0	3/4 x 18 x 3
4"	7.5" - 8.5"	3.50"-3.75"	10.50"	ABTEMPLATE PJ50041	AB18-0	3/4 x 18 x 3
4.5"	7.5" - 8.5"	3.50"-3.75"	10.50"	ABTEMPLATE PJ50041	AB18-0	3/4 x 18 x 3
5"	7.5" - 8.5"	3.50"-3.75"	10.50"	ABTEMPLATE PJ50041	AB18-0	3/4 x 18 x 3


## HANDHOLE ORIENTATION



### IMPORTANT INSTALLATION NOTES:

- **Do not** erect poles without having fixtures installed.
- Factory-supplied templates must be used when setting anchor bolts. Lithonia Lighting will not accept claim for incorrect anchorage placement due to failure to use factory template.
- If poles are stored outside, all protective wrapping must be removed immediately upon delivery to prevent finish damage.
- Lithonia Lighting is not responsible for the foundation design.

**CAUTION:** These specifications are intended for general purposes only. Lithonia Lighting reserves the right to change material or design, without prior notice, in a continuing effort to upgrade its products.

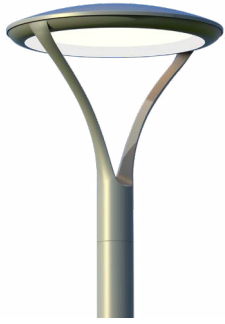

# Radean Post Top LED Area Luminaire



Catalog  
Number

Notes  
10' Total Height

Type  
OK

Hit the Tab key or mouse over the page to see all interactive elements.

## Specifications

**EPA:** 1.02 ft<sup>2</sup>  
(0.105 m<sup>2</sup>)


**Length:** 24"  
(61cm)

**Width:** 24"  
(61cm)

**H1  
Luminaire  
Height:** 4"  
(10.16cm)

**H2  
Luminaire  
Height:** 26"  
(66.04cm)

**Weight:** 38lbs  
(17.24Kg)

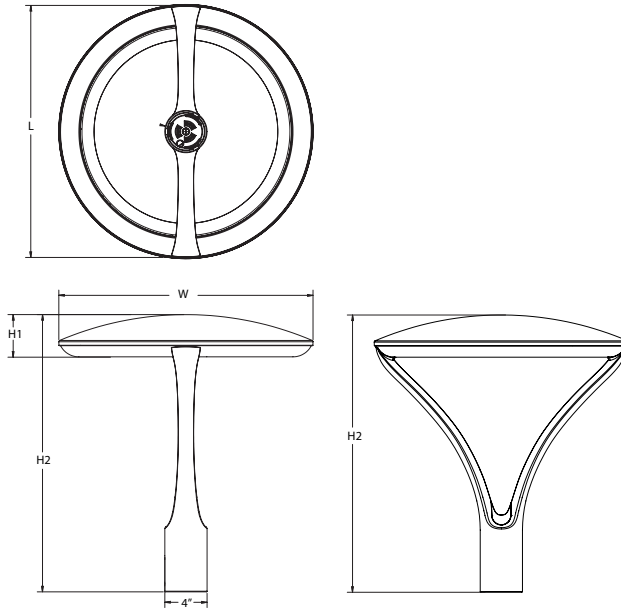

## Introduction

The architecturally-inspired shape of the RADEAN™ post top area luminaire embodies the grace and strength of the RADEAN family. The twin copper-core cast aluminum arms support the slender superstructure, creating a beautiful sculpture by day transforming into a beacon of comfort by night. Triangular arms redirect reflection maintaining its visually quiet appearance. With sleek lines and simple silhouettes, these LED luminaires use specialized lighting and visual comfort to transform common areas like courtyards, outdoor retail locations, universities and corporate campuses into pedestrian-friendly nighttime environments.

## Ordering Information

**EXAMPLE:** RADPT LED P3 30K SYM MVOLT PT4 PE DNAXD

RADPT LED	P1	40K	SYM	MVOLT	PT4
Series	Performance package	Color temperature	Distribution	Voltage	Mounting (required)
RADPT LED	P1 3,000 Lumens P2 5,000 Lumens P3 7,000 Lumens P4 10,000 Lumens P5 15,000 Lumens	27K 2700K 30K 3000K 35K 3500K 40K 4000K 50K 5000K	SYM Symmetric type V ASY Asymmetric type IV PATH Pathway Type III	MVOLT <sup>2</sup> 277 <sup>2</sup> 120 <sup>2</sup> 347 208 <sup>2</sup> 480 240 <sup>2</sup>	PT4 <sup>3</sup> Slips inside a 4" OD round metal pole RADPT20 Slips over a 2 3/8" diameter tenon (4" tall tenon required) RADPT25 Slips over a 2 7/8" diameter tenon (4" tall tenon required)

DMG	--	DDBXD
Control options	Other options	Finish (required)
<b>Shipped installed</b> NLTAIR2 nLight AIR 2.0 enabled <sup>4</sup> PE Button photocell <sup>4</sup> FAO Field adjustable output <sup>4</sup> DMG 0-10v dimming wires pulled outside fixture (for use with an external control, ordered separately) <sup>5</sup>	SF Single Fuse <sup>2</sup> DF Double Fuse <sup>2</sup> R90 Rotated optics <sup>6</sup>	<b>Shipped installed</b> HS Houseside shield <sup>7</sup> DDBXD Dark bronze DBLXD Black DNAXD Natural aluminum DWHXD White DDBTXD Textured dark bronze DBLTXD Textured black DNATXD Textured natural aluminum DWHGXD Textured white



COMMERCIAL OUTDOOR

One Lithonia Way • Conyers, Georgia 30012 • Phone: 1-800-705-SERV (7378) • [www.lithonia.com](http://www.lithonia.com)  
© 2011-2024 Acuity Brands Lighting, Inc. All rights reserved.

RADPT LED  
Rev. 03/27/24

## Ordering Information

### Accessories

Ordered and shipped separately.

RADHS	Houseside shield (shield is white)
RADCS DDBXD U	Decorative clamshell base for 4" RSS pole (specify finish)
RADFBC DDBXD U	Full base cover for 4" RSS pole (specify finish)

### NOTES


- 2700K and 3500K may require extended lead-times.
- MVOLT driver operates on any line voltage from 120-277V (50/60 Hz). Single fuse (SF) requires 120, 277 or 347 voltage option. Double fuse (DF) requires 208, 240 or 480 voltage option.
- Requires nominal 4" round straight metal pole.
- NLTAIR2 not available with PE or FAO. Must link to external nLight Air network. Does not include occupancy sensor. For more information refer to [rSBOR](#) pole mount sensor.
- DMG not available with NLTAIR2 or FAO.
- For left rotation, select R90 and rotate luminaire 180° on pole.
- Also available as a separate accessory; see Accessories information at left. HS not available with R90. Shield is field rotatable shield in 180° increments.

## Mounting

### PT4

### RADPT20 or RADPT25

RADPT20 and RADPT25 mounting require a 4" tall tenon (standard on Lithonia poles).

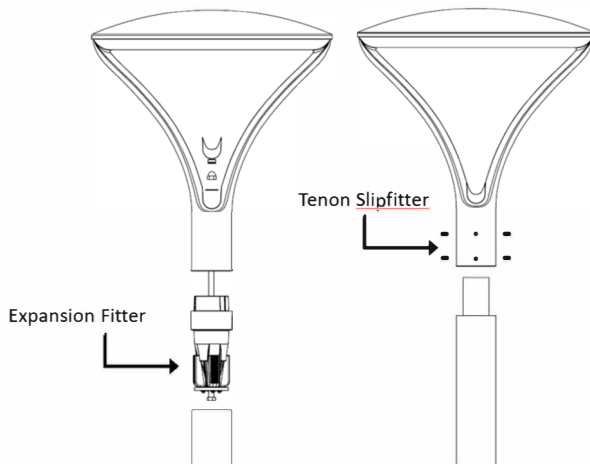


### Recommended Poles for use with RADEAN RADPT LED Luminaires.

Acuity Part Number	Description	For luminaires	Used with Mounting
RSS 10 4B PT DDBXD	10' Round Straight Steel - 4" O.D. - Open Top	RADPT LED	PT4
RSS 12 4B PT DDBXD	12' Round Straight Steel - 4" O.D. - Open Top	RADPT LED	PT4
RSS 14 4B PT DDBXD	14' Round Straight Steel - 4" O.D. - Open Top	RADPT LED	PT4
RSS 16 4B PT DDBXD	16' Round Straight Steel - 4" O.D. - Open Top	RADPT LED	PT4
RSS 18 4B PT DDBXD	18' Round Straight Steel - 4" O.D. - Open Top	RADPT LED	PT4
RSS 20 4B PT DDBXD	20' Round Straight Steel - 4" O.D. - Open Top	RADPT LED	PT4
RSS 25 4B PT DDBXD	25' Round Straight Steel - 4" O.D. - Open Top	RADPT LED	PT4
RSS 10 4B T20 DDBXD	10' Round Straight Steel - 4" O.D. - Tenon Top	RADPT LED	RADPT20
RSS 12 4B T20 DDBXD	12' Round Straight Steel - 4" O.D. - Tenon Top	RADPT LED	RADPT20
RSS 14 4B T20 DDBXD	14' Round Straight Steel - 4" O.D. - Tenon Top	RADPT LED	RADPT20
RSS 16 4B T20 DDBXD	16' Round Straight Steel - 4" O.D. - Tenon Top	RADPT LED	RADPT20
RSS 18 4B T20 DDBXD	18' Round Straight Steel - 4" O.D. - Tenon Top	RADPT LED	RADPT20
RSS 20 4B T20 DDBXD	20' Round Straight Steel - 4" O.D. - Tenon Top	RADPT LED	RADPT20
RSS 25 4B T20 DDBXD	25' Round Straight Steel - 4" O.D. - Tenon Top	RADPT LED	RADPT20

\* Customer must verify pole loading per required design criteria and specified wind speed. Consult pole specification sheet for additional details.

## Control Options

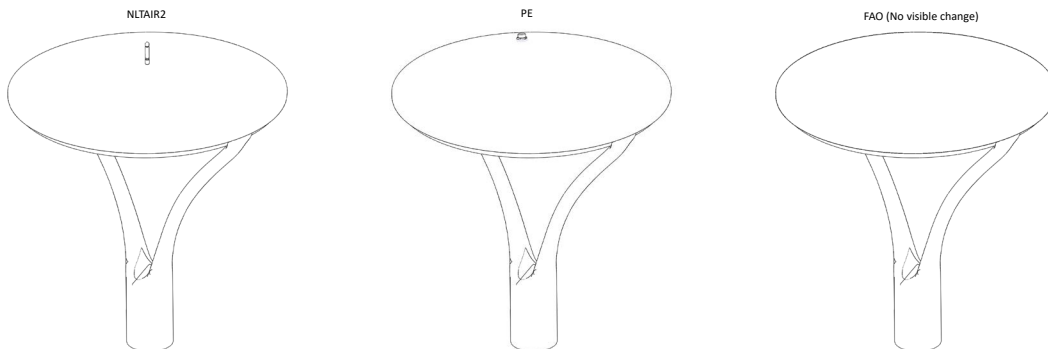

# Performance Data

## Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown. Contact factory for performance data on any configurations not shown here.

Performance Package	Input Wattage	Distribution	2700K					3000K					3500K					4000K					5000K				
			Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
P1	25	ASY	2,924	2	1	2	115	3,022	2	2	2	119	3,095	2	2	2	122	3,168	2	2	2	125	3,168	2	2	2	125
		PATH	2,529	2	1	2	100	2,613	2	2	2	103	2,676	2	2	2	105	2,739	2	2	2	108	2,739	2	2	2	108
		SYM	3,086	2	1	1	121	3,189	2	1	1	126	3,266	2	1	1	129	3,344	2	1	1	132	3,344	2	1	1	132
P2	38	ASY	4,521	3	2	3	119	4,672	3	2	3	123	4,785	3	2	3	126	4,898	3	2	3	129	4,898	3	2	3	129
		PATH	3,909	2	2	2	103	4,040	2	2	2	106	4,137	2	2	2	109	4,235	3	2	3	111	4,235	3	2	3	111
		SYM	4,772	2	2	1	126	4,931	3	2	1	130	5,050	3	2	1	133	5,169	3	2	1	136	5,169	3	2	1	136
P3	54	ASY	6,387	3	2	3	119	6,600	3	2	3	123	6,760	3	2	3	126	6,919	3	2	3	129	6,919	3	2	3	129
		PATH	5,523	3	2	3	103	5,707	3	2	3	106	5,845	3	2	3	109	5,983	3	2	3	112	5,983	3	2	3	112
		SYM	6,741	3	2	2	126	6,966	3	2	2	130	7,135	3	2	2	133	7,303	3	2	2	136	7,303	3	2	2	136
P4	86	ASY	10,150	4	2	4	118	10,489	4	2	4	122	10,742	4	2	4	125	10,996	4	2	4	128	10,996	4	2	4	128
		PATH	8,777	3	2	3	102	9,070	3	2	3	106	9,289	3	2	3	108	9,509	3	2	3	111	9,509	3	2	3	111
		SYM	10,713	3	2	2	125	11,071	3	2	2	129	11,338	3	2	2	132	11,606	3	2	2	135	11,606	3	2	2	135
P5	123	ASY	14,250	4	2	4	116	14,724	4	2	4	120	15,081	4	3	4	123	15,437	4	3	4	126	15,437	4	3	4	126
		PATH	12,322	4	2	4	101	12,733	4	3	4	104	13,041	4	3	4	106	13,349	4	3	4	109	13,349	4	3	4	109
		SYM	15,040	4	2	3	123	15,541	4	2	3	127	15,917	4	2	3	130	16,293	4	2	3	133	16,293	4	2	3	133

## Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient	LAT Factor
0°C / 32°F	1.06
5°C / 41°F	1.05
10°C / 50°F	1.04
15°C / 59°F	1.02
20°C / 68°F	1.01
<b>25°C / 77°F</b>	<b>1.00</b>
30°C / 86°F	0.99
35°C / 95°F	0.98
40°C / 104°F	0.96

## Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the **RADPT LED** platform in a **25°C ambient**, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.


	Projected LED Lumen Maintenance			
	0	25,000	50,000	100,000
P1	1.00	0.96	0.91	0.82
P2	1.00	0.96	0.91	0.82
P3	1.00	0.96	0.91	0.82
P4	1.00	0.96	0.91	0.82
P5	1.00	0.95	0.89	0.78

## Electrical Load

Lumen Package	LED Drive Current	Voltage	Wattage		Current (A)					
					120	208	240	277	347	480
P1	500	42.8	21.4	Input Current	0.22	0.13	0.11	0.1	0.08	0.06
				System Watts	26	26	26	27	25	26
P2	770	43	33.1	Input Current	0.33	0.19	0.16	0.14	0.11	0.08
				System Watts	39	39	39	39	38	38
P3	1100	43.2	47.5	Input Current	0.46	0.26	0.23	0.2	0.16	0.12
				System Watts	55	54	54	54	54	54
P4	900	87.3	78.6	Input Current	0.73	0.42	0.36	0.32	0.25	0.18
				System Watts	87	86	86	86	86	86
P5	1250	88.2	110.2	Input Current	1	0.58	0.5	0.44	0.35	0.25
				System Watts	120	119	119	119	120	120



Isofootcandle plots are considered to be representative of available optical distributions.

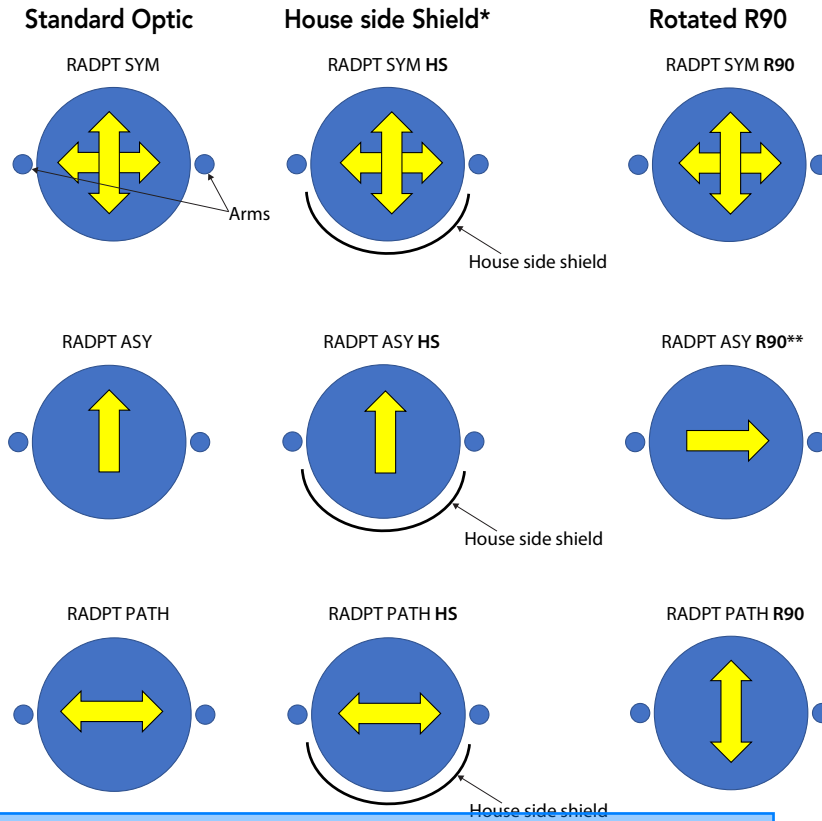

\*HS not available with R90  
 \*\*For L90, use R90 and rotate luminaire 180° on pole

## FEATURES & SPECIFICATIONS

### INTENDED USE

Pedestrian areas such as parks, campuses, pathways, courtyards and pedestrians malls.

### CONSTRUCTION

Single-piece die-cast aluminum housing with nominal wall thickness of 0.125" on a 6mm thick acrylic waveguide is fully gasketed with a single piece tubular silicone gasket.

### FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Standard Super Durable colors include dark bronze, black, natural aluminum and white. Available in textured and non-textured finishes.

### OPTICS

6MM thick acrylic waveguide with 360° flexible LED board. Available in 2700K, 3000K, 3500K, 4000K and 5000K (80CRI) CCT configurations.

### ELECTRICAL

Light engine consists of 96 high-efficacy LEDs mounted to a flexible circuit board and aluminum heat sink, ensuring optimal thermal management and long life. Fixtures ship standard with 0-10v dimming driver (order option DMG for connection to exterior controls). Class 1 electronic driver has a power factor >90%, THD <20%, and with an expected life of 100,000 hours with <1% failure rate. Serviceable 10kV surge protection device meets a minimum Category C Low for operation (per ANSI/IEEE C62.41.2).

### INSTALLATION

Standard post-top PT4 type mounting configuration fits into a 4" OD open pole top (round pole only). Alternate tenon (2-3/8" or 2-7/8") mounting also available and require 4" tall tenons.

### LISTINGS

CSA certified to U.S. and Canadian standards. Luminaire is IP65 rated. Rated for -40°C minimum ambient.

DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product. Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org/OPL](http://www.designlights.org/OPL) to confirm which versions are qualified.

International Dark-Sky Association (IDA) Fixture Seal of Approval (FSA) is available for all products on this page utilizing 3000K color or less. U.S. Patent No. D925,088S

### GOVERNMENT PROCUREMENT

BAA – Buy America(n) Act: Product qualifies as a domestic end product under the Buy American Act as implemented in the FAR and DFARS. Product also qualifies as manufactured in the United States under DOT Buy America regulations.

BABA – Build America Buy America: Product qualifies as produced in the United States under the definitions of the Build America, Buy America Act.

Please refer to [www.acuitybrands.com/buy-american](http://www.acuitybrands.com/buy-american) for additional information.

### WARRANTY

5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: [www.acuitybrands.com/support/warranty/terms-and-conditions](http://www.acuitybrands.com/support/warranty/terms-and-conditions)

**Note:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

Catalog Number
Notes
Type <b>OK Pole</b>

## FEATURES & SPECIFICATIONS

**INTENDED USE** — These specifications are for USA standards only. Round Straight Steel is a general purpose light pole for up to 30-foot mounting heights. This pole provides a robust yet cost effective option for mounting area lights and floodlights.

### CONSTRUCTION

**Pole Shaft:** The pole shaft is of 0.120" uniform wall thickness and is made of a weldable-grade, hot-rolled, commercial-quality steel tubing with a minimum yield of 42,000 psi. Shaft is one-piece with a full-length longitudinal high-frequency electric resistance weld. Uniformly round in cross-section down length of shaft with no taper. Standard shaft diameters are 3", 4", 4.5" and 5". 6" diameter shaft available by quote. Shaft wall thickness of .180" is available with certain tube diameters.

**Pole Top:** Options include tenon top, drilled for side mount fixture, 4" tenon with drilling (includes extra handhole) and open top. Side drilled and open top poles include a removable press-fit, black, low density polyethylene top cap.

**Handhole:** A reinforced handhole with grounding provision is provided at 12" or 18" from the base end of the pole assembly on side A. Every handhole includes a cover and cover attachment hardware. 2.5" x 5" rectangular handhole is provided on pole.

**Base Cover:** A two-piece ABS round plastic full base cover is provided with each pole assembly. Additional base cover options are available upon factory request. Options include fabricated two-piece sheet steel. All base covers are finished to match pole.

**Anchor Base/Bolts:** Anchor base is fabricated from hot-rolled carbon steel plate that conforms with ASTM A36. Anchor bolts conform to ASTM F1554 Grade 55 and are provided with two hex nuts and two flat washers. Bolts have an "L" blend on one end. All anchor bolts are hot-dipped galvanized a minimum of 12" nominal on the threaded end. Anchor bolts are made of steel rod having a minimum yield strength of 55,000 psi and a yield strength of 75,000 psi to 95,000 psi.

**HARDWARE** — All structural fasteners are high-strength galvanized carbon steel. All non-structural fasteners are galvanized or zinc-plated carbon steel or stainless steel.

**FINISH** — Extra durable standard powder-coat finishes include Dark Bronze, White, Black, Medium Bronze and Natural Aluminum colors. Classic finishes include Sandstone, Charcoal Gray, Tennis Green, Bright Red and Steel Blue colors. Architectural Colors and Special Finishes are available by quote and include, but are not limited to Hot-dipped Galvanized, Paint over Hot-dipped Galvanized, RAL Colors, Custom Colors and Extended Warranty Finishes. Factory-applied primer paint finish is available for customer field-paint applications.

### GOVERNMENT PROCUREMENT

**BAA** — Buy America(n) Act: Product qualifies as a domestic end product under the Buy American Act as implemented in the FAR and DFARS. Product also qualifies as manufactured in the United States under DOT Buy America regulations.

**BABA** — Build America Buy America: Product qualifies as produced in the United States under the definitions of the Build America, Buy America Act.

Please refer to [www.acuitybrands.com/buy-american](http://www.acuitybrands.com/buy-american) for additional information.

**WARRANTY** — 1-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: [www.acuitybrands.com/support/warranty/terms-and-conditions](http://www.acuitybrands.com/support/warranty/terms-and-conditions)

**NOTE:** Actual performance may differ as a result of end-user environment and application. Specifications subject to change without notice.



Anchor Base Poles

# RSS

ROUND STRAIGHT STEEL



# RSS Round Straight Steel Pole

## ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

**Example:** RSS 20 4-5B DM19 DDBXD

RSS	8	4B	PT	STLHHC-FBCSTL2PC	DDBXD
Series	Nominal fixture mounting height	Nominal shaft base size/wall thickness <sup>1</sup>	Mounting <sup>2</sup>	Options	Finish
RSS	8'-30' (for 1/2 ft increments, add -6 to the pole height. <b>Ex:</b> 20-6 equals 20ft 6in.)  (See technical information table for complete ordering information.)	3B 3" 11ga (.120") 4B 4" 11ga (.120") 4-5B 4.5" 11ga (.120") 5B 5" 11ga (.120")  (See technical information table for complete ordering information.)	<b>Tenon mounting</b> PT Open top T20 2-3/8" O.D. (2" NPS) T25 2-7/8" O.D. (2-1/2" NPS) T30 3-1/2" O.D. (3" NPS) T35 4" O.D. (3-1/2" NPS) <u>KAC/KAD/KSE/KSF/KVR/ KVF Drill mounting<sup>3</sup></u> DM19 1 at 90° DM28 2 at 180° DM28PL 2 at 180° with one side plugged DM29 2 at 90° DM32 3 at 120° DM49 4 at 90° <u>CSX/DSX/RSX/AERIS™/OMERO™/ KAX Drill mounting<sup>3</sup></u> DM19AS 1 at 90° DM28AS 2 at 180° DM29AS 2 at 90° DM32AS 3 at 120° DM39AS 3 at 90° DM49AS 4 at 90° <u>RAD drill mounting<sup>3,4</sup></u> DM19RAD 1 at 90° DM28RAD 2 at 180° DM29RAD 2 at 90° DM32RAD 3 at 120° DM39RAD 3 at 90° DM49RAD 4 at 90° <u>ESX Drill mounting<sup>3</sup></u> DM19ESX 1 at 90° DM28ESX 2 at 180° DM29ESX 2 at 90° DM32ESX 3 at 120° DM39ESX 3 at 90° DM49ESX 4 at 90°	<b>Shipped installed</b> VD Vibration damper <sup>5</sup> HAXy Horizontal arm bracket (1 fixture) <sup>6,7</sup> FDLxy Festoon outlet less electrical <sup>6,8</sup> CPL12/xy 1/2" coupling <sup>6</sup> CPL34/xy 3/4" coupling <sup>6</sup> CPL1/xy 1" coupling <sup>6</sup> NPL12/xy 1/2" threaded nipple <sup>6</sup> NPL34/xy 3/4" threaded nipple <sup>6</sup> NPL1/xy 1" threaded nipple <sup>6</sup> EHHxy Extra handhole <sup>6,9</sup>  STLHHC Steel handhole cover (standard is plastic, finish is smooth) <sup>10</sup> FBCSTL2PC 2 Piece steel base cover (standard is plastic) <sup>10</sup> IC Interior coating <sup>11</sup> L/AB Less anchor bolts (Include when anchor bolts are not needed) TP Tamper resistant handhole cover fasteners NEC NEC 410.30 compliant gasketed handhole (Not UL Labeled) UL UL listed with label (Includes NEC compliant cover) BAA Buy America(n) Act Compliant <sup>12</sup> VM/original order# Match pole to prior order or project <sup>13</sup>	<b>Super durable paint colors</b> DDBXD Dark bronze DBLXD Black DNAXD Natural aluminum DWHXD White DSSXD Sandstone DGCXD Charcoal gray DTGXD Tennis green DBRXD Bright red DSBXD Steel blue DDBTXD Textured dark bronze DBLBXD Textured black DNATXD Textured natural aluminum DWHGXD Textured white <b>Other finishes</b> GALV Galvanized finish <b>Architectural colors and special finishes<sup>14</sup></b> [PAINT] GALV Paint over galvanizing VP30 3 year warranty extension VP53 5 year warranty extension RAL#### Use designated Lithonia Lighting nomenclature in <a href="#">brochure</a> Custom color Nomenclature assigned through Customer Care "Custom Color Process"

### NOTES:

- Wall thickness will be signified with a "B" (11 Gauge) or a "F" (7-Gauge) in nomenclature. "B" - .120" | "F" - .180"
- PT open top poles include top cap. When ordering tenon mounting and drill mounting for the same pole, specify as drilling option/tenon option. The combination includes a required extra handhole.  
*Example: DM28/T20.*
- Refer to the fixture spec sheet for the correct drilling template pattern and orientation compatibility.
- DM19RAD, DM28RAD and DM32RAD require a minimum top O.D. of 4". DM29RAD, DM39RAD and DM49RAD require a minimum top O.D. of 4.25".
- VD not available with 3" pole. On 4" and 5" poles, VD cannot be installed if provisions (EHH, FDL, NPL, CPL) are located higher than 2/3 of the pole's total height.  
*Example: Pole height is 25ft, A provision cannot be placed above 16ft.*
- Specify location and orientation when ordering option.  
**For "x":** Specify the height above the base of pole in feet or feet and inches; separate feet and inches with a "-".  
*Example: 5ft = 5 and 20ft 3in = 20-3*  
**For "y":** Specify orientation from handhole (A,B,C,D) Refer to the Handhole Orientation diagram below.  
*Example: 1/2" coupling at 5' 8", orientation C = CPL12/5-8C*
- Horizontal arm is 18" x 2-3/8" O.D. tenon standard, with radius curve providing 12" rise and 2-3/8" O.D. If ordering two horizontal arm at the same height, specify with HAXxy.  
*Example: HA20BD.*
- FDL does not come with GFCI outlet or handhole cover. These must be supplied by contractor or electrician.
- Combination of tenon-top and drill mount includes extra handhole. EHH includes cover.
- Plastic hand hole cover and base covers come standard with all poles. Items ship separately. Additional parts can be ordered as replacements.
- Provides enhanced corrosion resistance. N/A with GALV.
- Use when mill certifications are required.
- Must add original order number. Not for replacement parts or post sales issues, contact tech support or post sales teams. VM is used to ensure poles match in appearance exactly from order to order, on a single project site. A common use case would be a multi-phase project with multiple orders.  
*Example: VM/010-36784*
- Must be quoted through AQD. Finishes do not require RFA. RAL colors available are shown in "Architectural Colors brochure". Lead times may be extended up to 2 weeks due to paint procurement.

### Accessories: Order as separate catalog number.

PL DT20	Plugs for ESX drillings
PL DT8	Plugs for DMxxAS drillings
FVD xxFT	Field installed vibration damper (snake style)

# RSS Round Straight Steel Pole

TECHNICAL INFORMATION — EPA (ft <sup>2</sup> ) with 1.3 gust										
Catalog number	Nominal shaft length (ft)*	Pole shaft size (in x ft)	Wall thickness (in)	80 mph	Max weight	90 mph	Max weight	100 mph	Max weight	Approximate ship weight (lbs.)
RSS 8 4-5B	8	4.5 x 8.0	0.120	24.7	630	19.7	495	16.0	430	55
RSS 10 3B	10	3.0 x 10.0	0.120	10.0	250	7.7	190	6.0	175	55
RSS 10 4B	10	4.0 x 10.0	0.120	19.1	480	15	375	12.2	305	70
RSS 10 4-5B	10	4.5 x 10.0	0.120	24.5	615	19.5	490	15.8	395	75
RSS 12 3B	12	3.0 x 12.0	0.120	7.7	195	5.8	145	4.4	130	60
RSS 12 4B	12	4.0 x 12.0	0.120	15.0	390	11.8	300	9.5	240	80
RSS 12 4-5B	12	4.5 x 12.0	0.120	19.8	495	15.7	395	12.7	320	85
RSS 14 3B	14	3.0 x 14.0	0.120	6.0	175	4.4	130	3.3	90	70
RSS 14 4B	14	4.0 x 14.0	0.120	12.2	305	9.4	250	7.6	195	90
RSS 14 4-5B	14	4.5 x 14.0	0.120	16.2	405	12.8	320	10.3	260	95
RSS 15 4-5B	15	4.5 x 15.0	0.120	12.0	300	9.5	250	7.5	200	96
RSS 16 3B	16	3.0 x 16.0	0.120	4.6	125	3.2	100	2.3	60	80
RSS 16 4B	16	4.0 x 16.0	0.120	9.6	250	7.4	185	5.9	150	100
RSS 16 4-5B	16	4.5 x 16.0	0.120	13.1	330	10.2	265	8.2	205	105
RSS 18 3B	18	3.0 x 18.0	0.120	3.4	90	2.3	60	1.4	70	90
RSS 18 4B	18	4.0 x 18.0	0.120	7.6	190	5.7	180	4.5	130	110
RSS 18 4-5B	18	4.5 x 18.0	0.120	10.5	265	8.2	210	6.5	165	115
RSS 20 3B	20	3.0 x 20.0	0.120	2.4	100	1.4	75	--	--	100
RSS 20 4B	20	4.0 x 20.0	0.120	6.0	150	4.45	150	3.45	125	120
RSS 20 4-5B	20	4.5 x 20.0	0.120	8.5	215	6.6	165	5.2	130	130
RSS 20 5B	20	5.0 x 20.0	0.120	11.75	300	9.1	230	7.25	180	145
RSS 22 4-5B	22	4.5 x 22.0	0.120	6.0	150	4.5	125	3.75	100	134
RSS 25 4B	25	4.0 x 25.0	0.120	2.85	100	1.95	75	1.35	75	145
RSS 25 4-5B	25	4.5 x 25.0	0.120	4.8	130	3.6	90	2.7	90	145
RSS 25 5B	25	5.0 x 25.0	0.120	7.25	180	5.5	150	4.25	150	180
RSS 30 4-5B	30	4.5 x 30.0	0.120	2.3	80	1.5	75	1.0	60	185
RSS 30 5B	30	5.0 x 30.0	0.120	4.2	150	3	125	2.25	100	210

NOTE: EPA values are based ASCE 7-93 wind map.

\*For 1/2 ft increments, add -6 to the pole height. Ex: 20-6 equals 20ft 6in.



# RSS Round Straight Steel Pole



## TECHNICAL INFORMATION — EPA (ft<sup>2</sup>) WITH 3-SECOND GUST PER AASHTO 2013

Series	Mounting Height (ft)*	Shaft Base Size	90 MPH	Max. weight	100 MPH	Max. weight	110 MPH	Max. weight	120 MPH	Max. weight	130 MPH	Max. weight	140 MPH	Max. weight	150 MPH	Max. weight	Approximate ship weight (lbs.)
RSS	8	4-5B	18.5	463	15	375	13	325	11	275	9.5	238	8	200	7	175	55
RSS	10	3B	6	150	5	125	4	100	3.5	88	2.5	63	2	50	2	50	55
RSS	10	4B	12	300	9.5	238	8	200	6.5	163	5.5	138	5	125	4.5	113	70
RSS	10	4-5B	15.5	388	12.5	313	10.5	263	9	225	7.5	188	6.5	163	6	150	75
RSS	12	3B	5	125	4	100	3	75	2.5	63	2	50	1.5	38	1	25	60
RSS	12	4B	10	250	8	200	6.5	163	5.5	138	4.5	113	4	100	3.5	88	80
RSS	12	4-5B	13	325	10.5	263	9	225	7.5	188	6.5	163	5.5	138	4.5	113	85
RSS	14	3B	4	100	3	75	2.5	63	2	50	1.5	38	1	25	0.5	13	70
RSS	14	4B	8.5	213	6.5	163	5.5	138	4	100	3.5	88	3	75	2.5	63	90
RSS	14	4-5B	11	275	9	225	7	175	6	150	5	125	4.5	113	4	100	95
RSS	15	4-5B	10	250	8	200	6.5	163	5.5	138	4.5	113	4	100	3.5	88	96
RSS	16	3B	3	75	2.5	63	1.5	38	1	25	0.5	13	0.5	13	-	-	80
RSS	16	4B	7	175	5.5	138	4	100	3	75	2.5	63	2	50	2	50	100
RSS	16	4-5B	9	225	7	175	6	150	5	125	4	100	3.5	88	3	75	105
RSS	18	3B	2.5	63	1.5	38	1	25	0.5	13	-	-	-	-	-	-	90
RSS	18	4B	5.5	138	4	100	3	75	2.5	63	2	50	1.5	38	1	25	110
RSS	18	4-5B	7.5	188	6	150	4.5	113	4	100	3	75	2.5	63	2	50	115
RSS	20	3B	2	50	1	25	0.5	13	-	-	-	-	-	-	-	-	100
RSS	20	4B	4.5	113	3	75	2	50	1.5	38	1	25	1	25	0.5	13	120
RSS	20	4-5B	6	150	4.5	113	3.5	88	3	75	2.5	63	2	50	1.5	38	130
RSS	20	5B	8	200	6.5	163	5.5	138	4.5	113	3.5	88	3	75	2.5	63	145
RSS	22	4-5B	5	125	3.5	88	2.5	63	2	50	1.5	38	1	25	1	25	134
RSS	25	4B	2.5	63	1	25	0.5	13	-	-	-	-	-	-	-	-	145
RSS	25	4-5B	3.5	88	2	50	1.5	38	1	25	0.5	13	-	-	-	-	145
RSS	25	5B	5	125	3.5	88	3	75	2	50	1.5	38	1.5	38	1	25	180
RSS	30	4-5B	1.5	38	-	-	-	-	-	-	-	-	-	-	-	-	185
RSS	30	5B	2.5	63	1.5	38	1	25	0.5	13	-	-	-	-	-	-	210

**NOTE:** AASHTO 2013 criteria is the most conservative existing EPA calculation. For poles not showing EPA values under AASHTO 2013, EPA values may exist under commercial criteria (see table above).

\*For 1/2 ft increments, add -6 to the pole height. Ex: 20-6 equals 20ft 6in.


## BASE DETAIL

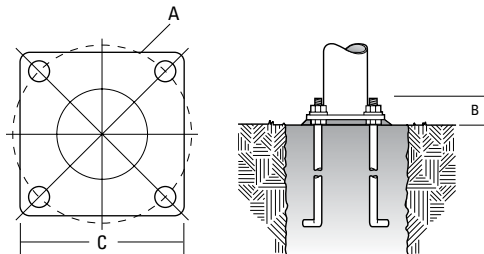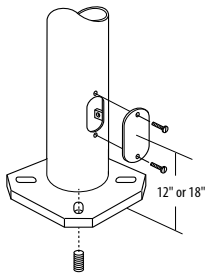

## ANCHORAGE AND TEMPLATE INFORMATION

Shaft base size	Bolt circle A	Bolt projection B	Base square C	Template description	Anchor bolt description	Bolt size (in. x in. x in.)
3"	7.5" - 8.5"	3.50"-3.75"	10.50"	ABTEMPLATE PJ50041	AB18-0	3/4 x 18 x 3
4"	7.5" - 8.5"	3.50"-3.75"	10.50"	ABTEMPLATE PJ50041	AB18-0	3/4 x 18 x 3
4.5"	7.5" - 8.5"	3.50"-3.75"	10.50"	ABTEMPLATE PJ50041	AB18-0	3/4 x 18 x 3
5"	7.5" - 8.5"	3.50"-3.75"	10.50"	ABTEMPLATE PJ50041	AB18-0	3/4 x 18 x 3


## HANDHOLE ORIENTATION



### IMPORTANT INSTALLATION NOTES:

- **Do not** erect poles without having fixtures installed.
- Factory-supplied templates must be used when setting anchor bolts. Lithonia Lighting will not accept claim for incorrect anchorage placement due to failure to use factory template.
- If poles are stored outside, all protective wrapping must be removed immediately upon delivery to prevent finish damage.
- Lithonia Lighting is not responsible for the foundation design.

**CAUTION:** These specifications are intended for general purposes only. Lithonia Lighting reserves the right to change material or design, without prior notice, in a continuing effort to upgrade its products.

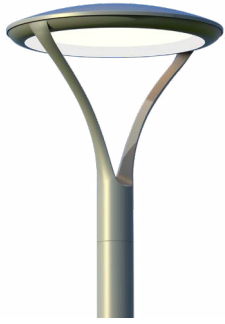

# Radean Post Top LED Area Luminaire



Catalog  
Number

Notes  
12' Total Height

Type  
OL

Hit the Tab key or mouse over the page to see all interactive elements.

## Specifications

**EPA:** 1.02 ft<sup>2</sup>  
(0.105 m<sup>2</sup>)


**Length:** 24"  
(61cm)

**Width:** 24"  
(61cm)

**H1  
Luminaire  
Height:** 4"  
(10.16cm)

**H2  
Luminaire  
Height:** 26"  
(66.04cm)

**Weight:** 38lbs  
(17.24Kg)

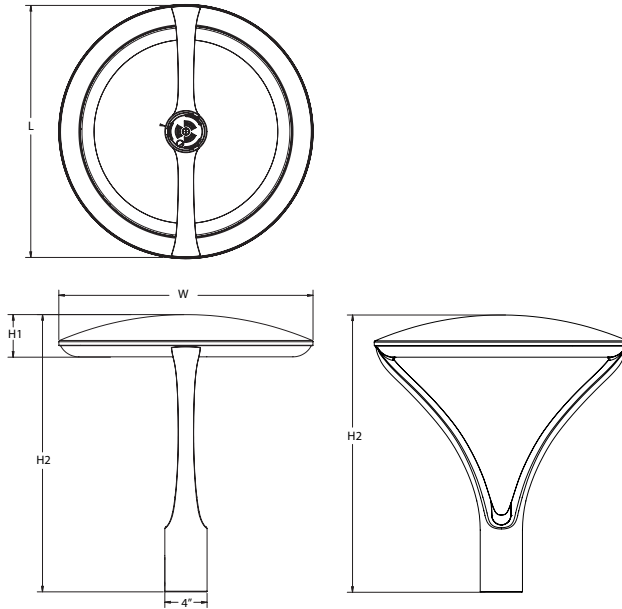

## Introduction

The architecturally-inspired shape of the RADEAN™ post top area luminaire embodies the grace and strength of the RADEAN family. The twin copper-core cast aluminum arms support the slender superstructure, creating a beautiful sculpture by day transforming into a beacon of comfort by night. Triangular arms redirect reflection maintaining its visually quiet appearance. With sleek lines and simple silhouettes, these LED luminaires use specialized lighting and visual comfort to transform common areas like courtyards, outdoor retail locations, universities and corporate campuses into pedestrian-friendly nighttime environments.

## Ordering Information

**EXAMPLE:** RADPT LED P3 30K SYM MVOLT PT4 PE DNAXD

RADPT LED	P3	40K	SYM	MVOLT	PT4
Series	Performance package	Color temperature	Distribution	Voltage	Mounting (required)
RADPT LED	P1 3,000 Lumens P2 5,000 Lumens P3 7,000 Lumens P4 10,000 Lumens P5 15,000 Lumens	27K 2700K 30K 3000K 35K 3500K 40K 4000K 50K 5000K	SYM Symmetric type V ASY Asymmetric type IV PATH Pathway Type III	MVOLT <sup>2</sup> 277 <sup>2</sup> 120 <sup>2</sup> 347 208 <sup>2</sup> 480 240 <sup>2</sup>	PT4 <sup>3</sup> Slips inside a 4" OD round metal pole RADPT20 Slips over a 2 3/8" diameter tenon (4" tall tenon required) RADPT25 Slips over a 2 7/8" diameter tenon (4" tall tenon required)

DMG	--	DDBXD
Control options	Other options	Finish (required)
<b>Shipped installed</b> NLTAIR2 nLight AIR 2.0 enabled <sup>4</sup> PE Button photocell <sup>4</sup> FAO Field adjustable output <sup>4</sup> DMG 0-10v dimming wires pulled outside fixture (for use with an external control, ordered separately) <sup>5</sup>	SF Single Fuse <sup>2</sup> DF Double Fuse <sup>2</sup> R90 Rotated optics <sup>6</sup>	<b>Shipped installed</b> HS Houseside shield <sup>7</sup> DDBXD Dark bronze DBLXD Black DNAXD Natural aluminum DWHXD White DDBTXD Textured dark bronze DBLTXD Textured black DNATXD Textured natural aluminum DWHGXD Textured white



COMMERCIAL OUTDOOR

One Lithonia Way • Conyers, Georgia 30012 • Phone: 1-800-705-SERV (7378) • [www.lithonia.com](http://www.lithonia.com)  
© 2011-2024 Acuity Brands Lighting, Inc. All rights reserved.

RADPT LED  
Rev. 03/27/24

## Ordering Information

### Accessories

Ordered and shipped separately.

RADHS	Houseside shield (shield is white)
RADCS DDBXD U	Decorative clamshell base for 4" RSS pole (specify finish)
RADFBC DDBXD U	Full base cover for 4" RSS pole (specify finish)

### NOTES


- 2700K and 3500K may require extended lead-times.
- MVOLT driver operates on any line voltage from 120-277V (50/60 Hz). Single fuse (SF) requires 120, 277 or 347 voltage option. Double fuse (DF) requires 208, 240 or 480 voltage option.
- Requires nominal 4" round straight metal pole.
- NLTAIR2 not available with PE or FAO. Must link to external nLight Air network. Does not include occupancy sensor. For more information refer to [RSBOR](#) pole mount sensor.
- DMG not available with NLTAIR2 or FAO.
- For left rotation, select R90 and rotate luminaire 180° on pole.
- Also available as a separate accessory; see Accessories information at left. HS not available with R90. Shield is field rotatable shield in 180° increments.

## Mounting

### PT4

### RADPT20 or RADPT25

RADPT20 and RADPT25 mounting require a 4" tall tenon (standard on Lithonia poles).

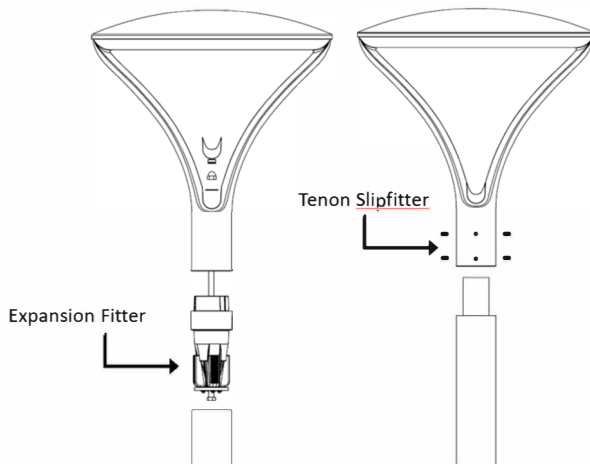


### Recommended Poles for use with RADEAN RADPT LED Luminaires.

Acuity Part Number	Description	For luminaires	Used with Mounting
RSS 10 4B PT DDBXD	10' Round Straight Steel - 4" O.D. - Open Top	RADPT LED	PT4
RSS 12 4B PT DDBXD	12' Round Straight Steel - 4" O.D. - Open Top	RADPT LED	PT4
RSS 14 4B PT DDBXD	14' Round Straight Steel - 4" O.D. - Open Top	RADPT LED	PT4
RSS 16 4B PT DDBXD	16' Round Straight Steel - 4" O.D. - Open Top	RADPT LED	PT4
RSS 18 4B PT DDBXD	18' Round Straight Steel - 4" O.D. - Open Top	RADPT LED	PT4
RSS 20 4B PT DDBXD	20' Round Straight Steel - 4" O.D. - Open Top	RADPT LED	PT4
RSS 25 4B PT DDBXD	25' Round Straight Steel - 4" O.D. - Open Top	RADPT LED	PT4
RSS 10 4B T20 DDBXD	10' Round Straight Steel - 4" O.D. - Tenon Top	RADPT LED	RADPT20
RSS 12 4B T20 DDBXD	12' Round Straight Steel - 4" O.D. - Tenon Top	RADPT LED	RADPT20
RSS 14 4B T20 DDBXD	14' Round Straight Steel - 4" O.D. - Tenon Top	RADPT LED	RADPT20
RSS 16 4B T20 DDBXD	16' Round Straight Steel - 4" O.D. - Tenon Top	RADPT LED	RADPT20
RSS 18 4B T20 DDBXD	18' Round Straight Steel - 4" O.D. - Tenon Top	RADPT LED	RADPT20
RSS 20 4B T20 DDBXD	20' Round Straight Steel - 4" O.D. - Tenon Top	RADPT LED	RADPT20
RSS 25 4B T20 DDBXD	25' Round Straight Steel - 4" O.D. - Tenon Top	RADPT LED	RADPT20

\* Customer must verify pole loading per required design criteria and specified wind speed. Consult pole specification sheet for additional details.

## Control Options

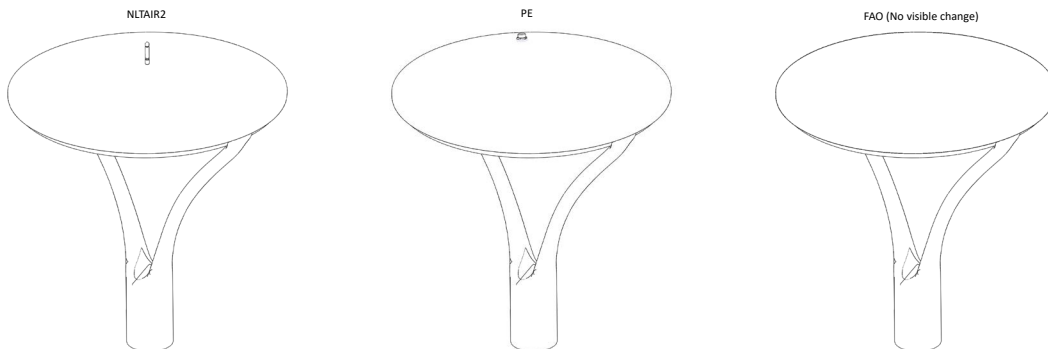

## Performance Data

### Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown. Contact factory for performance data on any configurations not shown here.

Performance Package	Input Wattage	Distribution	2700K					3000K					3500K					4000K					5000K				
			Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
P1	25	ASY	2,924	2	1	2	115	3,022	2	2	2	119	3,095	2	2	2	122	3,168	2	2	2	125	3,168	2	2	2	125
		PATH	2,529	2	1	2	100	2,613	2	2	2	103	2,676	2	2	2	105	2,739	2	2	2	108	2,739	2	2	2	108
		SYM	3,086	2	1	1	121	3,189	2	1	1	126	3,266	2	1	1	129	3,344	2	1	1	132	3,344	2	1	1	132
P2	38	ASY	4,521	3	2	3	119	4,672	3	2	3	123	4,785	3	2	3	126	4,898	3	2	3	129	4,898	3	2	3	129
		PATH	3,909	2	2	2	103	4,040	2	2	2	106	4,137	2	2	2	109	4,235	3	2	3	111	4,235	3	2	3	111
		SYM	4,772	2	2	1	126	4,931	3	2	1	130	5,050	3	2	1	133	5,169	3	2	1	136	5,169	3	2	1	136
P3	54	ASY	6,387	3	2	3	119	6,600	3	2	3	123	6,760	3	2	3	126	6,919	3	2	3	129	6,919	3	2	3	129
		PATH	5,523	3	2	3	103	5,707	3	2	3	106	5,845	3	2	3	109	5,983	3	2	3	112	5,983	3	2	3	112
		SYM	6,741	3	2	2	126	6,966	3	2	2	130	7,135	3	2	2	133	7,303	3	2	2	136	7,303	3	2	2	136
P4	86	ASY	10,150	4	2	4	118	10,489	4	2	4	122	10,742	4	2	4	125	10,996	4	2	4	128	10,996	4	2	4	128
		PATH	8,777	3	2	3	102	9,070	3	2	3	106	9,289	3	2	3	108	9,509	3	2	3	111	9,509	3	2	3	111
		SYM	10,713	3	2	2	125	11,071	3	2	2	129	11,338	3	2	2	132	11,606	3	2	2	135	11,606	3	2	2	135
P5	123	ASY	14,250	4	2	4	116	14,724	4	2	4	120	15,081	4	3	4	123	15,437	4	3	4	126	15,437	4	3	4	126
		PATH	12,322	4	2	4	101	12,733	4	3	4	104	13,041	4	3	4	106	13,349	4	3	4	109	13,349	4	3	4	109
		SYM	15,040	4	2	3	123	15,541	4	2	3	127	15,917	4	2	3	130	16,293	4	2	3	133	16,293	4	2	3	133

### Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient	LAT Factor	
0°C	32°F	1.06
5°C	41°F	1.05
10°C	50°F	1.04
15°C	59°F	1.02
20°C	68°F	1.01
<b>25°C</b>	<b>77°F</b>	<b>1.00</b>
30°C	86°F	0.99
35°C	95°F	0.98
40°C	104°F	0.96

### Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the **RADPT LED** platform in a **25°C ambient**, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.


	Projected LED Lumen Maintenance			
	0	25,000	50,000	100,000
P1	1.00	0.96	0.91	0.82
P2	1.00	0.96	0.91	0.82
P3	1.00	0.96	0.91	0.82
P4	1.00	0.96	0.91	0.82
P5	1.00	0.95	0.89	0.78

### Electrical Load

Lumen Package	LED Drive Current	Voltage	Wattage		Current (A)					
					120	208	240	277	347	480
P1	500	42.8	21.4	Input Current	0.22	0.13	0.11	0.1	0.08	0.06
				System Watts	26	26	26	27	25	26
P2	770	43	33.1	Input Current	0.33	0.19	0.16	0.14	0.11	0.08
				System Watts	39	39	39	39	38	38
P3	1100	43.2	47.5	Input Current	0.46	0.26	0.23	0.2	0.16	0.12
				System Watts	55	54	54	54	54	54
P4	900	87.3	78.6	Input Current	0.73	0.42	0.36	0.32	0.25	0.18
				System Watts	87	86	86	86	86	86
P5	1250	88.2	110.2	Input Current	1	0.58	0.5	0.44	0.35	0.25
				System Watts	120	119	119	119	120	120



Isofootcandle plots are considered to be representative of available optical distributions.

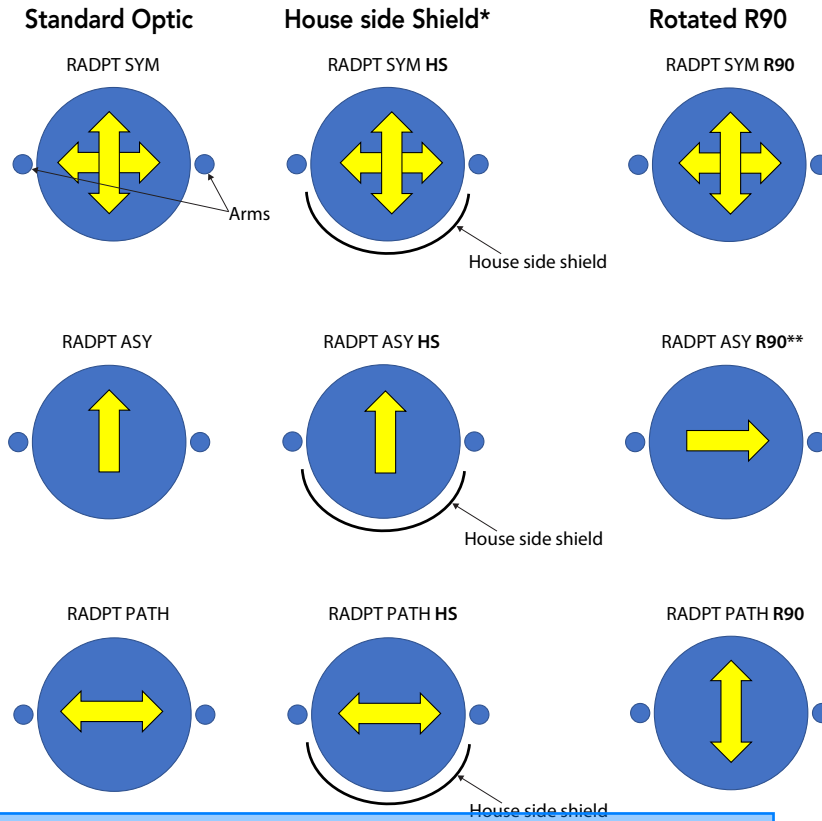

\*HS not available with R90  
 \*\*For L90, use R90 and rotate luminaire 180° on pole

## FEATURES & SPECIFICATIONS

### INTENDED USE

Pedestrian areas such as parks, campuses, pathways, courtyards and pedestrians malls.

### CONSTRUCTION

Single-piece die-cast aluminum housing with nominal wall thickness of 0.125" on a 6mm thick acrylic waveguide is fully gasketed with a single piece tubular silicone gasket.

### FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Standard Super Durable colors include dark bronze, black, natural aluminum and white. Available in textured and non-textured finishes.

### OPTICS

6MM thick acrylic waveguide with 360° flexible LED board. Available in 2700K, 3000K, 3500K, 4000K and 5000K (80CRI) CCT configurations.

### ELECTRICAL

Light engine consists of 96 high-efficacy LEDs mounted to a flexible circuit board and aluminum heat sink, ensuring optimal thermal management and long life. Fixtures ship standard with 0-10v dimming driver (order option DMG for connection to exterior controls). Class 1 electronic driver has a power factor >90%, THD <20%, and with an expected life of 100,000 hours with <1% failure rate. Serviceable 10kV surge protection device meets a minimum Category C Low for operation (per ANSI/IEEE C62.41.2).

### INSTALLATION

Standard post-top PT4 type mounting configuration fits into a 4" OD open pole top (round pole only). Alternate tenon (2-3/8" or 2-7/8") mounting also available and require 4" tall tenons.

### LISTINGS

CSA certified to U.S. and Canadian standards. Luminaire is IP65 rated. Rated for -40°C minimum ambient.

DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product. Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org/OPL](http://www.designlights.org/OPL) to confirm which versions are qualified.

International Dark-Sky Association (IDA) Fixture Seal of Approval (FSA) is available for all products on this page utilizing 3000K color or less. U.S. Patent No. D925,088S

### GOVERNMENT PROCUREMENT

BAA – Buy America(n) Act: Product qualifies as a domestic end product under the Buy American Act as implemented in the FAR and DFARS. Product also qualifies as manufactured in the United States under DOT Buy America regulations.

BABA – Build America Buy America: Product qualifies as produced in the United States under the definitions of the Build America, Buy America Act.

Please refer to [www.acuitybrands.com/buy-american](http://www.acuitybrands.com/buy-american) for additional information.

### WARRANTY

5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: [www.acuitybrands.com/support/warranty/terms-and-conditions](http://www.acuitybrands.com/support/warranty/terms-and-conditions)

**Note:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

Catalog Number
Notes
Type <b>OL Pole</b>

## FEATURES & SPECIFICATIONS

**INTENDED USE** — These specifications are for USA standards only. Round Straight Steel is a general purpose light pole for up to 30-foot mounting heights. This pole provides a robust yet cost effective option for mounting area lights and floodlights.

### CONSTRUCTION

**Pole Shaft:** The pole shaft is of 0.120" uniform wall thickness and is made of a weldable-grade, hot-rolled, commercial-quality steel tubing with a minimum yield of 42,000 psi. Shaft is one-piece with a full-length longitudinal high-frequency electric resistance weld. Uniformly round in cross-section down length of shaft with no taper. Standard shaft diameters are 3", 4", 4.5" and 5". 6" diameter shaft available by quote. Shaft wall thickness of .180" is available with certain tube diameters.

**Pole Top:** Options include tenon top, drilled for side mount fixture, 4" tenon with drilling (includes extra handhole) and open top. Side drilled and open top poles include a removable press-fit, black, low density polyethylene top cap.

**Handhole:** A reinforced handhole with grounding provision is provided at 12" or 18" from the base end of the pole assembly on side A. Every handhole includes a cover and cover attachment hardware. 2.5" x 5" rectangular handhole is provided on pole.

**Base Cover:** A two-piece ABS round plastic full base cover is provided with each pole assembly. Additional base cover options are available upon factory request. Options include fabricated two-piece sheet steel. All base covers are finished to match pole.

**Anchor Base/Bolts:** Anchor base is fabricated from hot-rolled carbon steel plate that conforms with ASTM A36. Anchor bolts conform to ASTM F1554 Grade 55 and are provided with two hex nuts and two flat washers. Bolts have an "L" blend on one end. All anchor bolts are hot-dipped galvanized a minimum of 12" nominal on the threaded end. Anchor bolts are made of steel rod having a minimum yield strength of 55,000 psi and a yield strength of 75,000 psi to 95,000 psi.

**HARDWARE** — All structural fasteners are high-strength galvanized carbon steel. All non-structural fasteners are galvanized or zinc-plated carbon steel or stainless steel.

**FINISH** — Extra durable standard powder-coat finishes include Dark Bronze, White, Black, Medium Bronze and Natural Aluminum colors. Classic finishes include Sandstone, Charcoal Gray, Tennis Green, Bright Red and Steel Blue colors. Architectural Colors and Special Finishes are available by quote and include, but are not limited to Hot-dipped Galvanized, Paint over Hot-dipped Galvanized, RAL Colors, Custom Colors and Extended Warranty Finishes. Factory-applied primer paint finish is available for customer field-paint applications.

### GOVERNMENT PROCUREMENT

**BAA** — Buy America(n) Act: Product qualifies as a domestic end product under the Buy American Act as implemented in the FAR and DFARS. Product also qualifies as manufactured in the United States under DOT Buy America regulations.

**BABA** — Build America Buy America: Product qualifies as produced in the United States under the definitions of the Build America, Buy America Act.

Please refer to [www.acuitybrands.com/buy-american](http://www.acuitybrands.com/buy-american) for additional information.

**WARRANTY** — 1-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: [www.acuitybrands.com/support/warranty/terms-and-conditions](http://www.acuitybrands.com/support/warranty/terms-and-conditions)

**NOTE:** Actual performance may differ as a result of end-user environment and application. Specifications subject to change without notice.



Anchor Base Poles

# RSS

ROUND STRAIGHT STEEL



# RSS Round Straight Steel Pole

## ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

**Example:** RSS 20 4-5B DM19 DDBXD

RSS	10	4B	PT	STLHHC-FBCSTL2PC	DDBXD
Series	Nominal fixture mounting height	Nominal shaft base size/wall thickness <sup>1</sup>	Mounting <sup>2</sup>	Options	Finish
RSS	8'-30' (for 1/2 ft increments, add -6 to the pole height. <b>Ex:</b> 20-6 equals 20ft 6in.)  (See technical information table for complete ordering information.)	3B 3" 11ga (.120") 4B 4" 11ga (.120") 4-5B 4.5" 11ga (.120") 5B 5" 11ga (.120")  (See technical information table for complete ordering information.)	<b>Tenon mounting</b> PT Open top T20 2-3/8" O.D. (2" NPS) T25 2-7/8" O.D. (2-1/2" NPS) T30 3-1/2" O.D. (3" NPS) T35 4" O.D. (3-1/2" NPS) <u>KAC/KAD/KSE/KSF/KVR/ KVF Drill mounting<sup>3</sup></u> DM19 1 at 90° DM28 2 at 180° DM28PL 2 at 180° with one side plugged DM29 2 at 90° DM32 3 at 120° DM49 4 at 90° <u>CSX/DSX/RSX/AERIS™/OMERO™/ KAX Drill mounting<sup>3</sup></u> DM19AS 1 at 90° DM28AS 2 at 180° DM29AS 2 at 90° DM32AS 3 at 120° DM39AS 3 at 90° DM49AS 4 at 90° <u>RAD drill mounting<sup>3,4</sup></u> DM19RAD 1 at 90° DM28RAD 2 at 180° DM29RAD 2 at 90° DM32RAD 3 at 120° DM39RAD 3 at 90° DM49RAD 4 at 90° <u>ESX Drill mounting<sup>3</sup></u> DM19ESX 1 at 90° DM28ESX 2 at 180° DM29ESX 2 at 90° DM32ESX 3 at 120° DM39ESX 3 at 90° DM49ESX 4 at 90°	<b>Shipped installed</b> VD Vibration damper <sup>5</sup> HAXy Horizontal arm bracket (1 fixture) <sup>6,7</sup> FDLxy Festoon outlet less electrical <sup>6,8</sup> CPL12/xy 1/2" coupling <sup>6</sup> CPL34/xy 3/4" coupling <sup>6</sup> CPL1/xy 1" coupling <sup>6</sup> NPL12/xy 1/2" threaded nipple <sup>6</sup> NPL34/xy 3/4" threaded nipple <sup>6</sup> NPL1/xy 1" threaded nipple <sup>6</sup> EHHxy Extra handhole <sup>6,9</sup>  STLHHC Steel handhole cover (standard is plastic, finish is smooth) <sup>10</sup> FBCSTL2PC 2 Piece steel base cover (standard is plastic) <sup>10</sup> IC Interior coating <sup>11</sup> L/AB Less anchor bolts (Include when anchor bolts are not needed) TP Tamper resistant handhole cover fasteners NEC NEC 410.30 compliant gasketed handhole (Not UL Labeled) UL UL listed with label (Includes NEC compliant cover) BAA Buy America(n) Act Compliant <sup>12</sup> VM/original order# Match pole to prior order or project <sup>13</sup>	<b>Super durable paint colors</b> DDBXD Dark bronze DBLXD Black DNAXD Natural aluminum DWHXD White DSSXD Sandstone DGCXD Charcoal gray DTGXD Tennis green DBRXD Bright red DSBXD Steel blue DDBTXD Textured dark bronze DBLBXD Textured black DNATXD Textured natural aluminum DWHGXD Textured white  <u>Other finishes</u> GALV Galvanized finish <u>Architectural colors and special finishes<sup>14</sup></u> [PAINT] GALV Paint over galvanizing VP30 3 year warranty extension VP53 5 year warranty extension RAL#### Use designated Lithonia Lighting nomenclature in <a href="#">brochure</a>  Custom color Nomenclature assigned through Customer Care "Custom Color Process"

### NOTES:

- Wall thickness will be signified with a "B" (11 Gauge) or a "F" (7-Gauge) in nomenclature. "B" - .120" | "F" - .180"
- PT open top poles include top cap. When ordering tenon mounting and drill mounting for the same pole, specify as drilling option/tenon option. The combination includes a required extra handhole.  
*Example: DM28/T20.*
- Refer to the fixture spec sheet for the correct drilling template pattern and orientation compatibility.
- DM19RAD, DM28RAD and DM32RAD require a minimum top O.D. of 4". DM29RAD, DM39RAD and DM49RAD require a minimum top O.D. of 4.25".
- VD not available with 3" pole. On 4" and 5" poles, VD cannot be installed if provisions (EHH, FDL, NPL, CPL) are located higher than 2/3 of the pole's total height.  
*Example: Pole height is 25ft, A provision cannot be placed above 16ft.*
- Specify location and orientation when ordering option.  
**For "x":** Specify the height above the base of pole in feet or feet and inches; separate feet and inches with a "-".  
*Example: 5ft = 5 and 20ft 3in = 20-3*  
**For "y":** Specify orientation from handhole (A,B,C,D) Refer to the Handhole Orientation diagram below.  
*Example: 1/2" coupling at 5' 8", orientation C = CPL12/5-8C*
- Horizontal arm is 18" x 2-3/8" O.D. tenon standard, with radius curve providing 12" rise and 2-3/8" O.D. If ordering two horizontal arm at the same height, specify with HAXxy.  
*Example: HA20BD.*
- FDL does not come with GFCI outlet or handhole cover. These must be supplied by contractor or electrician.
- Combination of tenon-top and drill mount includes extra handhole. EHH includes cover.
- Plastic hand hole cover and base covers come standard with all poles. Items ship separately. Additional parts can be ordered as replacements.
- Provides enhanced corrosion resistance. N/A with GALV.
- Use when mill certifications are required.
- Must add original order number. Not for replacement parts or post sales issues, contact tech support or post sales teams. VM is used to ensure poles match in appearance exactly from order to order, on a single project site. A common use case would be a multi-phase project with multiple orders.  
*Example: VM/010-36784*
- Must be quoted through AQD. Finishes do not require RFA. RAL colors available are shown in "Architectural Colors brochure". Lead times may be extended up to 2 weeks due to paint procurement.

Accessories: Order as separate catalog number.	
PL DT20	Plugs for ESX drillings
PL DT8	Plugs for DMxxAS drillings
FVD xxFT	Field installed vibration damper (snake style)

# RSS Round Straight Steel Pole

TECHNICAL INFORMATION — EPA (ft <sup>2</sup> ) with 1.3 gust										
Catalog number	Nominal shaft length (ft)*	Pole shaft size (in x ft)	Wall thickness (in)	80 mph	Max weight	90 mph	Max weight	100 mph	Max weight	Approximate ship weight (lbs.)
RSS 8 4-5B	8	4.5 x 8.0	0.120	24.7	630	19.7	495	16.0	430	55
RSS 10 3B	10	3.0 x 10.0	0.120	10.0	250	7.7	190	6.0	175	55
RSS 10 4B	10	4.0 x 10.0	0.120	19.1	480	15	375	12.2	305	70
RSS 10 4-5B	10	4.5 x 10.0	0.120	24.5	615	19.5	490	15.8	395	75
RSS 12 3B	12	3.0 x 12.0	0.120	7.7	195	5.8	145	4.4	130	60
RSS 12 4B	12	4.0 x 12.0	0.120	15.0	390	11.8	300	9.5	240	80
RSS 12 4-5B	12	4.5 x 12.0	0.120	19.8	495	15.7	395	12.7	320	85
RSS 14 3B	14	3.0 x 14.0	0.120	6.0	175	4.4	130	3.3	90	70
RSS 14 4B	14	4.0 x 14.0	0.120	12.2	305	9.4	250	7.6	195	90
RSS 14 4-5B	14	4.5 x 14.0	0.120	16.2	405	12.8	320	10.3	260	95
RSS 15 4-5B	15	4.5 x 15.0	0.120	12.0	300	9.5	250	7.5	200	96
RSS 16 3B	16	3.0 x 16.0	0.120	4.6	125	3.2	100	2.3	60	80
RSS 16 4B	16	4.0 x 16.0	0.120	9.6	250	7.4	185	5.9	150	100
RSS 16 4-5B	16	4.5 x 16.0	0.120	13.1	330	10.2	265	8.2	205	105
RSS 18 3B	18	3.0 x 18.0	0.120	3.4	90	2.3	60	1.4	70	90
RSS 18 4B	18	4.0 x 18.0	0.120	7.6	190	5.7	180	4.5	130	110
RSS 18 4-5B	18	4.5 x 18.0	0.120	10.5	265	8.2	210	6.5	165	115
RSS 20 3B	20	3.0 x 20.0	0.120	2.4	100	1.4	75	--	--	100
RSS 20 4B	20	4.0 x 20.0	0.120	6.0	150	4.45	150	3.45	125	120
RSS 20 4-5B	20	4.5 x 20.0	0.120	8.5	215	6.6	165	5.2	130	130
RSS 20 5B	20	5.0 x 20.0	0.120	11.75	300	9.1	230	7.25	180	145
RSS 22 4-5B	22	4.5 x 22.0	0.120	6.0	150	4.5	125	3.75	100	134
RSS 25 4B	25	4.0 x 25.0	0.120	2.85	100	1.95	75	1.35	75	145
RSS 25 4-5B	25	4.5 x 25.0	0.120	4.8	130	3.6	90	2.7	90	145
RSS 25 5B	25	5.0 x 25.0	0.120	7.25	180	5.5	150	4.25	150	180
RSS 30 4-5B	30	4.5 x 30.0	0.120	2.3	80	1.5	75	1.0	60	185
RSS 30 5B	30	5.0 x 30.0	0.120	4.2	150	3	125	2.25	100	210

NOTE: EPA values are based ASCE 7-93 wind map.

\*For 1/2 ft increments, add -6 to the pole height. Ex: 20-6 equals 20ft 6in.



# RSS Round Straight Steel Pole



## TECHNICAL INFORMATION — EPA (ft<sup>2</sup>) WITH 3-SECOND GUST PER AASHTO 2013

Series	Mounting Height (ft)*	Shaft Base Size	90 MPH	Max. weight	100 MPH	Max. weight	110 MPH	Max. weight	120 MPH	Max. weight	130 MPH	Max. weight	140 MPH	Max. weight	150 MPH	Max. weight	Approximate ship weight (lbs.)
RSS	8	4-5B	18.5	463	15	375	13	325	11	275	9.5	238	8	200	7	175	55
RSS	10	3B	6	150	5	125	4	100	3.5	88	2.5	63	2	50	2	50	55
RSS	10	4B	12	300	9.5	238	8	200	6.5	163	5.5	138	5	125	4.5	113	70
RSS	10	4-5B	15.5	388	12.5	313	10.5	263	9	225	7.5	188	6.5	163	6	150	75
RSS	12	3B	5	125	4	100	3	75	2.5	63	2	50	1.5	38	1	25	60
RSS	12	4B	10	250	8	200	6.5	163	5.5	138	4.5	113	4	100	3.5	88	80
RSS	12	4-5B	13	325	10.5	263	9	225	7.5	188	6.5	163	5.5	138	4.5	113	85
RSS	14	3B	4	100	3	75	2.5	63	2	50	1.5	38	1	25	0.5	13	70
RSS	14	4B	8.5	213	6.5	163	5.5	138	4	100	3.5	88	3	75	2.5	63	90
RSS	14	4-5B	11	275	9	225	7	175	6	150	5	125	4.5	113	4	100	95
RSS	15	4-5B	10	250	8	200	6.5	163	5.5	138	4.5	113	4	100	3.5	88	96
RSS	16	3B	3	75	2.5	63	1.5	38	1	25	0.5	13	0.5	13	-	-	80
RSS	16	4B	7	175	5.5	138	4	100	3	75	2.5	63	2	50	2	50	100
RSS	16	4-5B	9	225	7	175	6	150	5	125	4	100	3.5	88	3	75	105
RSS	18	3B	2.5	63	1.5	38	1	25	0.5	13	-	-	-	-	-	-	90
RSS	18	4B	5.5	138	4	100	3	75	2.5	63	2	50	1.5	38	1	25	110
RSS	18	4-5B	7.5	188	6	150	4.5	113	4	100	3	75	2.5	63	2	50	115
RSS	20	3B	2	50	1	25	0.5	13	-	-	-	-	-	-	-	-	100
RSS	20	4B	4.5	113	3	75	2	50	1.5	38	1	25	1	25	0.5	13	120
RSS	20	4-5B	6	150	4.5	113	3.5	88	3	75	2.5	63	2	50	1.5	38	130
RSS	20	5B	8	200	6.5	163	5.5	138	4.5	113	3.5	88	3	75	2.5	63	145
RSS	22	4-5B	5	125	3.5	88	2.5	63	2	50	1.5	38	1	25	1	25	134
RSS	25	4B	2.5	63	1	25	0.5	13	-	-	-	-	-	-	-	-	145
RSS	25	4-5B	3.5	88	2	50	1.5	38	1	25	0.5	13	-	-	-	-	145
RSS	25	5B	5	125	3.5	88	3	75	2	50	1.5	38	1.5	38	1	25	180
RSS	30	4-5B	1.5	38	-	-	-	-	-	-	-	-	-	-	-	-	185
RSS	30	5B	2.5	63	1.5	38	1	25	0.5	13	-	-	-	-	-	-	210

**NOTE:** AASHTO 2013 criteria is the most conservative existing EPA calculation. For poles not showing EPA values under AASHTO 2013, EPA values may exist under commercial criteria (see table above).

\*For 1/2 ft increments, add -6 to the pole height. Ex: 20-6 equals 20ft 6in.


## BASE DETAIL

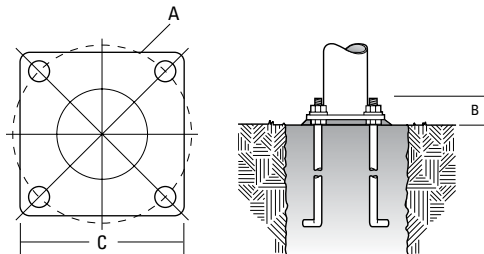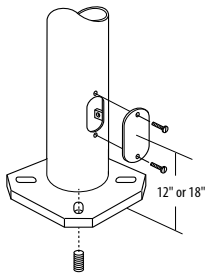

## ANCHORAGE AND TEMPLATE INFORMATION

Shaft base size	Bolt circle A	Bolt projection B	Base square C	Template description	Anchor bolt description	Bolt size (in. x in. x in.)
3"	7.5" - 8.5"	3.50"-3.75"	10.50"	ABTEMPLATE PJ50041	AB18-0	3/4 x 18 x 3
4"	7.5" - 8.5"	3.50"-3.75"	10.50"	ABTEMPLATE PJ50041	AB18-0	3/4 x 18 x 3
4.5"	7.5" - 8.5"	3.50"-3.75"	10.50"	ABTEMPLATE PJ50041	AB18-0	3/4 x 18 x 3
5"	7.5" - 8.5"	3.50"-3.75"	10.50"	ABTEMPLATE PJ50041	AB18-0	3/4 x 18 x 3

## HANDHOLE ORIENTATION



### IMPORTANT INSTALLATION NOTES:

- Do not erect poles without having fixtures installed.
- Factory-supplied templates must be used when setting anchor bolts. Lithonia Lighting will not accept claim for incorrect anchorage placement due to failure to use factory template.
- If poles are stored outside, all protective wrapping must be removed immediately upon delivery to prevent finish damage.
- Lithonia Lighting is not responsible for the foundation design.

**CAUTION:** These specifications are intended for general purposes only. Lithonia Lighting reserves the right to change material or design, without prior notice, in a continuing effort to upgrade its products.



# D-Series Size 0 LED Area Luminaire



Catalog Number

Notes  
**25' Total Height**

Type  
**OM**

Hit the Tab key or mouse over the page to see all interactive elements.

d<sup>s</sup>series

## Specifications

**EPA:** 0.44 ft<sup>2</sup>  
(0.04 m<sup>2</sup>)


**Length:** 26.18"  
(66.5 cm)

**Width:** 14.06"  
(35.7 cm)

**Height H1:** 2.26"  
(5.7 cm)

**Height H2:** 7.46"  
(18.9 cm)

**Weight:** 23 lbs  
(10.4 kg)

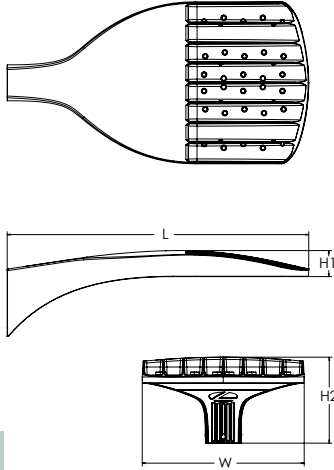

**ds** Design Select options indicated by this color background.

## Introduction

The modern styling of the D-Series features a highly refined aesthetic that blends seamlessly with its environment. The D-Series offers the benefits of the latest in LED technology into a high performance, high efficacy, long-life luminaire.

The photometric performance results in sites with excellent uniformity, greater pole spacing and lower power density. D-Series outstanding photometry aids in reducing the number of poles required in area lighting applications, with typical energy savings of 70% and expected service life of over 100,000 hours.



Items marked by a shaded background qualify for the Design Select program and ship in 15 days or less. To learn more about Design Select, visit [www.acuitybrands.com/designselect](http://www.acuitybrands.com/designselect).  
\*See ordering tree for details

## Ordering Information

**EXAMPLE: DSX0 LED P6 40K 70CRI T3M MVOLT SPA NLTAIR2 PIRHN DDBXD**

DSX0 LED	P3	40K	80CRI	BLC4	MVOLT	RPA			
Series	LEDs	Color temperature <sup>2</sup>	Color Rendering Index <sup>2</sup>	Distribution	Voltage	Mounting			
DSX0 LED	<b>Forward optics</b>		(this section 70CRI only)	AFR Automotive front row T1S Type I short T2M Type II medium T3M Type III medium T3LG Type III low glare <sup>3</sup> T4M Type IV medium T4LG Type IV low glare <sup>3</sup> TFTM Forward throw medium	T5M Type V medium T5LG Type V low glare T5W Type V wide BLC3 Type III backlight control <sup>3</sup> BLC4 Type IV backlight control <sup>3</sup> LCCO Left corner cutoff <sup>3</sup> RCCO Right corner cutoff <sup>3</sup>	<b>Shipped included</b> SPA Square pole mounting (#8 drilling, 3.5" min. SQ pole) RPA Round pole mounting (#8 drilling, 3" min. RND pole) SPA5 Square pole mounting (#5 drilling, 3" min. SQ pole) <sup>9</sup> RPA5 Round pole mounting (#5 drilling, 3" min. RND pole) <sup>9</sup> SPA8N Square narrow pole mounting (#8 drilling, 3" min. SQ pole) WBA Wall bracket <sup>10</sup> MA Mast arm adapter (mounts on 2 3/8" OD horizontal tenon)			
	P1	P5	30K 3000K				70CRI	MVOLT (120V-277V) <sup>4</sup>	HVOLT (347V-480V) <sup>5,6</sup> XVOLT (277V-480V) <sup>7,8</sup> 120 <sup>16, 24</sup> 208 <sup>16, 24</sup> 240 <sup>16, 24</sup> 277 <sup>16, 24</sup> 347 <sup>16, 24</sup> 480 <sup>16, 24</sup>
	P2	P6	40K 4000K				70CRI	120 <sup>16, 24</sup>	
	P3	P7	50K 5000K				70CRI	208 <sup>16, 24</sup>	
	P4		(this section 80CRI only, extended lead times apply)					240 <sup>16, 24</sup>	
	P10 <sup>1</sup>	P12 <sup>1</sup>	27K 2700K				80CRI	277 <sup>16, 24</sup>	
	P11 <sup>1</sup>	P13 <sup>1</sup>	30K 3000K				80CRI	347 <sup>16, 24</sup>	
			35K 3500K				80CRI	480 <sup>16, 24</sup>	
			40K 4000K				80CRI		
			50K 5000K				80CRI		
DMG	--					DDBXD			
<b>Control options</b>				<b>Other options</b>		<b>Finish (required)</b>			
<b>Shipped installed</b>		PER7 Seven-pin receptacle only (controls ordered separate) <sup>14, 19</sup>		<b>Shipped installed</b>		DDBXD Dark Bronze			
NLTAIR2 PIRHN	nLight AIR gen 2 enabled with bi-level motion / ambient sensor, 8-40' mounting height, ambient sensor enabled at 2fc. <sup>11, 12, 18, 19</sup>		FAO Field adjustable output <sup>15, 19</sup>	HS Houseside shield (black finish standard) <sup>20</sup>	DBLXD Black				
PIR	High/low, motion/ambient sensor, 8-40' mounting height, ambient sensor enabled at 2fc. <sup>13, 18, 19</sup>		BL30 Bi-level switched dimming, 30% <sup>16, 19</sup>	L90 Left rotated optics <sup>1</sup>	DNAXD Natural Aluminum				
PER	NEMA twist-lock receptacle only (controls ordered separate) <sup>14</sup>		BL50 Bi-level switched dimming, 50% <sup>16, 19</sup>	R90 Right rotated optics <sup>1</sup>	DWHXD White				
PER5	Five-pin receptacle only (controls ordered separate) <sup>14, 19</sup>		DMG 0-10v dimming wires pulled outside fixture (for use with an external control, ordered separately) <sup>17</sup>	CCE Coastal Construction <sup>21</sup>	DDBTXD Textured dark bronze				
				HA 50°C ambient operation <sup>22</sup>	DBLBXD Textured black				
				BAA Buy America(n) Act Compliant	DNATXD Textured natural aluminum				
				SF Single fuse (120, 277, 347V) <sup>24</sup>	DWHGXD Textured white				
				DF Double fuse (208, 240, 480V) <sup>24</sup>					
				<b>Shipped separately</b>					
				EGSR External Glare Shield (reversible, field install required, matches housing finish)					
				BSDB Bird Spikes (field install required)					



One Lithonia Way • Conyers, Georgia 30012 • Phone: 1-800-705-SERV (7378) • [www.lithonia.com](http://www.lithonia.com)  
© 2011-2024 Acuity Brands Lighting, Inc. All rights reserved.

DSX0-LED  
Rev. 03/26/24  
Page 1 of 9

## Ordering Information

### Accessories


Ordered and shipped separately.

DLL127F 1.5 JU	Photocell - SSL twist-lock (120-277V) <sup>23</sup>
DLL347F 1.5 CUL JU	Photocell - SSL twist-lock (347V) <sup>23</sup>
DLL480F 1.5 CUL JU	Photocell - SSL twist-lock (480V) <sup>23</sup>
DSHORT SBK	Shorting cap <sup>23</sup>
DSX0HS P#	House-side shield (enter package number P1-7, P10-13 in place of #)
DSXRPA (FINISH)	Round pole adapter (#8 drilling, specify finish)
DSXRPA5 (FINISH)	Round pole adapter #5 drilling (specify finish)
DSXSPA5 (FINISH)	Square pole adapter #5 drilling (specify finish)
DSX0EGSR (FINISH)	External glare shield (specify finish)
DSX0SDB (FINISH)	Bird spike deterrent bracket (specify finish)


### NOTES

- Rotated optics available with packages P10, P11, P12 and P13. Must be combined with option L90 or R90.
- 30K, 40K, and 50K available in 70CRI and 80CRI. 27K and 35K only available with 80CRI. Contact Technical Support for other possible combinations.
- T3LG, T4LG, BLC3, BLC4, LCCO, RCCO not available with option HS.
- MVOLT driver operates on any line voltage from 120-277V (50/60 Hz).
- HVOLT driver operates on any line voltage from 347-480V (50/60 Hz).
- HVOLT not available with package P1, P2 and P10 when combined with option NLTAIR2 PIRHN or option PIR.
- XVOLT operates with any voltage between 277V and 480V (50/60 Hz).
- XVOLT not available in packages P1, P2 or P10. XVOLT not available with fusing (SF or DF).
- SPAS and RPA5 for use with #5 drilling only (Not for use with #8 drilling).
- WBA cannot be combined with Type 5 distributions plus photocell (PER).
- NLTAIR2 and PIRHN must be ordered together. For more information on nLight Air 2.
- NLTAIR2 PIRHN not available with other controls including PIR, PER, PER5, PER7, FAO, BL30, BL50 and DMG. NLTAIR2 PIRHN not available with P1, P2 and P10 using HVOLT. NLTAIR2 PIRHN not available with P1, P2 and P10 using XVOLT. NLTAIR2 PIRHN not available with P1 using MVOLT.
- PIR not available with NLTAIR2, PER, PER5, PER7, FAO BL30, BL50 and DMG. PIR not available with P1, P2 and P10 using HVOLT. PIR not available with P1, P2 and P10 using XVOLT. PIR not available with P1 using MVOLT.
- PER/PER5/PER7 not available with NLTAIR2, PIR, BL30, BL50. Photocell ordered and shipped as a separate line item from Acuity Brands Controls. See accessories. Shorting Cap included.
- FAO not available with other dimming control options NLTAIR2 PIRHN, PIR, PER5, PER7, BL30, BL50, or DMG.
- BL30 and BL50 are not available with NLTAIR2 PIRHN, PIR, PER, PER5, PER7, FAO and DMG. BL30 or BL50 must specify 120, 277 or 347V. Consult tech support for 208, 240 or 480V.
- DMG not available with NLTAIR2 PIRHN, PIR, PER, PER5, PER7, BL30, BL50 and FAO.
- Reference Motion Sensor Default Settings table on page 4 to see functionality.
- Reference Controls Options table on page 4.
- Option HS not available with T3LG, T4LG, BLC3, BLC4, LCCO and RCCO distribution. Also available as a separate accessory; see Accessories information.
- CCE option not available with option B5 and EGSR. Contact Technical Support for availability.
- Option HA not available with performance packages P6, P7, P12 and P13.
- Requires luminaire to be specified with PER, PER5 or PER7 option. See Controls Table on page 4.
- Single fuse (SF) requires 120V, 277V, or 347V. Double fuse (DF) requires 208V, 240V or 480V. XVOLT not available with fusing (SF or DF).

## Shield Accessories

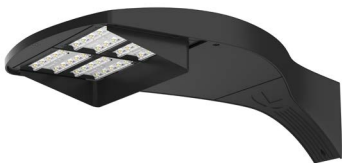

External Glare Shield (EGSR)

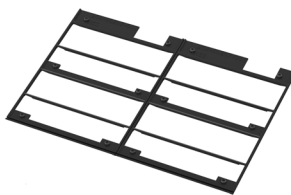


House Side Shield (HS)


## Drilling

### HANDHOLE ORIENTATION

(from top of pole)

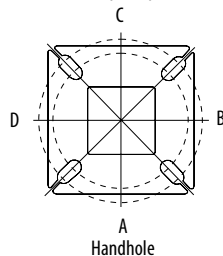

Handhole

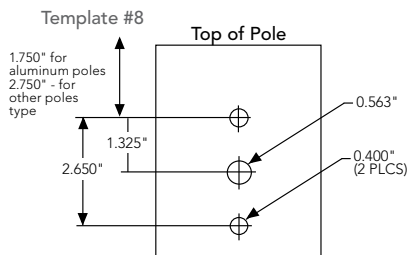

### Tenon Mounting Slipfitter

Tenon O.D.	Mounting	Single Unit	2 @ 180	2 @ 90	3 @ 90	3 @ 120	4 @ 90
2-3/8"	RPA	AS3-5 190	AS3-5 280	AS3-5 290	AS3-5 390	AS3-5 320	AS3-5 490
2-7/8"	RPA	AST25-190	AST25-280	AST25-290	AST25-390	AST25-320	AST25-490
4"	RPA	AST35-190	AST35-280	AST35-290	AST35-390	AST35-320	AST35-490

Mounting Option	Drilling Template	Single	2 @ 180	2 @ 90	3 @ 90	3 @ 120	4 @ 90
Head Location		Side B	Side B & D	Side B & C	Side B, C & D	Round Pole Only	Side A, B, C & D
Drill Nomenclature	#8	DM19AS	DM28AS	DM29AS	DM39AS	DM32AS	DM49AS
Minimum Acceptable Outside Pole Dimension							
SPA	#8	3.5"	3.5"	3.5"	3.5"		3.5"
RPA	#8	3"	3"	3"	3"	3"	3"
SPAS	#5	3"	3"	3"	3"		3"
RPA5	#5	3"	3"	3"	3"	3"	3"
SPA8N	#8	3"	3"	3"	3"		3"

### DSX0 Area Luminaire - EPA

\*Includes luminaire and integral mounting arm. Other tenons, arms, brackets or other accessories are not included in this EPA data.

Fixture Quantity & Mounting Configuration	Single DM19	2 @ 180 DM28	2 @ 90 DM29	3 @ 90 DM39	3 @ 120 DM32	4 @ 90 DM49
Mounting Type						
DSX0 with SPA	0.44	0.88	0.96	1.18	---	1.16
DSX0 with SPAS, SPA8N	0.51	1.02	1.06	1.26	---	1.29
DSX0 with RPA, RPA5	0.51	1.02	1.06	1.26	1.24	1.29
DSX0 with MA	0.64	1.28	1.24	1.67	1.70	1.93

Isofootcandle plots for the DSX0 LED P7 40K 70CRI. Distances are in units of mounting height (20').



## Performance Data

### Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient	Lumen Multiplier	
0°C	32°F	1.04
5°C	41°F	1.04
10°C	50°F	1.03
15°C	59°F	1.02
20°C	68°F	1.01
<b>25°C</b>	<b>77°C</b>	<b>1.00</b>
30°C	86°F	0.99
35°C	95°F	0.98
40°C	104°F	0.97

### Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the platforms noted in a **25°C ambient**, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	Lumen Maintenance Factor
0	1.00
25,000	0.94
50,000	0.89
100,000	0.80

### FAO Dimming Settings

FAO Position	% Wattage	% Lumen Output
8	100%	100%
7	93%	95%
6	80%	85%
5	66%	73%
4	54%	61%
3	41%	49%
2	29%	36%
1	15%	20%

\*Note: Calculated values are based on original performance package data. When calculating new values for given FAO position, use published values for each package based on input watts and lumens by optic type.

### Electrical Load

	Performance Package	LED Count	Drive Current (mA)	Wattage	Current (A)					
					120V	208V	240V	277V	347V	480V
Forward Optics (Non-Rotated)	P1	20	530	34	0.28	0.16	0.14	0.12	0.10	0.07
	P2	20	700	45	0.38	0.22	0.19	0.16	0.13	0.09
	P3	20	1050	69	0.57	0.33	0.29	0.25	0.20	0.14
	P4	20	1400	94	0.78	0.45	0.39	0.34	0.27	0.19
	P5	40	700	89	0.75	0.43	0.38	0.33	0.26	0.19
	P6	40	1050	136	1.14	0.66	0.57	0.49	0.39	0.29
	P7	40	1300	170	1.42	0.82	0.71	0.62	0.49	0.36
Rotated Optics (Requires L90 or R90)	P10	30	530	51	0.42	0.24	0.21	0.18	0.15	0.11
	P11	30	700	67	0.57	0.33	0.28	0.25	0.20	0.14
	P12	30	1050	103	0.86	0.50	0.43	0.37	0.30	0.22
	P13	30	1300	129	1.07	0.62	0.54	0.46	0.37	0.27

### LED Color Temperature / Color Rendering Multipliers

	70 CRI		80CRI		90CRI	
	Lumen Multiplier	Availability	Lumen Multiplier	Availability	Lumen Multiplier	Availability
5000K	102%	Standard	92%	Extended lead-time	71%	(see note)
4000K	100%	Standard	92%	Extended lead-time	67%	(see note)
3500K	100%	(see note)	90%	Extended lead-time	63%	(see note)
3000K	96%	Standard	87%	Extended lead-time	61%	(see note)
2700K	94%	(see note)	85%	Extended lead-time	57%	(see note)

Note: Some LED types are available as per special request. Contact Technical Support for more information.

### Motion Sensor Default Settings

Option	Unoccupied Dimmed Level	High Level (when occupied)	Photocell Operation	Dwell Time	Ramp-up Time	Dimming Fade Rate
PIR	30%	100%	Enabled @ 2FC	7.5 min	3 sec	5 min
NLTAIR2 PIRHN	30%	100%	Enabled @ 2FC	7.5 min	3 sec	5 min

### Controls Options

Nomenclature	Description	Functionality	Primary control device	Notes
FAO	Field adjustable output device installed inside the luminaire; wired to the driver dimming leads.	Allows the luminaire to be manually dimmed, effectively trimming the light output.	FAO device	Cannot be used with other controls options that need the 0-10V leads
DS (not available on DSX0)	Drivers wired independently for 50/50 luminaire operation	The luminaire is wired to two separate circuits, allowing for 50/50 operation.	Independently wired drivers	Requires two separately switched circuits. Consider nLight AIR as a more cost effective alternative.
PERS or PER7	Twist-lock photocell receptacle	Compatible with standard twist-lock photocells for dusk to dawn operation, or advanced control nodes that provide 0-10V dimming signals.	Twist-lock photocells such as DLL Elite or advanced control nodes such as ROAM.	Pins 4 & 5 to dimming leads on driver, Pins 6 & 7 are capped inside luminaire. Cannot be used with other controls options that need the 0-10V leads.
PIR	Motion sensor with integral photocell. Sensor suitable for 8' to 40' mounting height.	Luminaires dim when no occupancy is detected.	Acuity Controls rSBG	Cannot be used with other controls options that need the 0-10V leads.
NLTAIR2 PIRHN	nLight AIR enabled luminaire for motion sensing, photocell and wireless communication.	Motion and ambient light sensing with group response. Scheduled dimming with motion sensor over-ride when wirelessly connected to the nLight Eclipse.	nLight Air rSBG	nLight AIR sensors can be programmed and commissioned from the ground using the CIAIRity Pro app. Cannot be used with other controls options that need the 0-10V leads.
BL30 or BL50	Integrated bi-level device that allows a second control circuit to switch all light engines to either 30% or 50% light output	BLC device provides input to 0-10V dimming leads on all drivers providing either 100% or dimmed (30% or 50%) control by a secondary circuit	BLC UVOLT1	BLC device is powered off the 0-10V dimming leads, thus can be used with any input voltage from 120 to 480V

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.

Forward Optics																							
Performance Package	System Watts	LED Count	Drive Current (mA)	Distribution Type	30K					40K					50K								
					(3000K, 70 CRI)					(4000K, 70 CRI)					(5000K, 70 CRI)								
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW				
P1	33W	20	530	T1S	4,906	1	0	1	148	5,113	1	0	1	154	5,213	1	0	1	157				
				T2M	4,545	1	0	2	137	4,736	1	0	2	143	4,829	1	0	2	145				
				T3M	4,597	1	0	2	138	4,791	1	0	2	144	4,885	1	0	2	147				
				T3LG	4,107	1	0	1	124	4,280	1	0	1	129	4,363	1	0	1	131				
				T4M	4,666	1	0	2	141	4,863	1	0	2	146	4,957	1	0	2	149				
				T4LG	4,244	1	0	1	128	4,423	1	0	1	133	4,509	1	0	1	136				
				TFTM	4,698	1	0	2	141	4,896	1	0	2	147	4,992	1	0	2	150				
				T5M	4,801	3	0	1	145	5,003	3	0	1	151	5,101	3	0	1	154				
				T5W	4,878	3	0	1	147	5,084	3	0	2	153	5,183	3	0	2	156				
				T5LG	4,814	2	0	1	145	5,018	2	0	1	151	5,115	2	0	1	154				
				BLC3	3,344	0	0	1	101	3,485	0	0	1	105	3,553	0	0	1	107				
				BLC4	3,454	0	0	2	104	3,599	0	0	2	108	3,670	0	0	2	111				
				RCCO	3,374	0	0	1	102	3,517	0	0	1	106	3,585	0	0	1	108				
				LCCO	3,374	0	0	1	102	3,517	0	0	1	106	3,585	0	0	1	108				
				AFR	4,906	1	0	1	148	5,113	1	0	1	154	5,213	1	0	1	157				
				P2	45W	20	700	T1S	6,328	1	0	1	140	6,595	1	0	1	146	6,724	1	0	1	149
								T2M	5,862	1	0	2	130	6,109	1	0	2	135	6,228	1	0	2	138
T3M	5,930	1	0					3	131	6,180	1	0	3	137	6,301	1	0	3	140				
T3LG	5,297	1	0					1	117	5,521	1	0	1	122	5,628	1	0	1	125				
T4M	6,018	1	0					3	133	6,272	1	0	3	139	6,395	1	0	3	142				
T4LG	5,474	1	0					1	121	5,705	1	0	1	126	5,816	1	0	1	129				
TFTM	6,060	1	0					3	134	6,316	1	0	3	140	6,439	1	0	3	143				
T5M	6,192	3	0					1	137	6,453	3	0	2	143	6,579	3	0	2	146				
T5W	6,293	3	0					2	139	6,558	3	0	2	145	6,686	3	0	2	148				
T5LG	6,210	2	0					1	138	6,472	3	0	1	143	6,598	3	0	1	146				
BLC3	4,313	0	0					2	96	4,495	0	0	2	100	4,583	0	0	2	102				
BLC4	4,455	0	0					2	99	4,643	0	0	2	103	4,733	0	0	2	105				
RCCO	4,352	0	0					2	96	4,536	0	0	2	100	4,624	0	0	2	102				
LCCO	4,352	0	0					2	96	4,536	0	0	2	100	4,624	0	0	2	102				
AFR	6,328	1	0					1	140	6,595	1	0	1	146	6,724	1	0	1	149				
P3	69W	20	1050					T1S	9,006	1	0	2	131	9,386	1	0	2	136	9,569	1	0	2	139
								T2M	8,343	2	0	3	121	8,694	2	0	3	126	8,864	2	0	3	129
				T3M	8,439	2	0	3	122	8,795	2	0	3	128	8,967	2	0	3	130				
				T3LG	7,539	1	0	2	109	7,857	1	0	2	114	8,010	1	0	2	116				
				T4M	8,565	2	0	3	124	8,926	2	0	3	129	9,100	2	0	3	132				
				T4LG	7,790	1	0	2	113	8,119	1	0	2	118	8,277	1	0	2	120				
				TFTM	8,624	1	0	3	125	8,988	1	0	3	130	9,163	2	0	3	133				
				T5M	8,812	3	0	2	128	9,184	4	0	2	133	9,363	4	0	2	136				
				T5W	8,955	4	0	2	130	9,333	4	0	2	135	9,515	4	0	2	138				
				T5LG	8,838	3	0	1	128	9,211	3	0	1	134	9,390	3	0	1	136				
				BLC3	6,139	0	0	2	89	6,398	0	0	2	93	6,522	0	0	2	95				
				BLC4	6,340	0	0	3	92	6,607	0	0	3	96	6,736	0	0	3	98				
				RCCO	6,194	1	0	2	90	6,455	1	0	2	94	6,581	1	0	2	95				
				LCCO	6,194	1	0	2	90	6,455	1	0	2	94	6,581	1	0	2	95				
				AFR	9,006	1	0	2	131	9,386	1	0	2	136	9,569	1	0	2	139				
				P4	93W	20	1400	T1S	11,396	1	0	2	122	11,877	1	0	2	128	12,109	2	0	2	130
								T2M	10,557	2	0	3	113	11,003	2	0	3	118	11,217	2	0	3	121
T3M	10,680	2	0					3	115	11,130	2	0	3	120	11,347	2	0	3	122				
T3LG	9,540	1	0					2	103	9,942	1	0	2	107	10,136	1	0	2	109				
T4M	10,839	2	0					3	117	11,296	2	0	3	121	11,516	2	0	4	124				
T4LG	9,858	1	0					2	106	10,274	1	0	2	110	10,474	1	0	2	113				
TFTM	10,914	2	0					3	117	11,374	2	0	3	122	11,596	2	0	3	125				
T5M	11,152	4	0					2	120	11,622	4	0	2	125	11,849	4	0	2	127				
T5W	11,332	4	0					3	122	11,811	4	0	3	127	12,041	4	0	3	129				
T5LG	11,184	3	0					1	120	11,656	3	0	2	125	11,883	3	0	2	128				
BLC3	7,768	0	0					2	83	8,096	0	0	2	87	8,254	0	0	2	89				
BLC4	8,023	0	0					3	86	8,362	0	0	3	90	8,524	0	0	3	92				
RCCO	7,838	1	0					2	84	8,169	1	0	2	88	8,328	1	0	2	90				
LCCO	7,838	1	0					2	84	8,169	1	0	2	88	8,328	1	0	2	90				
AFR	11,396	1	0					2	122	11,877	1	0	2	128	12,109	2	0	2	130				

# Performance Data

## Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.

Forward Optics																							
Performance Package	System Watts	LED Count	Drive Current (mA)	Distribution Type	30K					40K					50K								
					(3000K, 70 CRI)					(4000K, 70 CRI)					(5000K, 70 CRI)								
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW				
P5	90W	40	700	T1S	12,380	2	0	2	137	12,902	2	0	2	143	13,154	2	0	2	146				
				T2M	11,468	2	0	3	127	11,952	2	0	3	133	12,185	2	0	3	135				
				T3M	11,601	2	0	3	129	12,091	2	0	3	134	12,326	2	0	4	137				
				T3LG	10,363	2	0	2	115	10,800	2	0	2	120	11,011	2	0	2	122				
				T4M	11,774	2	0	4	131	12,271	2	0	4	136	12,510	2	0	4	139				
				T4LG	10,709	1	0	2	119	11,160	2	0	2	124	11,378	2	0	2	126				
				TFTM	11,856	2	0	3	132	12,356	2	0	4	137	12,596	2	0	4	140				
				T5M	12,114	4	0	2	134	12,625	4	0	2	140	12,871	4	0	2	143				
				T5W	12,310	4	0	3	137	12,830	4	0	3	142	13,080	4	0	3	145				
				T5LG	12,149	3	0	2	135	12,662	3	0	2	141	12,908	3	0	2	143				
				BLC3	8,438	0	0	2	94	8,794	0	0	2	98	8,966	0	0	2	99				
				BLC4	8,715	0	0	3	97	9,083	0	0	3	101	9,260	0	0	3	103				
				RCCO	8,515	1	0	2	94	8,874	1	0	2	98	9,047	1	0	2	100				
				LCCO	8,515	1	0	2	94	8,874	1	0	2	98	9,047	1	0	2	100				
				AFR	12,380	2	0	2	137	12,902	2	0	2	143	13,154	2	0	2	146				
				P6	137W	40	1050	T1S	17,545	2	0	3	128	18,285	2	0	3	133	18,642	2	0	3	136
								T2M	16,253	3	0	4	119	16,939	3	0	4	124	17,269	3	0	4	126
T3M	16,442	2	0					4	120	17,135	3	0	4	125	17,469	3	0	4	128				
T3LG	14,687	2	0					2	107	15,306	2	0	2	112	15,605	2	0	2	114				
T4M	16,687	2	0					4	122	17,391	3	0	5	127	17,730	3	0	5	129				
T4LG	15,177	2	0					2	111	15,817	2	0	2	115	16,125	2	0	2	118				
TFTM	16,802	2	0					4	123	17,511	2	0	4	128	17,852	2	0	5	130				
T5M	17,168	4	0					2	125	17,893	5	0	3	131	18,241	5	0	3	133				
T5W	17,447	5	0					3	127	18,183	5	0	3	133	18,537	5	0	3	135				
T5LG	17,218	4	0					2	126	17,944	4	0	2	131	18,294	4	0	2	134				
BLC3	11,959	0	0					3	87	12,464	0	0	3	91	12,707	0	0	3	93				
BLC4	12,352	0	0					4	90	12,873	0	0	4	94	13,124	0	0	4	96				
RCCO	12,067	1	0					3	88	12,576	1	0	3	92	12,821	1	0	3	94				
LCCO	12,067	1	0					3	88	12,576	1	0	3	92	12,821	1	0	3	94				
AFR	17,545	2	0					3	128	18,285	2	0	3	133	18,642	2	0	3	136				
P7	171W	40	1300					T1S	20,806	2	0	3	122	21,683	2	0	3	127	22,106	2	0	3	129
								T2M	19,273	3	0	4	113	20,086	3	0	4	118	20,478	3	0	4	120
				T3M	19,497	3	0	5	114	20,319	3	0	5	119	20,715	3	0	5	121				
				T3LG	17,416	2	0	2	102	18,151	2	0	2	106	18,504	2	0	2	108				
				T4M	19,787	3	0	5	116	20,622	3	0	5	121	21,024	3	0	5	123				
				T4LG	17,997	2	0	2	105	18,756	2	0	2	110	19,121	2	0	2	112				
				TFTM	19,924	3	0	5	117	20,765	3	0	5	122	21,170	3	0	5	124				
				T5M	20,359	5	0	3	119	21,217	5	0	3	124	21,631	5	0	3	127				
				T5W	20,689	5	0	3	121	21,561	5	0	3	126	21,982	5	0	3	129				
				T5LG	20,418	4	0	2	120	21,279	4	0	2	125	21,694	4	0	2	127				
				BLC3	14,182	0	0	3	83	14,780	0	0	3	87	15,068	0	0	3	88				
				BLC4	14,647	0	0	4	86	15,265	0	0	4	89	15,562	0	0	4	91				
				RCCO	14,309	1	0	3	84	14,913	1	0	3	87	15,204	1	0	3	89				
				LCCO	14,309	1	0	3	84	14,913	1	0	3	87	15,204	1	0	3	89				
				AFR	20,806	2	0	3	122	21,683	2	0	3	127	22,106	2	0	3	129				

# Performance Data


## Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.



Rotated Optics																							
Performance Package	System Watts	LED Count	Drive Current (mA)	Distribution Type	30K					40K					50K								
					(3000K, 70 CRI)					(4000K, 70 CRI)					(5000K, 70 CRI)								
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW				
P10	51W	30	530	T1S	7,399	3	0	3	145	7,711	3	0	3	151	7,862	3	0	3	154				
				T2M	6,854	3	0	3	135	7,144	3	0	3	140	7,283	3	0	3	143				
				T3M	6,933	3	0	3	136	7,225	3	0	3	142	7,366	3	0	3	145				
				T3LG	6,194	2	0	2	122	6,455	2	0	2	127	6,581	2	0	2	129				
				T4M	7,036	3	0	3	138	7,333	3	0	3	144	7,476	3	0	3	147				
				T4LG	6,399	2	0	2	126	6,669	2	0	2	131	6,799	2	0	2	134				
				TFTM	7,086	3	0	3	139	7,385	3	0	3	145	7,529	3	0	3	148				
				T5M	7,239	3	0	2	142	7,545	3	0	2	148	7,692	3	0	2	151				
				T5W	7,357	3	0	2	145	7,667	3	0	2	151	7,816	4	0	2	154				
				T5LG	7,260	3	0	1	143	7,567	3	0	1	149	7,714	3	0	1	152				
				BLC3	5,043	3	0	3	99	5,256	3	0	3	103	5,358	3	0	3	105				
				BLC4	5,208	3	0	3	102	5,428	3	0	3	107	5,534	3	0	3	109				
				RCCO	5,089	0	0	2	100	5,303	0	0	2	104	5,407	0	0	2	106				
				LCCO	5,089	0	0	2	100	5,303	0	0	2	104	5,407	0	0	2	106				
				AFR	7,399	3	0	3	145	7,711	3	0	3	151	7,862	3	0	3	154				
				P11	68W	30	700	T1S	9,358	3	0	3	138	9,753	3	0	3	143	9,943	3	0	3	146
								T2M	8,669	3	0	3	127	9,034	3	0	3	133	9,211	3	0	3	135
T3M	8,768	3	0					3	129	9,138	3	0	3	134	9,316	3	0	3	137				
T3LG	7,833	3	0					3	115	8,164	3	0	3	120	8,323	3	0	3	122				
T4M	8,899	3	0					3	131	9,274	3	0	3	136	9,455	3	0	3	139				
T4LG	8,093	3	0					3	119	8,435	3	0	3	124	8,599	3	0	3	126				
TFTM	8,962	3	0					3	132	9,340	3	0	3	137	9,522	3	0	3	140				
T5M	9,156	4	0					2	135	9,542	4	0	2	140	9,728	4	0	2	143				
T5W	9,304	4	0					2	137	9,696	4	0	2	143	9,885	4	0	2	145				
T5LG	9,182	3	0					1	135	9,569	3	0	1	141	9,756	3	0	1	143				
BLC3	6,378	3	0					3	94	6,647	3	0	3	98	6,777	3	0	3	100				
BLC4	6,587	3	0					3	97	6,865	3	0	3	101	6,999	3	0	3	103				
RCCO	6,436	0	0					2	95	6,707	0	0	2	99	6,838	0	0	2	101				
LCCO	6,436	0	0					2	95	6,707	0	0	2	99	6,838	0	0	2	101				
AFR	9,358	3	0					3	138	9,753	3	0	3	143	9,943	3	0	3	146				
P12	103W	30	1050					T1S	13,247	3	0	3	128	13,806	3	0	3	134	14,075	3	0	3	136
								T2M	12,271	4	0	4	119	12,789	4	0	4	124	13,038	4	0	4	126
				T3M	12,412	4	0	4	120	12,935	4	0	4	125	13,187	4	0	4	128				
				T3LG	11,089	3	0	3	107	11,556	3	0	3	112	11,782	3	0	3	114				
				T4M	12,597	4	0	4	122	13,128	4	0	4	127	13,384	4	0	4	129				
				T4LG	11,457	3	0	3	111	11,940	3	0	3	116	12,173	3	0	3	118				
				TFTM	12,686	4	0	4	123	13,221	4	0	4	128	13,479	4	0	4	130				
				T5M	12,960	4	0	2	125	13,507	4	0	2	131	13,770	4	0	2	133				
				T5W	13,170	4	0	3	127	13,726	4	0	3	133	13,994	4	0	3	135				
				T5LG	12,998	3	0	2	126	13,546	3	0	2	131	13,810	3	0	2	134				
				BLC3	9,029	3	0	3	87	9,409	3	0	3	91	9,593	3	0	3	93				
				BLC4	9,324	4	0	4	90	9,718	4	0	4	94	9,907	4	0	4	96				
				RCCO	9,110	1	0	2	88	9,495	1	0	2	92	9,680	1	0	2	94				
				LCCO	9,110	1	0	2	88	9,494	1	0	2	92	9,680	1	0	2	94				
				AFR	13,247	3	0	3	128	13,806	3	0	3	134	14,075	3	0	3	136				
				P13	129W	30	1300	T1S	15,704	3	0	3	122	16,366	3	0	3	127	16,685	4	0	4	130
								T2M	14,547	4	0	4	113	15,161	4	0	4	118	15,457	4	0	4	120
T3M	14,714	4	0					4	114	15,335	4	0	4	119	15,634	4	0	4	121				
T3LG	13,145	3	0					3	102	13,700	3	0	3	106	13,967	3	0	3	108				
T4M	14,933	4	0					4	116	15,563	4	0	4	121	15,867	4	0	4	123				
T4LG	13,582	3	0					3	105	14,155	3	0	3	110	14,431	3	0	3	112				
TFTM	15,039	4	0					4	117	15,673	4	0	4	122	15,979	4	0	4	124				
T5M	15,364	4	0					2	119	16,013	4	0	2	124	16,325	4	0	2	127				
T5W	15,613	5	0					3	121	16,272	5	0	3	126	16,589	5	0	3	129				
T5LG	15,409	3	0					2	120	16,059	3	0	2	125	16,372	4	0	2	127				
BLC3	10,703	4	0					4	83	11,155	4	0	4	87	11,372	4	0	4	88				
BLC4	11,054	4	0					4	86	11,520	4	0	4	89	11,745	4	0	4	91				
RCCO	10,800	1	0					2	84	11,256	1	0	2	87	11,475	1	0	3	89				
LCCO	10,800	1	0					2	84	11,255	1	0	2	87	11,475	1	0	3	89				
AFR	15,704	3	0					3	122	16,366	3	0	3	127	16,685	4	0	4	130				





# Dimensions

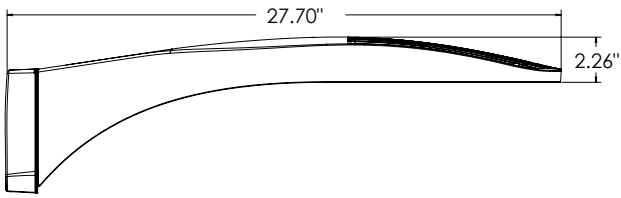


**DSX0 with RPA, RPA5, SPA5, SPA8N mount**  
**Weight: 25 lbs**

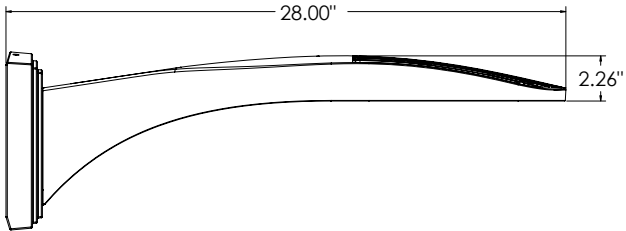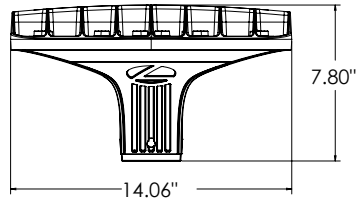


**DSX0 with WBA mount**  
**Weight: 27 lb**

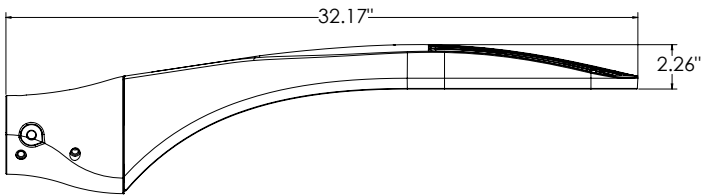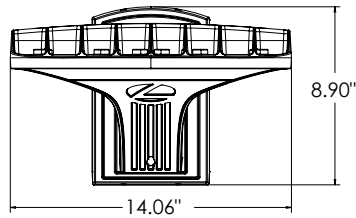


**DSX0 with MA mount**  
**Weight: 28 lbs**

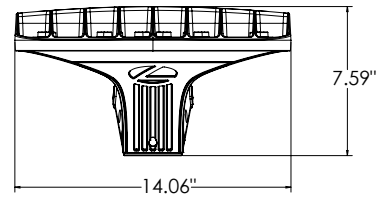


**SPA (STANDARD ARM)**

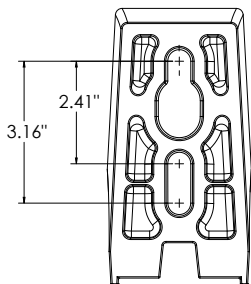


**RPA**

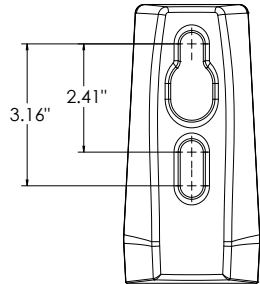


**SPA5**

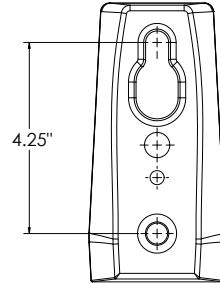

**RPA5**



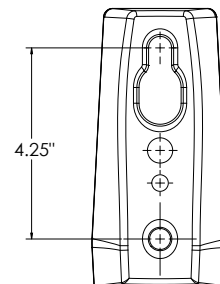


**SPA8N**

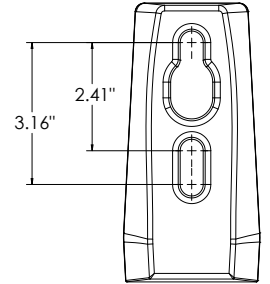

## nLight Sensor Coverage Pattern

### NLTAIR2 PIRHN

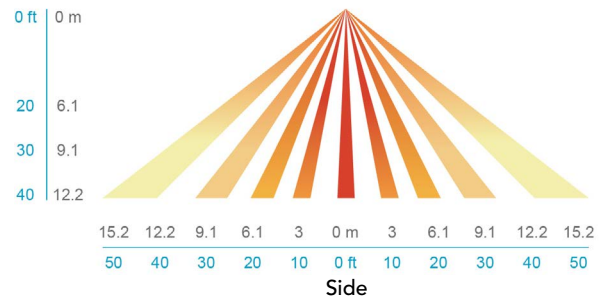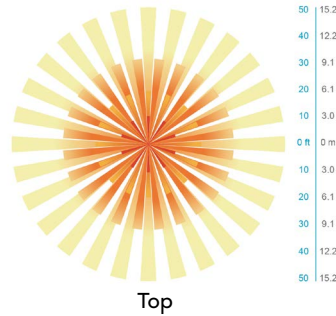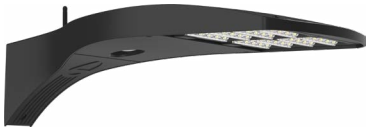

## FEATURES & SPECIFICATIONS

### INTENDED USE

The sleek design of the D-Series Size 0 reflects the embedded high performance LED technology. It is ideal for many commercial and municipal applications, such as parking lots, plazas, campuses, and pedestrian areas.

### CONSTRUCTION

Single-piece die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. Modular design allows for ease of maintenance and future light engine upgrades. The LED driver is mounted in direct contact with the casting to promote low operating temperature and long life. Housing driver compartment is completely sealed against moisture and environmental contaminants (IP66). Vibration rated per ANSI C136.31 for 3G. Low EPA (0.44 ft<sup>2</sup>) for optimized pole wind loading.

### FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Available in both textured and non-textured finishes.

### COASTAL CONSTRUCTION (CCE)

Optional corrosion resistant construction is engineered with added corrosion protection in materials and/or pre-treatment of base material under super durable paint. Provides additional corrosion protection for applications near coastal areas. Finish is salt spray tested to over 5,000 hours per ASTM B117 with scribe rating of 10. Additional lead-times may apply.

### OPTICS

Precision-molded proprietary silicone lenses are engineered for superior area lighting distribution, uniformity, and pole spacing. Light engines are available in 3000 K, 4000 K or 5000 K (70 CRI) configurations. 80CRI configurations are also available. The D-Series Size 0 has zero uplight and qualifies as a Nighttime Friendly™ product, meaning it is consistent with the LEED® and Green Globes™ criteria for eliminating wasteful uplight.

### ELECTRICAL

Light engine(s) configurations consist of high-efficacy LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life (up to L80/100,000 hours at 25°C). Class 1 electronic drivers are designed to have a power factor >90%, THD <20%, and an expected life of 100,000 hours with <1% failure rate. Easily serviceable 10kV surge protection device meets a minimum Category C Low operation (per ANSI/IEEE C62.41.2).

### STANDARD CONTROLS

The DSX0 LED area luminaire has a number of control options. DSX Size 0, comes standard with 0-10V dimming driver. Dusk to dawn controls can be utilized via optional NEMA twist-lock photocell receptacles. PIR integrated motion sensor with on-board photocell feature field-adjustable programming and are suitable for mounting heights up to 40 feet. Control option BL features a bi-level device that allows a second control circuit to switch all light engines to either 30% or 50% light output.

### nLIGHT AIR CONTROLS

The DSX0 LED area luminaire is also available with nLight® AIR for the ultimate in wireless control. This powerful controls platform provides out-of-the-box basic motion sensing and photocontrol functionality and is suitable for mounting heights up to 40 feet. Once commissioned using a smartphone and the easy-to-use CLAIRITY app, nLight AIR equipped luminaires can be grouped, resulting in motion sensor and photocell group response without the need for additional equipment. Scheduled dimming with motion sensor over-ride can be achieved when used with the nLight Eclipse. Additional information about nLight Air can be found [here](#).

### INSTALLATION

Integral mounting arm allows for fast mounting using Lithonia standard #8 drilling and accommodates pole drilling's from 2.41 to 3.12" on center. The standard "SPA" option for square poles and the "RPA" option for round poles use the #8 drilling. For #5 pole drillings, use SPA5 or RPA5. Additional mountings are available including a wall bracket (WBA) and mast arm (MA) option that allows luminaire attachment to a 2 3/8" horizontal mast arm.

### LISTINGS

UL listed to meet U.S. and Canadian standards. UL Listed for wet locations. Light engines are IP66 rated; luminaire is IP66 rated. Rated for -40°C minimum ambient.

DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product. Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org/QPL](http://www.designlights.org/QPL) to confirm which versions are qualified.

International Dark-Sky Association (IDA) Fixture Seal of Approval (FSA) is available for all products on this page utilizing 3000K color temperature only.

### GOVERNMENT PROCUREMENT

BAA – Buy America(n) Act: Product with the BAA option qualifies as a domestic end product under the Buy American Act as implemented in the FAR and DFARS. Product with the BAA option also qualifies as manufactured in the United States under DOT Buy America regulations.

BABA – Build America Buy America: Product with the BAA option also qualifies as produced in the United States under the definitions of the Build America, Buy America Act.

Please refer to [www.acuitybrands.com/buy-american](http://www.acuitybrands.com/buy-american) for additional information.

### WARRANTY

5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: [www.acuitybrands.com/support/warranty/terms-and-conditions](http://www.acuitybrands.com/support/warranty/terms-and-conditions)

**Note:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

Catalog Number
Notes
Type <b>OM-OV Pole</b>

## FEATURES & SPECIFICATIONS

**INTENDED USE** — These specifications are for USA standards only. Round Straight Steel is a general purpose light pole for up to 30-foot mounting heights. This pole provides a robust yet cost effective option for mounting area lights and floodlights.

**CONSTRUCTION** —

**Pole Shaft:** The pole shaft is of 0.120" uniform wall thickness and is made of a weldable-grade, hot-rolled, commercial-quality steel tubing with a minimum yield of 42,000 psi. Shaft is one-piece with a full-length longitudinal high-frequency electric resistance weld. Uniformly round in cross-section down length of shaft with no taper. Standard shaft diameters are 3", 4", 4.5" and 5". 6" diameter shaft available by quote. Shaft wall thickness of .180" is available with certain tube diameters.

**Pole Top:** Options include tenon top, drilled for side mount fixture, 4" tenon with drilling (includes extra handhole) and open top. Side drilled and open top poles include a removable press-fit, black, low density polyethylene top cap.

**Handhole:** A reinforced handhole with grounding provision is provided at 12" or 18" from the base end of the pole assembly on side A. Every handhole includes a cover and cover attachment hardware. 2.5" x 5" rectangular handhole is provided on pole.

**Base Cover:** A two-piece ABS round plastic full base cover is provided with each pole assembly. Additional base cover options are available upon factory request. Options include fabricated two-piece sheet steel. All base covers are finished to match pole.

**Anchor Base/Bolts:** Anchor base is fabricated from hot-rolled carbon steel plate that conforms with ASTM A36. Anchor bolts conform to ASTM F1554 Grade 55 and are provided with two hex nuts and two flat washers. Bolts have an "L" blend on one end. All anchor bolts are hot-dipped galvanized a minimum of 12" nominal on the threaded end. Anchor bolts are made of steel rod having a minimum yield strength of 55,000 psi and a yield strength of 75,000 psi to 95,000 psi.

**HARDWARE** — All structural fasteners are high-strength galvanized carbon steel. All non-structural fasteners are galvanized or zinc-plated carbon steel or stainless steel.

**FINISH** — Extra durable standard powder-coat finishes include Dark Bronze, White, Black, Medium Bronze and Natural Aluminum colors. Classic finishes include Sandstone, Charcoal Gray, Tennis Green, Bright Red and Steel Blue colors. Architectural Colors and Special Finishes are available by quote and include, but are not limited to Hot-dipped Galvanized, Paint over Hot-dipped Galvanized, RAL Colors, Custom Colors and Extended Warranty Finishes. Factory-applied primer paint finish is available for customer field-paint applications.

**GOVERNMENT PROCUREMENT** —

**BAA** — Buy America(n) Act: Product qualifies as a domestic end product under the Buy American Act as implemented in the FAR and DFARS. Product also qualifies as manufactured in the United States under DOT Buy America regulations.

**BABA** — Build America Buy America: Product qualifies as produced in the United States under the definitions of the Build America, Buy America Act.

Please refer to [www.acuitybrands.com/buy-american](http://www.acuitybrands.com/buy-american) for additional information.

**WARRANTY** — 1-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: [www.acuitybrands.com/support/warranty/terms-and-conditions](http://www.acuitybrands.com/support/warranty/terms-and-conditions)

**NOTE:** Actual performance may differ as a result of end-user environment and application. Specifications subject to change without notice.



Anchor Base Poles

# RSS

ROUND STRAIGHT STEEL



# RSS Round Straight Steel Pole

## ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

**Example:** RSS 20 4-5B DM19 DDBXD

RSS	23	4B	PT	STLHHC-FBCSTL2PC	DDBXD
Series	Nominal fixture mounting height	Nominal shaft base size/wall thickness <sup>1</sup>	Mounting <sup>2</sup>	Options	Finish
RSS	8'-30' (for 1/2 ft increments, add -6 to the pole height. <b>Ex:</b> 20-6 equals 20ft 6in.)  (See technical information table for complete ordering information.)	3B 3" 11ga (.120") 4B 4" 11ga (.120") 4-5B 4.5" 11ga (.120") 5B 5" 11ga (.120")  (See technical information table for complete ordering information.)	<b>Tenon mounting</b> PT Open top T20 2-3/8" O.D. (2" NPS) T25 2-7/8" O.D. (2-1/2" NPS) T30 3-1/2" O.D. (3" NPS) T35 4" O.D. (3-1/2" NPS) <u>KAC/KAD/KSE/KSF/KVR/ KVF Drill mounting<sup>3</sup></u> DM19 1 at 90° DM28 2 at 180° DM28PL 2 at 180° with one side plugged DM29 2 at 90° DM32 3 at 120° DM49 4 at 90° <u>CSX/DSX/R SX/AERIS™/OMERO™/ KAX Drill mounting<sup>3</sup></u> DM19AS 1 at 90° DM28AS 2 at 180° DM29AS 2 at 90° DM32AS 3 at 120° DM39AS 3 at 90° DM49AS 4 at 90° <u>RAD drill mounting<sup>3,4</sup></u> DM19RAD 1 at 90° DM28RAD 2 at 180° DM29RAD 2 at 90° DM32RAD 3 at 120° DM39RAD 3 at 90° DM49RAD 4 at 90° <u>ESX Drill mounting<sup>3</sup></u> DM19ESX 1 at 90° DM28ESX 2 at 180° DM29ESX 2 at 90° DM32ESX 3 at 120° DM39ESX 3 at 90° DM49ESX 4 at 90°	<b>Shipped installed</b> VD Vibration damper <sup>5</sup> HAXy Horizontal arm bracket (1 fixture) <sup>6,7</sup> FDLxy Festoon outlet less electrical <sup>6,8</sup> CPL12/xy 1/2" coupling <sup>6</sup> CPL34/xy 3/4" coupling <sup>6</sup> CPL1/xy 1" coupling <sup>6</sup> NPL12/xy 1/2" threaded nipple <sup>6</sup> NPL34/xy 3/4" threaded nipple <sup>6</sup> NPL1/xy 1" threaded nipple <sup>6</sup> EHHxy Extra handhole <sup>6,9</sup>  STLHHC Steel handhole cover (standard is plastic, finish is smooth) <sup>10</sup> FBCSTL2PC 2 Piece steel base cover (standard is plastic) <sup>10</sup> IC Interior coating <sup>11</sup> L/AB Less anchor bolts (Include when anchor bolts are not needed) TP Tamper resistant handhole cover fasteners NEC NEC 410.30 compliant gasketed handhole (Not UL Labeled) UL UL listed with label (Includes NEC compliant cover) BAA Buy America(n) Act Compliant <sup>12</sup> VM/original order# Match pole to prior order or project <sup>13</sup>	<b>Super durable paint colors</b> DDBXD Dark bronze DBLXD Black DNAXD Natural aluminum DWHXD White DSSXD Sandstone DGCXD Charcoal gray DTGXD Tennis green DBRXD Bright red DSBXD Steel blue DDBTXD Textured dark bronze DBLBXD Textured black DNATXD Textured natural aluminum DWHGXD Textured white <b>Other finishes</b> GALV Galvanized finish <b>Architectural colors and special finishes<sup>14</sup></b> [PAINT] GALV Paint over galvanizing VP30 3 year warranty extension VP53 5 year warranty extension RAL#### Use designated Lithonia Lighting nomenclature in <a href="#">brochure</a>  Custom color Nomenclature assigned through Customer Care "Custom Color Process"

### NOTES:

- Wall thickness will be signified with a "B" (11 Gauge) or a "F" (7-Gauge) in nomenclature. "B" - .120" | "F" - .180"
- PT open top poles include top cap. When ordering tenon mounting and drill mounting for the same pole, specify as drilling option/tenon option. The combination includes a required extra handhole.  
*Example: DM28/T20.*
- Refer to the fixture spec sheet for the correct drilling template pattern and orientation compatibility.
- DM19RAD, DM28RAD and DM32RAD require a minimum top O.D. of 4". DM29RAD, DM39RAD and DM49RAD require a minimum top O.D. of 4.25".
- VD not available with 3" pole. On 4" and 5" poles, VD cannot be installed if provisions (EHH, FDL, NPL, CPL) are located higher than 2/3 of the pole's total height.  
*Example: Pole height is 25ft, A provision cannot be placed above 16ft.*
- Specify location and orientation when ordering option.  
**For "x":** Specify the height above the base of pole in feet or feet and inches; separate feet and inches with a "-".  
*Example: 5ft = 5 and 20ft 3in = 20-3*  
**For "y":** Specify orientation from handhole (A,B,C,D) Refer to the Handhole Orientation diagram below.  
*Example: 1/2" coupling at 5' 8", orientation C = CPL12/5-8C*
- Horizontal arm is 18" x 2-3/8" O.D. tenon standard, with radius curve providing 12" rise and 2-3/8" O.D. If ordering two horizontal arm at the same height, specify with HAXy.  
*Example: HA20BD.*
- FDL does not come with GFCI outlet or handhole cover. These must be supplied by contractor or electrician.
- Combination of tenon-top and drill mount includes extra handhole. EHH includes cover.
- Plastic hand hole cover and base covers come standard with all poles. Items ship separately. Additional parts can be ordered as replacements.
- Provides enhanced corrosion resistance. N/A with GALV.
- Use when mill certifications are required.
- Must add original order number. Not for replacement parts or post sales issues, contact tech support or post sales teams. VM is used to ensure poles match in appearance exactly from order to order, on a single project site. A common use case would be a multi-phase project with multiple orders.  
*Example: VM/010-36784*
- Must be quoted through AQD. Finishes do not require RFA. RAL colors available are shown in "Architectural Colors brochure". Lead times may be extended up to 2 weeks due to paint procurement.

Accessories: Order as separate catalog number.	
PL DT20	Plugs for ESX drillings
PL DT8	Plugs for DMxxAS drillings
FVD xxFT	Field installed vibration damper (snake style)

# RSS Round Straight Steel Pole

TECHNICAL INFORMATION — EPA (ft <sup>2</sup> ) with 1.3 gust										
Catalog number	Nominal shaft length (ft)*	Pole shaft size (in x ft)	Wall thickness (in)	80 mph	Max weight	90 mph	Max weight	100 mph	Max weight	Approximate ship weight (lbs.)
RSS 8 4-5B	8	4.5 x 8.0	0.120	24.7	630	19.7	495	16.0	430	55
RSS 10 3B	10	3.0 x 10.0	0.120	10.0	250	7.7	190	6.0	175	55
RSS 10 4B	10	4.0 x 10.0	0.120	19.1	480	15	375	12.2	305	70
RSS 10 4-5B	10	4.5 x 10.0	0.120	24.5	615	19.5	490	15.8	395	75
RSS 12 3B	12	3.0 x 12.0	0.120	7.7	195	5.8	145	4.4	130	60
RSS 12 4B	12	4.0 x 12.0	0.120	15.0	390	11.8	300	9.5	240	80
RSS 12 4-5B	12	4.5 x 12.0	0.120	19.8	495	15.7	395	12.7	320	85
RSS 14 3B	14	3.0 x 14.0	0.120	6.0	175	4.4	130	3.3	90	70
RSS 14 4B	14	4.0 x 14.0	0.120	12.2	305	9.4	250	7.6	195	90
RSS 14 4-5B	14	4.5 x 14.0	0.120	16.2	405	12.8	320	10.3	260	95
RSS 15 4-5B	15	4.5 x 15.0	0.120	12.0	300	9.5	250	7.5	200	96
RSS 16 3B	16	3.0 x 16.0	0.120	4.6	125	3.2	100	2.3	60	80
RSS 16 4B	16	4.0 x 16.0	0.120	9.6	250	7.4	185	5.9	150	100
RSS 16 4-5B	16	4.5 x 16.0	0.120	13.1	330	10.2	265	8.2	205	105
RSS 18 3B	18	3.0 x 18.0	0.120	3.4	90	2.3	60	1.4	70	90
RSS 18 4B	18	4.0 x 18.0	0.120	7.6	190	5.7	180	4.5	130	110
RSS 18 4-5B	18	4.5 x 18.0	0.120	10.5	265	8.2	210	6.5	165	115
RSS 20 3B	20	3.0 x 20.0	0.120	2.4	100	1.4	75	--	--	100
RSS 20 4B	20	4.0 x 20.0	0.120	6.0	150	4.45	150	3.45	125	120
RSS 20 4-5B	20	4.5 x 20.0	0.120	8.5	215	6.6	165	5.2	130	130
RSS 20 5B	20	5.0 x 20.0	0.120	11.75	300	9.1	230	7.25	180	145
RSS 22 4-5B	22	4.5 x 22.0	0.120	6.0	150	4.5	125	3.75	100	134
RSS 25 4B	25	4.0 x 25.0	0.120	2.85	100	1.95	75	1.35	75	145
RSS 25 4-5B	25	4.5 x 25.0	0.120	4.8	130	3.6	90	2.7	90	145
RSS 25 5B	25	5.0 x 25.0	0.120	7.25	180	5.5	150	4.25	150	180
RSS 30 4-5B	30	4.5 x 30.0	0.120	2.3	80	1.5	75	1.0	60	185
RSS 30 5B	30	5.0 x 30.0	0.120	4.2	150	3	125	2.25	100	210

NOTE: EPA values are based ASCE 7-93 wind map.

\*For 1/2 ft increments, add -6 to the pole height. Ex: 20-6 equals 20ft 6in.

# RSS Round Straight Steel Pole



## TECHNICAL INFORMATION — EPA (ft<sup>2</sup>) WITH 3-SECOND GUST PER AASHTO 2013

Series	Mounting Height (ft)*	Shaft Base Size	90 MPH	Max. weight	100 MPH	Max. weight	110 MPH	Max. weight	120 MPH	Max. weight	130 MPH	Max. weight	140 MPH	Max. weight	150 MPH	Max. weight	Approximate ship weight (lbs.)
RSS	8	4-5B	18.5	463	15	375	13	325	11	275	9.5	238	8	200	7	175	55
RSS	10	3B	6	150	5	125	4	100	3.5	88	2.5	63	2	50	2	50	55
RSS	10	4B	12	300	9.5	238	8	200	6.5	163	5.5	138	5	125	4.5	113	70
RSS	10	4-5B	15.5	388	12.5	313	10.5	263	9	225	7.5	188	6.5	163	6	150	75
RSS	12	3B	5	125	4	100	3	75	2.5	63	2	50	1.5	38	1	25	60
RSS	12	4B	10	250	8	200	6.5	163	5.5	138	4.5	113	4	100	3.5	88	80
RSS	12	4-5B	13	325	10.5	263	9	225	7.5	188	6.5	163	5.5	138	4.5	113	85
RSS	14	3B	4	100	3	75	2.5	63	2	50	1.5	38	1	25	0.5	13	70
RSS	14	4B	8.5	213	6.5	163	5.5	138	4	100	3.5	88	3	75	2.5	63	90
RSS	14	4-5B	11	275	9	225	7	175	6	150	5	125	4.5	113	4	100	95
RSS	15	4-5B	10	250	8	200	6.5	163	5.5	138	4.5	113	4	100	3.5	88	96
RSS	16	3B	3	75	2.5	63	1.5	38	1	25	0.5	13	0.5	13	-	-	80
RSS	16	4B	7	175	5.5	138	4	100	3	75	2.5	63	2	50	2	50	100
RSS	16	4-5B	9	225	7	175	6	150	5	125	4	100	3.5	88	3	75	105
RSS	18	3B	2.5	63	1.5	38	1	25	0.5	13	-	-	-	-	-	-	90
RSS	18	4B	5.5	138	4	100	3	75	2.5	63	2	50	1.5	38	1	25	110
RSS	18	4-5B	7.5	188	6	150	4.5	113	4	100	3	75	2.5	63	2	50	115
RSS	20	3B	2	50	1	25	0.5	13	-	-	-	-	-	-	-	-	100
RSS	20	4B	4.5	113	3	75	2	50	1.5	38	1	25	1	25	0.5	13	120
RSS	20	4-5B	6	150	4.5	113	3.5	88	3	75	2.5	63	2	50	1.5	38	130
RSS	20	5B	8	200	6.5	163	5.5	138	4.5	113	3.5	88	3	75	2.5	63	145
RSS	22	4-5B	5	125	3.5	88	2.5	63	2	50	1.5	38	1	25	1	25	134
RSS	25	4B	2.5	63	1	25	0.5	13	-	-	-	-	-	-	-	-	145
RSS	25	4-5B	3.5	88	2	50	1.5	38	1	25	0.5	13	-	-	-	-	145
RSS	25	5B	5	125	3.5	88	3	75	2	50	1.5	38	1.5	38	1	25	180
RSS	30	4-5B	1.5	38	-	-	-	-	-	-	-	-	-	-	-	-	185
RSS	30	5B	2.5	63	1.5	38	1	25	0.5	13	-	-	-	-	-	-	210

**NOTE:** AASHTO 2013 criteria is the most conservative existing EPA calculation. For poles not showing EPA values under AASHTO 2013, EPA values may exist under commercial criteria (see table above).

\*For 1/2 ft increments, add -6 to the pole height. Ex: 20-6 equals 20ft 6in.


## BASE DETAIL

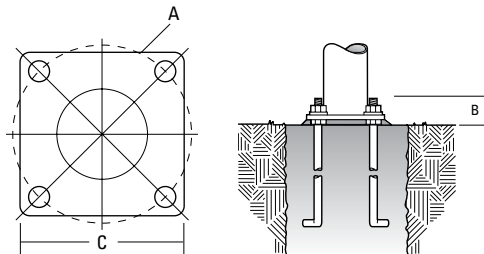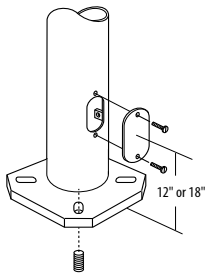

## ANCHORAGE AND TEMPLATE INFORMATION

Shaft base size	Bolt circle A	Bolt projection B	Base square C	Template description	Anchor bolt description	Bolt size (in. x in. x in.)
3"	7.5" - 8.5"	3.50"-3.75"	10.50"	ABTEMPLATE PJ50041	AB18-0	3/4 x 18 x 3
4"	7.5" - 8.5"	3.50"-3.75"	10.50"	ABTEMPLATE PJ50041	AB18-0	3/4 x 18 x 3
4.5"	7.5" - 8.5"	3.50"-3.75"	10.50"	ABTEMPLATE PJ50041	AB18-0	3/4 x 18 x 3
5"	7.5" - 8.5"	3.50"-3.75"	10.50"	ABTEMPLATE PJ50041	AB18-0	3/4 x 18 x 3

## HANDHOLE ORIENTATION



### IMPORTANT INSTALLATION NOTES:

- Do not erect poles without having fixtures installed.
- Factory-supplied templates must be used when setting anchor bolts. Lithonia Lighting will not accept claim for incorrect anchorage placement due to failure to use factory template.
- If poles are stored outside, all protective wrapping must be removed immediately upon delivery to prevent finish damage.
- Lithonia Lighting is not responsible for the foundation design.

**CAUTION:** These specifications are intended for general purposes only. Lithonia Lighting reserves the right to change material or design, without prior notice, in a continuing effort to upgrade its products.



# D-Series Size 0 LED Area Luminaire



Catalog  
Number

Notes  
**25' Total Height**

Type  
**ON**

Hit the Tab key or mouse over the page to see all interactive elements.


## Introduction

The modern styling of the D-Series features a highly refined aesthetic that blends seamlessly with its environment. The D-Series offers the benefits of the latest in LED technology into a high performance, high efficacy, long-life luminaire.

The photometric performance results in sites with excellent uniformity, greater pole spacing and lower power density. D-Series outstanding photometry aids in reducing the number of poles required in area lighting applications, with typical energy savings of 70% and expected service life of over 100,000 hours.

## Specifications

EPA:	0.44 ft <sup>2</sup> (0.04 m <sup>2</sup> )
Length:	26.18" (66.5 cm)
Width:	14.06" (35.7 cm)
Height H1:	2.26" (5.7 cm)
Height H2:	7.46" (18.9 cm)
Weight:	23 lbs (10.4 kg)

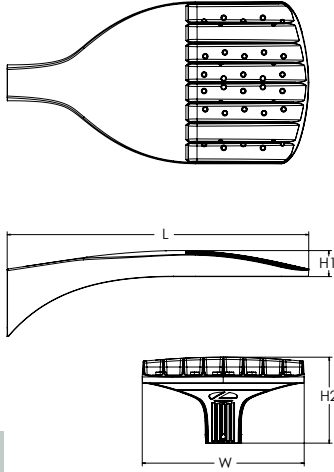

**ds** Design Select options indicated by this color background.



Items marked by a shaded background qualify for the Design Select program and ship in 15 days or less. To learn more about Design Select, visit [www.acuitybrands.com/designselect](http://www.acuitybrands.com/designselect).  
\*See ordering tree for details

## Ordering Information

**EXAMPLE: DSX0 LED P6 40K 70CRI T3M MVOLT SPA NLTAIR2 PIRHN DDBXD**

DSX0 LED	P7	40K	80CRI	BLC4	MVOLT	RPA	
Series	LEDs	Color temperature <sup>2</sup>	Color Rendering Index <sup>2</sup>	Distribution	Voltage	Mounting	
DSX0 LED	<b>Forward optics</b> P1 P5 P2 P6 P3 P7 P4 <b>Rotated optics</b> P10 <sup>1</sup> P12 <sup>1</sup> P11 <sup>1</sup> P13 <sup>1</sup>	(this section 70CRI only) 30K 3000K 40K 4000K 50K 5000K (this section 80CRI only, extended lead times apply) 27K 2700K 30K 3000K 35K 3500K 40K 4000K 50K 5000K	70CRI 70CRI 70CRI 80CRI 80CRI 80CRI 80CRI	AFR Automotive front row T1S Type I short T2M Type II medium T3M Type III medium T3LG Type III low glare <sup>3</sup> T4M Type IV medium T4LG Type IV low glare <sup>3</sup> TFTM Forward throw medium	T5M Type V medium T5LG Type V low glare T5W Type V wide BLC3 Type III backlight control <sup>3</sup> BLC4 Type IV backlight control <sup>3</sup> LCCO Left corner cutoff <sup>3</sup> RCCO Right corner cutoff <sup>3</sup>	MVOLT (120V-277V) <sup>4</sup> HVOLT (347V-480V) <sup>5,6</sup> XVOLT (277V-480V) <sup>7,8</sup> 120 <sup>16, 24</sup> 208 <sup>16, 24</sup> 240 <sup>16, 24</sup> 277 <sup>16, 24</sup> 347 <sup>16, 24</sup> 480 <sup>16, 24</sup>	<b>Shipped included</b> SPA Square pole mounting (#8 drilling, 3.5" min. SQ pole) RPA Round pole mounting (#8 drilling, 3" min. RND pole) SPA5 Square pole mounting (#5 drilling, 3" min. SQ pole) <sup>9</sup> RPA5 Round pole mounting (#5 drilling, 3" min. RND pole) <sup>9</sup> SPA8N Square narrow pole mounting (#8 drilling, 3" min. SQ pole) WBA Wall bracket <sup>10</sup> MA Mast arm adapter (mounts on 2 3/8" OD horizontal tenon)
DMG	--					DDBXD	
<b>Control options</b>	<b>Other options</b>			<b>Finish (required)</b>			
<b>Shipped installed</b> NLTAIR2 PIRHN nLight AIR gen 2 enabled with bi-level motion / ambient sensor, 8-40' mounting height, ambient sensor enabled at 2fc. <sup>11, 12, 18, 19</sup> PIR High/low, motion/ambient sensor, 8-40' mounting height, ambient sensor enabled at 2fc. <sup>13, 18, 19</sup> PER NEMA twist-lock receptacle only (controls ordered separate) <sup>14</sup> PERS Five-pin receptacle only (controls ordered separate) <sup>14, 19</sup>	PER7 Seven-pin receptacle only (controls ordered separate) <sup>14, 19</sup> FAO Field adjustable output <sup>15, 19</sup> BL30 Bi-level switched dimming, 30% <sup>16, 19</sup> BL50 Bi-level switched dimming, 50% <sup>16, 19</sup> DMG 0-10v dimming wires pulled outside fixture (for use with an external control, ordered separately) <sup>17</sup>	<b>Shipped installed</b> HS Houseside shield (black finish standard) <sup>20</sup> L90 Left rotated optics <sup>1</sup> R90 Right rotated optics <sup>1</sup> CCE Coastal Construction <sup>21</sup> HA 50°C ambient operation <sup>22</sup> BAA Buy America(n) Act Compliant SF Single fuse (120, 277, 347V) <sup>24</sup> DF Double fuse (208, 240, 480V) <sup>24</sup> <b>Shipped separately</b> EGSR External Glare Shield (reversible, field install required, matches housing finish) BSDB Bird Spikes (field install required)		DDBXD Dark Bronze DBLXD Black DNAXD Natural Aluminum DWHXD White DDBTXD Textured dark bronze DBLBXD Textured black DNATXD Textured natural aluminum DWHGXD Textured white			



## Ordering Information

### Accessories


Ordered and shipped separately.

DLL127F 1.5 JU	Photocell - SSL twist-lock (120-277V) <sup>23</sup>
DLL347F 1.5 CUL JU	Photocell - SSL twist-lock (347V) <sup>23</sup>
DLL480F 1.5 CUL JU	Photocell - SSL twist-lock (480V) <sup>23</sup>
DSHORT SBK	Shorting cap <sup>23</sup>
DSX0HS P#	House-side shield (enter package number P1-7, P10-13 in place of #)
DSXRPA (FINISH)	Round pole adapter (#8 drilling, specify finish)
DSXRPA5 (FINISH)	Round pole adapter #5 drilling (specify finish)
DSXSPA5 (FINISH)	Square pole adapter #5 drilling (specify finish)
DSX0EGSR (FINISH)	External glare shield (specify finish)
DSX0SDB (FINISH)	Bird spike deterrent bracket (specify finish)


### NOTES

- 1 Rotated optics available with packages P10, P11, P12 and P13. Must be combined with option L90 or R90.
- 2 30K, 40K, and 50K available in 70CRI and 80CRI. 27K and 35K only available with 80CRI. Contact Technical Support for other possible combinations.
- 3 T3LG, T4LG, BLC3, BLC4, LCCO, RCCO not available with option HS.
- 4 MVOLT driver operates on any line voltage from 120-277V (50/60 Hz).
- 5 HVOLT driver operates on any line voltage from 347-480V (50/60 Hz).
- 6 HVOLT not available with package P1, P2 and P10 when combined with option NLTAIR2 PIRHN or option PIR.
- 7 XVOLT operates with any voltage between 277V and 480V (50/60 Hz).
- 8 XVOLT not available in packages P1, P2 or P10. XVOLT not available with fusing (SF or DF).
- 9 SPAS and RPA5 for use with #5 drilling only (Not for use with #8 drilling).
- 10 WBA cannot be combined with Type 5 distributions plus photocell (PER).
- 11 NLTAIR2 and PIRHN must be ordered together. For more information on nLight Air 2.
- 12 NLTAIR2 PIRHN not available with other controls including PIR, PER, PER5, PER7, FAO, BL30, BL50 and DMG. NLTAIR2 PIRHN not available with P1, P2 and P10 using HVOLT. NLTAIR2 PIRHN not available with P1, P2 and P10 using XVOLT. NLTAIR2 PIRHN not available with P1 using MVOLT.
- 13 PIR not available with NLTAIR2, PER, PER5, PER7, FAO BL30, BL50 and DMG. PIR not available with P1, P2 and P10 using HVOLT. PIR not available with P1, P2 and P10 using XVOLT. PIR not available with P1 using MVOLT.
- 14 PER/PER5/PER7 not available with NLTAIR2, PIR, BL30, BL50. Photocell ordered and shipped as a separate line item from Acuity Brands Controls. See accessories. Shorting Cap included.
- 15 FAO not available with other dimming control options NLTAIR2 PIRHN, PIR, PER5, PER7, BL30, BL50, or DMG.
- 16 BL30 and BL50 are not available with NLTAIR2 PIRHN, PIR, PER, PER5, PER7, FAO and DMG. BL30 or BL50 must specify 120, 277 or 347V. Consult tech support for 208, 240 or 480V.
- 17 DMG not available with NLTAIR2 PIRHN, PIR, PER, PER5, PER7, BL30, BL50 and FAO.
- 18 Reference Motion Sensor Default Settings table on page 4 to see functionality.
- 19 Reference Controls Options table on page 4.
- 20 Option HS not available with T3LG, T4LG, BLC3, BLC4, LCCO and RCCO distribution. Also available as a separate accessory; see Accessories information.
- 21 CCE option not available with option B5 and EGSR. Contact Technical Support for availability.
- 22 Option HA not available with performance packages P6, P7, P12 and P13.
- 23 Requires luminaire to be specified with PER, PER5 or PER7 option. See Controls Table on page 4.
- 24 Single fuse (SF) requires 120V, 277V, or 347V. Double fuse (DF) requires 208V, 240V or 480V. XVOLT not available with fusing (SF or DF).

## Shield Accessories

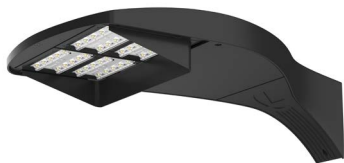

External Glare Shield (EGSR)

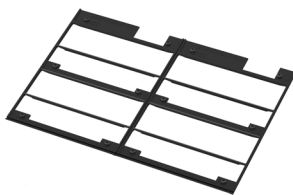


House Side Shield (HS)


## Drilling

### HANDHOLE ORIENTATION

(from top of pole)

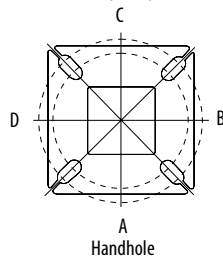

A Handhole

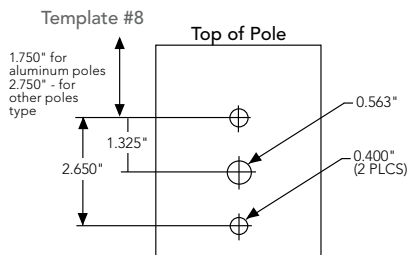

### Tenon Mounting Slipfitter

Tenon O.D.	Mounting	Single Unit	2 @ 180	2 @ 90	3 @ 90	3 @ 120	4 @ 90
2-3/8"	RPA	AS3-5 190	AS3-5 280	AS3-5 290	AS3-5 390	AS3-5 320	AS3-5 490
2-7/8"	RPA	AST25-190	AST25-280	AST25-290	AST25-390	AST25-320	AST25-490
4"	RPA	AST35-190	AST35-280	AST35-290	AST35-390	AST35-320	AST35-490

Mounting Option	Drilling Template	Single	2 @ 180	2 @ 90	3 @ 90	3 @ 120	4 @ 90
Head Location		Side B	Side B & D	Side B & C	Side B, C & D	Round Pole Only	Side A, B, C & D
Drill Nomenclature	#8	DM19AS	DM28AS	DM29AS	DM39AS	DM32AS	DM49AS
Minimum Acceptable Outside Pole Dimension							
SPA	#8	3.5"	3.5"	3.5"	3.5"		3.5"
RPA	#8	3"	3"	3"	3"	3"	3"
SPAS	#5	3"	3"	3"	3"		3"
RPA5	#5	3"	3"	3"	3"	3"	3"
SPA8N	#8	3"	3"	3"	3"		3"

### DSX0 Area Luminaire - EPA

\*Includes luminaire and integral mounting arm. Other tenons, arms, brackets or other accessories are not included in this EPA data.

Fixture Quantity & Mounting Configuration	Single DM19	2 @ 180 DM28	2 @ 90 DM29	3 @ 90 DM39	3 @ 120 DM32	4 @ 90 DM49
Mounting Type						
DSX0 with SPA	0.44	0.88	0.96	1.18	---	1.16
DSX0 with SPAS, SPA8N	0.51	1.02	1.06	1.26	---	1.29
DSX0 with RPA, RPA5	0.51	1.02	1.06	1.26	1.24	1.29
DSX0 with MA	0.64	1.28	1.24	1.67	1.70	1.93



Isofootcandle plots for the DSX0 LED P7 40K 70CRI. Distances are in units of mounting height (20').



## Performance Data

### Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient	Lumen Multiplier	
0°C	32°F	1.04
5°C	41°F	1.04
10°C	50°F	1.03
15°C	59°F	1.02
20°C	68°F	1.01
<b>25°C</b>	<b>77°C</b>	<b>1.00</b>
30°C	86°F	0.99
35°C	95°F	0.98
40°C	104°F	0.97

### Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the platforms noted in a **25°C ambient**, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	Lumen Maintenance Factor
0	1.00
25,000	0.94
50,000	0.89
100,000	0.80

### FAO Dimming Settings

FAO Position	% Wattage	% Lumen Output
8	100%	100%
7	93%	95%
6	80%	85%
5	66%	73%
4	54%	61%
3	41%	49%
2	29%	36%
1	15%	20%

\*Note: Calculated values are based on original performance package data. When calculating new values for given FAO position, use published values for each package based on input watts and lumens by optic type.

### Electrical Load

	Performance Package	LED Count	Drive Current (mA)	Wattage	Current (A)					
					120V	208V	240V	277V	347V	480V
Forward Optics (Non-Rotated)	P1	20	530	34	0.28	0.16	0.14	0.12	0.10	0.07
	P2	20	700	45	0.38	0.22	0.19	0.16	0.13	0.09
	P3	20	1050	69	0.57	0.33	0.29	0.25	0.20	0.14
	P4	20	1400	94	0.78	0.45	0.39	0.34	0.27	0.19
	P5	40	700	89	0.75	0.43	0.38	0.33	0.26	0.19
	P6	40	1050	136	1.14	0.66	0.57	0.49	0.39	0.29
	P7	40	1300	170	1.42	0.82	0.71	0.62	0.49	0.36
Rotated Optics (Requires L90 or R90)	P10	30	530	51	0.42	0.24	0.21	0.18	0.15	0.11
	P11	30	700	67	0.57	0.33	0.28	0.25	0.20	0.14
	P12	30	1050	103	0.86	0.50	0.43	0.37	0.30	0.22
	P13	30	1300	129	1.07	0.62	0.54	0.46	0.37	0.27

### LED Color Temperature / Color Rendering Multipliers

	70 CRI		80CRI		90CRI	
	Lumen Multiplier	Availability	Lumen Multiplier	Availability	Lumen Multiplier	Availability
5000K	102%	Standard	92%	Extended lead-time	71%	(see note)
4000K	100%	Standard	92%	Extended lead-time	67%	(see note)
3500K	100%	(see note)	90%	Extended lead-time	63%	(see note)
3000K	96%	Standard	87%	Extended lead-time	61%	(see note)
2700K	94%	(see note)	85%	Extended lead-time	57%	(see note)

Note: Some LED types are available as per special request. Contact Technical Support for more information.

### Motion Sensor Default Settings

Option	Unoccupied Dimmed Level	High Level (when occupied)	Photocell Operation	Dwell Time	Ramp-up Time	Dimming Fade Rate
PIR	30%	100%	Enabled @ 2FC	7.5 min	3 sec	5 min
NLTAIR2 PIRHN	30%	100%	Enabled @ 2FC	7.5 min	3 sec	5 min

### Controls Options

Nomenclature	Description	Functionality	Primary control device	Notes
FAO	Field adjustable output device installed inside the luminaire; wired to the driver dimming leads.	Allows the luminaire to be manually dimmed, effectively trimming the light output.	FAO device	Cannot be used with other controls options that need the 0-10V leads
DS (not available on DSX0)	Drivers wired independently for 50/50 luminaire operation	The luminaire is wired to two separate circuits, allowing for 50/50 operation.	Independently wired drivers	Requires two separately switched circuits. Consider nLight AIR as a more cost effective alternative.
PERS or PER7	Twist-lock photocell receptacle	Compatible with standard twist-lock photocells for dusk to dawn operation, or advanced control nodes that provide 0-10V dimming signals.	Twist-lock photocells such as DLL Elite or advanced control nodes such as ROAM.	Pins 4 & 5 to dimming leads on driver, Pins 6 & 7 are capped inside luminaire. Cannot be used with other controls options that need the 0-10V leads.
PIR	Motion sensor with integral photocell. Sensor suitable for 8' to 40' mounting height.	Luminaires dim when no occupancy is detected.	Acuity Controls rSBG	Cannot be used with other controls options that need the 0-10V leads.
NLTAIR2 PIRHN	nLight AIR enabled luminaire for motion sensing, photocell and wireless communication.	Motion and ambient light sensing with group response. Scheduled dimming with motion sensor over-ride when wirelessly connected to the nLight Eclipse.	nLight Air rSBG	nLight AIR sensors can be programmed and commissioned from the ground using the CIAIRity Pro app. Cannot be used with other controls options that need the 0-10V leads.
BL30 or BL50	Integrated bi-level device that allows a second control circuit to switch all light engines to either 30% or 50% light output	BLC device provides input to 0-10V dimming leads on all drivers providing either 100% or dimmed (30% or 50%) control by a secondary circuit	BLC UVOLT1	BLC device is powered off the 0-10V dimming leads, thus can be used with any input voltage from 120 to 480V

# Performance Data

## Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.

Forward Optics																							
Performance Package	System Watts	LED Count	Drive Current (mA)	Distribution Type	30K					40K					50K								
					(3000K, 70 CRI)					(4000K, 70 CRI)					(5000K, 70 CRI)								
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW				
P1	33W	20	530	T1S	4,906	1	0	1	148	5,113	1	0	1	154	5,213	1	0	1	157				
				T2M	4,545	1	0	2	137	4,736	1	0	2	143	4,829	1	0	2	145				
				T3M	4,597	1	0	2	138	4,791	1	0	2	144	4,885	1	0	2	147				
				T3LG	4,107	1	0	1	124	4,280	1	0	1	129	4,363	1	0	1	131				
				T4M	4,666	1	0	2	141	4,863	1	0	2	146	4,957	1	0	2	149				
				T4LG	4,244	1	0	1	128	4,423	1	0	1	133	4,509	1	0	1	136				
				TFTM	4,698	1	0	2	141	4,896	1	0	2	147	4,992	1	0	2	150				
				T5M	4,801	3	0	1	145	5,003	3	0	1	151	5,101	3	0	1	154				
				T5W	4,878	3	0	1	147	5,084	3	0	2	153	5,183	3	0	2	156				
				T5LG	4,814	2	0	1	145	5,018	2	0	1	151	5,115	2	0	1	154				
				BLC3	3,344	0	0	1	101	3,485	0	0	1	105	3,553	0	0	1	107				
				BLC4	3,454	0	0	2	104	3,599	0	0	2	108	3,670	0	0	2	111				
				RCCO	3,374	0	0	1	102	3,517	0	0	1	106	3,585	0	0	1	108				
				LCCO	3,374	0	0	1	102	3,517	0	0	1	106	3,585	0	0	1	108				
				AFR	4,906	1	0	1	148	5,113	1	0	1	154	5,213	1	0	1	157				
				P2	45W	20	700	T1S	6,328	1	0	1	140	6,595	1	0	1	146	6,724	1	0	1	149
								T2M	5,862	1	0	2	130	6,109	1	0	2	135	6,228	1	0	2	138
T3M	5,930	1	0					3	131	6,180	1	0	3	137	6,301	1	0	3	140				
T3LG	5,297	1	0					1	117	5,521	1	0	1	122	5,628	1	0	1	125				
T4M	6,018	1	0					3	133	6,272	1	0	3	139	6,395	1	0	3	142				
T4LG	5,474	1	0					1	121	5,705	1	0	1	126	5,816	1	0	1	129				
TFTM	6,060	1	0					3	134	6,316	1	0	3	140	6,439	1	0	3	143				
T5M	6,192	3	0					1	137	6,453	3	0	2	143	6,579	3	0	2	146				
T5W	6,293	3	0					2	139	6,558	3	0	2	145	6,686	3	0	2	148				
T5LG	6,210	2	0					1	138	6,472	3	0	1	143	6,598	3	0	1	146				
BLC3	4,313	0	0					2	96	4,495	0	0	2	100	4,583	0	0	2	102				
BLC4	4,455	0	0					2	99	4,643	0	0	2	103	4,733	0	0	2	105				
RCCO	4,352	0	0					2	96	4,536	0	0	2	100	4,624	0	0	2	102				
LCCO	4,352	0	0					2	96	4,536	0	0	2	100	4,624	0	0	2	102				
AFR	6,328	1	0					1	140	6,595	1	0	1	146	6,724	1	0	1	149				
P3	69W	20	1050					T1S	9,006	1	0	2	131	9,386	1	0	2	136	9,569	1	0	2	139
								T2M	8,343	2	0	3	121	8,694	2	0	3	126	8,864	2	0	3	129
				T3M	8,439	2	0	3	122	8,795	2	0	3	128	8,967	2	0	3	130				
				T3LG	7,539	1	0	2	109	7,857	1	0	2	114	8,010	1	0	2	116				
				T4M	8,565	2	0	3	124	8,926	2	0	3	129	9,100	2	0	3	132				
				T4LG	7,790	1	0	2	113	8,119	1	0	2	118	8,277	1	0	2	120				
				TFTM	8,624	1	0	3	125	8,988	1	0	3	130	9,163	2	0	3	133				
				T5M	8,812	3	0	2	128	9,184	4	0	2	133	9,363	4	0	2	136				
				T5W	8,955	4	0	2	130	9,333	4	0	2	135	9,515	4	0	2	138				
				T5LG	8,838	3	0	1	128	9,211	3	0	1	134	9,390	3	0	1	136				
				BLC3	6,139	0	0	2	89	6,398	0	0	2	93	6,522	0	0	2	95				
				BLC4	6,340	0	0	3	92	6,607	0	0	3	96	6,736	0	0	3	98				
				RCCO	6,194	1	0	2	90	6,455	1	0	2	94	6,581	1	0	2	95				
				LCCO	6,194	1	0	2	90	6,455	1	0	2	94	6,581	1	0	2	95				
				AFR	9,006	1	0	2	131	9,386	1	0	2	136	9,569	1	0	2	139				
				P4	93W	20	1400	T1S	11,396	1	0	2	122	11,877	1	0	2	128	12,109	2	0	2	130
								T2M	10,557	2	0	3	113	11,003	2	0	3	118	11,217	2	0	3	121
T3M	10,680	2	0					3	115	11,130	2	0	3	120	11,347	2	0	3	122				
T3LG	9,540	1	0					2	103	9,942	1	0	2	107	10,136	1	0	2	109				
T4M	10,839	2	0					3	117	11,296	2	0	3	121	11,516	2	0	4	124				
T4LG	9,858	1	0					2	106	10,274	1	0	2	110	10,474	1	0	2	113				
TFTM	10,914	2	0					3	117	11,374	2	0	3	122	11,596	2	0	3	125				
T5M	11,152	4	0					2	120	11,622	4	0	2	125	11,849	4	0	2	127				
T5W	11,332	4	0					3	122	11,811	4	0	3	127	12,041	4	0	3	129				
T5LG	11,184	3	0					1	120	11,656	3	0	2	125	11,883	3	0	2	128				
BLC3	7,768	0	0					2	83	8,096	0	0	2	87	8,254	0	0	2	89				
BLC4	8,023	0	0					3	86	8,362	0	0	3	90	8,524	0	0	3	92				
RCCO	7,838	1	0					2	84	8,169	1	0	2	88	8,328	1	0	2	90				
LCCO	7,838	1	0					2	84	8,169	1	0	2	88	8,328	1	0	2	90				
AFR	11,396	1	0					2	122	11,877	1	0	2	128	12,109	2	0	2	130				

# Performance Data

## Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.

Forward Optics																							
Performance Package	System Watts	LED Count	Drive Current (mA)	Distribution Type	30K					40K					50K								
					(3000K, 70 CRI)					(4000K, 70 CRI)					(5000K, 70 CRI)								
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW				
P5	90W	40	700	T1S	12,380	2	0	2	137	12,902	2	0	2	143	13,154	2	0	2	146				
				T2M	11,468	2	0	3	127	11,952	2	0	3	133	12,185	2	0	3	135				
				T3M	11,601	2	0	3	129	12,091	2	0	3	134	12,326	2	0	4	137				
				T3LG	10,363	2	0	2	115	10,800	2	0	2	120	11,011	2	0	2	122				
				T4M	11,774	2	0	4	131	12,271	2	0	4	136	12,510	2	0	4	139				
				T4LG	10,709	1	0	2	119	11,160	2	0	2	124	11,378	2	0	2	126				
				TFTM	11,856	2	0	3	132	12,356	2	0	4	137	12,596	2	0	4	140				
				T5M	12,114	4	0	2	134	12,625	4	0	2	140	12,871	4	0	2	143				
				T5W	12,310	4	0	3	137	12,830	4	0	3	142	13,080	4	0	3	145				
				T5LG	12,149	3	0	2	135	12,662	3	0	2	141	12,908	3	0	2	143				
				BLC3	8,438	0	0	2	94	8,794	0	0	2	98	8,966	0	0	2	99				
				BLC4	8,715	0	0	3	97	9,083	0	0	3	101	9,260	0	0	3	103				
				RCCO	8,515	1	0	2	94	8,874	1	0	2	98	9,047	1	0	2	100				
				LCCO	8,515	1	0	2	94	8,874	1	0	2	98	9,047	1	0	2	100				
				AFR	12,380	2	0	2	137	12,902	2	0	2	143	13,154	2	0	2	146				
				P6	137W	40	1050	T1S	17,545	2	0	3	128	18,285	2	0	3	133	18,642	2	0	3	136
								T2M	16,253	3	0	4	119	16,939	3	0	4	124	17,269	3	0	4	126
T3M	16,442	2	0					4	120	17,135	3	0	4	125	17,469	3	0	4	128				
T3LG	14,687	2	0					2	107	15,306	2	0	2	112	15,605	2	0	2	114				
T4M	16,687	2	0					4	122	17,391	3	0	5	127	17,730	3	0	5	129				
T4LG	15,177	2	0					2	111	15,817	2	0	2	115	16,125	2	0	2	118				
TFTM	16,802	2	0					4	123	17,511	2	0	4	128	17,852	2	0	5	130				
T5M	17,168	4	0					2	125	17,893	5	0	3	131	18,241	5	0	3	133				
T5W	17,447	5	0					3	127	18,183	5	0	3	133	18,537	5	0	3	135				
T5LG	17,218	4	0					2	126	17,944	4	0	2	131	18,294	4	0	2	134				
BLC3	11,959	0	0					3	87	12,464	0	0	3	91	12,707	0	0	3	93				
BLC4	12,352	0	0					4	90	12,873	0	0	4	94	13,124	0	0	4	96				
RCCO	12,067	1	0					3	88	12,576	1	0	3	92	12,821	1	0	3	94				
LCCO	12,067	1	0					3	88	12,576	1	0	3	92	12,821	1	0	3	94				
AFR	17,545	2	0					3	128	18,285	2	0	3	133	18,642	2	0	3	136				
P7	171W	40	1300					T1S	20,806	2	0	3	122	21,683	2	0	3	127	22,106	2	0	3	129
								T2M	19,273	3	0	4	113	20,086	3	0	4	118	20,478	3	0	4	120
				T3M	19,497	3	0	5	114	20,319	3	0	5	119	20,715	3	0	5	121				
				T3LG	17,416	2	0	2	102	18,151	2	0	2	106	18,504	2	0	2	108				
				T4M	19,787	3	0	5	116	20,622	3	0	5	121	21,024	3	0	5	123				
				T4LG	17,997	2	0	2	105	18,756	2	0	2	110	19,121	2	0	2	112				
				TFTM	19,924	3	0	5	117	20,765	3	0	5	122	21,170	3	0	5	124				
				T5M	20,359	5	0	3	119	21,217	5	0	3	124	21,631	5	0	3	127				
				T5W	20,689	5	0	3	121	21,561	5	0	3	126	21,982	5	0	3	129				
				T5LG	20,418	4	0	2	120	21,279	4	0	2	125	21,694	4	0	2	127				
				BLC3	14,182	0	0	3	83	14,780	0	0	3	87	15,068	0	0	3	88				
				BLC4	14,647	0	0	4	86	15,265	0	0	4	89	15,562	0	0	4	91				
				RCCO	14,309	1	0	3	84	14,913	1	0	3	87	15,204	1	0	3	89				
				LCCO	14,309	1	0	3	84	14,913	1	0	3	87	15,204	1	0	3	89				
				AFR	20,806	2	0	3	122	21,683	2	0	3	127	22,106	2	0	3	129				


# Performance Data

## Lumen Output



Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.

Rotated Optics																							
Performance Package	System Watts	LED Count	Drive Current (mA)	Distribution Type	30K					40K					50K								
					(3000K, 70 CRI)					(4000K, 70 CRI)					(5000K, 70 CRI)								
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW				
P10	51W	30	530	T1S	7,399	3	0	3	145	7,711	3	0	3	151	7,862	3	0	3	154				
				T2M	6,854	3	0	3	135	7,144	3	0	3	140	7,283	3	0	3	143				
				T3M	6,933	3	0	3	136	7,225	3	0	3	142	7,366	3	0	3	145				
				T3LG	6,194	2	0	2	122	6,455	2	0	2	127	6,581	2	0	2	129				
				T4M	7,036	3	0	3	138	7,333	3	0	3	144	7,476	3	0	3	147				
				T4LG	6,399	2	0	2	126	6,669	2	0	2	131	6,799	2	0	2	134				
				TFTM	7,086	3	0	3	139	7,385	3	0	3	145	7,529	3	0	3	148				
				T5M	7,239	3	0	2	142	7,545	3	0	2	148	7,692	3	0	2	151				
				T5W	7,357	3	0	2	145	7,667	3	0	2	151	7,816	4	0	2	154				
				T5LG	7,260	3	0	1	143	7,567	3	0	1	149	7,714	3	0	1	152				
				BLC3	5,043	3	0	3	99	5,256	3	0	3	103	5,358	3	0	3	105				
				BLC4	5,208	3	0	3	102	5,428	3	0	3	107	5,534	3	0	3	109				
				RCCO	5,089	0	0	2	100	5,303	0	0	2	104	5,407	0	0	2	106				
				LCCO	5,089	0	0	2	100	5,303	0	0	2	104	5,407	0	0	2	106				
				AFR	7,399	3	0	3	145	7,711	3	0	3	151	7,862	3	0	3	154				
				P11	68W	30	700	T1S	9,358	3	0	3	138	9,753	3	0	3	143	9,943	3	0	3	146
								T2M	8,669	3	0	3	127	9,034	3	0	3	133	9,211	3	0	3	135
T3M	8,768	3	0					3	129	9,138	3	0	3	134	9,316	3	0	3	137				
T3LG	7,833	3	0					3	115	8,164	3	0	3	120	8,323	3	0	3	122				
T4M	8,899	3	0					3	131	9,274	3	0	3	136	9,455	3	0	3	139				
T4LG	8,093	3	0					3	119	8,435	3	0	3	124	8,599	3	0	3	126				
TFTM	8,962	3	0					3	132	9,340	3	0	3	137	9,522	3	0	3	140				
T5M	9,156	4	0					2	135	9,542	4	0	2	140	9,728	4	0	2	143				
T5W	9,304	4	0					2	137	9,696	4	0	2	143	9,885	4	0	2	145				
T5LG	9,182	3	0					1	135	9,569	3	0	1	141	9,756	3	0	1	143				
BLC3	6,378	3	0					3	94	6,647	3	0	3	98	6,777	3	0	3	100				
BLC4	6,587	3	0					3	97	6,865	3	0	3	101	6,999	3	0	3	103				
RCCO	6,436	0	0					2	95	6,707	0	0	2	99	6,838	0	0	2	101				
LCCO	6,436	0	0					2	95	6,707	0	0	2	99	6,838	0	0	2	101				
AFR	9,358	3	0					3	138	9,753	3	0	3	143	9,943	3	0	3	146				
P12	103W	30	1050					T1S	13,247	3	0	3	128	13,806	3	0	3	134	14,075	3	0	3	136
								T2M	12,271	4	0	4	119	12,789	4	0	4	124	13,038	4	0	4	126
				T3M	12,412	4	0	4	120	12,935	4	0	4	125	13,187	4	0	4	128				
				T3LG	11,089	3	0	3	107	11,556	3	0	3	112	11,782	3	0	3	114				
				T4M	12,597	4	0	4	122	13,128	4	0	4	127	13,384	4	0	4	129				
				T4LG	11,457	3	0	3	111	11,940	3	0	3	116	12,173	3	0	3	118				
				TFTM	12,686	4	0	4	123	13,221	4	0	4	128	13,479	4	0	4	130				
				T5M	12,960	4	0	2	125	13,507	4	0	2	131	13,770	4	0	2	133				
				T5W	13,170	4	0	3	127	13,726	4	0	3	133	13,994	4	0	3	135				
				T5LG	12,998	3	0	2	126	13,546	3	0	2	131	13,810	3	0	2	134				
				BLC3	9,029	3	0	3	87	9,409	3	0	3	91	9,593	3	0	3	93				
				BLC4	9,324	4	0	4	90	9,718	4	0	4	94	9,907	4	0	4	96				
				RCCO	9,110	1	0	2	88	9,495	1	0	2	92	9,680	1	0	2	94				
				LCCO	9,110	1	0	2	88	9,494	1	0	2	92	9,680	1	0	2	94				
				AFR	13,247	3	0	3	128	13,806	3	0	3	134	14,075	3	0	3	136				
				P13	129W	30	1300	T1S	15,704	3	0	3	122	16,366	3	0	3	127	16,685	4	0	4	130
								T2M	14,547	4	0	4	113	15,161	4	0	4	118	15,457	4	0	4	120
T3M	14,714	4	0					4	114	15,335	4	0	4	119	15,634	4	0	4	121				
T3LG	13,145	3	0					3	102	13,700	3	0	3	106	13,967	3	0	3	108				
T4M	14,933	4	0					4	116	15,563	4	0	4	121	15,867	4	0	4	123				
T4LG	13,582	3	0					3	105	14,155	3	0	3	110	14,431	3	0	3	112				
TFTM	15,039	4	0					4	117	15,673	4	0	4	122	15,979	4	0	4	124				
T5M	15,364	4	0					2	119	16,013	4	0	2	124	16,325	4	0	2	127				
T5W	15,613	5	0					3	121	16,272	5	0	3	126	16,589	5	0	3	129				
T5LG	15,409	3	0					2	120	16,059	3	0	2	125	16,372	4	0	2	127				
BLC3	10,703	4	0					4	83	11,155	4	0	4	87	11,372	4	0	4	88				
BLC4	11,054	4	0					4	86	11,520	4	0	4	89	11,745	4	0	4	91				
RCCO	10,800	1	0					2	84	11,256	1	0	2	87	11,475	1	0	3	89				
LCCO	10,800	1	0					2	84	11,255	1	0	2	87	11,475	1	0	3	89				
AFR	15,704	3	0					3	122	16,366	3	0	3	127	16,685	4	0	4	130				



# Dimensions

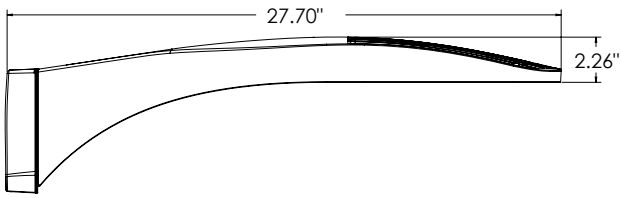


**DSX0 with RPA, RPA5, SPA5, SPA8N mount**  
**Weight: 25 lbs**

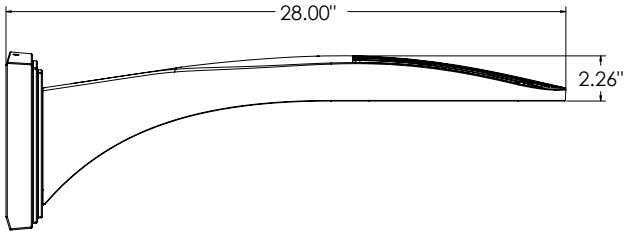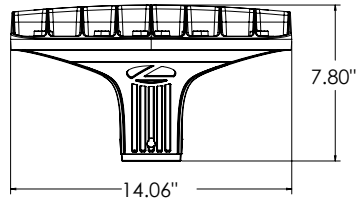


**DSX0 with WBA mount**  
**Weight: 27 lb**

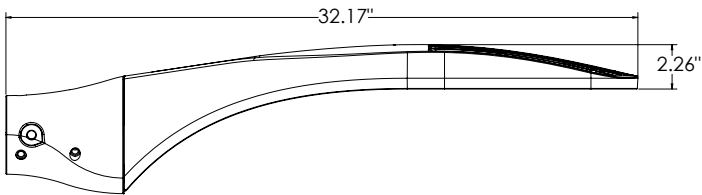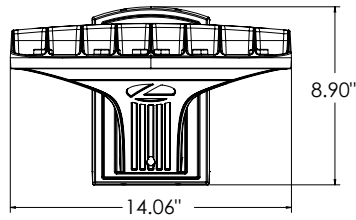


**DSX0 with MA mount**  
**Weight: 28 lbs**

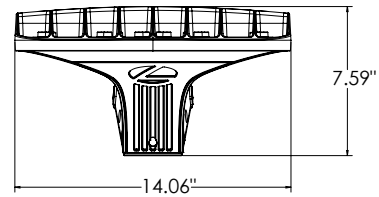


**SPA (STANDARD ARM)**

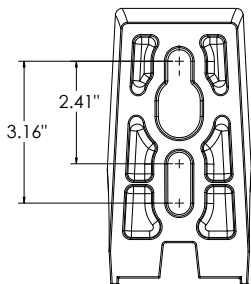


**RPA**

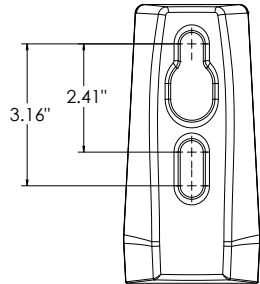


**SPA5**

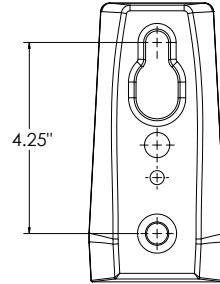

**RPA5**



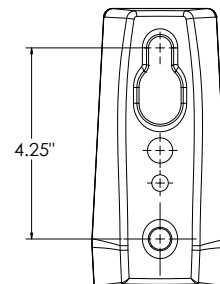


**SPA8N**

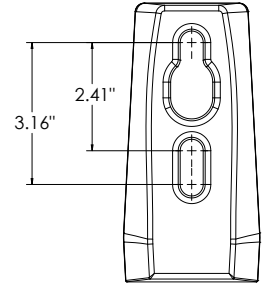

## nLight Sensor Coverage Pattern

### NLTAIR2 PIRHN

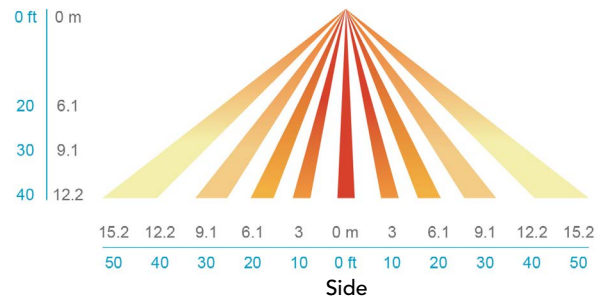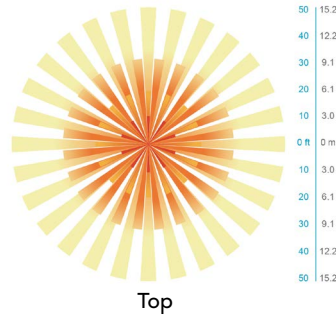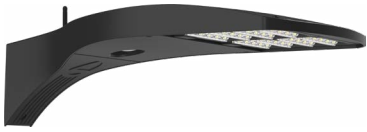

## FEATURES & SPECIFICATIONS

### INTENDED USE

The sleek design of the D-Series Size 0 reflects the embedded high performance LED technology. It is ideal for many commercial and municipal applications, such as parking lots, plazas, campuses, and pedestrian areas.

### CONSTRUCTION

Single-piece die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. Modular design allows for ease of maintenance and future light engine upgrades. The LED driver is mounted in direct contact with the casting to promote low operating temperature and long life. Housing driver compartment is completely sealed against moisture and environmental contaminants (IP66). Vibration rated per ANSI C136.31 for 3G. Low EPA (0.44 ft<sup>2</sup>) for optimized pole wind loading.

### FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Available in both textured and non-textured finishes.

### COASTAL CONSTRUCTION (CCE)

Optional corrosion resistant construction is engineered with added corrosion protection in materials and/or pre-treatment of base material under super durable paint. Provides additional corrosion protection for applications near coastal areas. Finish is salt spray tested to over 5,000 hours per ASTM B117 with scribe rating of 10. Additional lead-times may apply.

### OPTICS

Precision-molded proprietary silicone lenses are engineered for superior area lighting distribution, uniformity, and pole spacing. Light engines are available in 3000 K, 4000 K or 5000 K (70 CRI) configurations. 80CRI configurations are also available. The D-Series Size 0 has zero uplight and qualifies as a Nighttime Friendly™ product, meaning it is consistent with the LEED® and Green Globes™ criteria for eliminating wasteful uplight.

### ELECTRICAL

Light engine(s) configurations consist of high-efficacy LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life (up to L80/100,000 hours at 25°C). Class 1 electronic drivers are designed to have a power factor >90%, THD <20%, and an expected life of 100,000 hours with <1% failure rate. Easily serviceable 10kV surge protection device meets a minimum Category C Low operation (per ANSI/IEEE C62.41.2).

### STANDARD CONTROLS

The DSX0 LED area luminaire has a number of control options. DSX Size 0, comes standard with 0-10V dimming driver. Dusk to dawn controls can be utilized via optional NEMA twist-lock photocell receptacles. PIR integrated motion sensor with on-board photocell feature field-adjustable programming and are suitable for mounting heights up to 40 feet. Control option BL features a bi-level device that allows a second control circuit to switch all light engines to either 30% or 50% light output.

### nLIGHT AIR CONTROLS

The DSX0 LED area luminaire is also available with nLight® AIR for the ultimate in wireless control. This powerful controls platform provides out-of-the-box basic motion sensing and photocontrol functionality and is suitable for mounting heights up to 40 feet. Once commissioned using a smartphone and the easy-to-use CLAIRITY app, nLight AIR equipped luminaires can be grouped, resulting in motion sensor and photocell group response without the need for additional equipment. Scheduled dimming with motion sensor over-ride can be achieved when used with the nLight Eclipse. Additional information about nLight Air can be found [here](#).

### INSTALLATION

Integral mounting arm allows for fast mounting using Lithonia standard #8 drilling and accommodates pole drilling's from 2.41 to 3.12" on center. The standard "SPA" option for square poles and the "RPA" option for round poles use the #8 drilling. For #5 pole drillings, use SPA5 or RPA5. Additional mountings are available including a wall bracket (WBA) and mast arm (MA) option that allows luminaire attachment to a 2 3/8" horizontal mast arm.

### LISTINGS

UL listed to meet U.S. and Canadian standards. UL Listed for wet locations. Light engines are IP66 rated; luminaire is IP66 rated. Rated for -40°C minimum ambient.

DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product. Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org/QPL](http://www.designlights.org/QPL) to confirm which versions are qualified.

International Dark-Sky Association (IDA) Fixture Seal of Approval (FSA) is available for all products on this page utilizing 3000K color temperature only.

### GOVERNMENT PROCUREMENT

BAA – Buy America(n) Act: Product with the BAA option qualifies as a domestic end product under the Buy American Act as implemented in the FAR and DFARS. Product with the BAA option also qualifies as manufactured in the United States under DOT Buy America regulations.

BABA – Build America Buy America: Product with the BAA option also qualifies as produced in the United States under the definitions of the Build America, Buy America Act.

Please refer to [www.acuitybrands.com/buy-american](http://www.acuitybrands.com/buy-american) for additional information.

### WARRANTY

5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: [www.acuitybrands.com/support/warranty/terms-and-conditions](http://www.acuitybrands.com/support/warranty/terms-and-conditions)

**Note:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.



# D-Series Size 0 LED Area Luminaire



Catalog  
Number

Notes  
**25' Total Height**

Type  
**OP**

Hit the Tab key or mouse over the page to see all interactive elements.

d<sup>s</sup>series

## Specifications

**EPA:** 0.44 ft<sup>2</sup>  
(0.04 m<sup>2</sup>)


**Length:** 26.18"  
(66.5 cm)

**Width:** 14.06"  
(35.7 cm)

**Height H1:** 2.26"  
(5.7 cm)

**Height H2:** 7.46"  
(18.9 cm)

**Weight:** 23 lbs  
(10.4 kg)

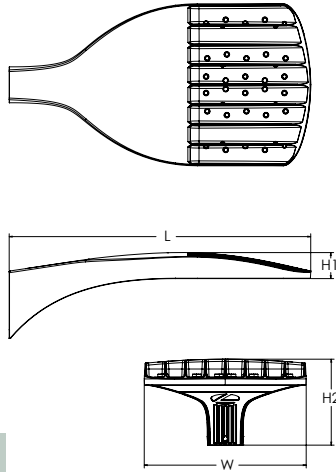

**ds** Design Select options indicated by this color background.

## Introduction

The modern styling of the D-Series features a highly refined aesthetic that blends seamlessly with its environment. The D-Series offers the benefits of the latest in LED technology into a high performance, high efficacy, long-life luminaire.

The photometric performance results in sites with excellent uniformity, greater pole spacing and lower power density. D-Series outstanding photometry aids in reducing the number of poles required in area lighting applications, with typical energy savings of 70% and expected service life of over 100,000 hours.



Items marked by a shaded background qualify for the Design Select program and ship in 15 days or less. To learn more about Design Select, visit [www.acuitybrands.com/designselect](http://www.acuitybrands.com/designselect).  
\*See ordering tree for details

## Ordering Information

**EXAMPLE: DSX0 LED P6 40K 70CRI T3M MVOLT SPA NLTAIR2 PIRHN DDBXD**

DSX0 LED	P2	40K	80CRI	T3M	MVOLT	RPA			
Series	LEDs	Color temperature <sup>2</sup>	Color Rendering Index <sup>2</sup>	Distribution	Voltage	Mounting			
DSX0 LED	<b>Forward optics</b>		(this section 70CRI only)	AFR Automotive front row T1S Type I short T2M Type II medium T3M Type III medium T3LG Type III low glare <sup>3</sup> T4M Type IV medium T4LG Type IV low glare <sup>3</sup> TFTM Forward throw medium	T5M Type V medium T5LG Type V low glare T5W Type V wide BLC3 Type III backlight control <sup>3</sup> BLC4 Type IV backlight control <sup>3</sup> LCCO Left corner cutoff <sup>3</sup> RCCO Right corner cutoff <sup>3</sup>	<b>Shipped included</b> SPA Square pole mounting (#8 drilling, 3.5" min. SQ pole) RPA Round pole mounting (#8 drilling, 3" min. RND pole) SPA5 Square pole mounting (#5 drilling, 3" min. SQ pole) <sup>9</sup> RPA5 Round pole mounting (#5 drilling, 3" min. RND pole) <sup>9</sup> SPA8N Square narrow pole mounting (#8 drilling, 3" min. SQ pole) WBA Wall bracket <sup>10</sup> MA Mast arm adapter (mounts on 2 3/8" OD horizontal tenon)			
	P1	P5	30K 3000K				70CRI	MVOLT (120V-277V) <sup>4</sup>	HVOLT (347V-480V) <sup>5,6</sup> XVOLT (277V-480V) <sup>7,8</sup> 120 <sup>16, 24</sup> 208 <sup>16, 24</sup> 240 <sup>16, 24</sup> 277 <sup>16, 24</sup> 347 <sup>16, 24</sup> 480 <sup>16, 24</sup>
	P2	P6	40K 4000K				70CRI	120 <sup>16, 24</sup>	
	P3	P7	50K 5000K				70CRI	208 <sup>16, 24</sup>	
	<b>Rotated optics</b>		(this section 80CRI only, extended lead times apply)				80CRI	240 <sup>16, 24</sup>	
	P10 <sup>1</sup>	P12 <sup>1</sup>	27K 2700K					277 <sup>16, 24</sup>	
	P11 <sup>1</sup>	P13 <sup>1</sup>	30K 3000K					347 <sup>16, 24</sup>	
			35K 3500K					480 <sup>16, 24</sup>	
			40K 4000K						
			50K 5000K						
DMG	--				DDBXD				
<b>Control options</b>				<b>Other options</b>		<b>Finish (required)</b>			
<b>Shipped installed</b>		PER7 Seven-pin receptacle only (controls ordered separate) <sup>14, 19</sup>		<b>Shipped installed</b>		DDBXD Dark Bronze			
NLTAIR2 PIRHN	nLight AIR gen 2 enabled with bi-level motion / ambient sensor, 8-40' mounting height, ambient sensor enabled at 2fc. <sup>11, 12, 18, 19</sup>		FAO Field adjustable output <sup>15, 19</sup>	HS Houseside shield (black finish standard) <sup>20</sup>	DBLXD Black				
PIR	High/low, motion/ambient sensor, 8-40' mounting height, ambient sensor enabled at 2fc. <sup>13, 18, 19</sup>		BL30 Bi-level switched dimming, 30% <sup>16, 19</sup>	L90 Left rotated optics <sup>1</sup>	DNAXD Natural Aluminum				
PER	NEMA twist-lock receptacle only (controls ordered separate) <sup>14</sup>		BL50 Bi-level switched dimming, 50% <sup>16, 19</sup>	R90 Right rotated optics <sup>1</sup>	DWHXD White				
PER5	Five-pin receptacle only (controls ordered separate) <sup>14, 19</sup>		DMG 0-10v dimming wires pulled outside fixture (for use with an external control, ordered separately) <sup>17</sup>	CCE Coastal Construction <sup>21</sup>	DDBTXD Textured dark bronze				
				HA 50°C ambient operation <sup>22</sup>	DBLBXD Textured black				
				BAA Buy America(n) Act Compliant	DNATXD Textured natural aluminum				
				SF Single fuse (120, 277, 347V) <sup>24</sup>	DWHGXD Textured white				
				DF Double fuse (208, 240, 480V) <sup>24</sup>					
				<b>Shipped separately</b>					
				EGSR External Glare Shield (reversible, field install required, matches housing finish)					
				BSDB Bird Spikes (field install required)					



One Lithonia Way • Conyers, Georgia 30012 • Phone: 1-800-705-SERV (7378) • [www.lithonia.com](http://www.lithonia.com)  
© 2011-2024 Acuity Brands Lighting, Inc. All rights reserved.

DSX0-LED  
Rev. 03/26/24  
Page 1 of 9



## Ordering Information

### Accessories


Ordered and shipped separately.

DLL127F 1.5 JU	Photocell - SSL twist-lock (120-277V) <sup>23</sup>
DLL347F 1.5 CUL JU	Photocell - SSL twist-lock (347V) <sup>23</sup>
DLL480F 1.5 CUL JU	Photocell - SSL twist-lock (480V) <sup>23</sup>
DSHORT SBK	Shorting cap <sup>23</sup>
DSX0HS P#	House-side shield (enter package number P1-7, P10-13 in place of #)
DSXRPA (FINISH)	Round pole adapter (#8 drilling, specify finish)
DSXRPA5 (FINISH)	Round pole adapter #5 drilling (specify finish)
DSXSPA5 (FINISH)	Square pole adapter #5 drilling (specify finish)
DSX0EGSR (FINISH)	External glare shield (specify finish)
DSX0SDB (FINISH)	Bird spike deterrent bracket (specify finish)


### NOTES

- 1 Rotated optics available with packages P10, P11, P12 and P13. Must be combined with option L90 or R90.
- 2 30K, 40K, and 50K available in 70CRI and 80CRI. 27K and 35K only available with 80CRI. Contact Technical Support for other possible combinations.
- 3 T3LG, T4LG, BLC3, BLC4, LCCO, RCCO not available with option HS.
- 4 MVOLT driver operates on any line voltage from 120-277V (50/60 Hz).
- 5 HVOLT driver operates on any line voltage from 347-480V (50/60 Hz).
- 6 HVOLT not available with package P1, P2 and P10 when combined with option NLTAIR2 PIRHN or option PIR.
- 7 XVOLT operates with any voltage between 277V and 480V (50/60 Hz).
- 8 XVOLT not available in packages P1, P2 or P10. XVOLT not available with fusing (SF or DF).
- 9 SPAS and RPA5 for use with #5 drilling only (Not for use with #8 drilling).
- 10 WBA cannot be combined with Type 5 distributions plus photocell (PER).
- 11 NLTAIR2 and PIRHN must be ordered together. For more information on nLight Air 2.
- 12 NLTAIR2 PIRHN not available with other controls including PIR, PER, PER5, PER7, FAO, BL30, BL50 and DMG. NLTAIR2 PIRHN not available with P1, P2 and P10 using HVOLT. NLTAIR2 PIRHN not available with P1, P2 and P10 using XVOLT. NLTAIR2 PIRHN not available with P1 using MVOLT.
- 13 PIR not available with NLTAIR2, PER, PER5, PER7, FAO BL30, BL50 and DMG. PIR not available with P1, P2 and P10 using HVOLT. PIR not available with P1, P2 and P10 using XVOLT. PIR not available with P1 using MVOLT.
- 14 PER/PER5/PER7 not available with NLTAIR2, PIR, BL30, BL50. Photocell ordered and shipped as a separate line item from Acuity Brands Controls. See accessories. Shorting Cap included.
- 15 FAO not available with other dimming control options NLTAIR2 PIRHN, PIR, PER5, PER7, BL30, BL50, or DMG.
- 16 BL30 and BL50 are not available with NLTAIR2 PIRHN, PIR, PER, PER5, PER7, FAO and DMG. BL30 or BL50 must specify 120, 277 or 347V. Consult tech support for 208, 240 or 480V.
- 17 DMG not available with NLTAIR2 PIRHN, PIR, PER, PER5, PER7, BL30, BL50 and FAO.
- 18 Reference Motion Sensor Default Settings table on page 4 to see functionality.
- 19 Reference Controls Options table on page 4.
- 20 Option HS not available with T3LG, T4LG, BLC3, BLC4, LCCO and RCCO distribution. Also available as a separate accessory; see Accessories information.
- 21 CCE option not available with option B5 and EGSR. Contact Technical Support for availability.
- 22 Option HA not available with performance packages P6, P7, P12 and P13.
- 23 Requires luminaire to be specified with PER, PER5 or PER7 option. See Controls Table on page 4.
- 24 Single fuse (SF) requires 120V, 277V, or 347V. Double fuse (DF) requires 208V, 240V or 480V. XVOLT not available with fusing (SF or DF).

## Shield Accessories

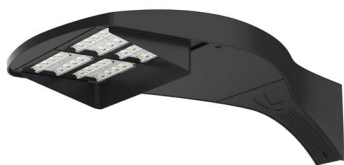

External Glare Shield (EGSR)

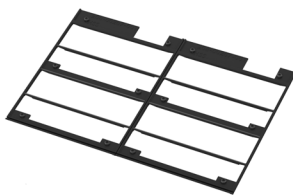


House Side Shield (HS)


## Drilling

### HANDHOLE ORIENTATION

(from top of pole)

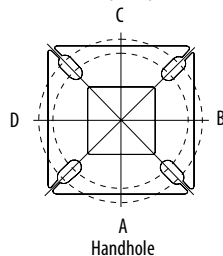

A Handhole

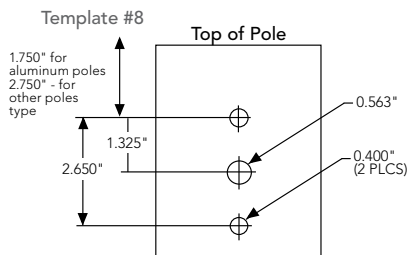

### Tenon Mounting Slipfitter

Tenon O.D.	Mounting	Single Unit	2 @ 180	2 @ 90	3 @ 90	3 @ 120	4 @ 90
2-3/8"	RPA	AS3-5 190	AS3-5 280	AS3-5 290	AS3-5 390	AS3-5 320	AS3-5 490
2-7/8"	RPA	AST25-190	AST25-280	AST25-290	AST25-390	AST25-320	AST25-490
4"	RPA	AST35-190	AST35-280	AST35-290	AST35-390	AST35-320	AST35-490

Mounting Option	Drilling Template	Single	2 @ 180	2 @ 90	3 @ 90	3 @ 120	4 @ 90
Head Location		Side B	Side B & D	Side B & C	Side B, C & D	Round Pole Only	Side A, B, C & D
Drill Nomenclature	#8	DM19AS	DM28AS	DM29AS	DM39AS	DM32AS	DM49AS
Minimum Acceptable Outside Pole Dimension							
SPA	#8	3.5"	3.5"	3.5"	3.5"		3.5"
RPA	#8	3"	3"	3"	3"	3"	3"
SPAS	#5	3"	3"	3"	3"		3"
RPA5	#5	3"	3"	3"	3"	3"	3"
SPA8N	#8	3"	3"	3"	3"		3"

### DSX0 Area Luminaire - EPA

\*Includes luminaire and integral mounting arm. Other tenons, arms, brackets or other accessories are not included in this EPA data.

Fixture Quantity & Mounting Configuration	Single DM19	2 @ 180 DM28	2 @ 90 DM29	3 @ 90 DM39	3 @ 120 DM32	4 @ 90 DM49
Mounting Type						
DSX0 with SPA	0.44	0.88	0.96	1.18	---	1.16
DSX0 with SPAS, SPA8N	0.51	1.02	1.06	1.26	---	1.29
DSX0 with RPA, RPA5	0.51	1.02	1.06	1.26	1.24	1.29
DSX0 with MA	0.64	1.28	1.24	1.67	1.70	1.93



COMMERCIAL OUTDOOR

One Lithonia Way • Conyers, Georgia 30012 • Phone: 1-800-705-SERV (7378) • [www.lithonia.com](http://www.lithonia.com)  
© 2011-2024 Acuity Brands Lighting, Inc. All rights reserved.

DSX0-LED  
Rev. 03/26/24  
Page 2 of 9

Isofootcandle plots for the DSX0 LED P7 40K 70CRI. Distances are in units of mounting height (20').



## Performance Data

### Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient	Lumen Multiplier	
0°C	32°F	1.04
5°C	41°F	1.04
10°C	50°F	1.03
15°C	59°F	1.02
20°C	68°F	1.01
<b>25°C</b>	<b>77°C</b>	<b>1.00</b>
30°C	86°F	0.99
35°C	95°F	0.98
40°C	104°F	0.97

### Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the platforms noted in a **25°C ambient**, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	Lumen Maintenance Factor
0	1.00
25,000	0.94
50,000	0.89
100,000	0.80

### FAO Dimming Settings

FAO Position	% Wattage	% Lumen Output
8	100%	100%
7	93%	95%
6	80%	85%
5	66%	73%
4	54%	61%
3	41%	49%
2	29%	36%
1	15%	20%

\*Note: Calculated values are based on original performance package data. When calculating new values for given FAO position, use published values for each package based on input watts and lumens by optic type.

### Electrical Load

	Performance Package	LED Count	Drive Current (mA)	Wattage	Current (A)					
					120V	208V	240V	277V	347V	480V
Forward Optics (Non-Rotated)	P1	20	530	34	0.28	0.16	0.14	0.12	0.10	0.07
	P2	20	700	45	0.38	0.22	0.19	0.16	0.13	0.09
	P3	20	1050	69	0.57	0.33	0.29	0.25	0.20	0.14
	P4	20	1400	94	0.78	0.45	0.39	0.34	0.27	0.19
	P5	40	700	89	0.75	0.43	0.38	0.33	0.26	0.19
	P6	40	1050	136	1.14	0.66	0.57	0.49	0.39	0.29
	P7	40	1300	170	1.42	0.82	0.71	0.62	0.49	0.36
Rotated Optics (Requires L90 or R90)	P10	30	530	51	0.42	0.24	0.21	0.18	0.15	0.11
	P11	30	700	67	0.57	0.33	0.28	0.25	0.20	0.14
	P12	30	1050	103	0.86	0.50	0.43	0.37	0.30	0.22
	P13	30	1300	129	1.07	0.62	0.54	0.46	0.37	0.27

### LED Color Temperature / Color Rendering Multipliers

	70 CRI		80CRI		90CRI	
	Lumen Multiplier	Availability	Lumen Multiplier	Availability	Lumen Multiplier	Availability
5000K	102%	Standard	92%	Extended lead-time	71%	(see note)
4000K	100%	Standard	92%	Extended lead-time	67%	(see note)
3500K	100%	(see note)	90%	Extended lead-time	63%	(see note)
3000K	96%	Standard	87%	Extended lead-time	61%	(see note)
2700K	94%	(see note)	85%	Extended lead-time	57%	(see note)

Note: Some LED types are available as per special request. Contact Technical Support for more information.

### Motion Sensor Default Settings

Option	Unoccupied Dimmed Level	High Level (when occupied)	Photocell Operation	Dwell Time	Ramp-up Time	Dimming Fade Rate
PIR	30%	100%	Enabled @ 2FC	7.5 min	3 sec	5 min
NLTAIR2 PIRHN	30%	100%	Enabled @ 2FC	7.5 min	3 sec	5 min

### Controls Options

Nomenclature	Description	Functionality	Primary control device	Notes
FAO	Field adjustable output device installed inside the luminaire; wired to the driver dimming leads.	Allows the luminaire to be manually dimmed, effectively trimming the light output.	FAO device	Cannot be used with other controls options that need the 0-10V leads
DS (not available on DSX0)	Drivers wired independently for 50/50 luminaire operation	The luminaire is wired to two separate circuits, allowing for 50/50 operation.	Independently wired drivers	Requires two separately switched circuits. Consider nLight AIR as a more cost effective alternative.
PERS or PER7	Twist-lock photocell receptacle	Compatible with standard twist-lock photocells for dusk to dawn operation, or advanced control nodes that provide 0-10V dimming signals.	Twist-lock photocells such as DLL Elite or advanced control nodes such as ROAM.	Pins 4 & 5 to dimming leads on driver, Pins 6 & 7 are capped inside luminaire. Cannot be used with other controls options that need the 0-10V leads.
PIR	Motion sensor with integral photocell. Sensor suitable for 8' to 40' mounting height.	Luminaires dim when no occupancy is detected.	Acuity Controls rSBG	Cannot be used with other controls options that need the 0-10V leads.
NLTAIR2 PIRHN	nLight AIR enabled luminaire for motion sensing, photocell and wireless communication.	Motion and ambient light sensing with group response. Scheduled dimming with motion sensor over-ride when wirelessly connected to the nLight Eclipse.	nLight Air rSBG	nLight AIR sensors can be programmed and commissioned from the ground using the CIAIRity Pro app. Cannot be used with other controls options that need the 0-10V leads.
BL30 or BL50	Integrated bi-level device that allows a second control circuit to switch all light engines to either 30% or 50% light output	BLC device provides input to 0-10V dimming leads on all drivers providing either 100% or dimmed (30% or 50%) control by a secondary circuit	BLC UVOLT1	BLC device is powered off the 0-10V dimming leads, thus can be used with any input voltage from 120 to 480V

# Performance Data

## Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.

Forward Optics																							
Performance Package	System Watts	LED Count	Drive Current (mA)	Distribution Type	30K					40K					50K								
					(3000K, 70 CRI)					(4000K, 70 CRI)					(5000K, 70 CRI)								
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW				
P1	33W	20	530	T1S	4,906	1	0	1	148	5,113	1	0	1	154	5,213	1	0	1	157				
				T2M	4,545	1	0	2	137	4,736	1	0	2	143	4,829	1	0	2	145				
				T3M	4,597	1	0	2	138	4,791	1	0	2	144	4,885	1	0	2	147				
				T3LG	4,107	1	0	1	124	4,280	1	0	1	129	4,363	1	0	1	131				
				T4M	4,666	1	0	2	141	4,863	1	0	2	146	4,957	1	0	2	149				
				T4LG	4,244	1	0	1	128	4,423	1	0	1	133	4,509	1	0	1	136				
				TFTM	4,698	1	0	2	141	4,896	1	0	2	147	4,992	1	0	2	150				
				T5M	4,801	3	0	1	145	5,003	3	0	1	151	5,101	3	0	1	154				
				T5W	4,878	3	0	1	147	5,084	3	0	2	153	5,183	3	0	2	156				
				T5LG	4,814	2	0	1	145	5,018	2	0	1	151	5,115	2	0	1	154				
				BLC3	3,344	0	0	1	101	3,485	0	0	1	105	3,553	0	0	1	107				
				BLC4	3,454	0	0	2	104	3,599	0	0	2	108	3,670	0	0	2	111				
				RCCO	3,374	0	0	1	102	3,517	0	0	1	106	3,585	0	0	1	108				
				LCCO	3,374	0	0	1	102	3,517	0	0	1	106	3,585	0	0	1	108				
				AFR	4,906	1	0	1	148	5,113	1	0	1	154	5,213	1	0	1	157				
				P2	45W	20	700	T1S	6,328	1	0	1	140	6,595	1	0	1	146	6,724	1	0	1	149
								T2M	5,862	1	0	2	130	6,109	1	0	2	135	6,228	1	0	2	138
T3M	5,930	1	0					3	131	6,180	1	0	3	137	6,301	1	0	3	140				
T3LG	5,297	1	0					1	117	5,521	1	0	1	122	5,628	1	0	1	125				
T4M	6,018	1	0					3	133	6,272	1	0	3	139	6,395	1	0	3	142				
T4LG	5,474	1	0					1	121	5,705	1	0	1	126	5,816	1	0	1	129				
TFTM	6,060	1	0					3	134	6,316	1	0	3	140	6,439	1	0	3	143				
T5M	6,192	3	0					1	137	6,453	3	0	2	143	6,579	3	0	2	146				
T5W	6,293	3	0					2	139	6,558	3	0	2	145	6,686	3	0	2	148				
T5LG	6,210	2	0					1	138	6,472	3	0	1	143	6,598	3	0	1	146				
BLC3	4,313	0	0					2	96	4,495	0	0	2	100	4,583	0	0	2	102				
BLC4	4,455	0	0					2	99	4,643	0	0	2	103	4,733	0	0	2	105				
RCCO	4,352	0	0					2	96	4,536	0	0	2	100	4,624	0	0	2	102				
LCCO	4,352	0	0					2	96	4,536	0	0	2	100	4,624	0	0	2	102				
AFR	6,328	1	0					1	140	6,595	1	0	1	146	6,724	1	0	1	149				
P3	69W	20	1050					T1S	9,006	1	0	2	131	9,386	1	0	2	136	9,569	1	0	2	139
								T2M	8,343	2	0	3	121	8,694	2	0	3	126	8,864	2	0	3	129
				T3M	8,439	2	0	3	122	8,795	2	0	3	128	8,967	2	0	3	130				
				T3LG	7,539	1	0	2	109	7,857	1	0	2	114	8,010	1	0	2	116				
				T4M	8,565	2	0	3	124	8,926	2	0	3	129	9,100	2	0	3	132				
				T4LG	7,790	1	0	2	113	8,119	1	0	2	118	8,277	1	0	2	120				
				TFTM	8,624	1	0	3	125	8,988	1	0	3	130	9,163	2	0	3	133				
				T5M	8,812	3	0	2	128	9,184	4	0	2	133	9,363	4	0	2	136				
				T5W	8,955	4	0	2	130	9,333	4	0	2	135	9,515	4	0	2	138				
				T5LG	8,838	3	0	1	128	9,211	3	0	1	134	9,390	3	0	1	136				
				BLC3	6,139	0	0	2	89	6,398	0	0	2	93	6,522	0	0	2	95				
				BLC4	6,340	0	0	3	92	6,607	0	0	3	96	6,736	0	0	3	98				
				RCCO	6,194	1	0	2	90	6,455	1	0	2	94	6,581	1	0	2	95				
				LCCO	6,194	1	0	2	90	6,455	1	0	2	94	6,581	1	0	2	95				
				AFR	9,006	1	0	2	131	9,386	1	0	2	136	9,569	1	0	2	139				
				P4	93W	20	1400	T1S	11,396	1	0	2	122	11,877	1	0	2	128	12,109	2	0	2	130
								T2M	10,557	2	0	3	113	11,003	2	0	3	118	11,217	2	0	3	121
T3M	10,680	2	0					3	115	11,130	2	0	3	120	11,347	2	0	3	122				
T3LG	9,540	1	0					2	103	9,942	1	0	2	107	10,136	1	0	2	109				
T4M	10,839	2	0					3	117	11,296	2	0	3	121	11,516	2	0	4	124				
T4LG	9,858	1	0					2	106	10,274	1	0	2	110	10,474	1	0	2	113				
TFTM	10,914	2	0					3	117	11,374	2	0	3	122	11,596	2	0	3	125				
T5M	11,152	4	0					2	120	11,622	4	0	2	125	11,849	4	0	2	127				
T5W	11,332	4	0					3	122	11,811	4	0	3	127	12,041	4	0	3	129				
T5LG	11,184	3	0					1	120	11,656	3	0	2	125	11,883	3	0	2	128				
BLC3	7,768	0	0					2	83	8,096	0	0	2	87	8,254	0	0	2	89				
BLC4	8,023	0	0					3	86	8,362	0	0	3	90	8,524	0	0	3	92				
RCCO	7,838	1	0					2	84	8,169	1	0	2	88	8,328	1	0	2	90				
LCCO	7,838	1	0					2	84	8,169	1	0	2	88	8,328	1	0	2	90				
AFR	11,396	1	0					2	122	11,877	1	0	2	128	12,109	2	0	2	130				

# Performance Data

## Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.

Forward Optics																							
Performance Package	System Watts	LED Count	Drive Current (mA)	Distribution Type	30K					40K					50K								
					(3000K, 70 CRI)					(4000K, 70 CRI)					(5000K, 70 CRI)								
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW				
P5	90W	40	700	T1S	12,380	2	0	2	137	12,902	2	0	2	143	13,154	2	0	2	146				
				T2M	11,468	2	0	3	127	11,952	2	0	3	133	12,185	2	0	3	135				
				T3M	11,601	2	0	3	129	12,091	2	0	3	134	12,326	2	0	4	137				
				T3LG	10,363	2	0	2	115	10,800	2	0	2	120	11,011	2	0	2	122				
				T4M	11,774	2	0	4	131	12,271	2	0	4	136	12,510	2	0	4	139				
				T4LG	10,709	1	0	2	119	11,160	2	0	2	124	11,378	2	0	2	126				
				TFTM	11,856	2	0	3	132	12,356	2	0	4	137	12,596	2	0	4	140				
				T5M	12,114	4	0	2	134	12,625	4	0	2	140	12,871	4	0	2	143				
				T5W	12,310	4	0	3	137	12,830	4	0	3	142	13,080	4	0	3	145				
				T5LG	12,149	3	0	2	135	12,662	3	0	2	141	12,908	3	0	2	143				
				BLC3	8,438	0	0	2	94	8,794	0	0	2	98	8,966	0	0	2	99				
				BLC4	8,715	0	0	3	97	9,083	0	0	3	101	9,260	0	0	3	103				
				RCCO	8,515	1	0	2	94	8,874	1	0	2	98	9,047	1	0	2	100				
				LCCO	8,515	1	0	2	94	8,874	1	0	2	98	9,047	1	0	2	100				
				AFR	12,380	2	0	2	137	12,902	2	0	2	143	13,154	2	0	2	146				
				P6	137W	40	1050	T1S	17,545	2	0	3	128	18,285	2	0	3	133	18,642	2	0	3	136
								T2M	16,253	3	0	4	119	16,939	3	0	4	124	17,269	3	0	4	126
T3M	16,442	2	0					4	120	17,135	3	0	4	125	17,469	3	0	4	128				
T3LG	14,687	2	0					2	107	15,306	2	0	2	112	15,605	2	0	2	114				
T4M	16,687	2	0					4	122	17,391	3	0	5	127	17,730	3	0	5	129				
T4LG	15,177	2	0					2	111	15,817	2	0	2	115	16,125	2	0	2	118				
TFTM	16,802	2	0					4	123	17,511	2	0	4	128	17,852	2	0	5	130				
T5M	17,168	4	0					2	125	17,893	5	0	3	131	18,241	5	0	3	133				
T5W	17,447	5	0					3	127	18,183	5	0	3	133	18,537	5	0	3	135				
T5LG	17,218	4	0					2	126	17,944	4	0	2	131	18,294	4	0	2	134				
BLC3	11,959	0	0					3	87	12,464	0	0	3	91	12,707	0	0	3	93				
BLC4	12,352	0	0					4	90	12,873	0	0	4	94	13,124	0	0	4	96				
RCCO	12,067	1	0					3	88	12,576	1	0	3	92	12,821	1	0	3	94				
LCCO	12,067	1	0					3	88	12,576	1	0	3	92	12,821	1	0	3	94				
AFR	17,545	2	0					3	128	18,285	2	0	3	133	18,642	2	0	3	136				
P7	171W	40	1300					T1S	20,806	2	0	3	122	21,683	2	0	3	127	22,106	2	0	3	129
								T2M	19,273	3	0	4	113	20,086	3	0	4	118	20,478	3	0	4	120
				T3M	19,497	3	0	5	114	20,319	3	0	5	119	20,715	3	0	5	121				
				T3LG	17,416	2	0	2	102	18,151	2	0	2	106	18,504	2	0	2	108				
				T4M	19,787	3	0	5	116	20,622	3	0	5	121	21,024	3	0	5	123				
				T4LG	17,997	2	0	2	105	18,756	2	0	2	110	19,121	2	0	2	112				
				TFTM	19,924	3	0	5	117	20,765	3	0	5	122	21,170	3	0	5	124				
				T5M	20,359	5	0	3	119	21,217	5	0	3	124	21,631	5	0	3	127				
				T5W	20,689	5	0	3	121	21,561	5	0	3	126	21,982	5	0	3	129				
				T5LG	20,418	4	0	2	120	21,279	4	0	2	125	21,694	4	0	2	127				
				BLC3	14,182	0	0	3	83	14,780	0	0	3	87	15,068	0	0	3	88				
				BLC4	14,647	0	0	4	86	15,265	0	0	4	89	15,562	0	0	4	91				
				RCCO	14,309	1	0	3	84	14,913	1	0	3	87	15,204	1	0	3	89				
				LCCO	14,309	1	0	3	84	14,913	1	0	3	87	15,204	1	0	3	89				
				AFR	20,806	2	0	3	122	21,683	2	0	3	127	22,106	2	0	3	129				


# Performance Data

## Lumen Output



Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.

Rotated Optics																							
Performance Package	System Watts	LED Count	Drive Current (mA)	Distribution Type	30K					40K					50K								
					(3000K, 70 CRI)					(4000K, 70 CRI)					(5000K, 70 CRI)								
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW				
P10	51W	30	530	T1S	7,399	3	0	3	145	7,711	3	0	3	151	7,862	3	0	3	154				
				T2M	6,854	3	0	3	135	7,144	3	0	3	140	7,283	3	0	3	143				
				T3M	6,933	3	0	3	136	7,225	3	0	3	142	7,366	3	0	3	145				
				T3LG	6,194	2	0	2	122	6,455	2	0	2	127	6,581	2	0	2	129				
				T4M	7,036	3	0	3	138	7,333	3	0	3	144	7,476	3	0	3	147				
				T4LG	6,399	2	0	2	126	6,669	2	0	2	131	6,799	2	0	2	134				
				TFTM	7,086	3	0	3	139	7,385	3	0	3	145	7,529	3	0	3	148				
				T5M	7,239	3	0	2	142	7,545	3	0	2	148	7,692	3	0	2	151				
				T5W	7,357	3	0	2	145	7,667	3	0	2	151	7,816	4	0	2	154				
				T5LG	7,260	3	0	1	143	7,567	3	0	1	149	7,714	3	0	1	152				
				BLC3	5,043	3	0	3	99	5,256	3	0	3	103	5,358	3	0	3	105				
				BLC4	5,208	3	0	3	102	5,428	3	0	3	107	5,534	3	0	3	109				
				RCCO	5,089	0	0	2	100	5,303	0	0	2	104	5,407	0	0	2	106				
				LCCO	5,089	0	0	2	100	5,303	0	0	2	104	5,407	0	0	2	106				
				AFR	7,399	3	0	3	145	7,711	3	0	3	151	7,862	3	0	3	154				
				P11	68W	30	700	T1S	9,358	3	0	3	138	9,753	3	0	3	143	9,943	3	0	3	146
								T2M	8,669	3	0	3	127	9,034	3	0	3	133	9,211	3	0	3	135
T3M	8,768	3	0					3	129	9,138	3	0	3	134	9,316	3	0	3	137				
T3LG	7,833	3	0					3	115	8,164	3	0	3	120	8,323	3	0	3	122				
T4M	8,899	3	0					3	131	9,274	3	0	3	136	9,455	3	0	3	139				
T4LG	8,093	3	0					3	119	8,435	3	0	3	124	8,599	3	0	3	126				
TFTM	8,962	3	0					3	132	9,340	3	0	3	137	9,522	3	0	3	140				
T5M	9,156	4	0					2	135	9,542	4	0	2	140	9,728	4	0	2	143				
T5W	9,304	4	0					2	137	9,696	4	0	2	143	9,885	4	0	2	145				
T5LG	9,182	3	0					1	135	9,569	3	0	1	141	9,756	3	0	1	143				
BLC3	6,378	3	0					3	94	6,647	3	0	3	98	6,777	3	0	3	100				
BLC4	6,587	3	0					3	97	6,865	3	0	3	101	6,999	3	0	3	103				
RCCO	6,436	0	0					2	95	6,707	0	0	2	99	6,838	0	0	2	101				
LCCO	6,436	0	0					2	95	6,707	0	0	2	99	6,838	0	0	2	101				
AFR	9,358	3	0					3	138	9,753	3	0	3	143	9,943	3	0	3	146				
P12	103W	30	1050					T1S	13,247	3	0	3	128	13,806	3	0	3	134	14,075	3	0	3	136
								T2M	12,271	4	0	4	119	12,789	4	0	4	124	13,038	4	0	4	126
				T3M	12,412	4	0	4	120	12,935	4	0	4	125	13,187	4	0	4	128				
				T3LG	11,089	3	0	3	107	11,556	3	0	3	112	11,782	3	0	3	114				
				T4M	12,597	4	0	4	122	13,128	4	0	4	127	13,384	4	0	4	129				
				T4LG	11,457	3	0	3	111	11,940	3	0	3	116	12,173	3	0	3	118				
				TFTM	12,686	4	0	4	123	13,221	4	0	4	128	13,479	4	0	4	130				
				T5M	12,960	4	0	2	125	13,507	4	0	2	131	13,770	4	0	2	133				
				T5W	13,170	4	0	3	127	13,726	4	0	3	133	13,994	4	0	3	135				
				T5LG	12,998	3	0	2	126	13,546	3	0	2	131	13,810	3	0	2	134				
				BLC3	9,029	3	0	3	87	9,409	3	0	3	91	9,593	3	0	3	93				
				BLC4	9,324	4	0	4	90	9,718	4	0	4	94	9,907	4	0	4	96				
				RCCO	9,110	1	0	2	88	9,495	1	0	2	92	9,680	1	0	2	94				
				LCCO	9,110	1	0	2	88	9,494	1	0	2	92	9,680	1	0	2	94				
				AFR	13,247	3	0	3	128	13,806	3	0	3	134	14,075	3	0	3	136				
				P13	129W	30	1300	T1S	15,704	3	0	3	122	16,366	3	0	3	127	16,685	4	0	4	130
								T2M	14,547	4	0	4	113	15,161	4	0	4	118	15,457	4	0	4	120
T3M	14,714	4	0					4	114	15,335	4	0	4	119	15,634	4	0	4	121				
T3LG	13,145	3	0					3	102	13,700	3	0	3	106	13,967	3	0	3	108				
T4M	14,933	4	0					4	116	15,563	4	0	4	121	15,867	4	0	4	123				
T4LG	13,582	3	0					3	105	14,155	3	0	3	110	14,431	3	0	3	112				
TFTM	15,039	4	0					4	117	15,673	4	0	4	122	15,979	4	0	4	124				
T5M	15,364	4	0					2	119	16,013	4	0	2	124	16,325	4	0	2	127				
T5W	15,613	5	0					3	121	16,272	5	0	3	126	16,589	5	0	3	129				
T5LG	15,409	3	0					2	120	16,059	3	0	2	125	16,372	4	0	2	127				
BLC3	10,703	4	0					4	83	11,155	4	0	4	87	11,372	4	0	4	88				
BLC4	11,054	4	0					4	86	11,520	4	0	4	89	11,745	4	0	4	91				
RCCO	10,800	1	0					2	84	11,256	1	0	2	87	11,475	1	0	3	89				
LCCO	10,800	1	0					2	84	11,255	1	0	2	87	11,475	1	0	3	89				
AFR	15,704	3	0					3	122	16,366	3	0	3	127	16,685	4	0	4	130				



# Dimensions

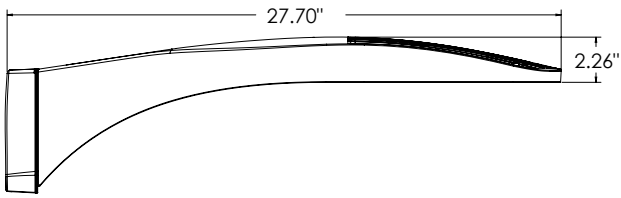


**DSX0 with RPA, RPA5, SPA5, SPA8N mount**  
**Weight: 25 lbs**

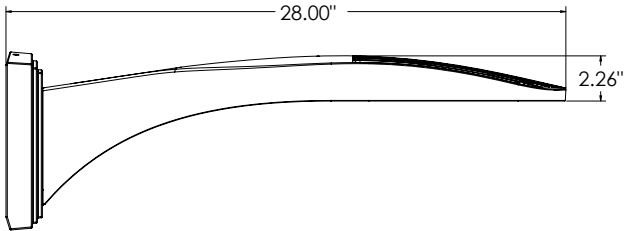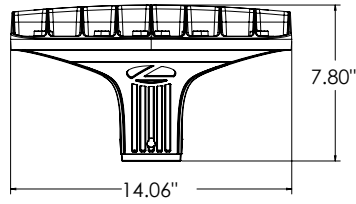


**DSX0 with WBA mount**  
**Weight: 27 lb**

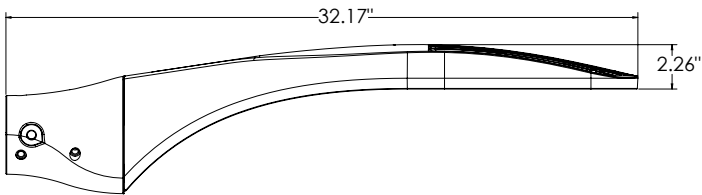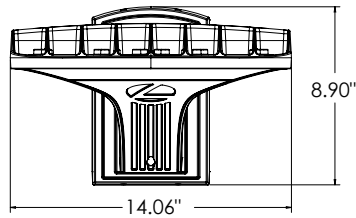


**DSX0 with MA mount**  
**Weight: 28 lbs**

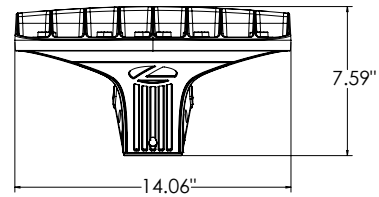


**SPA (STANDARD ARM)**

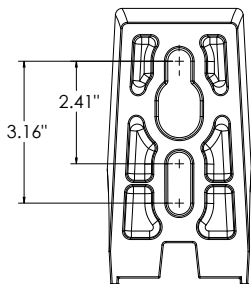


**RPA**

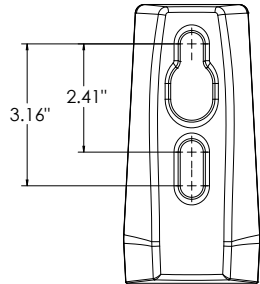


**SPA5**

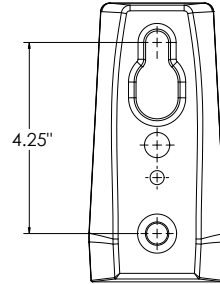

**RPA5**



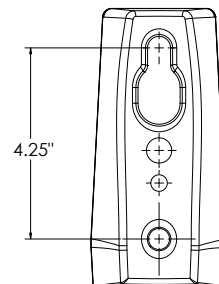


**SPA8N**

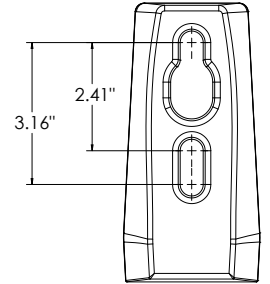

## nLight Sensor Coverage Pattern

### NLTAIR2 PIRHN

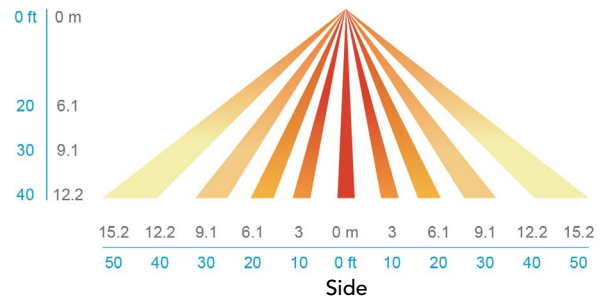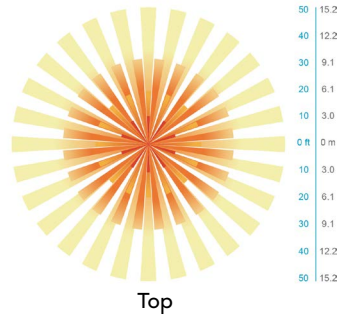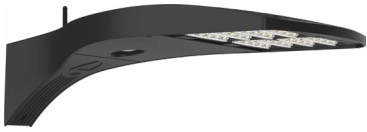

## FEATURES & SPECIFICATIONS

### INTENDED USE

The sleek design of the D-Series Size 0 reflects the embedded high performance LED technology. It is ideal for many commercial and municipal applications, such as parking lots, plazas, campuses, and pedestrian areas.

### CONSTRUCTION

Single-piece die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. Modular design allows for ease of maintenance and future light engine upgrades. The LED driver is mounted in direct contact with the casting to promote low operating temperature and long life. Housing driver compartment is completely sealed against moisture and environmental contaminants (IP66). Vibration rated per ANSI C136.31 for 3G. Low EPA (0.44 ft<sup>2</sup>) for optimized pole wind loading.

### FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Available in both textured and non-textured finishes.

### COASTAL CONSTRUCTION (CCE)

Optional corrosion resistant construction is engineered with added corrosion protection in materials and/or pre-treatment of base material under super durable paint. Provides additional corrosion protection for applications near coastal areas. Finish is salt spray tested to over 5,000 hours per ASTM B117 with scribe rating of 10. Additional lead-times may apply.

### OPTICS

Precision-molded proprietary silicone lenses are engineered for superior area lighting distribution, uniformity, and pole spacing. Light engines are available in 3000 K, 4000 K or 5000 K (70 CRI) configurations. 80CRI configurations are also available. The D-Series Size 0 has zero uplight and qualifies as a Nighttime Friendly™ product, meaning it is consistent with the LEED® and Green Globes™ criteria for eliminating wasteful uplight.

### ELECTRICAL

Light engine(s) configurations consist of high-efficacy LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life (up to L80/100,000 hours at 25°C). Class 1 electronic drivers are designed to have a power factor >90%, THD <20%, and an expected life of 100,000 hours with <1% failure rate. Easily serviceable 10kV surge protection device meets a minimum Category C Low operation (per ANSI/IEEE C62.41.2).

### STANDARD CONTROLS

The DSX0 LED area luminaire has a number of control options. DSX Size 0, comes standard with 0-10V dimming driver. Dusk to dawn controls can be utilized via optional NEMA twist-lock photocell receptacles. PIR integrated motion sensor with on-board photocell feature field-adjustable programming and are suitable for mounting heights up to 40 feet. Control option BL features a bi-level device that allows a second control circuit to switch all light engines to either 30% or 50% light output.

### nLIGHT AIR CONTROLS

The DSX0 LED area luminaire is also available with nLight® AIR for the ultimate in wireless control. This powerful controls platform provides out-of-the-box basic motion sensing and photocontrol functionality and is suitable for mounting heights up to 40 feet. Once commissioned using a smartphone and the easy-to-use CLAIRITY app, nLight AIR equipped luminaires can be grouped, resulting in motion sensor and photocell group response without the need for additional equipment. Scheduled dimming with motion sensor over-ride can be achieved when used with the nLight Eclipse. Additional information about nLight Air can be found [here](#).

### INSTALLATION

Integral mounting arm allows for fast mounting using Lithonia standard #8 drilling and accommodates pole drilling's from 2.41 to 3.12" on center. The standard "SPA" option for square poles and the "RPA" option for round poles use the #8 drilling. For #5 pole drillings, use SPA5 or RPA5. Additional mountings are available including a wall bracket (WBA) and mast arm (MA) option that allows luminaire attachment to a 2 3/8" horizontal mast arm.

### LISTINGS

UL listed to meet U.S. and Canadian standards. UL Listed for wet locations. Light engines are IP66 rated; luminaire is IP66 rated. Rated for -40°C minimum ambient.

DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product. Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org/QPL](http://www.designlights.org/QPL) to confirm which versions are qualified.

International Dark-Sky Association (IDA) Fixture Seal of Approval (FSA) is available for all products on this page utilizing 3000K color temperature only.

### GOVERNMENT PROCUREMENT

BAA – Buy America(n) Act: Product with the BAA option qualifies as a domestic end product under the Buy American Act as implemented in the FAR and DFARS. Product with the BAA option also qualifies as manufactured in the United States under DOT Buy America regulations.

BABA – Build America Buy America: Product with the BAA option also qualifies as produced in the United States under the definitions of the Build America, Buy America Act.

Please refer to [www.acuitybrands.com/buy-american](http://www.acuitybrands.com/buy-american) for additional information.

### WARRANTY

5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: [www.acuitybrands.com/support/warranty/terms-and-conditions](http://www.acuitybrands.com/support/warranty/terms-and-conditions)

**Note:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.





# D-Series Size 0 LED Area Luminaire



Catalog  
Number

Notes  
**25' Total Height**

Type  
**OQ**

Hit the Tab key or mouse over the page to see all interactive elements.


## Introduction

The modern styling of the D-Series features a highly refined aesthetic that blends seamlessly with its environment. The D-Series offers the benefits of the latest in LED technology into a high performance, high efficacy, long-life luminaire.

The photometric performance results in sites with excellent uniformity, greater pole spacing and lower power density. D-Series outstanding photometry aids in reducing the number of poles required in area lighting applications, with typical energy savings of 70% and expected service life of over 100,000 hours.

## Specifications

EPA:	0.44 ft <sup>2</sup> (0.04 m <sup>2</sup> )
Length:	26.18" (66.5 cm)
Width:	14.06" (35.7 cm)
Height H1:	2.26" (5.7 cm)
Height H2:	7.46" (18.9 cm)
Weight:	23 lbs (10.4 kg)

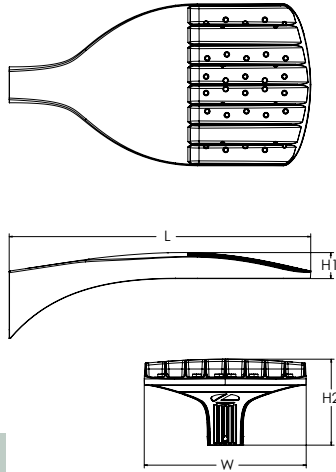

**ds** Design Select options indicated by this color background.



Items marked by a shaded background qualify for the Design Select program and ship in 15 days or less. To learn more about Design Select, visit [www.acuitybrands.com/designselect](http://www.acuitybrands.com/designselect).  
\*See ordering tree for details

## Ordering Information

**EXAMPLE: DSX0 LED P6 40K 70CRI T3M MVOLT SPA NLTAIR2 PIRHN DDBXD**

DSX0 LED	P4	40K	80CRI	T3M	MVOLT	RPA		
Series	LEDs	Color temperature <sup>2</sup>	Color Rendering Index <sup>2</sup>	Distribution	Voltage	Mounting		
DSX0 LED	<b>Forward optics</b>		(this section 70CRI only)	AFR Automotive front row T1S Type I short T2M Type II medium T3M Type III medium T3LG Type III low glare <sup>3</sup> T4M Type IV medium T4LG Type IV low glare <sup>3</sup> TFTM Forward throw medium	<b>T5M</b> Type V medium <b>T5LG</b> Type V low glare <b>T5W</b> Type V wide <b>BLC3</b> Type III backlight control <sup>3</sup> <b>BLC4</b> Type IV backlight control <sup>3</sup> <b>LCCO</b> Left corner cutoff <sup>3</sup> <b>RCCO</b> Right corner cutoff <sup>3</sup>	<b>MVOLT</b> (120V-277V) <sup>4</sup> <b>HVOLT</b> (347V-480V) <sup>5,6</sup> <b>XVOLT</b> (277V-480V) <sup>7,8</sup> 120 <sup>16, 24</sup> 208 <sup>16, 24</sup> 240 <sup>16, 24</sup> 277 <sup>16, 24</sup> 347 <sup>16, 24</sup> 480 <sup>16, 24</sup>	<b>Shipped included</b> <b>SPA</b> Square pole mounting (#8 drilling, 3.5" min. SQ pole) <b>RPA</b> Round pole mounting (#8 drilling, 3" min. RND pole) <b>SPA5</b> Square pole mounting (#5 drilling, 3" min. SQ pole) <sup>9</sup> <b>RPA5</b> Round pole mounting (#5 drilling, 3" min. RND pole) <sup>9</sup> <b>SPA8N</b> Square narrow pole mounting (#8 drilling, 3" min. SQ pole) <b>WBA</b> Wall bracket <sup>10</sup> <b>MA</b> Mast arm adapter (mounts on 2 3/8" OD horizontal tenon)	
	P1	P5	30K 3000K					70CRI
	P2	P6	40K 4000K					70CRI
	P3	P7	50K 5000K					70CRI
	<b>Rotated optics</b>		(this section 80CRI only, extended lead times apply)					
	P10 <sup>1</sup>	P12 <sup>1</sup>	27K 2700K					80CRI
	P11 <sup>1</sup>	P13 <sup>1</sup>	30K 3000K					80CRI
			35K 3500K					80CRI
			40K 4000K					80CRI
			50K 5000K					80CRI
DMG	--				DDBXD			
<b>Control options</b>				<b>Other options</b>		<b>Finish (required)</b>		
<b>Shipped installed</b>		<b>PER7</b> Seven-pin receptacle only (controls ordered separate) <sup>14, 19</sup>		<b>Shipped installed</b>		DDBXD Dark Bronze		
NLTAIR2 PIRHN	nLight AIR gen 2 enabled with bi-level motion / ambient sensor, 8-40' mounting height, ambient sensor enabled at 2fc. <sup>11, 12, 18, 19</sup>		<b>FAO</b> Field adjustable output <sup>15, 19</sup>	<b>HS</b> Houseside shield (black finish standard) <sup>20</sup>	DBLXD Black			
PIR	High/low, motion/ambient sensor, 8-40' mounting height, ambient sensor enabled at 2fc. <sup>13, 18, 19</sup>		<b>BL30</b> Bi-level switched dimming, 30% <sup>16, 19</sup>	<b>L90</b> Left rotated optics <sup>1</sup>	DNAXD Natural Aluminum			
PER	NEMA twist-lock receptacle only (controls ordered separate) <sup>14</sup>		<b>BL50</b> Bi-level switched dimming, 50% <sup>16, 19</sup>	<b>R90</b> Right rotated optics <sup>1</sup>	DWHXD White			
PER5	Five-pin receptacle only (controls ordered separate) <sup>14, 19</sup>		<b>DMG</b> 0-10v dimming wires pulled outside fixture (for use with an external control, ordered separately) <sup>17</sup>	<b>CCE</b> Coastal Construction <sup>21</sup>	DDBTXD Textured dark bronze			
				<b>HA</b> 50°C ambient operation <sup>22</sup>	DBLBXD Textured black			
				<b>BAA</b> Buy America(n) Act Compliant	DNATXD Textured natural aluminum			
				<b>SF</b> Single fuse (120, 277, 347V) <sup>24</sup>	DWHGXD Textured white			
				<b>DF</b> Double fuse (208, 240, 480V) <sup>24</sup>				
				<b>Shipped separately</b>				
				<b>EGSR</b> External Glare Shield (reversible, field install required, matches housing finish)				
				<b>BSDB</b> Bird Spikes (field install required)				



One Lithonia Way • Conyers, Georgia 30012 • Phone: 1-800-705-SERV (7378) • [www.lithonia.com](http://www.lithonia.com)  
© 2011-2024 Acuity Brands Lighting, Inc. All rights reserved.

DSX0-LED  
Rev. 03/26/24  
Page 1 of 9

## Ordering Information

### Accessories


Ordered and shipped separately.

DLL127F 1.5 JU	Photocell - SSL twist-lock (120-277V) <sup>23</sup>
DLL347F 1.5 CUL JU	Photocell - SSL twist-lock (347V) <sup>23</sup>
DLL480F 1.5 CUL JU	Photocell - SSL twist-lock (480V) <sup>23</sup>
DSHORT SBK	Shorting cap <sup>23</sup>
DSX0HS P#	House-side shield (enter package number P1-7, P10-13 in place of #)
DSXRPA (FINISH)	Round pole adapter (#8 drilling, specify finish)
DSXRPA5 (FINISH)	Round pole adapter #5 drilling (specify finish)
DSXSPA5 (FINISH)	Square pole adapter #5 drilling (specify finish)
DSX0EGSR (FINISH)	External glare shield (specify finish)
DSX0SDB (FINISH)	Bird spike deterrent bracket (specify finish)


### NOTES

- 1 Rotated optics available with packages P10, P11, P12 and P13. Must be combined with option L90 or R90.
- 2 30K, 40K, and 50K available in 70CRI and 80CRI. 27K and 35K only available with 80CRI. Contact Technical Support for other possible combinations.
- 3 T3LG, T4LG, BLC3, BLC4, LCCO, RCCO not available with option HS.
- 4 MVOLT driver operates on any line voltage from 120-277V (50/60 Hz).
- 5 HVOLT driver operates on any line voltage from 347-480V (50/60 Hz).
- 6 HVOLT not available with package P1, P2 and P10 when combined with option NLTAIR2 PIRHN or option PIR.
- 7 XVOLT operates with any voltage between 277V and 480V (50/60 Hz).
- 8 XVOLT not available in packages P1, P2 or P10. XVOLT not available with fusing (SF or DF).
- 9 SPAS and RPA5 for use with #5 drilling only (Not for use with #8 drilling).
- 10 WBA cannot be combined with Type 5 distributions plus photocell (PER).
- 11 NLTAIR2 and PIRHN must be ordered together. For more information on nLight Air 2.
- 12 NLTAIR2 PIRHN not available with other controls including PIR, PER, PER5, PER7, FAO, BL30, BL50 and DMG. NLTAIR2 PIRHN not available with P1, P2 and P10 using HVOLT. NLTAIR2 PIRHN not available with P1, P2 and P10 using XVOLT. NLTAIR2 PIRHN not available with P1 using MVOLT.
- 13 PIR not available with NLTAIR2, PER, PER5, PER7, FAO BL30, BL50 and DMG. PIR not available with P1, P2 and P10 using HVOLT. PIR not available with P1, P2 and P10 using XVOLT. PIR not available with P1 using MVOLT.
- 14 PER/PER5/PER7 not available with NLTAIR2, PIR, BL30, BL50. Photocell ordered and shipped as a separate line item from Acuity Brands Controls. See accessories. Shorting Cap included.
- 15 FAO not available with other dimming control options NLTAIR2 PIRHN, PIR, PER5, PER7, BL30, BL50, or DMG.
- 16 BL30 and BL50 are not available with NLTAIR2 PIRHN, PIR, PER, PER5, PER7, FAO and DMG. BL30 or BL50 must specify 120, 277 or 347V. Consult tech support for 208, 240 or 480V.
- 17 DMG not available with NLTAIR2 PIRHN, PIR, PER, PER5, PER7, BL30, BL50 and FAO.
- 18 Reference Motion Sensor Default Settings table on page 4 to see functionality.
- 19 Reference Controls Options table on page 4.
- 20 Option HS not available with T3LG, T4LG, BLC3, BLC4, LCCO and RCCO distribution. Also available as a separate accessory; see Accessories information.
- 21 CCE option not available with option B5 and EGSR. Contact Technical Support for availability.
- 22 Option HA not available with performance packages P6, P7, P12 and P13.
- 23 Requires luminaire to be specified with PER, PER5 or PER7 option. See Controls Table on page 4.
- 24 Single fuse (SF) requires 120V, 277V, or 347V. Double fuse (DF) requires 208V, 240V or 480V. XVOLT not available with fusing (SF or DF).

## Shield Accessories

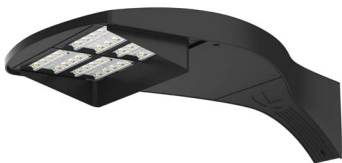

External Glare Shield (EGSR)

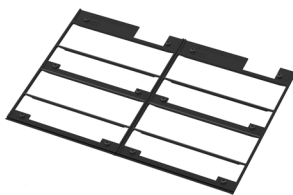


House Side Shield (HS)


## Drilling

### HANDHOLE ORIENTATION

(from top of pole)

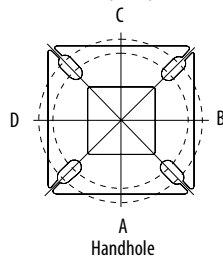

A Handhole

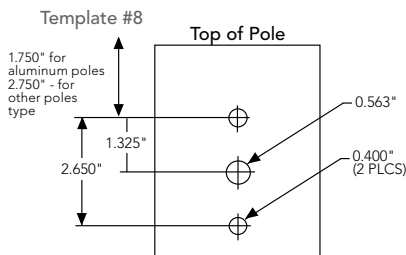

### Tenon Mounting Slipfitter

Tenon O.D.	Mounting	Single Unit	2 @ 180	2 @ 90	3 @ 90	3 @ 120	4 @ 90
2-3/8"	RPA	AS3-5 190	AS3-5 280	AS3-5 290	AS3-5 390	AS3-5 320	AS3-5 490
2-7/8"	RPA	AST25-190	AST25-280	AST25-290	AST25-390	AST25-320	AST25-490
4"	RPA	AST35-190	AST35-280	AST35-290	AST35-390	AST35-320	AST35-490

Mounting Option	Drilling Template	Single	2 @ 180	2 @ 90	3 @ 90	3 @ 120	4 @ 90
Head Location		Side B	Side B & D	Side B & C	Side B, C & D	Round Pole Only	Side A, B, C & D
Drill Nomenclature	#8	DM19AS	DM28AS	DM29AS	DM39AS	DM32AS	DM49AS
Minimum Acceptable Outside Pole Dimension							
SPA	#8	3.5"	3.5"	3.5"	3.5"		3.5"
RPA	#8	3"	3"	3"	3"	3"	3"
SPAS	#5	3"	3"	3"	3"		3"
RPA5	#5	3"	3"	3"	3"	3"	3"
SPA8N	#8	3"	3"	3"	3"		3"

### DSX0 Area Luminaire - EPA

\*Includes luminaire and integral mounting arm. Other tenons, arms, brackets or other accessories are not included in this EPA data.

Fixture Quantity & Mounting Configuration	Single DM19	2 @ 180 DM28	2 @ 90 DM29	3 @ 90 DM39	3 @ 120 DM32	4 @ 90 DM49
Mounting Type						
DSX0 with SPA	0.44	0.88	0.96	1.18	---	1.16
DSX0 with SPAS, SPA8N	0.51	1.02	1.06	1.26	---	1.29
DSX0 with RPA, RPA5	0.51	1.02	1.06	1.26	1.24	1.29
DSX0 with MA	0.64	1.28	1.24	1.67	1.70	1.93




COMMERCIAL OUTDOOR

One Lithonia Way • Conyers, Georgia 30012 • Phone: 1-800-705-SERV (7378) • [www.lithonia.com](http://www.lithonia.com)  
© 2011-2024 Acuity Brands Lighting, Inc. All rights reserved.

DSX0-LED  
Rev. 03/26/24  
Page 2 of 9

Isofootcandle plots for the DSX0 LED P7 40K 70CRI. Distances are in units of mounting height (20').

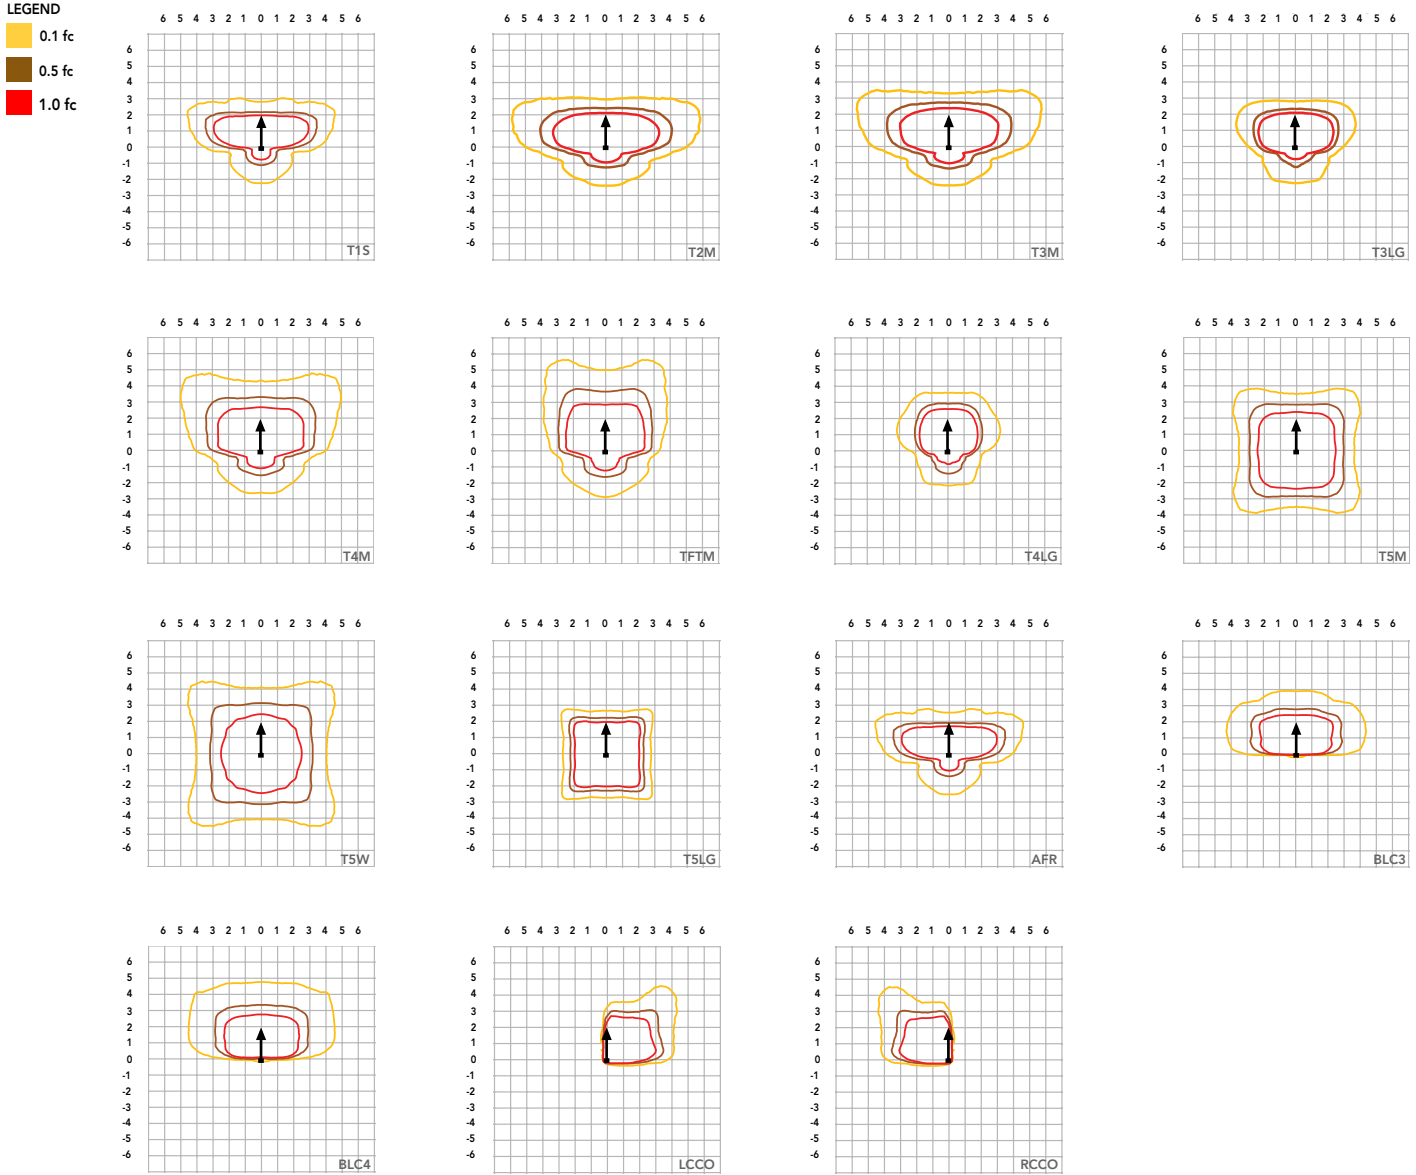

## Performance Data

### Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient	Lumen Multiplier	
0°C	32°F	1.04
5°C	41°F	1.04
10°C	50°F	1.03
15°C	59°F	1.02
20°C	68°F	1.01
<b>25°C</b>	<b>77°C</b>	<b>1.00</b>
30°C	86°F	0.99
35°C	95°F	0.98
40°C	104°F	0.97

### Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the platforms noted in a **25°C ambient**, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	Lumen Maintenance Factor
0	1.00
25,000	0.94
50,000	0.89
100,000	0.80

### FAO Dimming Settings

FAO Position	% Wattage	% Lumen Output
8	100%	100%
7	93%	95%
6	80%	85%
5	66%	73%
4	54%	61%
3	41%	49%
2	29%	36%
1	15%	20%

\*Note: Calculated values are based on original performance package data. When calculating new values for given FAO position, use published values for each package based on input watts and lumens by optic type.

### Electrical Load

	Performance Package	LED Count	Drive Current (mA)	Wattage	Current (A)					
					120V	208V	240V	277V	347V	480V
Forward Optics (Non-Rotated)	P1	20	530	34	0.28	0.16	0.14	0.12	0.10	0.07
	P2	20	700	45	0.38	0.22	0.19	0.16	0.13	0.09
	P3	20	1050	69	0.57	0.33	0.29	0.25	0.20	0.14
	P4	20	1400	94	0.78	0.45	0.39	0.34	0.27	0.19
	P5	40	700	89	0.75	0.43	0.38	0.33	0.26	0.19
	P6	40	1050	136	1.14	0.66	0.57	0.49	0.39	0.29
	P7	40	1300	170	1.42	0.82	0.71	0.62	0.49	0.36
Rotated Optics (Requires L90 or R90)	P10	30	530	51	0.42	0.24	0.21	0.18	0.15	0.11
	P11	30	700	67	0.57	0.33	0.28	0.25	0.20	0.14
	P12	30	1050	103	0.86	0.50	0.43	0.37	0.30	0.22
	P13	30	1300	129	1.07	0.62	0.54	0.46	0.37	0.27

### LED Color Temperature / Color Rendering Multipliers

	70 CRI		80CRI		90CRI	
	Lumen Multiplier	Availability	Lumen Multiplier	Availability	Lumen Multiplier	Availability
5000K	102%	Standard	92%	Extended lead-time	71%	(see note)
4000K	100%	Standard	92%	Extended lead-time	67%	(see note)
3500K	100%	(see note)	90%	Extended lead-time	63%	(see note)
3000K	96%	Standard	87%	Extended lead-time	61%	(see note)
2700K	94%	(see note)	85%	Extended lead-time	57%	(see note)

Note: Some LED types are available as per special request. Contact Technical Support for more information.

### Motion Sensor Default Settings

Option	Unoccupied Dimmed Level	High Level (when occupied)	Photocell Operation	Dwell Time	Ramp-up Time	Dimming Fade Rate
PIR	30%	100%	Enabled @ 2FC	7.5 min	3 sec	5 min
NLTAIR2 PIRHN	30%	100%	Enabled @ 2FC	7.5 min	3 sec	5 min

### Controls Options

Nomenclature	Description	Functionality	Primary control device	Notes
FAO	Field adjustable output device installed inside the luminaire; wired to the driver dimming leads.	Allows the luminaire to be manually dimmed, effectively trimming the light output.	FAO device	Cannot be used with other controls options that need the 0-10V leads
DS (not available on DSX0)	Drivers wired independently for 50/50 luminaire operation	The luminaire is wired to two separate circuits, allowing for 50/50 operation.	Independently wired drivers	Requires two separately switched circuits. Consider nLight AIR as a more cost effective alternative.
PERS or PER7	Twist-lock photocell receptacle	Compatible with standard twist-lock photocells for dusk to dawn operation, or advanced control nodes that provide 0-10V dimming signals.	Twist-lock photocells such as DLL Elite or advanced control nodes such as ROAM.	Pins 4 & 5 to dimming leads on driver, Pins 6 & 7 are capped inside luminaire. Cannot be used with other controls options that need the 0-10V leads.
PIR	Motion sensor with integral photocell. Sensor suitable for 8' to 40' mounting height.	Luminaires dim when no occupancy is detected.	Acuity Controls rSBG	Cannot be used with other controls options that need the 0-10V leads.
NLTAIR2 PIRHN	nLight AIR enabled luminaire for motion sensing, photocell and wireless communication.	Motion and ambient light sensing with group response. Scheduled dimming with motion sensor over-ride when wirelessly connected to the nLight Eclipse.	nLight Air rSBG	nLight AIR sensors can be programmed and commissioned from the ground using the CIAIRity Pro app. Cannot be used with other controls options that need the 0-10V leads.
BL30 or BL50	Integrated bi-level device that allows a second control circuit to switch all light engines to either 30% or 50% light output	BLC device provides input to 0-10V dimming leads on all drivers providing either 100% or dimmed (30% or 50%) control by a secondary circuit	BLC UVOLT1	BLC device is powered off the 0-10V dimming leads, thus can be used with any input voltage from 120 to 480V

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.

Forward Optics																							
Performance Package	System Watts	LED Count	Drive Current (mA)	Distribution Type	30K					40K					50K								
					(3000K, 70 CRI)					(4000K, 70 CRI)					(5000K, 70 CRI)								
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW				
P1	33W	20	530	T1S	4,906	1	0	1	148	5,113	1	0	1	154	5,213	1	0	1	157				
				T2M	4,545	1	0	2	137	4,736	1	0	2	143	4,829	1	0	2	145				
				T3M	4,597	1	0	2	138	4,791	1	0	2	144	4,885	1	0	2	147				
				T3LG	4,107	1	0	1	124	4,280	1	0	1	129	4,363	1	0	1	131				
				T4M	4,666	1	0	2	141	4,863	1	0	2	146	4,957	1	0	2	149				
				T4LG	4,244	1	0	1	128	4,423	1	0	1	133	4,509	1	0	1	136				
				TFTM	4,698	1	0	2	141	4,896	1	0	2	147	4,992	1	0	2	150				
				T5M	4,801	3	0	1	145	5,003	3	0	1	151	5,101	3	0	1	154				
				T5W	4,878	3	0	1	147	5,084	3	0	2	153	5,183	3	0	2	156				
				T5LG	4,814	2	0	1	145	5,018	2	0	1	151	5,115	2	0	1	154				
				BLC3	3,344	0	0	1	101	3,485	0	0	1	105	3,553	0	0	1	107				
				BLC4	3,454	0	0	2	104	3,599	0	0	2	108	3,670	0	0	2	111				
				RCCO	3,374	0	0	1	102	3,517	0	0	1	106	3,585	0	0	1	108				
				LCCO	3,374	0	0	1	102	3,517	0	0	1	106	3,585	0	0	1	108				
				AFR	4,906	1	0	1	148	5,113	1	0	1	154	5,213	1	0	1	157				
				P2	45W	20	700	T1S	6,328	1	0	1	140	6,595	1	0	1	146	6,724	1	0	1	149
								T2M	5,862	1	0	2	130	6,109	1	0	2	135	6,228	1	0	2	138
T3M	5,930	1	0					3	131	6,180	1	0	3	137	6,301	1	0	3	140				
T3LG	5,297	1	0					1	117	5,521	1	0	1	122	5,628	1	0	1	125				
T4M	6,018	1	0					3	133	6,272	1	0	3	139	6,395	1	0	3	142				
T4LG	5,474	1	0					1	121	5,705	1	0	1	126	5,816	1	0	1	129				
TFTM	6,060	1	0					3	134	6,316	1	0	3	140	6,439	1	0	3	143				
T5M	6,192	3	0					1	137	6,453	3	0	2	143	6,579	3	0	2	146				
T5W	6,293	3	0					2	139	6,558	3	0	2	145	6,686	3	0	2	148				
T5LG	6,210	2	0					1	138	6,472	3	0	1	143	6,598	3	0	1	146				
BLC3	4,313	0	0					2	96	4,495	0	0	2	100	4,583	0	0	2	102				
BLC4	4,455	0	0					2	99	4,643	0	0	2	103	4,733	0	0	2	105				
RCCO	4,352	0	0					2	96	4,536	0	0	2	100	4,624	0	0	2	102				
LCCO	4,352	0	0					2	96	4,536	0	0	2	100	4,624	0	0	2	102				
AFR	6,328	1	0					1	140	6,595	1	0	1	146	6,724	1	0	1	149				
P3	69W	20	1050					T1S	9,006	1	0	2	131	9,386	1	0	2	136	9,569	1	0	2	139
								T2M	8,343	2	0	3	121	8,694	2	0	3	126	8,864	2	0	3	129
				T3M	8,439	2	0	3	122	8,795	2	0	3	128	8,967	2	0	3	130				
				T3LG	7,539	1	0	2	109	7,857	1	0	2	114	8,010	1	0	2	116				
				T4M	8,565	2	0	3	124	8,926	2	0	3	129	9,100	2	0	3	132				
				T4LG	7,790	1	0	2	113	8,119	1	0	2	118	8,277	1	0	2	120				
				TFTM	8,624	1	0	3	125	8,988	1	0	3	130	9,163	2	0	3	133				
				T5M	8,812	3	0	2	128	9,184	4	0	2	133	9,363	4	0	2	136				
				T5W	8,955	4	0	2	130	9,333	4	0	2	135	9,515	4	0	2	138				
				T5LG	8,838	3	0	1	128	9,211	3	0	1	134	9,390	3	0	1	136				
				BLC3	6,139	0	0	2	89	6,398	0	0	2	93	6,522	0	0	2	95				
				BLC4	6,340	0	0	3	92	6,607	0	0	3	96	6,736	0	0	3	98				
				RCCO	6,194	1	0	2	90	6,455	1	0	2	94	6,581	1	0	2	95				
				LCCO	6,194	1	0	2	90	6,455	1	0	2	94	6,581	1	0	2	95				
				AFR	9,006	1	0	2	131	9,386	1	0	2	136	9,569	1	0	2	139				
				P4	93W	20	1400	T1S	11,396	1	0	2	122	11,877	1	0	2	128	12,109	2	0	2	130
								T2M	10,557	2	0	3	113	11,003	2	0	3	118	11,217	2	0	3	121
T3M	10,680	2	0					3	115	11,130	2	0	3	120	11,347	2	0	3	122				
T3LG	9,540	1	0					2	103	9,942	1	0	2	107	10,136	1	0	2	109				
T4M	10,839	2	0					3	117	11,296	2	0	3	121	11,516	2	0	4	124				
T4LG	9,858	1	0					2	106	10,274	1	0	2	110	10,474	1	0	2	113				
TFTM	10,914	2	0					3	117	11,374	2	0	3	122	11,596	2	0	3	125				
T5M	11,152	4	0					2	120	11,622	4	0	2	125	11,849	4	0	2	127				
T5W	11,332	4	0					3	122	11,811	4	0	3	127	12,041	4	0	3	129				
T5LG	11,184	3	0					1	120	11,656	3	0	2	125	11,883	3	0	2	128				
BLC3	7,768	0	0					2	83	8,096	0	0	2	87	8,254	0	0	2	89				
BLC4	8,023	0	0					3	86	8,362	0	0	3	90	8,524	0	0	3	92				
RCCO	7,838	1	0					2	84	8,169	1	0	2	88	8,328	1	0	2	90				
LCCO	7,838	1	0					2	84	8,169	1	0	2	88	8,328	1	0	2	90				
AFR	11,396	1	0					2	122	11,877	1	0	2	128	12,109	2	0	2	130				

# Performance Data

## Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.

Forward Optics																							
Performance Package	System Watts	LED Count	Drive Current (mA)	Distribution Type	30K					40K					50K								
					(3000K, 70 CRI)					(4000K, 70 CRI)					(5000K, 70 CRI)								
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW				
P5	90W	40	700	T1S	12,380	2	0	2	137	12,902	2	0	2	143	13,154	2	0	2	146				
				T2M	11,468	2	0	3	127	11,952	2	0	3	133	12,185	2	0	3	135				
				T3M	11,601	2	0	3	129	12,091	2	0	3	134	12,326	2	0	4	137				
				T3LG	10,363	2	0	2	115	10,800	2	0	2	120	11,011	2	0	2	122				
				T4M	11,774	2	0	4	131	12,271	2	0	4	136	12,510	2	0	4	139				
				T4LG	10,709	1	0	2	119	11,160	2	0	2	124	11,378	2	0	2	126				
				TFTM	11,856	2	0	3	132	12,356	2	0	4	137	12,596	2	0	4	140				
				T5M	12,114	4	0	2	134	12,625	4	0	2	140	12,871	4	0	2	143				
				T5W	12,310	4	0	3	137	12,830	4	0	3	142	13,080	4	0	3	145				
				T5LG	12,149	3	0	2	135	12,662	3	0	2	141	12,908	3	0	2	143				
				BLC3	8,438	0	0	2	94	8,794	0	0	2	98	8,966	0	0	2	99				
				BLC4	8,715	0	0	3	97	9,083	0	0	3	101	9,260	0	0	3	103				
				RCCO	8,515	1	0	2	94	8,874	1	0	2	98	9,047	1	0	2	100				
				LCCO	8,515	1	0	2	94	8,874	1	0	2	98	9,047	1	0	2	100				
				AFR	12,380	2	0	2	137	12,902	2	0	2	143	13,154	2	0	2	146				
				P6	137W	40	1050	T1S	17,545	2	0	3	128	18,285	2	0	3	133	18,642	2	0	3	136
								T2M	16,253	3	0	4	119	16,939	3	0	4	124	17,269	3	0	4	126
T3M	16,442	2	0					4	120	17,135	3	0	4	125	17,469	3	0	4	128				
T3LG	14,687	2	0					2	107	15,306	2	0	2	112	15,605	2	0	2	114				
T4M	16,687	2	0					4	122	17,391	3	0	5	127	17,730	3	0	5	129				
T4LG	15,177	2	0					2	111	15,817	2	0	2	115	16,125	2	0	2	118				
TFTM	16,802	2	0					4	123	17,511	2	0	4	128	17,852	2	0	5	130				
T5M	17,168	4	0					2	125	17,893	5	0	3	131	18,241	5	0	3	133				
T5W	17,447	5	0					3	127	18,183	5	0	3	133	18,537	5	0	3	135				
T5LG	17,218	4	0					2	126	17,944	4	0	2	131	18,294	4	0	2	134				
BLC3	11,959	0	0					3	87	12,464	0	0	3	91	12,707	0	0	3	93				
BLC4	12,352	0	0					4	90	12,873	0	0	4	94	13,124	0	0	4	96				
RCCO	12,067	1	0					3	88	12,576	1	0	3	92	12,821	1	0	3	94				
LCCO	12,067	1	0					3	88	12,576	1	0	3	92	12,821	1	0	3	94				
AFR	17,545	2	0					3	128	18,285	2	0	3	133	18,642	2	0	3	136				
P7	171W	40	1300					T1S	20,806	2	0	3	122	21,683	2	0	3	127	22,106	2	0	3	129
								T2M	19,273	3	0	4	113	20,086	3	0	4	118	20,478	3	0	4	120
				T3M	19,497	3	0	5	114	20,319	3	0	5	119	20,715	3	0	5	121				
				T3LG	17,416	2	0	2	102	18,151	2	0	2	106	18,504	2	0	2	108				
				T4M	19,787	3	0	5	116	20,622	3	0	5	121	21,024	3	0	5	123				
				T4LG	17,997	2	0	2	105	18,756	2	0	2	110	19,121	2	0	2	112				
				TFTM	19,924	3	0	5	117	20,765	3	0	5	122	21,170	3	0	5	124				
				T5M	20,359	5	0	3	119	21,217	5	0	3	124	21,631	5	0	3	127				
				T5W	20,689	5	0	3	121	21,561	5	0	3	126	21,982	5	0	3	129				
				T5LG	20,418	4	0	2	120	21,279	4	0	2	125	21,694	4	0	2	127				
				BLC3	14,182	0	0	3	83	14,780	0	0	3	87	15,068	0	0	3	88				
				BLC4	14,647	0	0	4	86	15,265	0	0	4	89	15,562	0	0	4	91				
				RCCO	14,309	1	0	3	84	14,913	1	0	3	87	15,204	1	0	3	89				
				LCCO	14,309	1	0	3	84	14,913	1	0	3	87	15,204	1	0	3	89				
				AFR	20,806	2	0	3	122	21,683	2	0	3	127	22,106	2	0	3	129				


# Performance Data

## Lumen Output



Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.

Rotated Optics																							
Performance Package	System Watts	LED Count	Drive Current (mA)	Distribution Type	30K					40K					50K								
					(3000K, 70 CRI)					(4000K, 70 CRI)					(5000K, 70 CRI)								
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW				
P10	51W	30	530	T1S	7,399	3	0	3	145	7,711	3	0	3	151	7,862	3	0	3	154				
				T2M	6,854	3	0	3	135	7,144	3	0	3	140	7,283	3	0	3	143				
				T3M	6,933	3	0	3	136	7,225	3	0	3	142	7,366	3	0	3	145				
				T3LG	6,194	2	0	2	122	6,455	2	0	2	127	6,581	2	0	2	129				
				T4M	7,036	3	0	3	138	7,333	3	0	3	144	7,476	3	0	3	147				
				T4LG	6,399	2	0	2	126	6,669	2	0	2	131	6,799	2	0	2	134				
				TFTM	7,086	3	0	3	139	7,385	3	0	3	145	7,529	3	0	3	148				
				T5M	7,239	3	0	2	142	7,545	3	0	2	148	7,692	3	0	2	151				
				T5W	7,357	3	0	2	145	7,667	3	0	2	151	7,816	4	0	2	154				
				T5LG	7,260	3	0	1	143	7,567	3	0	1	149	7,714	3	0	1	152				
				BLC3	5,043	3	0	3	99	5,256	3	0	3	103	5,358	3	0	3	105				
				BLC4	5,208	3	0	3	102	5,428	3	0	3	107	5,534	3	0	3	109				
				RCCO	5,089	0	0	2	100	5,303	0	0	2	104	5,407	0	0	2	106				
				LCCO	5,089	0	0	2	100	5,303	0	0	2	104	5,407	0	0	2	106				
				AFR	7,399	3	0	3	145	7,711	3	0	3	151	7,862	3	0	3	154				
				P11	68W	30	700	T1S	9,358	3	0	3	138	9,753	3	0	3	143	9,943	3	0	3	146
								T2M	8,669	3	0	3	127	9,034	3	0	3	133	9,211	3	0	3	135
T3M	8,768	3	0					3	129	9,138	3	0	3	134	9,316	3	0	3	137				
T3LG	7,833	3	0					3	115	8,164	3	0	3	120	8,323	3	0	3	122				
T4M	8,899	3	0					3	131	9,274	3	0	3	136	9,455	3	0	3	139				
T4LG	8,093	3	0					3	119	8,435	3	0	3	124	8,599	3	0	3	126				
TFTM	8,962	3	0					3	132	9,340	3	0	3	137	9,522	3	0	3	140				
T5M	9,156	4	0					2	135	9,542	4	0	2	140	9,728	4	0	2	143				
T5W	9,304	4	0					2	137	9,696	4	0	2	143	9,885	4	0	2	145				
T5LG	9,182	3	0					1	135	9,569	3	0	1	141	9,756	3	0	1	143				
BLC3	6,378	3	0					3	94	6,647	3	0	3	98	6,777	3	0	3	100				
BLC4	6,587	3	0					3	97	6,865	3	0	3	101	6,999	3	0	3	103				
RCCO	6,436	0	0					2	95	6,707	0	0	2	99	6,838	0	0	2	101				
LCCO	6,436	0	0					2	95	6,707	0	0	2	99	6,838	0	0	2	101				
AFR	9,358	3	0					3	138	9,753	3	0	3	143	9,943	3	0	3	146				
P12	103W	30	1050					T1S	13,247	3	0	3	128	13,806	3	0	3	134	14,075	3	0	3	136
								T2M	12,271	4	0	4	119	12,789	4	0	4	124	13,038	4	0	4	126
				T3M	12,412	4	0	4	120	12,935	4	0	4	125	13,187	4	0	4	128				
				T3LG	11,089	3	0	3	107	11,556	3	0	3	112	11,782	3	0	3	114				
				T4M	12,597	4	0	4	122	13,128	4	0	4	127	13,384	4	0	4	129				
				T4LG	11,457	3	0	3	111	11,940	3	0	3	116	12,173	3	0	3	118				
				TFTM	12,686	4	0	4	123	13,221	4	0	4	128	13,479	4	0	4	130				
				T5M	12,960	4	0	2	125	13,507	4	0	2	131	13,770	4	0	2	133				
				T5W	13,170	4	0	3	127	13,726	4	0	3	133	13,994	4	0	3	135				
				T5LG	12,998	3	0	2	126	13,546	3	0	2	131	13,810	3	0	2	134				
				BLC3	9,029	3	0	3	87	9,409	3	0	3	91	9,593	3	0	3	93				
				BLC4	9,324	4	0	4	90	9,718	4	0	4	94	9,907	4	0	4	96				
				RCCO	9,110	1	0	2	88	9,495	1	0	2	92	9,680	1	0	2	94				
				LCCO	9,110	1	0	2	88	9,494	1	0	2	92	9,680	1	0	2	94				
				AFR	13,247	3	0	3	128	13,806	3	0	3	134	14,075	3	0	3	136				
				P13	129W	30	1300	T1S	15,704	3	0	3	122	16,366	3	0	3	127	16,685	4	0	4	130
								T2M	14,547	4	0	4	113	15,161	4	0	4	118	15,457	4	0	4	120
T3M	14,714	4	0					4	114	15,335	4	0	4	119	15,634	4	0	4	121				
T3LG	13,145	3	0					3	102	13,700	3	0	3	106	13,967	3	0	3	108				
T4M	14,933	4	0					4	116	15,563	4	0	4	121	15,867	4	0	4	123				
T4LG	13,582	3	0					3	105	14,155	3	0	3	110	14,431	3	0	3	112				
TFTM	15,039	4	0					4	117	15,673	4	0	4	122	15,979	4	0	4	124				
T5M	15,364	4	0					2	119	16,013	4	0	2	124	16,325	4	0	2	127				
T5W	15,613	5	0					3	121	16,272	5	0	3	126	16,589	5	0	3	129				
T5LG	15,409	3	0					2	120	16,059	3	0	2	125	16,372	4	0	2	127				
BLC3	10,703	4	0					4	83	11,155	4	0	4	87	11,372	4	0	4	88				
BLC4	11,054	4	0					4	86	11,520	4	0	4	89	11,745	4	0	4	91				
RCCO	10,800	1	0					2	84	11,256	1	0	2	87	11,475	1	0	3	89				
LCCO	10,800	1	0					2	84	11,255	1	0	2	87	11,475	1	0	3	89				
AFR	15,704	3	0					3	122	16,366	3	0	3	127	16,685	4	0	4	130				



# Dimensions

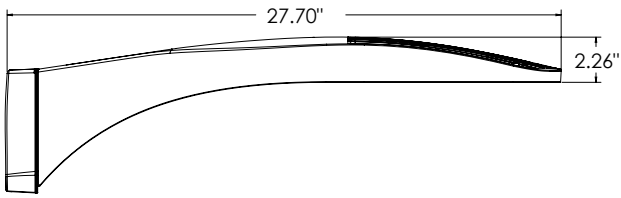


**DSX0 with RPA, RPA5, SPA5, SPA8N mount**  
**Weight: 25 lbs**

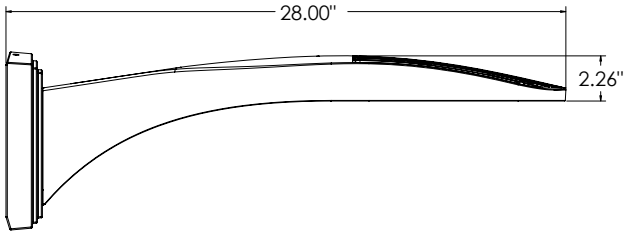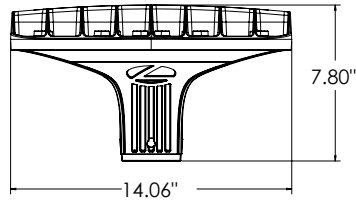


**DSX0 with WBA mount**  
**Weight: 27 lb**

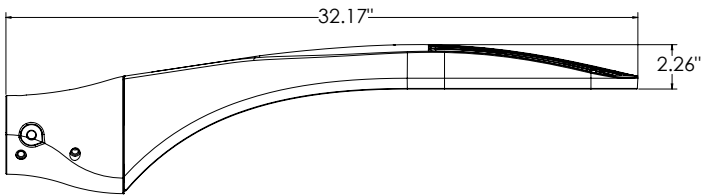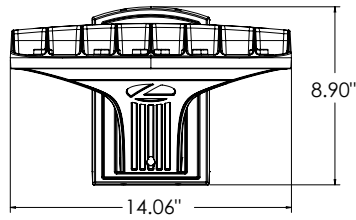


**DSX0 with MA mount**  
**Weight: 28 lbs**

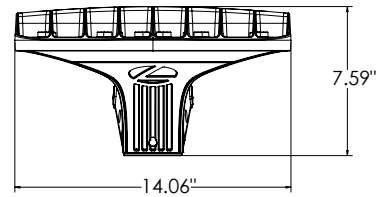


**SPA (STANDARD ARM)**

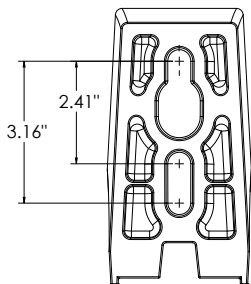


**RPA**

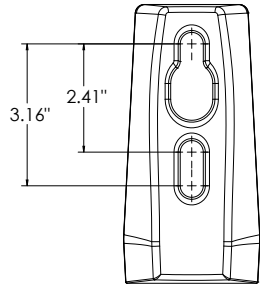


**SPA5**

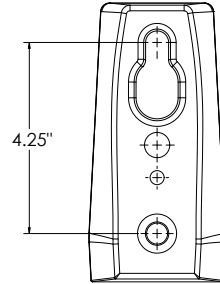

**RPA5**

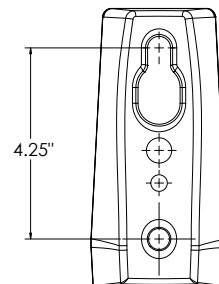




**SPA8N**

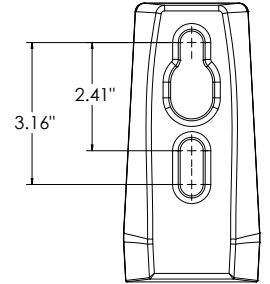



## nLight Sensor Coverage Pattern

### NLTAIR2 PIRHN

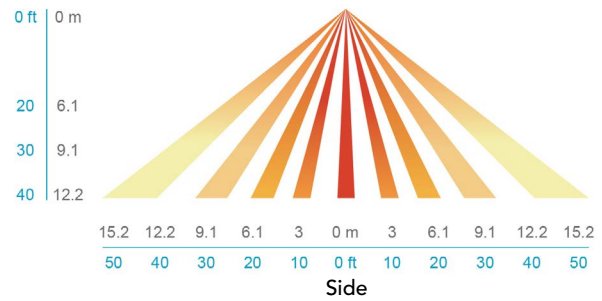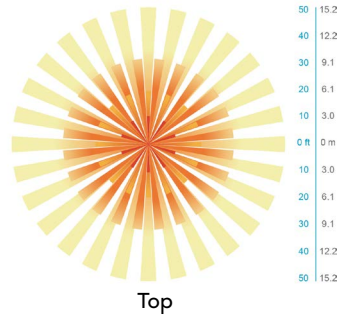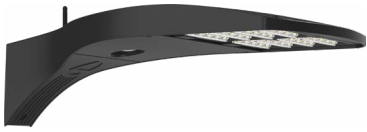

## FEATURES & SPECIFICATIONS

### INTENDED USE

The sleek design of the D-Series Size 0 reflects the embedded high performance LED technology. It is ideal for many commercial and municipal applications, such as parking lots, plazas, campuses, and pedestrian areas.

### CONSTRUCTION

Single-piece die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. Modular design allows for ease of maintenance and future light engine upgrades. The LED driver is mounted in direct contact with the casting to promote low operating temperature and long life. Housing driver compartment is completely sealed against moisture and environmental contaminants (IP66). Vibration rated per ANSI C136.31 for 3G. Low EPA (0.44 ft<sup>2</sup>) for optimized pole wind loading.

### FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Available in both textured and non-textured finishes.

### COASTAL CONSTRUCTION (CCE)

Optional corrosion resistant construction is engineered with added corrosion protection in materials and/or pre-treatment of base material under super durable paint. Provides additional corrosion protection for applications near coastal areas. Finish is salt spray tested to over 5,000 hours per ASTM B117 with scribe rating of 10. Additional lead-times may apply.

### OPTICS

Precision-molded proprietary silicone lenses are engineered for superior area lighting distribution, uniformity, and pole spacing. Light engines are available in 3000 K, 4000 K or 5000 K (70 CRI) configurations. 80CRI configurations are also available. The D-Series Size 0 has zero uplight and qualifies as a Nighttime Friendly™ product, meaning it is consistent with the LEED® and Green Globes™ criteria for eliminating wasteful uplight.

### ELECTRICAL

Light engine(s) configurations consist of high-efficacy LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life (up to L80/100,000 hours at 25°C). Class 1 electronic drivers are designed to have a power factor >90%, THD <20%, and an expected life of 100,000 hours with <1% failure rate. Easily serviceable 10kV surge protection device meets a minimum Category C Low operation (per ANSI/IEEE C62.41.2).

### STANDARD CONTROLS

The DSX0 LED area luminaire has a number of control options. DSX Size 0, comes standard with 0-10V dimming driver. Dusk to dawn controls can be utilized via optional NEMA twist-lock photocell receptacles. PIR integrated motion sensor with on-board photocell feature field-adjustable programming and are suitable for mounting heights up to 40 feet. Control option BL features a bi-level device that allows a second control circuit to switch all light engines to either 30% or 50% light output.

### nLIGHT AIR CONTROLS

The DSX0 LED area luminaire is also available with nLight® AIR for the ultimate in wireless control. This powerful controls platform provides out-of-the-box basic motion sensing and photocontrol functionality and is suitable for mounting heights up to 40 feet. Once commissioned using a smartphone and the easy-to-use CLAIRITY app, nLight AIR equipped luminaires can be grouped, resulting in motion sensor and photocell group response without the need for additional equipment. Scheduled dimming with motion sensor over-ride can be achieved when used with the nLight Eclipse. Additional information about nLight Air can be found [here](#).

### INSTALLATION

Integral mounting arm allows for fast mounting using Lithonia standard #8 drilling and accommodates pole drilling's from 2.41 to 3.12" on center. The standard "SPA" option for square poles and the "RPA" option for round poles use the #8 drilling. For #5 pole drillings, use SPA5 or RPA5. Additional mountings are available including a wall bracket (WBA) and mast arm (MA) option that allows luminaire attachment to a 2 3/8" horizontal mast arm.

### LISTINGS

UL listed to meet U.S. and Canadian standards. UL Listed for wet locations. Light engines are IP66 rated; luminaire is IP66 rated. Rated for -40°C minimum ambient.

DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product. Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org/QPL](http://www.designlights.org/QPL) to confirm which versions are qualified.

International Dark-Sky Association (IDA) Fixture Seal of Approval (FSA) is available for all products on this page utilizing 3000K color temperature only.

### GOVERNMENT PROCUREMENT

BAA – Buy America(n) Act: Product with the BAA option qualifies as a domestic end product under the Buy American Act as implemented in the FAR and DFARS. Product with the BAA option also qualifies as manufactured in the United States under DOT Buy America regulations.

BABA – Build America Buy America: Product with the BAA option also qualifies as produced in the United States under the definitions of the Build America, Buy America Act.

Please refer to [www.acuitybrands.com/buy-american](http://www.acuitybrands.com/buy-american) for additional information.

### WARRANTY

5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: [www.acuitybrands.com/support/warranty/terms-and-conditions](http://www.acuitybrands.com/support/warranty/terms-and-conditions)

**Note:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.



# D-Series Size 0 LED Area Luminaire



Catalog  
Number

Notes  
**25' Total Height**


Type  
**OR**

Hit the Tab key or mouse over the page to see all interactive elements.

d<sup>s</sup>series

## Specifications

EPA:	0.44 ft <sup>2</sup> (0.04 m <sup>2</sup> )
Length:	26.18" (66.5 cm)
Width:	14.06" (35.7 cm)
Height H1:	2.26" (5.7 cm)
Height H2:	7.46" (18.9 cm)
Weight:	23 lbs (10.4 kg)

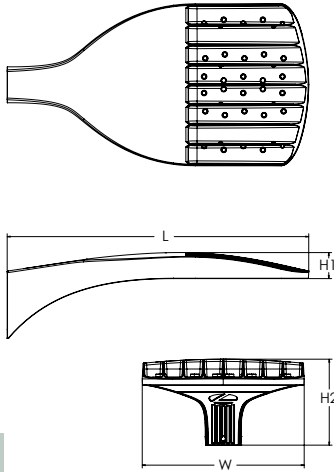

**ds** Design Select options indicated by this color background.

## Introduction

The modern styling of the D-Series features a highly refined aesthetic that blends seamlessly with its environment. The D-Series offers the benefits of the latest in LED technology into a high performance, high efficacy, long-life luminaire.

The photometric performance results in sites with excellent uniformity, greater pole spacing and lower power density. D-Series outstanding photometry aids in reducing the number of poles required in area lighting applications, with typical energy savings of 70% and expected service life of over 100,000 hours.



Items marked by a shaded background qualify for the Design Select program and ship in 15 days or less. To learn more about Design Select, visit [www.acuitybrands.com/designselect](http://www.acuitybrands.com/designselect).  
\*See ordering tree for details

## Ordering Information

**EXAMPLE: DSX0 LED P6 40K 70CRI T3M MVOLT SPA NLTAIR2 PIRHN DDBXD**

DSX0 LED	P5	40K	80CRI	T5LG	MVOLT	RPA		
Series	LEDs	Color temperature <sup>2</sup>	Color Rendering Index <sup>2</sup>	Distribution	Voltage	Mounting		
DSX0 LED	<b>Forward optics</b>		(this section 70CRI only)	AFR Automotive front row T1S Type I short T2M Type II medium T3M Type III medium T3LG Type III low glare <sup>3</sup> T4M Type IV medium T4LG Type IV low glare <sup>3</sup> TFTM Forward throw medium	T5M Type V medium T5LG Type V low glare T5W Type V wide BLC3 Type III backlight control <sup>3</sup> BLC4 Type IV backlight control <sup>3</sup> LCCO Left corner cutoff <sup>3</sup> RCCO Right corner cutoff <sup>3</sup>	MVOLT (120V-277V) <sup>4</sup> HVOLT (347V-480V) <sup>5,6</sup> XVOLT (277V-480V) <sup>7,8</sup> 120 <sup>16, 24</sup> 208 <sup>16, 24</sup> 240 <sup>16, 24</sup> 277 <sup>16, 24</sup> 347 <sup>16, 24</sup> 480 <sup>16, 24</sup>	<b>Shipped included</b> SPA Square pole mounting (#8 drilling, 3.5" min. SQ pole) RPA Round pole mounting (#8 drilling, 3" min. RND pole) SPA5 Square pole mounting (#5 drilling, 3" min. SQ pole) <sup>9</sup> RPA5 Round pole mounting (#5 drilling, 3" min. RND pole) <sup>9</sup> SPA8N Square narrow pole mounting (#8 drilling, 3" min. SQ pole) WBA Wall bracket <sup>10</sup> MA Mast arm adapter (mounts on 2 3/8" OD horizontal tenon)	
	P1	P5	30K 3000K					70CRI
	P2	P6	40K 4000K					70CRI
	P3	P7	50K 5000K					70CRI
	<b>Rotated optics</b>		(this section 80CRI only, extended lead times apply)					
	P10 <sup>1</sup>	P12 <sup>1</sup>	27K 2700K					80CRI
	P11 <sup>1</sup>	P13 <sup>1</sup>	30K 3000K					80CRI
			35K 3500K					80CRI
			40K 4000K					80CRI
			50K 5000K					80CRI
DMG	--				DDBXD			
<b>Control options</b>				<b>Other options</b>		<b>Finish (required)</b>		
<b>Shipped installed</b>		PER7 Seven-pin receptacle only (controls ordered separate) <sup>14, 19</sup>		<b>Shipped installed</b>		DDBXD Dark Bronze		
NLTAIR2 PIRHN	nLight AIR gen 2 enabled with bi-level motion / ambient sensor, 8-40' mounting height, ambient sensor enabled at 2fc. <sup>11, 12, 18, 19</sup>		FAO Field adjustable output <sup>15, 19</sup>	HS Houseside shield (black finish standard) <sup>20</sup>	DBLXD Black			
PIR	High/low, motion/ambient sensor, 8-40' mounting height, ambient sensor enabled at 2fc. <sup>13, 18, 19</sup>		BL30 Bi-level switched dimming, 30% <sup>16, 19</sup>	L90 Left rotated optics <sup>1</sup>	DNAXD Natural Aluminum			
PER	NEMA twist-lock receptacle only (controls ordered separate) <sup>14</sup>		BL50 Bi-level switched dimming, 50% <sup>16, 19</sup>	R90 Right rotated optics <sup>1</sup>	DWHXD White			
PER5	Five-pin receptacle only (controls ordered separate) <sup>14, 19</sup>		DMG 0-10v dimming wires pulled outside fixture (for use with an external control, ordered separately) <sup>17</sup>	CCE Coastal Construction <sup>21</sup>	DDBTXD Textured dark bronze			
				HA 50°C ambient operation <sup>22</sup>	DBLBXD Textured black			
				BAA Buy America(n) Act Compliant	DNATXD Textured natural aluminum			
				SF Single fuse (120, 277, 347V) <sup>24</sup>	DWHGXD Textured white			
				DF Double fuse (208, 240, 480V) <sup>24</sup>				
				<b>Shipped separately</b>				
				EGSR External Glare Shield (reversible, field install required, matches housing finish)				
				BSDB Bird Spikes (field install required)				



One Lithonia Way • Conyers, Georgia 30012 • Phone: 1-800-705-SERV (7378) • [www.lithonia.com](http://www.lithonia.com)  
© 2011-2024 Acuity Brands Lighting, Inc. All rights reserved.

DSX0-LED  
Rev. 03/26/24  
Page 1 of 9

## Ordering Information

### Accessories


Ordered and shipped separately.

DLL127F 1.5 JU	Photocell - SSL twist-lock (120-277V) <sup>23</sup>
DLL347F 1.5 CUL JU	Photocell - SSL twist-lock (347V) <sup>23</sup>
DLL480F 1.5 CUL JU	Photocell - SSL twist-lock (480V) <sup>23</sup>
DSHORT SBK	Shorting cap <sup>23</sup>
DSX0HS P#	House-side shield (enter package number P1-7, P10-13 in place of #)
DSXRPA (FINISH)	Round pole adapter (#8 drilling, specify finish)
DSXRPA5 (FINISH)	Round pole adapter #5 drilling (specify finish)
DSXSPA5 (FINISH)	Square pole adapter #5 drilling (specify finish)
DSX0EGSR (FINISH)	External glare shield (specify finish)
DSX0SDB (FINISH)	Bird spike deterrent bracket (specify finish)


### NOTES

- 1 Rotated optics available with packages P10, P11, P12 and P13. Must be combined with option L90 or R90.
- 2 30K, 40K, and 50K available in 70CRI and 80CRI. 27K and 35K only available with 80CRI. Contact Technical Support for other possible combinations.
- 3 T3LG, T4LG, BLC3, BLC4, LCCO, RCCO not available with option HS.
- 4 MVOLT driver operates on any line voltage from 120-277V (50/60 Hz).
- 5 HVOLT driver operates on any line voltage from 347-480V (50/60 Hz).
- 6 HVOLT not available with package P1, P2 and P10 when combined with option NLTAIR2 PIRHN or option PIR.
- 7 XVOLT operates with any voltage between 277V and 480V (50/60 Hz).
- 8 XVOLT not available in packages P1, P2 or P10. XVOLT not available with fusing (SF or DF).
- 9 SPAS and RPA5 for use with #5 drilling only (Not for use with #8 drilling).
- 10 WBA cannot be combined with Type 5 distributions plus photocell (PER).
- 11 NLTAIR2 and PIRHN must be ordered together. For more information on nLight Air 2.
- 12 NLTAIR2 PIRHN not available with other controls including PIR, PER, PER5, PER7, FAO, BL30, BL50 and DMG. NLTAIR2 PIRHN not available with P1, P2 and P10 using HVOLT. NLTAIR2 PIRHN not available with P1, P2 and P10 using XVOLT. NLTAIR2 PIRHN not available with P1 using MVOLT.
- 13 PIR not available with NLTAIR2, PER, PER5, PER7, FAO BL30, BL50 and DMG. PIR not available with P1, P2 and P10 using HVOLT. PIR not available with P1, P2 and P10 using XVOLT. PIR not available with P1 using MVOLT.
- 14 PER/PER5/PER7 not available with NLTAIR2, PIR, BL30, BL50. Photocell ordered and shipped as a separate line item from Acuity Brands Controls. See accessories. Shorting Cap included.
- 15 FAO not available with other dimming control options NLTAIR2 PIRHN, PIR, PER5, PER7, BL30, BL50, or DMG.
- 16 BL30 and BL50 are not available with NLTAIR2 PIRHN, PIR, PER, PER5, PER7, FAO and DMG. BL30 or BL50 must specify 120, 277 or 347V. Consult tech support for 208, 240 or 480V.
- 17 DMG not available with NLTAIR2 PIRHN, PIR, PER, PER5, PER7, BL30, BL50 and FAO.
- 18 Reference Motion Sensor Default Settings table on page 4 to see functionality.
- 19 Reference Controls Options table on page 4.
- 20 Option HS not available with T3LG, T4LG, BLC3, BLC4, LCCO and RCCO distribution. Also available as a separate accessory; see Accessories information.
- 21 CCE option not available with option B5 and EGSR. Contact Technical Support for availability.
- 22 Option HA not available with performance packages P6, P7, P12 and P13.
- 23 Requires luminaire to be specified with PER, PER5 or PER7 option. See Controls Table on page 4.
- 24 Single fuse (SF) requires 120V, 277V, or 347V. Double fuse (DF) requires 208V, 240V or 480V. XVOLT not available with fusing (SF or DF).

## Shield Accessories

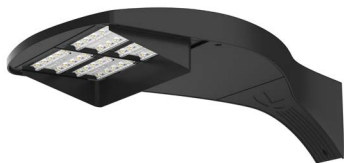

External Glare Shield (EGSR)


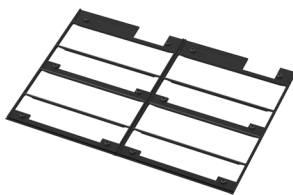


House Side Shield (HS)

## Drilling

### HANDHOLE ORIENTATION

(from top of pole)

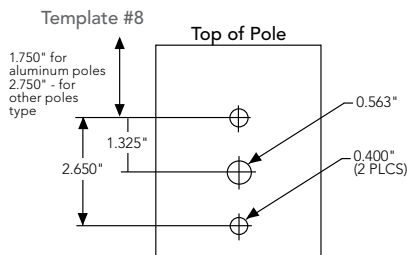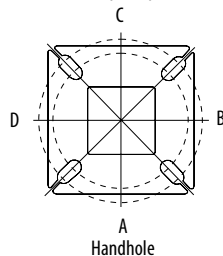

### Tenon Mounting Slipfitter

Tenon O.D.	Mounting	Single Unit	2 @ 180	2 @ 90	3 @ 90	3 @ 120	4 @ 90
2-3/8"	RPA	AS3-5 190	AS3-5 280	AS3-5 290	AS3-5 390	AS3-5 320	AS3-5 490
2-7/8"	RPA	AST25-190	AST25-280	AST25-290	AST25-390	AST25-320	AST25-490
4"	RPA	AST35-190	AST35-280	AST35-290	AST35-390	AST35-320	AST35-490

Mounting Option	Drilling Template	Single	2 @ 180	2 @ 90	3 @ 90	3 @ 120	4 @ 90
Head Location		Side B	Side B & D	Side B & C	Side B, C & D	Round Pole Only	Side A, B, C & D
Drill Nomenclature	#8	DM19AS	DM28AS	DM29AS	DM39AS	DM32AS	DM49AS
Minimum Acceptable Outside Pole Dimension							
SPA	#8	3.5"	3.5"	3.5"	3.5"		3.5"
RPA	#8	3"	3"	3"	3"	3"	3"
SPAS	#5	3"	3"	3"	3"		3"
RPA5	#5	3"	3"	3"	3"	3"	3"
SPA8N	#8	3"	3"	3"	3"		3"

### DSX0 Area Luminaire - EPA

\*Includes luminaire and integral mounting arm. Other tenons, arms, brackets or other accessories are not included in this EPA data.

Fixture Quantity & Mounting Configuration	Single DM19	2 @ 180 DM28	2 @ 90 DM29	3 @ 90 DM39	3 @ 120 DM32	4 @ 90 DM49
Mounting Type						
DSX0 with SPA	0.44	0.88	0.96	1.18	---	1.16
DSX0 with SPAS, SPA8N	0.51	1.02	1.06	1.26	---	1.29
DSX0 with RPA, RPA5	0.51	1.02	1.06	1.26	1.24	1.29
DSX0 with MA	0.64	1.28	1.24	1.67	1.70	1.93

Isofootcandle plots for the DSX0 LED P7 40K 70CRI. Distances are in units of mounting height (20').



## Performance Data

### Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient	Lumen Multiplier	
0°C	32°F	1.04
5°C	41°F	1.04
10°C	50°F	1.03
15°C	59°F	1.02
20°C	68°F	1.01
<b>25°C</b>	<b>77°C</b>	<b>1.00</b>
30°C	86°F	0.99
35°C	95°F	0.98
40°C	104°F	0.97

### Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the platforms noted in a **25°C ambient**, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	Lumen Maintenance Factor
0	1.00
25,000	0.94
50,000	0.89
100,000	0.80

### FAO Dimming Settings

FAO Position	% Wattage	% Lumen Output
8	100%	100%
7	93%	95%
6	80%	85%
5	66%	73%
4	54%	61%
3	41%	49%
2	29%	36%
1	15%	20%

\*Note: Calculated values are based on original performance package data. When calculating new values for given FAO position, use published values for each package based on input watts and lumens by optic type.

### Electrical Load

	Performance Package	LED Count	Drive Current (mA)	Wattage	Current (A)					
					120V	208V	240V	277V	347V	480V
Forward Optics (Non-Rotated)	P1	20	530	34	0.28	0.16	0.14	0.12	0.10	0.07
	P2	20	700	45	0.38	0.22	0.19	0.16	0.13	0.09
	P3	20	1050	69	0.57	0.33	0.29	0.25	0.20	0.14
	P4	20	1400	94	0.78	0.45	0.39	0.34	0.27	0.19
	P5	40	700	89	0.75	0.43	0.38	0.33	0.26	0.19
	P6	40	1050	136	1.14	0.66	0.57	0.49	0.39	0.29
	P7	40	1300	170	1.42	0.82	0.71	0.62	0.49	0.36
Rotated Optics (Requires L90 or R90)	P10	30	530	51	0.42	0.24	0.21	0.18	0.15	0.11
	P11	30	700	67	0.57	0.33	0.28	0.25	0.20	0.14
	P12	30	1050	103	0.86	0.50	0.43	0.37	0.30	0.22
	P13	30	1300	129	1.07	0.62	0.54	0.46	0.37	0.27

### LED Color Temperature / Color Rendering Multipliers

	70 CRI		80CRI		90CRI	
	Lumen Multiplier	Availability	Lumen Multiplier	Availability	Lumen Multiplier	Availability
5000K	102%	Standard	92%	Extended lead-time	71%	(see note)
4000K	100%	Standard	92%	Extended lead-time	67%	(see note)
3500K	100%	(see note)	90%	Extended lead-time	63%	(see note)
3000K	96%	Standard	87%	Extended lead-time	61%	(see note)
2700K	94%	(see note)	85%	Extended lead-time	57%	(see note)

Note: Some LED types are available as per special request. Contact Technical Support for more information.

### Motion Sensor Default Settings

Option	Unoccupied Dimmed Level	High Level (when occupied)	Photocell Operation	Dwell Time	Ramp-up Time	Dimming Fade Rate
PIR	30%	100%	Enabled @ 2FC	7.5 min	3 sec	5 min
NLTAIR2 PIRHN	30%	100%	Enabled @ 2FC	7.5 min	3 sec	5 min

### Controls Options

Nomenclature	Description	Functionality	Primary control device	Notes
FAO	Field adjustable output device installed inside the luminaire; wired to the driver dimming leads.	Allows the luminaire to be manually dimmed, effectively trimming the light output.	FAO device	Cannot be used with other controls options that need the 0-10V leads
DS (not available on DSX0)	Drivers wired independently for 50/50 luminaire operation	The luminaire is wired to two separate circuits, allowing for 50/50 operation.	Independently wired drivers	Requires two separately switched circuits. Consider nLight AIR as a more cost effective alternative.
PERS or PER7	Twist-lock photocell receptacle	Compatible with standard twist-lock photocells for dusk to dawn operation, or advanced control nodes that provide 0-10V dimming signals.	Twist-lock photocells such as DLL Elite or advanced control nodes such as ROAM.	Pins 4 & 5 to dimming leads on driver, Pins 6 & 7 are capped inside luminaire. Cannot be used with other controls options that need the 0-10V leads.
PIR	Motion sensor with integral photocell. Sensor suitable for 8' to 40' mounting height.	Luminaires dim when no occupancy is detected.	Acuity Controls rSBG	Cannot be used with other controls options that need the 0-10V leads.
NLTAIR2 PIRHN	nLight AIR enabled luminaire for motion sensing, photocell and wireless communication.	Motion and ambient light sensing with group response. Scheduled dimming with motion sensor over-ride when wirelessly connected to the nLight Eclipse.	nLight Air rSBG	nLight AIR sensors can be programmed and commissioned from the ground using the CIAIRity Pro app. Cannot be used with other controls options that need the 0-10V leads.
BL30 or BL50	Integrated bi-level device that allows a second control circuit to switch all light engines to either 30% or 50% light output	BLC device provides input to 0-10V dimming leads on all drivers providing either 100% or dimmed (30% or 50%) control by a secondary circuit	BLC UVOLT1	BLC device is powered off the 0-10V dimming leads, thus can be used with any input voltage from 120 to 480V

## Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.

Forward Optics																							
Performance Package	System Watts	LED Count	Drive Current (mA)	Distribution Type	30K					40K					50K								
					(3000K, 70 CRI)					(4000K, 70 CRI)					(5000K, 70 CRI)								
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW				
P1	33W	20	530	T1S	4,906	1	0	1	148	5,113	1	0	1	154	5,213	1	0	1	157				
				T2M	4,545	1	0	2	137	4,736	1	0	2	143	4,829	1	0	2	145				
				T3M	4,597	1	0	2	138	4,791	1	0	2	144	4,885	1	0	2	147				
				T3LG	4,107	1	0	1	124	4,280	1	0	1	129	4,363	1	0	1	131				
				T4M	4,666	1	0	2	141	4,863	1	0	2	146	4,957	1	0	2	149				
				T4LG	4,244	1	0	1	128	4,423	1	0	1	133	4,509	1	0	1	136				
				TFTM	4,698	1	0	2	141	4,896	1	0	2	147	4,992	1	0	2	150				
				T5M	4,801	3	0	1	145	5,003	3	0	1	151	5,101	3	0	1	154				
				T5W	4,878	3	0	1	147	5,084	3	0	2	153	5,183	3	0	2	156				
				T5LG	4,814	2	0	1	145	5,018	2	0	1	151	5,115	2	0	1	154				
				BLC3	3,344	0	0	1	101	3,485	0	0	1	105	3,553	0	0	1	107				
				BLC4	3,454	0	0	2	104	3,599	0	0	2	108	3,670	0	0	2	111				
				RCCO	3,374	0	0	1	102	3,517	0	0	1	106	3,585	0	0	1	108				
				LCCO	3,374	0	0	1	102	3,517	0	0	1	106	3,585	0	0	1	108				
				AFR	4,906	1	0	1	148	5,113	1	0	1	154	5,213	1	0	1	157				
				P2	45W	20	700	T1S	6,328	1	0	1	140	6,595	1	0	1	146	6,724	1	0	1	149
								T2M	5,862	1	0	2	130	6,109	1	0	2	135	6,228	1	0	2	138
T3M	5,930	1	0					3	131	6,180	1	0	3	137	6,301	1	0	3	140				
T3LG	5,297	1	0					1	117	5,521	1	0	1	122	5,628	1	0	1	125				
T4M	6,018	1	0					3	133	6,272	1	0	3	139	6,395	1	0	3	142				
T4LG	5,474	1	0					1	121	5,705	1	0	1	126	5,816	1	0	1	129				
TFTM	6,060	1	0					3	134	6,316	1	0	3	140	6,439	1	0	3	143				
T5M	6,192	3	0					1	137	6,453	3	0	2	143	6,579	3	0	2	146				
T5W	6,293	3	0					2	139	6,558	3	0	2	145	6,686	3	0	2	148				
T5LG	6,210	2	0					1	138	6,472	3	0	1	143	6,598	3	0	1	146				
BLC3	4,313	0	0					2	96	4,495	0	0	2	100	4,583	0	0	2	102				
BLC4	4,455	0	0					2	99	4,643	0	0	2	103	4,733	0	0	2	105				
RCCO	4,352	0	0					2	96	4,536	0	0	2	100	4,624	0	0	2	102				
LCCO	4,352	0	0					2	96	4,536	0	0	2	100	4,624	0	0	2	102				
AFR	6,328	1	0					1	140	6,595	1	0	1	146	6,724	1	0	1	149				
P3	69W	20	1050					T1S	9,006	1	0	2	131	9,386	1	0	2	136	9,569	1	0	2	139
								T2M	8,343	2	0	3	121	8,694	2	0	3	126	8,864	2	0	3	129
				T3M	8,439	2	0	3	122	8,795	2	0	3	128	8,967	2	0	3	130				
				T3LG	7,539	1	0	2	109	7,857	1	0	2	114	8,010	1	0	2	116				
				T4M	8,565	2	0	3	124	8,926	2	0	3	129	9,100	2	0	3	132				
				T4LG	7,790	1	0	2	113	8,119	1	0	2	118	8,277	1	0	2	120				
				TFTM	8,624	1	0	3	125	8,988	1	0	3	130	9,163	2	0	3	133				
				T5M	8,812	3	0	2	128	9,184	4	0	2	133	9,363	4	0	2	136				
				T5W	8,955	4	0	2	130	9,333	4	0	2	135	9,515	4	0	2	138				
				T5LG	8,838	3	0	1	128	9,211	3	0	1	134	9,390	3	0	1	136				
				BLC3	6,139	0	0	2	89	6,398	0	0	2	93	6,522	0	0	2	95				
				BLC4	6,340	0	0	3	92	6,607	0	0	3	96	6,736	0	0	3	98				
				RCCO	6,194	1	0	2	90	6,455	1	0	2	94	6,581	1	0	2	95				
				LCCO	6,194	1	0	2	90	6,455	1	0	2	94	6,581	1	0	2	95				
				AFR	9,006	1	0	2	131	9,386	1	0	2	136	9,569	1	0	2	139				
				P4	93W	20	1400	T1S	11,396	1	0	2	122	11,877	1	0	2	128	12,109	2	0	2	130
								T2M	10,557	2	0	3	113	11,003	2	0	3	118	11,217	2	0	3	121
T3M	10,680	2	0					3	115	11,130	2	0	3	120	11,347	2	0	3	122				
T3LG	9,540	1	0					2	103	9,942	1	0	2	107	10,136	1	0	2	109				
T4M	10,839	2	0					3	117	11,296	2	0	3	121	11,516	2	0	4	124				
T4LG	9,858	1	0					2	106	10,274	1	0	2	110	10,474	1	0	2	113				
TFTM	10,914	2	0					3	117	11,374	2	0	3	122	11,596	2	0	3	125				
T5M	11,152	4	0					2	120	11,622	4	0	2	125	11,849	4	0	2	127				
T5W	11,332	4	0					3	122	11,811	4	0	3	127	12,041	4	0	3	129				
T5LG	11,184	3	0					1	120	11,656	3	0	2	125	11,883	3	0	2	128				
BLC3	7,768	0	0					2	83	8,096	0	0	2	87	8,254	0	0	2	89				
BLC4	8,023	0	0					3	86	8,362	0	0	3	90	8,524	0	0	3	92				
RCCO	7,838	1	0					2	84	8,169	1	0	2	88	8,328	1	0	2	90				
LCCO	7,838	1	0					2	84	8,169	1	0	2	88	8,328	1	0	2	90				
AFR	11,396	1	0					2	122	11,877	1	0	2	128	12,109	2	0	2	130				

# Performance Data

## Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.

Forward Optics																							
Performance Package	System Watts	LED Count	Drive Current (mA)	Distribution Type	30K					40K					50K								
					(3000K, 70 CRI)					(4000K, 70 CRI)					(5000K, 70 CRI)								
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW				
P5	90W	40	700	T1S	12,380	2	0	2	137	12,902	2	0	2	143	13,154	2	0	2	146				
				T2M	11,468	2	0	3	127	11,952	2	0	3	133	12,185	2	0	3	135				
				T3M	11,601	2	0	3	129	12,091	2	0	3	134	12,326	2	0	4	137				
				T3LG	10,363	2	0	2	115	10,800	2	0	2	120	11,011	2	0	2	122				
				T4M	11,774	2	0	4	131	12,271	2	0	4	136	12,510	2	0	4	139				
				T4LG	10,709	1	0	2	119	11,160	2	0	2	124	11,378	2	0	2	126				
				TFTM	11,856	2	0	3	132	12,356	2	0	4	137	12,596	2	0	4	140				
				T5M	12,114	4	0	2	134	12,625	4	0	2	140	12,871	4	0	2	143				
				T5W	12,310	4	0	3	137	12,830	4	0	3	142	13,080	4	0	3	145				
				T5LG	12,149	3	0	2	135	12,662	3	0	2	141	12,908	3	0	2	143				
				BLC3	8,438	0	0	2	94	8,794	0	0	2	98	8,966	0	0	2	99				
				BLC4	8,715	0	0	3	97	9,083	0	0	3	101	9,260	0	0	3	103				
				RCCO	8,515	1	0	2	94	8,874	1	0	2	98	9,047	1	0	2	100				
				LCCO	8,515	1	0	2	94	8,874	1	0	2	98	9,047	1	0	2	100				
				AFR	12,380	2	0	2	137	12,902	2	0	2	143	13,154	2	0	2	146				
				P6	137W	40	1050	T1S	17,545	2	0	3	128	18,285	2	0	3	133	18,642	2	0	3	136
								T2M	16,253	3	0	4	119	16,939	3	0	4	124	17,269	3	0	4	126
T3M	16,442	2	0					4	120	17,135	3	0	4	125	17,469	3	0	4	128				
T3LG	14,687	2	0					2	107	15,306	2	0	2	112	15,605	2	0	2	114				
T4M	16,687	2	0					4	122	17,391	3	0	5	127	17,730	3	0	5	129				
T4LG	15,177	2	0					2	111	15,817	2	0	2	115	16,125	2	0	2	118				
TFTM	16,802	2	0					4	123	17,511	2	0	4	128	17,852	2	0	5	130				
T5M	17,168	4	0					2	125	17,893	5	0	3	131	18,241	5	0	3	133				
T5W	17,447	5	0					3	127	18,183	5	0	3	133	18,537	5	0	3	135				
T5LG	17,218	4	0					2	126	17,944	4	0	2	131	18,294	4	0	2	134				
BLC3	11,959	0	0					3	87	12,464	0	0	3	91	12,707	0	0	3	93				
BLC4	12,352	0	0					4	90	12,873	0	0	4	94	13,124	0	0	4	96				
RCCO	12,067	1	0					3	88	12,576	1	0	3	92	12,821	1	0	3	94				
LCCO	12,067	1	0					3	88	12,576	1	0	3	92	12,821	1	0	3	94				
AFR	17,545	2	0					3	128	18,285	2	0	3	133	18,642	2	0	3	136				
P7	171W	40	1300					T1S	20,806	2	0	3	122	21,683	2	0	3	127	22,106	2	0	3	129
								T2M	19,273	3	0	4	113	20,086	3	0	4	118	20,478	3	0	4	120
				T3M	19,497	3	0	5	114	20,319	3	0	5	119	20,715	3	0	5	121				
				T3LG	17,416	2	0	2	102	18,151	2	0	2	106	18,504	2	0	2	108				
				T4M	19,787	3	0	5	116	20,622	3	0	5	121	21,024	3	0	5	123				
				T4LG	17,997	2	0	2	105	18,756	2	0	2	110	19,121	2	0	2	112				
				TFTM	19,924	3	0	5	117	20,765	3	0	5	122	21,170	3	0	5	124				
				T5M	20,359	5	0	3	119	21,217	5	0	3	124	21,631	5	0	3	127				
				T5W	20,689	5	0	3	121	21,561	5	0	3	126	21,982	5	0	3	129				
				T5LG	20,418	4	0	2	120	21,279	4	0	2	125	21,694	4	0	2	127				
				BLC3	14,182	0	0	3	83	14,780	0	0	3	87	15,068	0	0	3	88				
				BLC4	14,647	0	0	4	86	15,265	0	0	4	89	15,562	0	0	4	91				
				RCCO	14,309	1	0	3	84	14,913	1	0	3	87	15,204	1	0	3	89				
				LCCO	14,309	1	0	3	84	14,913	1	0	3	87	15,204	1	0	3	89				
				AFR	20,806	2	0	3	122	21,683	2	0	3	127	22,106	2	0	3	129				

# Performance Data


## Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.



Rotated Optics																							
Performance Package	System Watts	LED Count	Drive Current (mA)	Distribution Type	30K					40K					50K								
					(3000K, 70 CRI)					(4000K, 70 CRI)					(5000K, 70 CRI)								
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW				
P10	51W	30	530	T1S	7,399	3	0	3	145	7,711	3	0	3	151	7,862	3	0	3	154				
				T2M	6,854	3	0	3	135	7,144	3	0	3	140	7,283	3	0	3	143				
				T3M	6,933	3	0	3	136	7,225	3	0	3	142	7,366	3	0	3	145				
				T3LG	6,194	2	0	2	122	6,455	2	0	2	127	6,581	2	0	2	129				
				T4M	7,036	3	0	3	138	7,333	3	0	3	144	7,476	3	0	3	147				
				T4LG	6,399	2	0	2	126	6,669	2	0	2	131	6,799	2	0	2	134				
				TFTM	7,086	3	0	3	139	7,385	3	0	3	145	7,529	3	0	3	148				
				T5M	7,239	3	0	2	142	7,545	3	0	2	148	7,692	3	0	2	151				
				T5W	7,357	3	0	2	145	7,667	3	0	2	151	7,816	4	0	2	154				
				T5LG	7,260	3	0	1	143	7,567	3	0	1	149	7,714	3	0	1	152				
				BLC3	5,043	3	0	3	99	5,256	3	0	3	103	5,358	3	0	3	105				
				BLC4	5,208	3	0	3	102	5,428	3	0	3	107	5,534	3	0	3	109				
				RCCO	5,089	0	0	2	100	5,303	0	0	2	104	5,407	0	0	2	106				
				LCCO	5,089	0	0	2	100	5,303	0	0	2	104	5,407	0	0	2	106				
				AFR	7,399	3	0	3	145	7,711	3	0	3	151	7,862	3	0	3	154				
				P11	68W	30	700	T1S	9,358	3	0	3	138	9,753	3	0	3	143	9,943	3	0	3	146
								T2M	8,669	3	0	3	127	9,034	3	0	3	133	9,211	3	0	3	135
T3M	8,768	3	0					3	129	9,138	3	0	3	134	9,316	3	0	3	137				
T3LG	7,833	3	0					3	115	8,164	3	0	3	120	8,323	3	0	3	122				
T4M	8,899	3	0					3	131	9,274	3	0	3	136	9,455	3	0	3	139				
T4LG	8,093	3	0					3	119	8,435	3	0	3	124	8,599	3	0	3	126				
TFTM	8,962	3	0					3	132	9,340	3	0	3	137	9,522	3	0	3	140				
T5M	9,156	4	0					2	135	9,542	4	0	2	140	9,728	4	0	2	143				
T5W	9,304	4	0					2	137	9,696	4	0	2	143	9,885	4	0	2	145				
T5LG	9,182	3	0					1	135	9,569	3	0	1	141	9,756	3	0	1	143				
BLC3	6,378	3	0					3	94	6,647	3	0	3	98	6,777	3	0	3	100				
BLC4	6,587	3	0					3	97	6,865	3	0	3	101	6,999	3	0	3	103				
RCCO	6,436	0	0					2	95	6,707	0	0	2	99	6,838	0	0	2	101				
LCCO	6,436	0	0					2	95	6,707	0	0	2	99	6,838	0	0	2	101				
AFR	9,358	3	0					3	138	9,753	3	0	3	143	9,943	3	0	3	146				
P12	103W	30	1050					T1S	13,247	3	0	3	128	13,806	3	0	3	134	14,075	3	0	3	136
								T2M	12,271	4	0	4	119	12,789	4	0	4	124	13,038	4	0	4	126
				T3M	12,412	4	0	4	120	12,935	4	0	4	125	13,187	4	0	4	128				
				T3LG	11,089	3	0	3	107	11,556	3	0	3	112	11,782	3	0	3	114				
				T4M	12,597	4	0	4	122	13,128	4	0	4	127	13,384	4	0	4	129				
				T4LG	11,457	3	0	3	111	11,940	3	0	3	116	12,173	3	0	3	118				
				TFTM	12,686	4	0	4	123	13,221	4	0	4	128	13,479	4	0	4	130				
				T5M	12,960	4	0	2	125	13,507	4	0	2	131	13,770	4	0	2	133				
				T5W	13,170	4	0	3	127	13,726	4	0	3	133	13,994	4	0	3	135				
				T5LG	12,998	3	0	2	126	13,546	3	0	2	131	13,810	3	0	2	134				
				BLC3	9,029	3	0	3	87	9,409	3	0	3	91	9,593	3	0	3	93				
				BLC4	9,324	4	0	4	90	9,718	4	0	4	94	9,907	4	0	4	96				
				RCCO	9,110	1	0	2	88	9,495	1	0	2	92	9,680	1	0	2	94				
				LCCO	9,110	1	0	2	88	9,494	1	0	2	92	9,680	1	0	2	94				
				AFR	13,247	3	0	3	128	13,806	3	0	3	134	14,075	3	0	3	136				
				P13	129W	30	1300	T1S	15,704	3	0	3	122	16,366	3	0	3	127	16,685	4	0	4	130
								T2M	14,547	4	0	4	113	15,161	4	0	4	118	15,457	4	0	4	120
T3M	14,714	4	0					4	114	15,335	4	0	4	119	15,634	4	0	4	121				
T3LG	13,145	3	0					3	102	13,700	3	0	3	106	13,967	3	0	3	108				
T4M	14,933	4	0					4	116	15,563	4	0	4	121	15,867	4	0	4	123				
T4LG	13,582	3	0					3	105	14,155	3	0	3	110	14,431	3	0	3	112				
TFTM	15,039	4	0					4	117	15,673	4	0	4	122	15,979	4	0	4	124				
T5M	15,364	4	0					2	119	16,013	4	0	2	124	16,325	4	0	2	127				
T5W	15,613	5	0					3	121	16,272	5	0	3	126	16,589	5	0	3	129				
T5LG	15,409	3	0					2	120	16,059	3	0	2	125	16,372	4	0	2	127				
BLC3	10,703	4	0					4	83	11,155	4	0	4	87	11,372	4	0	4	88				
BLC4	11,054	4	0					4	86	11,520	4	0	4	89	11,745	4	0	4	91				
RCCO	10,800	1	0					2	84	11,256	1	0	2	87	11,475	1	0	3	89				
LCCO	10,800	1	0					2	84	11,255	1	0	2	87	11,475	1	0	3	89				
AFR	15,704	3	0					3	122	16,366	3	0	3	127	16,685	4	0	4	130				





# Dimensions

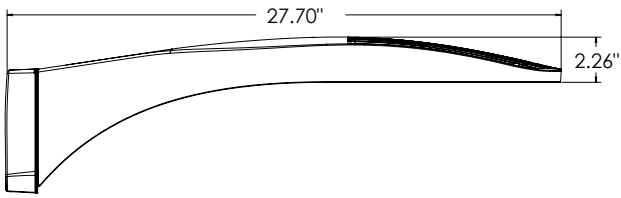


**DSX0 with RPA, RPA5, SPA5, SPA8N mount**  
**Weight: 25 lbs**

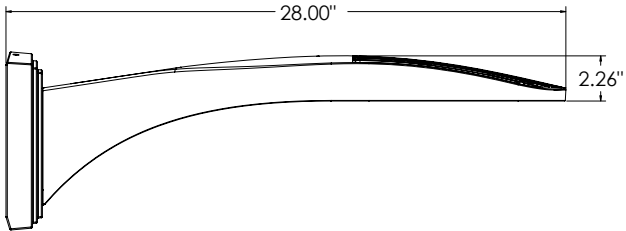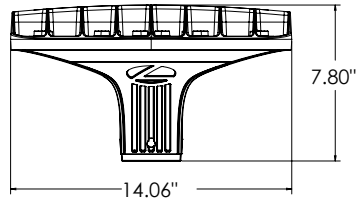


**DSX0 with WBA mount**  
**Weight: 27 lb**

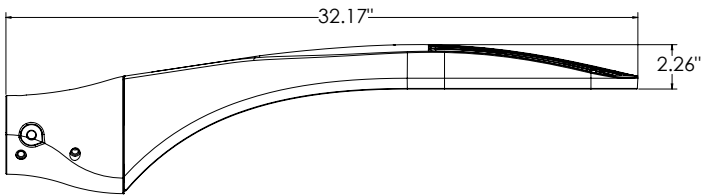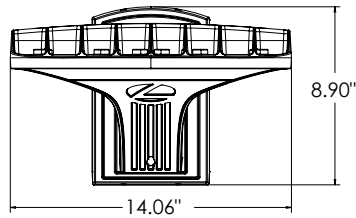


**DSX0 with MA mount**  
**Weight: 28 lbs**

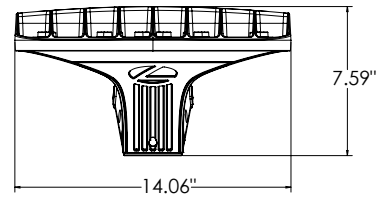


**SPA (STANDARD ARM)**

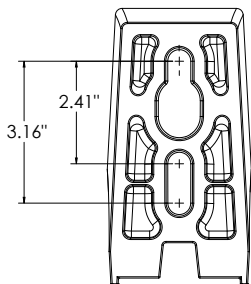


**RPA**

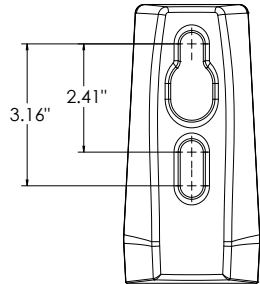


**SPA5**

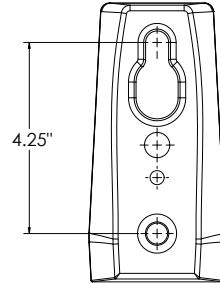

**RPA5**



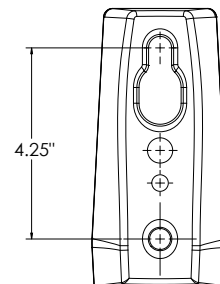


**SPA8N**

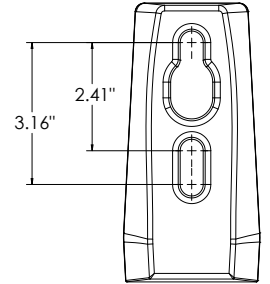

## nLight Sensor Coverage Pattern

### NLTAIR2 PIRHN

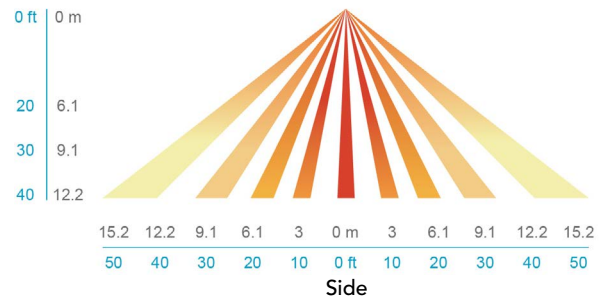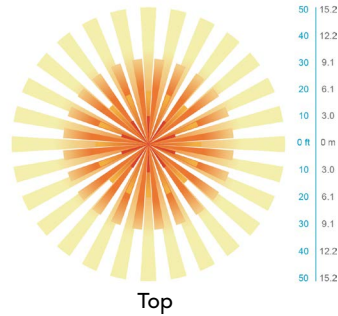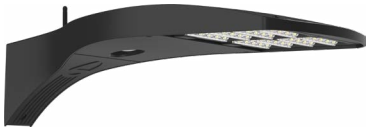

## FEATURES & SPECIFICATIONS

### INTENDED USE

The sleek design of the D-Series Size 0 reflects the embedded high performance LED technology. It is ideal for many commercial and municipal applications, such as parking lots, plazas, campuses, and pedestrian areas.

### CONSTRUCTION

Single-piece die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. Modular design allows for ease of maintenance and future light engine upgrades. The LED driver is mounted in direct contact with the casting to promote low operating temperature and long life. Housing driver compartment is completely sealed against moisture and environmental contaminants (IP66). Vibration rated per ANSI C136.31 for 3G. Low EPA (0.44 ft<sup>2</sup>) for optimized pole wind loading.

### FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Available in both textured and non-textured finishes.

### COASTAL CONSTRUCTION (CCE)

Optional corrosion resistant construction is engineered with added corrosion protection in materials and/or pre-treatment of base material under super durable paint. Provides additional corrosion protection for applications near coastal areas. Finish is salt spray tested to over 5,000 hours per ASTM B117 with scribe rating of 10. Additional lead-times may apply.

### OPTICS

Precision-molded proprietary silicone lenses are engineered for superior area lighting distribution, uniformity, and pole spacing. Light engines are available in 3000 K, 4000 K or 5000 K (70 CRI) configurations. 80CRI configurations are also available. The D-Series Size 0 has zero uplight and qualifies as a Nighttime Friendly™ product, meaning it is consistent with the LEED® and Green Globes™ criteria for eliminating wasteful uplight.

### ELECTRICAL

Light engine(s) configurations consist of high-efficacy LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life (up to L80/100,000 hours at 25°C). Class 1 electronic drivers are designed to have a power factor >90%, THD <20%, and an expected life of 100,000 hours with <1% failure rate. Easily serviceable 10kV surge protection device meets a minimum Category C Low operation (per ANSI/IEEE C62.41.2).

### STANDARD CONTROLS

The DSX0 LED area luminaire has a number of control options. DSX Size 0, comes standard with 0-10V dimming driver. Dusk to dawn controls can be utilized via optional NEMA twist-lock photocell receptacles. PIR integrated motion sensor with on-board photocell feature field-adjustable programming and are suitable for mounting heights up to 40 feet. Control option BL features a bi-level device that allows a second control circuit to switch all light engines to either 30% or 50% light output.

### nLIGHT AIR CONTROLS

The DSX0 LED area luminaire is also available with nLight® AIR for the ultimate in wireless control. This powerful controls platform provides out-of-the-box basic motion sensing and photocontrol functionality and is suitable for mounting heights up to 40 feet. Once commissioned using a smartphone and the easy-to-use CLAIRITY app, nLight AIR equipped luminaires can be grouped, resulting in motion sensor and photocell group response without the need for additional equipment. Scheduled dimming with motion sensor over-ride can be achieved when used with the nLight Eclipse. Additional information about nLight Air can be found [here](#).

### INSTALLATION

Integral mounting arm allows for fast mounting using Lithonia standard #8 drilling and accommodates pole drilling's from 2.41 to 3.12" on center. The standard "SPA" option for square poles and the "RPA" option for round poles use the #8 drilling. For #5 pole drillings, use SPA5 or RPA5. Additional mountings are available including a wall bracket (WBA) and mast arm (MA) option that allows luminaire attachment to a 2 3/8" horizontal mast arm.

### LISTINGS

UL listed to meet U.S. and Canadian standards. UL Listed for wet locations. Light engines are IP66 rated; luminaire is IP66 rated. Rated for -40°C minimum ambient.

DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product. Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org/QPL](http://www.designlights.org/QPL) to confirm which versions are qualified.

International Dark-Sky Association (IDA) Fixture Seal of Approval (FSA) is available for all products on this page utilizing 3000K color temperature only.

### GOVERNMENT PROCUREMENT

BAA – Buy America(n) Act: Product with the BAA option qualifies as a domestic end product under the Buy American Act as implemented in the FAR and DFARS. Product with the BAA option also qualifies as manufactured in the United States under DOT Buy America regulations.

BABA – Build America Buy America: Product with the BAA option also qualifies as produced in the United States under the definitions of the Build America, Buy America Act.

Please refer to [www.acuitybrands.com/buy-american](http://www.acuitybrands.com/buy-american) for additional information.

### WARRANTY

5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: [www.acuitybrands.com/support/warranty/terms-and-conditions](http://www.acuitybrands.com/support/warranty/terms-and-conditions)

**Note:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.



# D-Series Size 0 LED Area Luminaire



Catalog Number

Notes  
**25' Total Height**

Type  
**OS**

Hit the Tab key or mouse over the page to see all interactive elements.

d<sup>s</sup>series

## Specifications

**EPA:** 0.44 ft<sup>2</sup>  
(0.04 m<sup>2</sup>)


**Length:** 26.18"  
(66.5 cm)

**Width:** 14.06"  
(35.7 cm)

**Height H1:** 2.26"  
(5.7 cm)

**Height H2:** 7.46"  
(18.9 cm)

**Weight:** 23 lbs  
(10.4 kg)

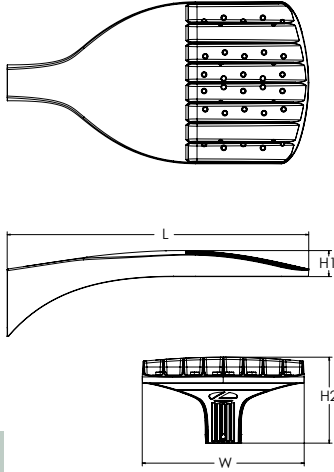

ds Design Select options indicated by this color background.

## Introduction

The modern styling of the D-Series features a highly refined aesthetic that blends seamlessly with its environment. The D-Series offers the benefits of the latest in LED technology into a high performance, high efficacy, long-life luminaire.

The photometric performance results in sites with excellent uniformity, greater pole spacing and lower power density. D-Series outstanding photometry aids in reducing the number of poles required in area lighting applications, with typical energy savings of 70% and expected service life of over 100,000 hours.



Items marked by a shaded background qualify for the Design Select program and ship in 15 days or less. To learn more about Design Select, visit [www.acuitybrands.com/designselect](http://www.acuitybrands.com/designselect).  
\*See ordering tree for details

## Ordering Information

**EXAMPLE: DSX0 LED P6 40K 70CRI T3M MVOLT SPA NLTAIR2 PIRHN DDBXD**

DSX0 LED	P4	40K	80CRI	T5M	MVOLT	RPA			
Series	LEDs	Color temperature <sup>2</sup>	Color Rendering Index <sup>2</sup>	Distribution	Voltage	Mounting			
DSX0 LED	<b>Forward optics</b>		(this section 70CRI only)	AFR Automotive front row T1S Type I short T2M Type II medium T3M Type III medium T3LG Type III low glare <sup>3</sup> T4M Type IV medium T4LG Type IV low glare <sup>3</sup> TFTM Forward throw medium	T5M Type V medium T5LG Type V low glare T5W Type V wide BLC3 Type III backlight control <sup>3</sup> BLC4 Type IV backlight control <sup>3</sup> LCCO Left corner cutoff <sup>3</sup> RCCO Right corner cutoff <sup>3</sup>	<b>Shipped included</b> SPA Square pole mounting (#8 drilling, 3.5" min. SQ pole) RPA Round pole mounting (#8 drilling, 3" min. RND pole) SPA5 Square pole mounting (#5 drilling, 3" min. SQ pole) <sup>9</sup> RPA5 Round pole mounting (#5 drilling, 3" min. RND pole) <sup>9</sup> SPA8N Square narrow pole mounting (#8 drilling, 3" min. SQ pole) WBA Wall bracket <sup>10</sup> MA Mast arm adapter (mounts on 2 3/8" OD horizontal tenon)			
	P1	P5	30K 3000K				70CRI	MVOLT (120V-277V) <sup>4</sup>	HVOLT (347V-480V) <sup>5,6</sup> XVOLT (277V-480V) <sup>7,8</sup> 120 <sup>16, 24</sup> 208 <sup>16, 24</sup> 240 <sup>16, 24</sup> 277 <sup>16, 24</sup> 347 <sup>16, 24</sup> 480 <sup>16, 24</sup>
	P2	P6	40K 4000K				70CRI	120 <sup>16, 24</sup>	
	P3	P7	50K 5000K				70CRI	208 <sup>16, 24</sup>	
	<b>Rotated optics</b>		(this section 80CRI only, extended lead times apply)				80CRI 80CRI 80CRI 80CRI	240 <sup>16, 24</sup>	
	P10 <sup>1</sup>	P12 <sup>1</sup>	27K 2700K					277 <sup>16, 24</sup>	
	P11 <sup>1</sup>	P13 <sup>1</sup>	30K 3000K					347 <sup>16, 24</sup>	
			35K 3500K					480 <sup>16, 24</sup>	
			40K 4000K						
			50K 5000K						
DMG	--				DDBXD				
<b>Control options</b>				<b>Other options</b>		<b>Finish (required)</b>			
<b>Shipped installed</b>		PER7 Seven-pin receptacle only (controls ordered separate) <sup>14, 19</sup>		<b>Shipped installed</b>		DDBXD Dark Bronze			
NLTAIR2 PIRHN	nLight AIR gen 2 enabled with bi-level motion / ambient sensor, 8-40' mounting height, ambient sensor enabled at 2fc. <sup>11, 12, 18, 19</sup>		FAO Field adjustable output <sup>15, 19</sup>	HS Houseside shield (black finish standard) <sup>20</sup>	DBLXD Black				
PIR	High/low, motion/ambient sensor, 8-40' mounting height, ambient sensor enabled at 2fc. <sup>13, 18, 19</sup>		BL30 Bi-level switched dimming, 30% <sup>16, 19</sup>	L90 Left rotated optics <sup>1</sup>	DNAXD Natural Aluminum				
PER	NEMA twist-lock receptacle only (controls ordered separate) <sup>14</sup>		BL50 Bi-level switched dimming, 50% <sup>16, 19</sup>	R90 Right rotated optics <sup>1</sup>	DWHXD White				
PER5	Five-pin receptacle only (controls ordered separate) <sup>14, 19</sup>		DMG 0-10v dimming wires pulled outside fixture (for use with an external control, ordered separately) <sup>17</sup>	CCE Coastal Construction <sup>21</sup>	DDBTXD Textured dark bronze				
				HA 50°C ambient operation <sup>22</sup>	DBLBXD Textured black				
				BAA Buy America(n) Act Compliant	DNATXD Textured natural aluminum				
				SF Single fuse (120, 277, 347V) <sup>24</sup>	DWHGXD Textured white				
				DF Double fuse (208, 240, 480V) <sup>24</sup>					
				<b>Shipped separately</b>					
				EGSR External Glare Shield (reversible, field install required, matches housing finish)					
				BSDB Bird Spikes (field install required)					



One Lithonia Way • Conyers, Georgia 30012 • Phone: 1-800-705-SERV (7378) • [www.lithonia.com](http://www.lithonia.com)  
© 2011-2024 Acuity Brands Lighting, Inc. All rights reserved.

DSX0-LED  
Rev. 03/26/24  
Page 1 of 9

## Ordering Information

### Accessories


Ordered and shipped separately.

DLL127F 1.5 JU	Photocell - SSL twist-lock (120-277V) <sup>23</sup>
DLL347F 1.5 CUL JU	Photocell - SSL twist-lock (347V) <sup>23</sup>
DLL480F 1.5 CUL JU	Photocell - SSL twist-lock (480V) <sup>23</sup>
DSHORT SBK	Shorting cap <sup>23</sup>
DSX0HS P#	House-side shield (enter package number P1-7, P10-13 in place of #)
DSXRPA (FINISH)	Round pole adapter (#8 drilling, specify finish)
DSXRPAS (FINISH)	Round pole adapter #5 drilling (specify finish)
DSXSPA5 (FINISH)	Square pole adapter #5 drilling (specify finish)
DSX0EGSR (FINISH)	External glare shield (specify finish)
DSX0SDB (FINISH)	Bird spike deterrent bracket (specify finish)


### NOTES

- 1 Rotated optics available with packages P10, P11, P12 and P13. Must be combined with option L90 or R90.
- 2 30K, 40K, and 50K available in 70CRI and 80CRI. 27K and 35K only available with 80CRI. Contact Technical Support for other possible combinations.
- 3 T3LG, T4LG, BLC3, BLC4, LCCO, RCCO not available with option HS.
- 4 MVOLT driver operates on any line voltage from 120-277V (50/60 Hz).
- 5 HVOLT driver operates on any line voltage from 347-480V (50/60 Hz).
- 6 HVOLT not available with package P1, P2 and P10 when combined with option NLTAIR2 PIRHN or option PIR.
- 7 XVOLT operates with any voltage between 277V and 480V (50/60 Hz).
- 8 XVOLT not available in packages P1, P2 or P10. XVOLT not available with fusing (SF or DF).
- 9 SPAS and RPA5 for use with #5 drilling only (Not for use with #8 drilling).
- 10 WBA cannot be combined with Type 5 distributions plus photocell (PER).
- 11 NLTAIR2 and PIRHN must be ordered together. For more information on nLight Air 2.
- 12 NLTAIR2 PIRHN not available with other controls including PIR, PER, PER5, PER7, FAO, BL30, BL50 and DMG. NLTAIR2 PIRHN not available with P1, P2 and P10 using HVOLT. NLTAIR2 PIRHN not available with P1, P2 and P10 using XVOLT. NLTAIR2 PIRHN not available with P1 using MVOLT.
- 13 PIR not available with NLTAIR2, PER, PER5, PER7, FAO BL30, BL50 and DMG. PIR not available with P1, P2 and P10 using HVOLT. PIR not available with P1, P2 and P10 using XVOLT. PIR not available with P1 using MVOLT.
- 14 PER/PER5/PER7 not available with NLTAIR2, PIR, BL30, BL50. Photocell ordered and shipped as a separate line item from Acuity Brands Controls. See accessories. Shorting Cap included.
- 15 FAO not available with other dimming control options NLTAIR2 PIRHN, PIR, PER5, PER7, BL30, BL50, or DMG.
- 16 BL30 and BL50 are not available with NLTAIR2 PIRHN, PIR, PER, PER5, PER7, FAO and DMG. BL30 or BL50 must specify 120, 277 or 347V. Consult tech support for 208, 240 or 480V.
- 17 DMG not available with NLTAIR2 PIRHN, PIR, PER, PER5, PER7, BL30, BL50 and FAO.
- 18 Reference Motion Sensor Default Settings table on page 4 to see functionality.
- 19 Reference Controls Options table on page 4.
- 20 Option HS not available with T3LG, T4LG, BLC3, BLC4, LCCO and RCCO distribution. Also available as a separate accessory; see Accessories information.
- 21 CCE option not available with option B5 and EGSR. Contact Technical Support for availability.
- 22 Option HA not available with performance packages P6, P7, P12 and P13.
- 23 Requires luminaire to be specified with PER, PER5 or PER7 option. See Controls Table on page 4.
- 24 Single fuse (SF) requires 120V, 277V, or 347V. Double fuse (DF) requires 208V, 240V or 480V. XVOLT not available with fusing (SF or DF).

## Shield Accessories

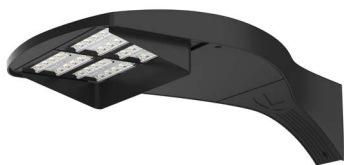

External Glare Shield (EGSR)


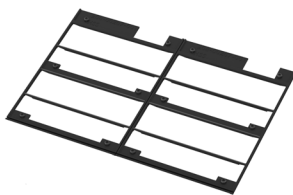


House Side Shield (HS)

## Drilling

### HANDHOLE ORIENTATION

(from top of pole)

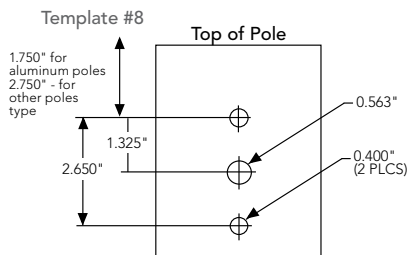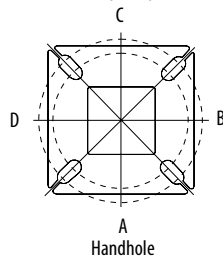

### Tenon Mounting Slipfitter

Tenon O.D.	Mounting	Single Unit	2 @ 180	2 @ 90	3 @ 90	3 @ 120	4 @ 90
2-3/8"	RPA	AS3-5 190	AS3-5 280	AS3-5 290	AS3-5 390	AS3-5 320	AS3-5 490
2-7/8"	RPA	AST25-190	AST25-280	AST25-290	AST25-390	AST25-320	AST25-490
4"	RPA	AST35-190	AST35-280	AST35-290	AST35-390	AST35-320	AST35-490

Mounting Option	Drilling Template	Single	2 @ 180	2 @ 90	3 @ 90	3 @ 120	4 @ 90
Head Location		Side B	Side B & D	Side B & C	Side B, C & D	Round Pole Only	Side A, B, C & D
Drill Nomenclature	#8	DM19AS	DM28AS	DM29AS	DM39AS	DM32AS	DM49AS
Minimum Acceptable Outside Pole Dimension							
SPA	#8	3.5"	3.5"	3.5"	3.5"		3.5"
RPA	#8	3"	3"	3"	3"	3"	3"
SPAS	#5	3"	3"	3"	3"		3"
RPA5	#5	3"	3"	3"	3"	3"	3"
SPA8N	#8	3"	3"	3"	3"		3"

### DSX0 Area Luminaire - EPA

\*Includes luminaire and integral mounting arm. Other tenons, arms, brackets or other accessories are not included in this EPA data.

Fixture Quantity & Mounting Configuration	Single DM19	2 @ 180 DM28	2 @ 90 DM29	3 @ 90 DM39	3 @ 120 DM32	4 @ 90 DM49
Mounting Type						
DSX0 with SPA	0.44	0.88	0.96	1.18	---	1.16
DSX0 with SPAS, SPA8N	0.51	1.02	1.06	1.26	---	1.29
DSX0 with RPA, RPA5	0.51	1.02	1.06	1.26	1.24	1.29
DSX0 with MA	0.64	1.28	1.24	1.67	1.70	1.93

Isofootcandle plots for the DSX0 LED P7 40K 70CRI. Distances are in units of mounting height (20').



## Performance Data

### Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient	Lumen Multiplier	
0°C	32°F	1.04
5°C	41°F	1.04
10°C	50°F	1.03
15°C	59°F	1.02
20°C	68°F	1.01
<b>25°C</b>	<b>77°C</b>	<b>1.00</b>
30°C	86°F	0.99
35°C	95°F	0.98
40°C	104°F	0.97

### Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the platforms noted in a **25°C ambient**, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	Lumen Maintenance Factor
0	1.00
25,000	0.94
50,000	0.89
100,000	0.80

### FAO Dimming Settings

FAO Position	% Wattage	% Lumen Output
8	100%	100%
7	93%	95%
6	80%	85%
5	66%	73%
4	54%	61%
3	41%	49%
2	29%	36%
1	15%	20%

\*Note: Calculated values are based on original performance package data. When calculating new values for given FAO position, use published values for each package based on input watts and lumens by optic type.

### Electrical Load

	Performance Package	LED Count	Drive Current (mA)	Wattage	Current (A)					
					120V	208V	240V	277V	347V	480V
Forward Optics (Non-Rotated)	P1	20	530	34	0.28	0.16	0.14	0.12	0.10	0.07
	P2	20	700	45	0.38	0.22	0.19	0.16	0.13	0.09
	P3	20	1050	69	0.57	0.33	0.29	0.25	0.20	0.14
	P4	20	1400	94	0.78	0.45	0.39	0.34	0.27	0.19
	P5	40	700	89	0.75	0.43	0.38	0.33	0.26	0.19
	P6	40	1050	136	1.14	0.66	0.57	0.49	0.39	0.29
	P7	40	1300	170	1.42	0.82	0.71	0.62	0.49	0.36
Rotated Optics (Requires L90 or R90)	P10	30	530	51	0.42	0.24	0.21	0.18	0.15	0.11
	P11	30	700	67	0.57	0.33	0.28	0.25	0.20	0.14
	P12	30	1050	103	0.86	0.50	0.43	0.37	0.30	0.22
	P13	30	1300	129	1.07	0.62	0.54	0.46	0.37	0.27

### LED Color Temperature / Color Rendering Multipliers

	70 CRI		80CRI		90CRI	
	Lumen Multiplier	Availability	Lumen Multiplier	Availability	Lumen Multiplier	Availability
5000K	102%	Standard	92%	Extended lead-time	71%	(see note)
4000K	100%	Standard	92%	Extended lead-time	67%	(see note)
3500K	100%	(see note)	90%	Extended lead-time	63%	(see note)
3000K	96%	Standard	87%	Extended lead-time	61%	(see note)
2700K	94%	(see note)	85%	Extended lead-time	57%	(see note)

Note: Some LED types are available as per special request. Contact Technical Support for more information.

### Motion Sensor Default Settings

Option	Unoccupied Dimmed Level	High Level (when occupied)	Photocell Operation	Dwell Time	Ramp-up Time	Dimming Fade Rate
PIR	30%	100%	Enabled @ 2FC	7.5 min	3 sec	5 min
NLTAIR2 PIRHN	30%	100%	Enabled @ 2FC	7.5 min	3 sec	5 min

### Controls Options

Nomenclature	Description	Functionality	Primary control device	Notes
FAO	Field adjustable output device installed inside the luminaire; wired to the driver dimming leads.	Allows the luminaire to be manually dimmed, effectively trimming the light output.	FAO device	Cannot be used with other controls options that need the 0-10V leads
DS (not available on DSX0)	Drivers wired independently for 50/50 luminaire operation	The luminaire is wired to two separate circuits, allowing for 50/50 operation.	Independently wired drivers	Requires two separately switched circuits. Consider nLight AIR as a more cost effective alternative.
PERS or PER7	Twist-lock photocell receptacle	Compatible with standard twist-lock photocells for dusk to dawn operation, or advanced control nodes that provide 0-10V dimming signals.	Twist-lock photocells such as DLL Elite or advanced control nodes such as ROAM.	Pins 4 & 5 to dimming leads on driver, Pins 6 & 7 are capped inside luminaire. Cannot be used with other controls options that need the 0-10V leads.
PIR	Motion sensor with integral photocell. Sensor suitable for 8' to 40' mounting height.	Luminaires dim when no occupancy is detected.	Acuity Controls rSBG	Cannot be used with other controls options that need the 0-10V leads.
NLTAIR2 PIRHN	nLight AIR enabled luminaire for motion sensing, photocell and wireless communication.	Motion and ambient light sensing with group response. Scheduled dimming with motion sensor over-ride when wirelessly connected to the nLight Eclipse.	nLight Air rSBG	nLight AIR sensors can be programmed and commissioned from the ground using the CIAIRity Pro app. Cannot be used with other controls options that need the 0-10V leads.
BL30 or BL50	Integrated bi-level device that allows a second control circuit to switch all light engines to either 30% or 50% light output	BLC device provides input to 0-10V dimming leads on all drivers providing either 100% or dimmed (30% or 50%) control by a secondary circuit	BLC UVOLT1	BLC device is powered off the 0-10V dimming leads, thus can be used with any input voltage from 120 to 480V

# Performance Data

## Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.

Forward Optics																							
Performance Package	System Watts	LED Count	Drive Current (mA)	Distribution Type	30K					40K					50K								
					(3000K, 70 CRI)					(4000K, 70 CRI)					(5000K, 70 CRI)								
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW				
P1	33W	20	530	T1S	4,906	1	0	1	148	5,113	1	0	1	154	5,213	1	0	1	157				
				T2M	4,545	1	0	2	137	4,736	1	0	2	143	4,829	1	0	2	145				
				T3M	4,597	1	0	2	138	4,791	1	0	2	144	4,885	1	0	2	147				
				T3LG	4,107	1	0	1	124	4,280	1	0	1	129	4,363	1	0	1	131				
				T4M	4,666	1	0	2	141	4,863	1	0	2	146	4,957	1	0	2	149				
				T4LG	4,244	1	0	1	128	4,423	1	0	1	133	4,509	1	0	1	136				
				TFTM	4,698	1	0	2	141	4,896	1	0	2	147	4,992	1	0	2	150				
				T5M	4,801	3	0	1	145	5,003	3	0	1	151	5,101	3	0	1	154				
				T5W	4,878	3	0	1	147	5,084	3	0	2	153	5,183	3	0	2	156				
				T5LG	4,814	2	0	1	145	5,018	2	0	1	151	5,115	2	0	1	154				
				BLC3	3,344	0	0	1	101	3,485	0	0	1	105	3,553	0	0	1	107				
				BLC4	3,454	0	0	2	104	3,599	0	0	2	108	3,670	0	0	2	111				
				RCCO	3,374	0	0	1	102	3,517	0	0	1	106	3,585	0	0	1	108				
				LCCO	3,374	0	0	1	102	3,517	0	0	1	106	3,585	0	0	1	108				
				AFR	4,906	1	0	1	148	5,113	1	0	1	154	5,213	1	0	1	157				
				P2	45W	20	700	T1S	6,328	1	0	1	140	6,595	1	0	1	146	6,724	1	0	1	149
								T2M	5,862	1	0	2	130	6,109	1	0	2	135	6,228	1	0	2	138
T3M	5,930	1	0					3	131	6,180	1	0	3	137	6,301	1	0	3	140				
T3LG	5,297	1	0					1	117	5,521	1	0	1	122	5,628	1	0	1	125				
T4M	6,018	1	0					3	133	6,272	1	0	3	139	6,395	1	0	3	142				
T4LG	5,474	1	0					1	121	5,705	1	0	1	126	5,816	1	0	1	129				
TFTM	6,060	1	0					3	134	6,316	1	0	3	140	6,439	1	0	3	143				
T5M	6,192	3	0					1	137	6,453	3	0	2	143	6,579	3	0	2	146				
T5W	6,293	3	0					2	139	6,558	3	0	2	145	6,686	3	0	2	148				
T5LG	6,210	2	0					1	138	6,472	3	0	1	143	6,598	3	0	1	146				
BLC3	4,313	0	0					2	96	4,495	0	0	2	100	4,583	0	0	2	102				
BLC4	4,455	0	0					2	99	4,643	0	0	2	103	4,733	0	0	2	105				
RCCO	4,352	0	0					2	96	4,536	0	0	2	100	4,624	0	0	2	102				
LCCO	4,352	0	0					2	96	4,536	0	0	2	100	4,624	0	0	2	102				
AFR	6,328	1	0					1	140	6,595	1	0	1	146	6,724	1	0	1	149				
P3	69W	20	1050					T1S	9,006	1	0	2	131	9,386	1	0	2	136	9,569	1	0	2	139
								T2M	8,343	2	0	3	121	8,694	2	0	3	126	8,864	2	0	3	129
				T3M	8,439	2	0	3	122	8,795	2	0	3	128	8,967	2	0	3	130				
				T3LG	7,539	1	0	2	109	7,857	1	0	2	114	8,010	1	0	2	116				
				T4M	8,565	2	0	3	124	8,926	2	0	3	129	9,100	2	0	3	132				
				T4LG	7,790	1	0	2	113	8,119	1	0	2	118	8,277	1	0	2	120				
				TFTM	8,624	1	0	3	125	8,988	1	0	3	130	9,163	2	0	3	133				
				T5M	8,812	3	0	2	128	9,184	4	0	2	133	9,363	4	0	2	136				
				T5W	8,955	4	0	2	130	9,333	4	0	2	135	9,515	4	0	2	138				
				T5LG	8,838	3	0	1	128	9,211	3	0	1	134	9,390	3	0	1	136				
				BLC3	6,139	0	0	2	89	6,398	0	0	2	93	6,522	0	0	2	95				
				BLC4	6,340	0	0	3	92	6,607	0	0	3	96	6,736	0	0	3	98				
				RCCO	6,194	1	0	2	90	6,455	1	0	2	94	6,581	1	0	2	95				
				LCCO	6,194	1	0	2	90	6,455	1	0	2	94	6,581	1	0	2	95				
				AFR	9,006	1	0	2	131	9,386	1	0	2	136	9,569	1	0	2	139				
				P4	93W	20	1400	T1S	11,396	1	0	2	122	11,877	1	0	2	128	12,109	2	0	2	130
								T2M	10,557	2	0	3	113	11,003	2	0	3	118	11,217	2	0	3	121
T3M	10,680	2	0					3	115	11,130	2	0	3	120	11,347	2	0	3	122				
T3LG	9,540	1	0					2	103	9,942	1	0	2	107	10,136	1	0	2	109				
T4M	10,839	2	0					3	117	11,296	2	0	3	121	11,516	2	0	4	124				
T4LG	9,858	1	0					2	106	10,274	1	0	2	110	10,474	1	0	2	113				
TFTM	10,914	2	0					3	117	11,374	2	0	3	122	11,596	2	0	3	125				
T5M	11,152	4	0					2	120	11,622	4	0	2	125	11,849	4	0	2	127				
T5W	11,332	4	0					3	122	11,811	4	0	3	127	12,041	4	0	3	129				
T5LG	11,184	3	0					1	120	11,656	3	0	2	125	11,883	3	0	2	128				
BLC3	7,768	0	0					2	83	8,096	0	0	2	87	8,254	0	0	2	89				
BLC4	8,023	0	0					3	86	8,362	0	0	3	90	8,524	0	0	3	92				
RCCO	7,838	1	0					2	84	8,169	1	0	2	88	8,328	1	0	2	90				
LCCO	7,838	1	0					2	84	8,169	1	0	2	88	8,328	1	0	2	90				
AFR	11,396	1	0					2	122	11,877	1	0	2	128	12,109	2	0	2	130				

# Performance Data

## Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.

Forward Optics																			
Performance Package	System Watts	LED Count	Drive Current (mA)	Distribution Type	30K					40K					50K				
					(3000K, 70 CRI)					(4000K, 70 CRI)					(5000K, 70 CRI)				
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
P5	90W	40	700	T1S	12,380	2	0	2	137	12,902	2	0	2	143	13,154	2	0	2	146
				T2M	11,468	2	0	3	127	11,952	2	0	3	133	12,185	2	0	3	135
				T3M	11,601	2	0	3	129	12,091	2	0	3	134	12,326	2	0	4	137
				T3LG	10,363	2	0	2	115	10,800	2	0	2	120	11,011	2	0	2	122
				T4M	11,774	2	0	4	131	12,271	2	0	4	136	12,510	2	0	4	139
				T4LG	10,709	1	0	2	119	11,160	2	0	2	124	11,378	2	0	2	126
				TFTM	11,856	2	0	3	132	12,356	2	0	4	137	12,596	2	0	4	140
				T5M	12,114	4	0	2	134	12,625	4	0	2	140	12,871	4	0	2	143
				T5W	12,310	4	0	3	137	12,830	4	0	3	142	13,080	4	0	3	145
				T5LG	12,149	3	0	2	135	12,662	3	0	2	141	12,908	3	0	2	143
				BLC3	8,438	0	0	2	94	8,794	0	0	2	98	8,966	0	0	2	99
				BLC4	8,715	0	0	3	97	9,083	0	0	3	101	9,260	0	0	3	103
				RCCO	8,515	1	0	2	94	8,874	1	0	2	98	9,047	1	0	2	100
				LCCO	8,515	1	0	2	94	8,874	1	0	2	98	9,047	1	0	2	100
				AFR	12,380	2	0	2	137	12,902	2	0	2	143	13,154	2	0	2	146
				P6	137W	40	1050	T1S	17,545	2	0	3	128	18,285	2	0	3	133	18,642
T2M	16,253	3	0					4	119	16,939	3	0	4	124	17,269	3	0	4	126
T3M	16,442	2	0					4	120	17,135	3	0	4	125	17,469	3	0	4	128
T3LG	14,687	2	0					2	107	15,306	2	0	2	112	15,605	2	0	2	114
T4M	16,687	2	0					4	122	17,391	3	0	5	127	17,730	3	0	5	129
T4LG	15,177	2	0					2	111	15,817	2	0	2	115	16,125	2	0	2	118
TFTM	16,802	2	0					4	123	17,511	2	0	4	128	17,852	2	0	5	130
T5M	17,168	4	0					2	125	17,893	5	0	3	131	18,241	5	0	3	133
T5W	17,447	5	0					3	127	18,183	5	0	3	133	18,537	5	0	3	135
T5LG	17,218	4	0					2	126	17,944	4	0	2	131	18,294	4	0	2	134
BLC3	11,959	0	0					3	87	12,464	0	0	3	91	12,707	0	0	3	93
BLC4	12,352	0	0					4	90	12,873	0	0	4	94	13,124	0	0	4	96
RCCO	12,067	1	0					3	88	12,576	1	0	3	92	12,821	1	0	3	94
LCCO	12,067	1	0					3	88	12,576	1	0	3	92	12,821	1	0	3	94
AFR	17,545	2	0					3	128	18,285	2	0	3	133	18,642	2	0	3	136
P7	171W	40	1300					T1S	20,806	2	0	3	122	21,683	2	0	3	127	22,106
				T2M	19,273	3	0	4	113	20,086	3	0	4	118	20,478	3	0	4	120
				T3M	19,497	3	0	5	114	20,319	3	0	5	119	20,715	3	0	5	121
				T3LG	17,416	2	0	2	102	18,151	2	0	2	106	18,504	2	0	2	108
				T4M	19,787	3	0	5	116	20,622	3	0	5	121	21,024	3	0	5	123
				T4LG	17,997	2	0	2	105	18,756	2	0	2	110	19,121	2	0	2	112
				TFTM	19,924	3	0	5	117	20,765	3	0	5	122	21,170	3	0	5	124
				T5M	20,359	5	0	3	119	21,217	5	0	3	124	21,631	5	0	3	127
				T5W	20,689	5	0	3	121	21,561	5	0	3	126	21,982	5	0	3	129
				T5LG	20,418	4	0	2	120	21,279	4	0	2	125	21,694	4	0	2	127
				BLC3	14,182	0	0	3	83	14,780	0	0	3	87	15,068	0	0	3	88
				BLC4	14,647	0	0	4	86	15,265	0	0	4	89	15,562	0	0	4	91
				RCCO	14,309	1	0	3	84	14,913	1	0	3	87	15,204	1	0	3	89
				LCCO	14,309	1	0	3	84	14,913	1	0	3	87	15,204	1	0	3	89
				AFR	20,806	2	0	3	122	21,683	2	0	3	127	22,106	2	0	3	129



# Performance Data


## Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.



Rotated Optics																							
Performance Package	System Watts	LED Count	Drive Current (mA)	Distribution Type	30K					40K					50K								
					(3000K, 70 CRI)					(4000K, 70 CRI)					(5000K, 70 CRI)								
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW				
P10	51W	30	530	T1S	7,399	3	0	3	145	7,711	3	0	3	151	7,862	3	0	3	154				
				T2M	6,854	3	0	3	135	7,144	3	0	3	140	7,283	3	0	3	143				
				T3M	6,933	3	0	3	136	7,225	3	0	3	142	7,366	3	0	3	145				
				T3LG	6,194	2	0	2	122	6,455	2	0	2	127	6,581	2	0	2	129				
				T4M	7,036	3	0	3	138	7,333	3	0	3	144	7,476	3	0	3	147				
				T4LG	6,399	2	0	2	126	6,669	2	0	2	131	6,799	2	0	2	134				
				TFTM	7,086	3	0	3	139	7,385	3	0	3	145	7,529	3	0	3	148				
				T5M	7,239	3	0	2	142	7,545	3	0	2	148	7,692	3	0	2	151				
				T5W	7,357	3	0	2	145	7,667	3	0	2	151	7,816	4	0	2	154				
				T5LG	7,260	3	0	1	143	7,567	3	0	1	149	7,714	3	0	1	152				
				BLC3	5,043	3	0	3	99	5,256	3	0	3	103	5,358	3	0	3	105				
				BLC4	5,208	3	0	3	102	5,428	3	0	3	107	5,534	3	0	3	109				
				RCCO	5,089	0	0	2	100	5,303	0	0	2	104	5,407	0	0	2	106				
				LCCO	5,089	0	0	2	100	5,303	0	0	2	104	5,407	0	0	2	106				
				AFR	7,399	3	0	3	145	7,711	3	0	3	151	7,862	3	0	3	154				
				P11	68W	30	700	T1S	9,358	3	0	3	138	9,753	3	0	3	143	9,943	3	0	3	146
								T2M	8,669	3	0	3	127	9,034	3	0	3	133	9,211	3	0	3	135
T3M	8,768	3	0					3	129	9,138	3	0	3	134	9,316	3	0	3	137				
T3LG	7,833	3	0					3	115	8,164	3	0	3	120	8,323	3	0	3	122				
T4M	8,899	3	0					3	131	9,274	3	0	3	136	9,455	3	0	3	139				
T4LG	8,093	3	0					3	119	8,435	3	0	3	124	8,599	3	0	3	126				
TFTM	8,962	3	0					3	132	9,340	3	0	3	137	9,522	3	0	3	140				
T5M	9,156	4	0					2	135	9,542	4	0	2	140	9,728	4	0	2	143				
T5W	9,304	4	0					2	137	9,696	4	0	2	143	9,885	4	0	2	145				
T5LG	9,182	3	0					1	135	9,569	3	0	1	141	9,756	3	0	1	143				
BLC3	6,378	3	0					3	94	6,647	3	0	3	98	6,777	3	0	3	100				
BLC4	6,587	3	0					3	97	6,865	3	0	3	101	6,999	3	0	3	103				
RCCO	6,436	0	0					2	95	6,707	0	0	2	99	6,838	0	0	2	101				
LCCO	6,436	0	0					2	95	6,707	0	0	2	99	6,838	0	0	2	101				
AFR	9,358	3	0					3	138	9,753	3	0	3	143	9,943	3	0	3	146				
P12	103W	30	1050					T1S	13,247	3	0	3	128	13,806	3	0	3	134	14,075	3	0	3	136
								T2M	12,271	4	0	4	119	12,789	4	0	4	124	13,038	4	0	4	126
				T3M	12,412	4	0	4	120	12,935	4	0	4	125	13,187	4	0	4	128				
				T3LG	11,089	3	0	3	107	11,556	3	0	3	112	11,782	3	0	3	114				
				T4M	12,597	4	0	4	122	13,128	4	0	4	127	13,384	4	0	4	129				
				T4LG	11,457	3	0	3	111	11,940	3	0	3	116	12,173	3	0	3	118				
				TFTM	12,686	4	0	4	123	13,221	4	0	4	128	13,479	4	0	4	130				
				T5M	12,960	4	0	2	125	13,507	4	0	2	131	13,770	4	0	2	133				
				T5W	13,170	4	0	3	127	13,726	4	0	3	133	13,994	4	0	3	135				
				T5LG	12,998	3	0	2	126	13,546	3	0	2	131	13,810	3	0	2	134				
				BLC3	9,029	3	0	3	87	9,409	3	0	3	91	9,593	3	0	3	93				
				BLC4	9,324	4	0	4	90	9,718	4	0	4	94	9,907	4	0	4	96				
				RCCO	9,110	1	0	2	88	9,495	1	0	2	92	9,680	1	0	2	94				
				LCCO	9,110	1	0	2	88	9,494	1	0	2	92	9,680	1	0	2	94				
				AFR	13,247	3	0	3	128	13,806	3	0	3	134	14,075	3	0	3	136				
				P13	129W	30	1300	T1S	15,704	3	0	3	122	16,366	3	0	3	127	16,685	4	0	4	130
								T2M	14,547	4	0	4	113	15,161	4	0	4	118	15,457	4	0	4	120
T3M	14,714	4	0					4	114	15,335	4	0	4	119	15,634	4	0	4	121				
T3LG	13,145	3	0					3	102	13,700	3	0	3	106	13,967	3	0	3	108				
T4M	14,933	4	0					4	116	15,563	4	0	4	121	15,867	4	0	4	123				
T4LG	13,582	3	0					3	105	14,155	3	0	3	110	14,431	3	0	3	112				
TFTM	15,039	4	0					4	117	15,673	4	0	4	122	15,979	4	0	4	124				
T5M	15,364	4	0					2	119	16,013	4	0	2	124	16,325	4	0	2	127				
T5W	15,613	5	0					3	121	16,272	5	0	3	126	16,589	5	0	3	129				
T5LG	15,409	3	0					2	120	16,059	3	0	2	125	16,372	4	0	2	127				
BLC3	10,703	4	0					4	83	11,155	4	0	4	87	11,372	4	0	4	88				
BLC4	11,054	4	0					4	86	11,520	4	0	4	89	11,745	4	0	4	91				
RCCO	10,800	1	0					2	84	11,256	1	0	2	87	11,475	1	0	3	89				
LCCO	10,800	1	0					2	84	11,255	1	0	2	87	11,475	1	0	3	89				
AFR	15,704	3	0					3	122	16,366	3	0	3	127	16,685	4	0	4	130				





## Dimensions

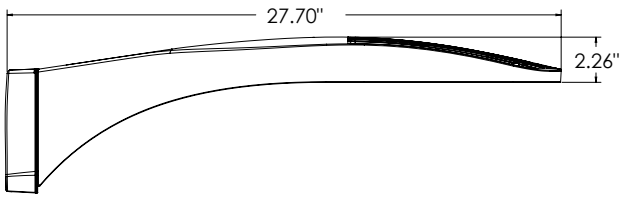


**DSX0 with RPA, RPA5, SPA5, SPA8N mount**  
**Weight: 25 lbs**

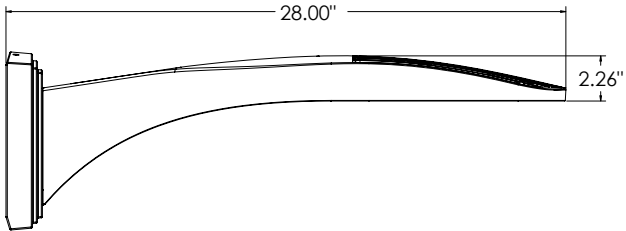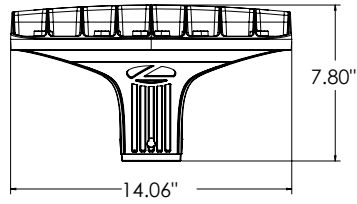


**DSX0 with WBA mount**  
**Weight: 27 lb**

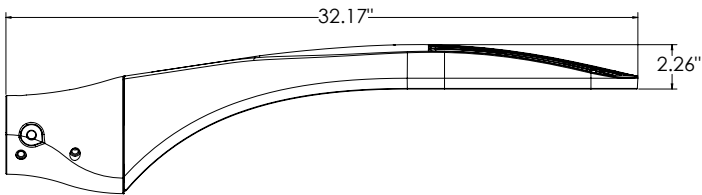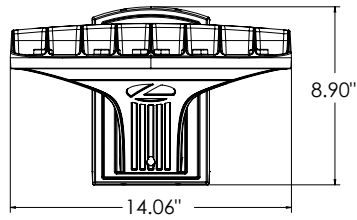


**DSX0 with MA mount**  
**Weight: 28 lbs**

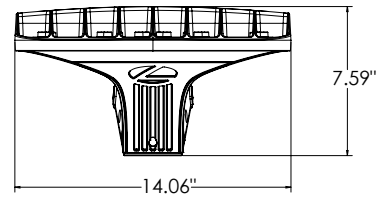


**SPA (STANDARD ARM)**

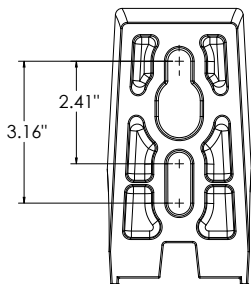


**RPA**

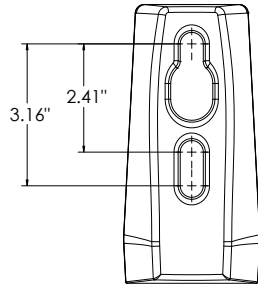


**SPA5**

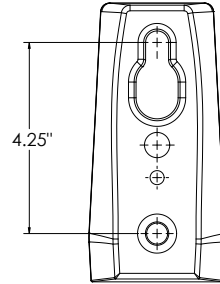

**RPA5**



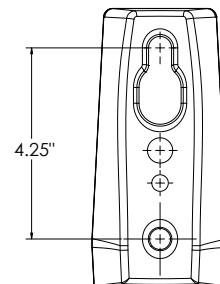


**SPA8N**

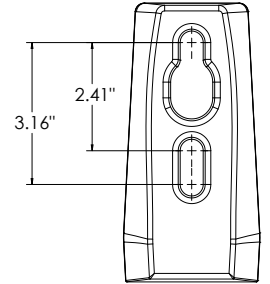

## nLight Sensor Coverage Pattern

### NLTAIR2 PIRHN

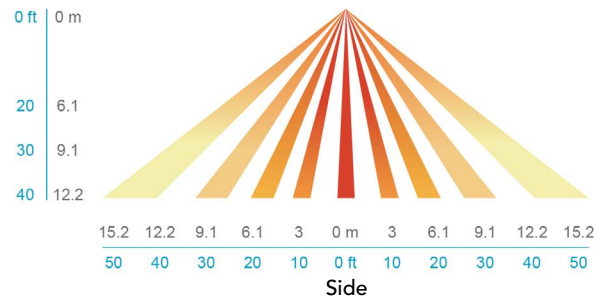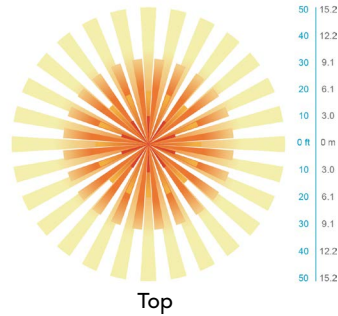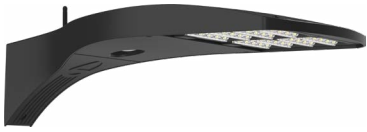

## FEATURES & SPECIFICATIONS

### INTENDED USE

The sleek design of the D-Series Size 0 reflects the embedded high performance LED technology. It is ideal for many commercial and municipal applications, such as parking lots, plazas, campuses, and pedestrian areas.

### CONSTRUCTION

Single-piece die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. Modular design allows for ease of maintenance and future light engine upgrades. The LED driver is mounted in direct contact with the casting to promote low operating temperature and long life. Housing driver compartment is completely sealed against moisture and environmental contaminants (IP66). Vibration rated per ANSI C136.31 for 3G. Low EPA (0.44 ft<sup>2</sup>) for optimized pole wind loading.

### FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Available in both textured and non-textured finishes.

### COASTAL CONSTRUCTION (CCE)

Optional corrosion resistant construction is engineered with added corrosion protection in materials and/or pre-treatment of base material under super durable paint. Provides additional corrosion protection for applications near coastal areas. Finish is salt spray tested to over 5,000 hours per ASTM B117 with scribe rating of 10. Additional lead-times may apply.

### OPTICS

Precision-molded proprietary silicone lenses are engineered for superior area lighting distribution, uniformity, and pole spacing. Light engines are available in 3000 K, 4000 K or 5000 K (70 CRI) configurations. 80CRI configurations are also available. The D-Series Size 0 has zero uplight and qualifies as a Nighttime Friendly™ product, meaning it is consistent with the LEED® and Green Globes™ criteria for eliminating wasteful uplight.

### ELECTRICAL

Light engine(s) configurations consist of high-efficacy LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life (up to L80/100,000 hours at 25°C). Class 1 electronic drivers are designed to have a power factor >90%, THD <20%, and an expected life of 100,000 hours with <1% failure rate. Easily serviceable 10kV surge protection device meets a minimum Category C Low operation (per ANSI/IEEE C62.41.2).

### STANDARD CONTROLS

The DSX0 LED area luminaire has a number of control options. DSX Size 0, comes standard with 0-10V dimming driver. Dusk to dawn controls can be utilized via optional NEMA twist-lock photocell receptacles. PIR integrated motion sensor with on-board photocell feature field-adjustable programming and are suitable for mounting heights up to 40 feet. Control option BL features a bi-level device that allows a second control circuit to switch all light engines to either 30% or 50% light output.

### nLIGHT AIR CONTROLS

The DSX0 LED area luminaire is also available with nLight® AIR for the ultimate in wireless control. This powerful controls platform provides out-of-the-box basic motion sensing and photocontrol functionality and is suitable for mounting heights up to 40 feet. Once commissioned using a smartphone and the easy-to-use CLAIRITY app, nLight AIR equipped luminaires can be grouped, resulting in motion sensor and photocell group response without the need for additional equipment. Scheduled dimming with motion sensor over-ride can be achieved when used with the nLight Eclipse. Additional information about nLight Air can be found [here](#).

### INSTALLATION

Integral mounting arm allows for fast mounting using Lithonia standard #8 drilling and accommodates pole drilling's from 2.41 to 3.12" on center. The standard "SPA" option for square poles and the "RPA" option for round poles use the #8 drilling. For #5 pole drillings, use SPA5 or RPA5. Additional mountings are available including a wall bracket (WBA) and mast arm (MA) option that allows luminaire attachment to a 2 3/8" horizontal mast arm.

### LISTINGS

UL listed to meet U.S. and Canadian standards. UL Listed for wet locations. Light engines are IP66 rated; luminaire is IP66 rated. Rated for -40°C minimum ambient.

DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product. Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org/QPL](http://www.designlights.org/QPL) to confirm which versions are qualified.

International Dark-Sky Association (IDA) Fixture Seal of Approval (FSA) is available for all products on this page utilizing 3000K color temperature only.

### GOVERNMENT PROCUREMENT

BAA – Buy America(n) Act: Product with the BAA option qualifies as a domestic end product under the Buy American Act as implemented in the FAR and DFARS. Product with the BAA option also qualifies as manufactured in the United States under DOT Buy America regulations.

BABA – Build America Buy America: Product with the BAA option also qualifies as produced in the United States under the definitions of the Build America, Buy America Act.

Please refer to [www.acuitybrands.com/buy-american](http://www.acuitybrands.com/buy-american) for additional information.

### WARRANTY

5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: [www.acuitybrands.com/support/warranty/terms-and-conditions](http://www.acuitybrands.com/support/warranty/terms-and-conditions)

**Note:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.



# D-Series Size 0 LED Area Luminaire



Catalog  
Number

Notes  
**25' Total Height**

Type  
**OT**

Hit the Tab key or mouse over the page to see all interactive elements.

d<sup>s</sup>series

## Specifications

**EPA:** 0.44 ft<sup>2</sup>  
(0.04 m<sup>2</sup>)


**Length:** 26.18"  
(66.5 cm)

**Width:** 14.06"  
(35.7 cm)

**Height H1:** 2.26"  
(5.7 cm)

**Height H2:** 7.46"  
(18.9 cm)

**Weight:** 23 lbs  
(10.4 kg)

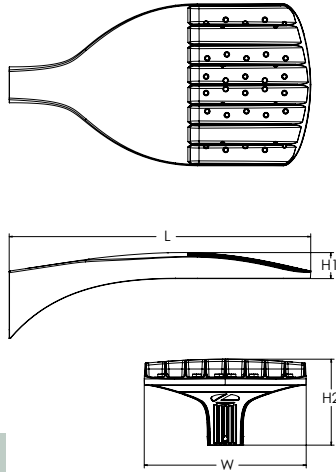

ds Design Select options indicated by this color background.

## Introduction

The modern styling of the D-Series features a highly refined aesthetic that blends seamlessly with its environment. The D-Series offers the benefits of the latest in LED technology into a high performance, high efficacy, long-life luminaire.

The photometric performance results in sites with excellent uniformity, greater pole spacing and lower power density. D-Series outstanding photometry aids in reducing the number of poles required in area lighting applications, with typical energy savings of 70% and expected service life of over 100,000 hours.



Items marked by a shaded background qualify for the Design Select program and ship in 15 days or less. To learn more about Design Select, visit [www.acuitybrands.com/designselect](http://www.acuitybrands.com/designselect).  
\*See ordering tree for details

## Ordering Information

**EXAMPLE: DSX0 LED P6 40K 70CRI T3M MVOLT SPA NLTAIR2 PIRHN DDBXD**

DSX0 LED	P7	40K	80CRI	T5M	MVOLT	RPA		
Series	LEDs	Color temperature <sup>2</sup>	Color Rendering Index <sup>2</sup>	Distribution	Voltage	Mounting		
DSX0 LED	<b>Forward optics</b>		(this section 70CRI only)	AFR Automotive front row T1S Type I short T2M Type II medium T3M Type III medium T3LG Type III low glare <sup>3</sup> T4M Type IV medium T4LG Type IV low glare <sup>3</sup> TFTM Forward throw medium	T5M Type V medium T5LG Type V low glare T5W Type V wide BLC3 Type III backlight control <sup>3</sup> BLC4 Type IV backlight control <sup>3</sup> LCCO Left corner cutoff <sup>3</sup> RCCO Right corner cutoff <sup>3</sup>	MVOLT (120V-277V) <sup>4</sup> HVOLT (347V-480V) <sup>5,6</sup> XVOLT (277V-480V) <sup>7,8</sup> 120 <sup>16, 24</sup> 208 <sup>16, 24</sup> 240 <sup>16, 24</sup> 277 <sup>16, 24</sup> 347 <sup>16, 24</sup> 480 <sup>16, 24</sup>	<b>Shipped included</b> SPA Square pole mounting (#8 drilling, 3.5" min. SQ pole) RPA Round pole mounting (#8 drilling, 3" min. RND pole) SPA5 Square pole mounting (#5 drilling, 3" min. SQ pole) <sup>9</sup> RPA5 Round pole mounting (#5 drilling, 3" min. RND pole) <sup>9</sup> SPA8N Square narrow pole mounting (#8 drilling, 3" min. SQ pole) WBA Wall bracket <sup>10</sup> MA Mast arm adapter (mounts on 2 3/8" OD horizontal tenon)	
	P1	P5	30K 3000K					70CRI
	P2	P6	40K 4000K					70CRI
	P3	P7	50K 5000K					70CRI
	<b>Rotated optics</b>		(this section 80CRI only, extended lead times apply)					
	P10 <sup>1</sup>	P12 <sup>1</sup>	27K 2700K					80CRI
	P11 <sup>1</sup>	P13 <sup>1</sup>	30K 3000K					80CRI
			35K 3500K					80CRI
			40K 4000K					80CRI
			50K 5000K					80CRI
DMG	--					DDBXD		
<b>Control options</b>				<b>Other options</b>		<b>Finish (required)</b>		
<b>Shipped installed</b>		PER7 Seven-pin receptacle only (controls ordered separate) <sup>14, 19</sup>		<b>Shipped installed</b>		DDBXD Dark Bronze		
NLTAIR2 PIRHN	nLight AIR gen 2 enabled with bi-level motion / ambient sensor, 8-40' mounting height, ambient sensor enabled at 2fc. <sup>11, 12, 18, 19</sup>		FAO Field adjustable output <sup>15, 19</sup>	HS Houseside shield (black finish standard) <sup>20</sup>	DBLXD Black			
PIR	High/low, motion/ambient sensor, 8-40' mounting height, ambient sensor enabled at 2fc. <sup>13, 18, 19</sup>		BL30 Bi-level switched dimming, 30% <sup>16, 19</sup>	L90 Left rotated optics <sup>1</sup>	DNAXD Natural Aluminum			
PER	NEMA twist-lock receptacle only (controls ordered separate) <sup>14</sup>		BL50 Bi-level switched dimming, 50% <sup>16, 19</sup>	R90 Right rotated optics <sup>1</sup>	DWHXD White			
PER5	Five-pin receptacle only (controls ordered separate) <sup>14, 19</sup>		DMG 0-10v dimming wires pulled outside fixture (for use with an external control, ordered separately) <sup>17</sup>	CCE Coastal Construction <sup>21</sup>	DDBTXD Textured dark bronze			
				HA 50°C ambient operation <sup>22</sup>	DBLBXD Textured black			
				BAA Buy America(n) Act Compliant	DNATXD Textured natural aluminum			
				SF Single fuse (120, 277, 347V) <sup>24</sup>	DWHGXD Textured white			
				DF Double fuse (208, 240, 480V) <sup>24</sup>				
				<b>Shipped separately</b>				
				ECSR External Glare Shield (reversible, field install required, matches housing finish)				
				BSDB Bird Spikes (field install required)				



One Lithonia Way • Conyers, Georgia 30012 • Phone: 1-800-705-SERV (7378) • [www.lithonia.com](http://www.lithonia.com)  
© 2011-2024 Acuity Brands Lighting, Inc. All rights reserved.

DSX0-LED  
Rev. 03/26/24  
Page 1 of 9

## Ordering Information

### Accessories


Ordered and shipped separately.

DLL127F 1.5 JU	Photocell - SSL twist-lock (120-277V) <sup>23</sup>
DLL347F 1.5 CUL JU	Photocell - SSL twist-lock (347V) <sup>23</sup>
DLL480F 1.5 CUL JU	Photocell - SSL twist-lock (480V) <sup>23</sup>
DSHORT SBK	Shorting cap <sup>23</sup>
DSX0HS P#	House-side shield (enter package number P1-7, P10-13 in place of #)
DSXRPA (FINISH)	Round pole adapter (#8 drilling, specify finish)
DSXRPA5 (FINISH)	Round pole adapter #5 drilling (specify finish)
DSXSPA5 (FINISH)	Square pole adapter #5 drilling (specify finish)
DSX0EGSR (FINISH)	External glare shield (specify finish)
DSX0SDB (FINISH)	Bird spike deterrent bracket (specify finish)


### NOTES

- Rotated optics available with packages P10, P11, P12 and P13. Must be combined with option L90 or R90.
- 30K, 40K, and 50K available in 70CRI and 80CRI. 27K and 35K only available with 80CRI. Contact Technical Support for other possible combinations.
- T3LG, T4LG, BLC3, BLC4, LCCO, RCCO not available with option HS.
- MVOLT driver operates on any line voltage from 120-277V (50/60 Hz).
- HVOLT driver operates on any line voltage from 347-480V (50/60 Hz).
- HVOLT not available with package P1, P2 and P10 when combined with option NLTAIR2 PIRHN or option PIR.
- XVOLT operates with any voltage between 277V and 480V (50/60 Hz).
- XVOLT not available in packages P1, P2 or P10. XVOLT not available with fusing (SF or DF).
- SPAS and RPA5 for use with #5 drilling only (Not for use with #8 drilling).
- WBA cannot be combined with Type 5 distributions plus photocell (PER).
- NLTAIR2 and PIRHN must be ordered together. For more information on nLight Air 2.
- NLTAIR2 PIRHN not available with other controls including PIR, PER, PER5, PER7, FAO, BL30, BL50 and DMG. NLTAIR2 PIRHN not available with P1, P2 and P10 using HVOLT. NLTAIR2 PIRHN not available with P1, P2 and P10 using XVOLT. NLTAIR2 PIRHN not available with P1 using MVOLT.
- PIR not available with NLTAIR2, PER, PER5, PER7, FAO BL30, BL50 and DMG. PIR not available with P1, P2 and P10 using HVOLT. PIR not available with P1, P2 and P10 using XVOLT. PIR not available with P1 using MVOLT.
- PER/PER5/PER7 not available with NLTAIR2, PIR, BL30, BL50. Photocell ordered and shipped as a separate line item from Acuity Brands Controls. See accessories. Shorting Cap included.
- FAO not available with other dimming control options NLTAIR2 PIRHN, PIR, PER5, PER7, BL30, BL50, or DMG.
- BL30 and BL50 are not available with NLTAIR2 PIRHN, PIR, PER, PER5, PER7, FAO and DMG. BL30 or BL50 must specify 120, 277 or 347V. Consult tech support for 208, 240 or 480V.
- DMG not available with NLTAIR2 PIRHN, PIR, PER, PER5, PER7, BL30, BL50 and FAO.
- Reference Motion Sensor Default Settings table on page 4 to see functionality.
- Reference Controls Options table on page 4.
- Option HS not available with T3LG, T4LG, BLC3, BLC4, LCCO and RCCO distribution. Also available as a separate accessory; see Accessories information.
- CCE option not available with option B5 and EGSR. Contact Technical Support for availability.
- Option HA not available with performance packages P6, P7, P12 and P13.
- Requires luminaire to be specified with PER, PER5 or PER7 option. See Controls Table on page 4.
- Single fuse (SF) requires 120V, 277V, or 347V. Double fuse (DF) requires 208V, 240V or 480V. XVOLT not available with fusing (SF or DF).

## Shield Accessories

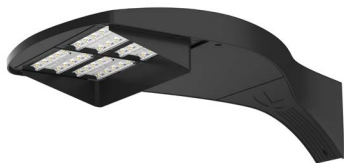

External Glare Shield (EGSR)

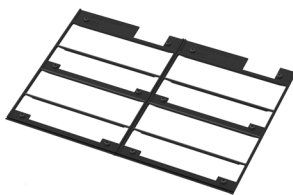


House Side Shield (HS)


## Drilling

### HANDHOLE ORIENTATION

(from top of pole)

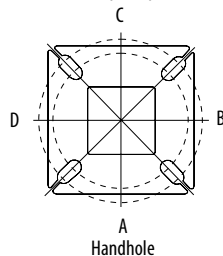

Handhole

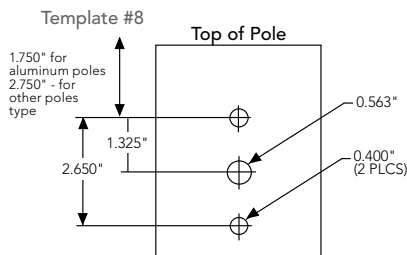

### Tenon Mounting Slipfitter

Tenon O.D.	Mounting	Single Unit	2 @ 180	2 @ 90	3 @ 90	3 @ 120	4 @ 90
2-3/8"	RPA	AS3-5 190	AS3-5 280	AS3-5 290	AS3-5 390	AS3-5 320	AS3-5 490
2-7/8"	RPA	AST25-190	AST25-280	AST25-290	AST25-390	AST25-320	AST25-490
4"	RPA	AST35-190	AST35-280	AST35-290	AST35-390	AST35-320	AST35-490

Mounting Option	Drilling Template	Single	2 @ 180	2 @ 90	3 @ 90	3 @ 120	4 @ 90
Head Location		Side B	Side B & D	Side B & C	Side B, C & D	Round Pole Only	Side A, B, C & D
Drill Nomenclature	#8	DM19AS	DM28AS	DM29AS	DM39AS	DM32AS	DM49AS
Minimum Acceptable Outside Pole Dimension							
SPA	#8	3.5"	3.5"	3.5"	3.5"	3"	3.5"
RPA	#8	3"	3"	3"	3"	3"	3"
SPAS	#5	3"	3"	3"	3"	3"	3"
RPA5	#5	3"	3"	3"	3"	3"	3"
SPA8N	#8	3"	3"	3"	3"	3"	3"

### DSX0 Area Luminaire - EPA

\*Includes luminaire and integral mounting arm. Other tenons, arms, brackets or other accessories are not included in this EPA data.

Fixture Quantity & Mounting Configuration	Single DM19	2 @ 180 DM28	2 @ 90 DM29	3 @ 90 DM39	3 @ 120 DM32	4 @ 90 DM49
Mounting Type						
DSX0 with SPA	0.44	0.88	0.96	1.18	---	1.16
DSX0 with SPAS, SPA8N	0.51	1.02	1.06	1.26	---	1.29
DSX0 with RPA, RPA5	0.51	1.02	1.06	1.26	1.24	1.29
DSX0 with MA	0.64	1.28	1.24	1.67	1.70	1.93

Isofootcandle plots for the DSX0 LED P7 40K 70CRI. Distances are in units of mounting height (20').



## Performance Data

### Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient	Lumen Multiplier	
0°C	32°F	1.04
5°C	41°F	1.04
10°C	50°F	1.03
15°C	59°F	1.02
20°C	68°F	1.01
<b>25°C</b>	<b>77°C</b>	<b>1.00</b>
30°C	86°F	0.99
35°C	95°F	0.98
40°C	104°F	0.97

### Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the platforms noted in a **25°C ambient**, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	Lumen Maintenance Factor
0	1.00
25,000	0.94
50,000	0.89
100,000	0.80

### FAO Dimming Settings

FAO Position	% Wattage	% Lumen Output
8	100%	100%
7	93%	95%
6	80%	85%
5	66%	73%
4	54%	61%
3	41%	49%
2	29%	36%
1	15%	20%

\*Note: Calculated values are based on original performance package data. When calculating new values for given FAO position, use published values for each package based on input watts and lumens by optic type.

### Electrical Load

	Performance Package	LED Count	Drive Current (mA)	Wattage	Current (A)					
					120V	208V	240V	277V	347V	480V
Forward Optics (Non-Rotated)	P1	20	530	34	0.28	0.16	0.14	0.12	0.10	0.07
	P2	20	700	45	0.38	0.22	0.19	0.16	0.13	0.09
	P3	20	1050	69	0.57	0.33	0.29	0.25	0.20	0.14
	P4	20	1400	94	0.78	0.45	0.39	0.34	0.27	0.19
	P5	40	700	89	0.75	0.43	0.38	0.33	0.26	0.19
	P6	40	1050	136	1.14	0.66	0.57	0.49	0.39	0.29
	P7	40	1300	170	1.42	0.82	0.71	0.62	0.49	0.36
Rotated Optics (Requires L90 or R90)	P10	30	530	51	0.42	0.24	0.21	0.18	0.15	0.11
	P11	30	700	67	0.57	0.33	0.28	0.25	0.20	0.14
	P12	30	1050	103	0.86	0.50	0.43	0.37	0.30	0.22
	P13	30	1300	129	1.07	0.62	0.54	0.46	0.37	0.27

### LED Color Temperature / Color Rendering Multipliers

	70 CRI		80CRI		90CRI	
	Lumen Multiplier	Availability	Lumen Multiplier	Availability	Lumen Multiplier	Availability
5000K	102%	Standard	92%	Extended lead-time	71%	(see note)
4000K	100%	Standard	92%	Extended lead-time	67%	(see note)
3500K	100%	(see note)	90%	Extended lead-time	63%	(see note)
3000K	96%	Standard	87%	Extended lead-time	61%	(see note)
2700K	94%	(see note)	85%	Extended lead-time	57%	(see note)

Note: Some LED types are available as per special request. Contact Technical Support for more information.

### Motion Sensor Default Settings

Option	Unoccupied Dimmed Level	High Level (when occupied)	Photocell Operation	Dwell Time	Ramp-up Time	Dimming Fade Rate
PIR	30%	100%	Enabled @ 2FC	7.5 min	3 sec	5 min
NLTAIR2 PIRHN	30%	100%	Enabled @ 2FC	7.5 min	3 sec	5 min

### Controls Options

Nomenclature	Description	Functionality	Primary control device	Notes
FAO	Field adjustable output device installed inside the luminaire; wired to the driver dimming leads.	Allows the luminaire to be manually dimmed, effectively trimming the light output.	FAO device	Cannot be used with other controls options that need the 0-10V leads
DS (not available on DSX0)	Drivers wired independently for 50/50 luminaire operation	The luminaire is wired to two separate circuits, allowing for 50/50 operation.	Independently wired drivers	Requires two separately switched circuits. Consider nLight AIR as a more cost effective alternative.
PERS or PER7	Twist-lock photocell receptacle	Compatible with standard twist-lock photocells for dusk to dawn operation, or advanced control nodes that provide 0-10V dimming signals.	Twist-lock photocells such as DLL Elite or advanced control nodes such as ROAM.	Pins 4 & 5 to dimming leads on driver, Pins 6 & 7 are capped inside luminaire. Cannot be used with other controls options that need the 0-10V leads.
PIR	Motion sensor with integral photocell. Sensor suitable for 8' to 40' mounting height.	Luminaires dim when no occupancy is detected.	Acuity Controls rSBG	Cannot be used with other controls options that need the 0-10V leads.
NLTAIR2 PIRHN	nLight AIR enabled luminaire for motion sensing, photocell and wireless communication.	Motion and ambient light sensing with group response. Scheduled dimming with motion sensor over-ride when wirelessly connected to the nLight Eclipse.	nLight Air rSBG	nLight AIR sensors can be programmed and commissioned from the ground using the CIAIRity Pro app. Cannot be used with other controls options that need the 0-10V leads.
BL30 or BL50	Integrated bi-level device that allows a second control circuit to switch all light engines to either 30% or 50% light output	BLC device provides input to 0-10V dimming leads on all drivers providing either 100% or dimmed (30% or 50%) control by a secondary circuit	BLC UVOLT1	BLC device is powered off the 0-10V dimming leads, thus can be used with any input voltage from 120 to 480V

# Performance Data

## Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.

Forward Optics																							
Performance Package	System Watts	LED Count	Drive Current (mA)	Distribution Type	30K					40K					50K								
					(3000K, 70 CRI)					(4000K, 70 CRI)					(5000K, 70 CRI)								
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW				
P1	33W	20	530	T1S	4,906	1	0	1	148	5,113	1	0	1	154	5,213	1	0	1	157				
				T2M	4,545	1	0	2	137	4,736	1	0	2	143	4,829	1	0	2	145				
				T3M	4,597	1	0	2	138	4,791	1	0	2	144	4,885	1	0	2	147				
				T3LG	4,107	1	0	1	124	4,280	1	0	1	129	4,363	1	0	1	131				
				T4M	4,666	1	0	2	141	4,863	1	0	2	146	4,957	1	0	2	149				
				T4LG	4,244	1	0	1	128	4,423	1	0	1	133	4,509	1	0	1	136				
				TFTM	4,698	1	0	2	141	4,896	1	0	2	147	4,992	1	0	2	150				
				T5M	4,801	3	0	1	145	5,003	3	0	1	151	5,101	3	0	1	154				
				T5W	4,878	3	0	1	147	5,084	3	0	2	153	5,183	3	0	2	156				
				T5LG	4,814	2	0	1	145	5,018	2	0	1	151	5,115	2	0	1	154				
				BLC3	3,344	0	0	1	101	3,485	0	0	1	105	3,553	0	0	1	107				
				BLC4	3,454	0	0	2	104	3,599	0	0	2	108	3,670	0	0	2	111				
				RCCO	3,374	0	0	1	102	3,517	0	0	1	106	3,585	0	0	1	108				
				LCCO	3,374	0	0	1	102	3,517	0	0	1	106	3,585	0	0	1	108				
				AFR	4,906	1	0	1	148	5,113	1	0	1	154	5,213	1	0	1	157				
				P2	45W	20	700	T1S	6,328	1	0	1	140	6,595	1	0	1	146	6,724	1	0	1	149
								T2M	5,862	1	0	2	130	6,109	1	0	2	135	6,228	1	0	2	138
T3M	5,930	1	0					3	131	6,180	1	0	3	137	6,301	1	0	3	140				
T3LG	5,297	1	0					1	117	5,521	1	0	1	122	5,628	1	0	1	125				
T4M	6,018	1	0					3	133	6,272	1	0	3	139	6,395	1	0	3	142				
T4LG	5,474	1	0					1	121	5,705	1	0	1	126	5,816	1	0	1	129				
TFTM	6,060	1	0					3	134	6,316	1	0	3	140	6,439	1	0	3	143				
T5M	6,192	3	0					1	137	6,453	3	0	2	143	6,579	3	0	2	146				
T5W	6,293	3	0					2	139	6,558	3	0	2	145	6,686	3	0	2	148				
T5LG	6,210	2	0					1	138	6,472	3	0	1	143	6,598	3	0	1	146				
BLC3	4,313	0	0					2	96	4,495	0	0	2	100	4,583	0	0	2	102				
BLC4	4,455	0	0					2	99	4,643	0	0	2	103	4,733	0	0	2	105				
RCCO	4,352	0	0					2	96	4,536	0	0	2	100	4,624	0	0	2	102				
LCCO	4,352	0	0					2	96	4,536	0	0	2	100	4,624	0	0	2	102				
AFR	6,328	1	0					1	140	6,595	1	0	1	146	6,724	1	0	1	149				
P3	69W	20	1050					T1S	9,006	1	0	2	131	9,386	1	0	2	136	9,569	1	0	2	139
								T2M	8,343	2	0	3	121	8,694	2	0	3	126	8,864	2	0	3	129
				T3M	8,439	2	0	3	122	8,795	2	0	3	128	8,967	2	0	3	130				
				T3LG	7,539	1	0	2	109	7,857	1	0	2	114	8,010	1	0	2	116				
				T4M	8,565	2	0	3	124	8,926	2	0	3	129	9,100	2	0	3	132				
				T4LG	7,790	1	0	2	113	8,119	1	0	2	118	8,277	1	0	2	120				
				TFTM	8,624	1	0	3	125	8,988	1	0	3	130	9,163	2	0	3	133				
				T5M	8,812	3	0	2	128	9,184	4	0	2	133	9,363	4	0	2	136				
				T5W	8,955	4	0	2	130	9,333	4	0	2	135	9,515	4	0	2	138				
				T5LG	8,838	3	0	1	128	9,211	3	0	1	134	9,390	3	0	1	136				
				BLC3	6,139	0	0	2	89	6,398	0	0	2	93	6,522	0	0	2	95				
				BLC4	6,340	0	0	3	92	6,607	0	0	3	96	6,736	0	0	3	98				
				RCCO	6,194	1	0	2	90	6,455	1	0	2	94	6,581	1	0	2	95				
				LCCO	6,194	1	0	2	90	6,455	1	0	2	94	6,581	1	0	2	95				
				AFR	9,006	1	0	2	131	9,386	1	0	2	136	9,569	1	0	2	139				
				P4	93W	20	1400	T1S	11,396	1	0	2	122	11,877	1	0	2	128	12,109	2	0	2	130
								T2M	10,557	2	0	3	113	11,003	2	0	3	118	11,217	2	0	3	121
T3M	10,680	2	0					3	115	11,130	2	0	3	120	11,347	2	0	3	122				
T3LG	9,540	1	0					2	103	9,942	1	0	2	107	10,136	1	0	2	109				
T4M	10,839	2	0					3	117	11,296	2	0	3	121	11,516	2	0	4	124				
T4LG	9,858	1	0					2	106	10,274	1	0	2	110	10,474	1	0	2	113				
TFTM	10,914	2	0					3	117	11,374	2	0	3	122	11,596	2	0	3	125				
T5M	11,152	4	0					2	120	11,622	4	0	2	125	11,849	4	0	2	127				
T5W	11,332	4	0					3	122	11,811	4	0	3	127	12,041	4	0	3	129				
T5LG	11,184	3	0					1	120	11,656	3	0	2	125	11,883	3	0	2	128				
BLC3	7,768	0	0					2	83	8,096	0	0	2	87	8,254	0	0	2	89				
BLC4	8,023	0	0					3	86	8,362	0	0	3	90	8,524	0	0	3	92				
RCCO	7,838	1	0					2	84	8,169	1	0	2	88	8,328	1	0	2	90				
LCCO	7,838	1	0					2	84	8,169	1	0	2	88	8,328	1	0	2	90				
AFR	11,396	1	0					2	122	11,877	1	0	2	128	12,109	2	0	2	130				



# Performance Data

## Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.

Forward Optics																							
Performance Package	System Watts	LED Count	Drive Current (mA)	Distribution Type	30K					40K					50K								
					(3000K, 70 CRI)					(4000K, 70 CRI)					(5000K, 70 CRI)								
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW				
P5	90W	40	700	T1S	12,380	2	0	2	137	12,902	2	0	2	143	13,154	2	0	2	146				
				T2M	11,468	2	0	3	127	11,952	2	0	3	133	12,185	2	0	3	135				
				T3M	11,601	2	0	3	129	12,091	2	0	3	134	12,326	2	0	4	137				
				T3LG	10,363	2	0	2	115	10,800	2	0	2	120	11,011	2	0	2	122				
				T4M	11,774	2	0	4	131	12,271	2	0	4	136	12,510	2	0	4	139				
				T4LG	10,709	1	0	2	119	11,160	2	0	2	124	11,378	2	0	2	126				
				TFTM	11,856	2	0	3	132	12,356	2	0	4	137	12,596	2	0	4	140				
				T5M	12,114	4	0	2	134	12,625	4	0	2	140	12,871	4	0	2	143				
				T5W	12,310	4	0	3	137	12,830	4	0	3	142	13,080	4	0	3	145				
				T5LG	12,149	3	0	2	135	12,662	3	0	2	141	12,908	3	0	2	143				
				BLC3	8,438	0	0	2	94	8,794	0	0	2	98	8,966	0	0	2	99				
				BLC4	8,715	0	0	3	97	9,083	0	0	3	101	9,260	0	0	3	103				
				RCCO	8,515	1	0	2	94	8,874	1	0	2	98	9,047	1	0	2	100				
				LCCO	8,515	1	0	2	94	8,874	1	0	2	98	9,047	1	0	2	100				
				AFR	12,380	2	0	2	137	12,902	2	0	2	143	13,154	2	0	2	146				
				P6	137W	40	1050	T1S	17,545	2	0	3	128	18,285	2	0	3	133	18,642	2	0	3	136
								T2M	16,253	3	0	4	119	16,939	3	0	4	124	17,269	3	0	4	126
T3M	16,442	2	0					4	120	17,135	3	0	4	125	17,469	3	0	4	128				
T3LG	14,687	2	0					2	107	15,306	2	0	2	112	15,605	2	0	2	114				
T4M	16,687	2	0					4	122	17,391	3	0	5	127	17,730	3	0	5	129				
T4LG	15,177	2	0					2	111	15,817	2	0	2	115	16,125	2	0	2	118				
TFTM	16,802	2	0					4	123	17,511	2	0	4	128	17,852	2	0	5	130				
T5M	17,168	4	0					2	125	17,893	5	0	3	131	18,241	5	0	3	133				
T5W	17,447	5	0					3	127	18,183	5	0	3	133	18,537	5	0	3	135				
T5LG	17,218	4	0					2	126	17,944	4	0	2	131	18,294	4	0	2	134				
BLC3	11,959	0	0					3	87	12,464	0	0	3	91	12,707	0	0	3	93				
BLC4	12,352	0	0					4	90	12,873	0	0	4	94	13,124	0	0	4	96				
RCCO	12,067	1	0					3	88	12,576	1	0	3	92	12,821	1	0	3	94				
LCCO	12,067	1	0					3	88	12,576	1	0	3	92	12,821	1	0	3	94				
AFR	17,545	2	0					3	128	18,285	2	0	3	133	18,642	2	0	3	136				
P7	171W	40	1300					T1S	20,806	2	0	3	122	21,683	2	0	3	127	22,106	2	0	3	129
								T2M	19,273	3	0	4	113	20,086	3	0	4	118	20,478	3	0	4	120
				T3M	19,497	3	0	5	114	20,319	3	0	5	119	20,715	3	0	5	121				
				T3LG	17,416	2	0	2	102	18,151	2	0	2	106	18,504	2	0	2	108				
				T4M	19,787	3	0	5	116	20,622	3	0	5	121	21,024	3	0	5	123				
				T4LG	17,997	2	0	2	105	18,756	2	0	2	110	19,121	2	0	2	112				
				TFTM	19,924	3	0	5	117	20,765	3	0	5	122	21,170	3	0	5	124				
				T5M	20,359	5	0	3	119	21,217	5	0	3	124	21,631	5	0	3	127				
				T5W	20,689	5	0	3	121	21,561	5	0	3	126	21,982	5	0	3	129				
				T5LG	20,418	4	0	2	120	21,279	4	0	2	125	21,694	4	0	2	127				
				BLC3	14,182	0	0	3	83	14,780	0	0	3	87	15,068	0	0	3	88				
				BLC4	14,647	0	0	4	86	15,265	0	0	4	89	15,562	0	0	4	91				
				RCCO	14,309	1	0	3	84	14,913	1	0	3	87	15,204	1	0	3	89				
				LCCO	14,309	1	0	3	84	14,913	1	0	3	87	15,204	1	0	3	89				
				AFR	20,806	2	0	3	122	21,683	2	0	3	127	22,106	2	0	3	129				


# Performance Data

## Lumen Output



Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.

Rotated Optics																			
Performance Package	System Watts	LED Count	Drive Current (mA)	Distribution Type	30K					40K					50K				
					(3000K, 70 CRI)					(4000K, 70 CRI)					(5000K, 70 CRI)				
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
P10	51W	30	530	T1S	7,399	3	0	3	145	7,711	3	0	3	151	7,862	3	0	3	154
				T2M	6,854	3	0	3	135	7,144	3	0	3	140	7,283	3	0	3	143
				T3M	6,933	3	0	3	136	7,225	3	0	3	142	7,366	3	0	3	145
				T3LG	6,194	2	0	2	122	6,455	2	0	2	127	6,581	2	0	2	129
				T4M	7,036	3	0	3	138	7,333	3	0	3	144	7,476	3	0	3	147
				T4LG	6,399	2	0	2	126	6,669	2	0	2	131	6,799	2	0	2	134
				TFTM	7,086	3	0	3	139	7,385	3	0	3	145	7,529	3	0	3	148
				T5M	7,239	3	0	2	142	7,545	3	0	2	148	7,692	3	0	2	151
				T5W	7,357	3	0	2	145	7,667	3	0	2	151	7,816	4	0	2	154
				T5LG	7,260	3	0	1	143	7,567	3	0	1	149	7,714	3	0	1	152
				BLC3	5,043	3	0	3	99	5,256	3	0	3	103	5,358	3	0	3	105
				BLC4	5,208	3	0	3	102	5,428	3	0	3	107	5,534	3	0	3	109
				RCCO	5,089	0	0	2	100	5,303	0	0	2	104	5,407	0	0	2	106
				LCCO	5,089	0	0	2	100	5,303	0	0	2	104	5,407	0	0	2	106
				AFR	7,399	3	0	3	145	7,711	3	0	3	151	7,862	3	0	3	154
				P11	68W	30	700	T1S	9,358	3	0	3	138	9,753	3	0	3	143	9,943
T2M	8,669	3	0					3	127	9,034	3	0	3	133	9,211	3	0	3	135
T3M	8,768	3	0					3	129	9,138	3	0	3	134	9,316	3	0	3	137
T3LG	7,833	3	0					3	115	8,164	3	0	3	120	8,323	3	0	3	122
T4M	8,899	3	0					3	131	9,274	3	0	3	136	9,455	3	0	3	139
T4LG	8,093	3	0					3	119	8,435	3	0	3	124	8,599	3	0	3	126
TFTM	8,962	3	0					3	132	9,340	3	0	3	137	9,522	3	0	3	140
T5M	9,156	4	0					2	135	9,542	4	0	2	140	9,728	4	0	2	143
T5W	9,304	4	0					2	137	9,696	4	0	2	143	9,885	4	0	2	145
T5LG	9,182	3	0					1	135	9,569	3	0	1	141	9,756	3	0	1	143
BLC3	6,378	3	0					3	94	6,647	3	0	3	98	6,777	3	0	3	100
BLC4	6,587	3	0					3	97	6,865	3	0	3	101	6,999	3	0	3	103
RCCO	6,436	0	0					2	95	6,707	0	0	2	99	6,838	0	0	2	101
LCCO	6,436	0	0					2	95	6,707	0	0	2	99	6,838	0	0	2	101
AFR	9,358	3	0					3	138	9,753	3	0	3	143	9,943	3	0	3	146
P12	103W	30	1050					T1S	13,247	3	0	3	128	13,806	3	0	3	134	14,075
				T2M	12,271	4	0	4	119	12,789	4	0	4	124	13,038	4	0	4	126
				T3M	12,412	4	0	4	120	12,935	4	0	4	125	13,187	4	0	4	128
				T3LG	11,089	3	0	3	107	11,556	3	0	3	112	11,782	3	0	3	114
				T4M	12,597	4	0	4	122	13,128	4	0	4	127	13,384	4	0	4	129
				T4LG	11,457	3	0	3	111	11,940	3	0	3	116	12,173	3	0	3	118
				TFTM	12,686	4	0	4	123	13,221	4	0	4	128	13,479	4	0	4	130
				T5M	12,960	4	0	2	125	13,507	4	0	2	131	13,770	4	0	2	133
				T5W	13,170	4	0	3	127	13,726	4	0	3	133	13,994	4	0	3	135
				T5LG	12,998	3	0	2	126	13,546	3	0	2	131	13,810	3	0	2	134
				BLC3	9,029	3	0	3	87	9,409	3	0	3	91	9,593	3	0	3	93
				BLC4	9,324	4	0	4	90	9,718	4	0	4	94	9,907	4	0	4	96
				RCCO	9,110	1	0	2	88	9,495	1	0	2	92	9,680	1	0	2	94
				LCCO	9,110	1	0	2	88	9,494	1	0	2	92	9,680	1	0	2	94
				AFR	13,247	3	0	3	128	13,806	3	0	3	134	14,075	3	0	3	136
				P13	129W	30	1300	T1S	15,704	3	0	3	122	16,366	3	0	3	127	16,685
T2M	14,547	4	0					4	113	15,161	4	0	4	118	15,457	4	0	4	120
T3M	14,714	4	0					4	114	15,335	4	0	4	119	15,634	4	0	4	121
T3LG	13,145	3	0					3	102	13,700	3	0	3	106	13,967	3	0	3	108
T4M	14,933	4	0					4	116	15,563	4	0	4	121	15,867	4	0	4	123
T4LG	13,582	3	0					3	105	14,155	3	0	3	110	14,431	3	0	3	112
TFTM	15,039	4	0					4	117	15,673	4	0	4	122	15,979	4	0	4	124
T5M	15,364	4	0					2	119	16,013	4	0	2	124	16,325	4	0	2	127
T5W	15,613	5	0					3	121	16,272	5	0	3	126	16,589	5	0	3	129
T5LG	15,409	3	0					2	120	16,059	3	0	2	125	16,372	4	0	2	127
BLC3	10,703	4	0					4	83	11,155	4	0	4	87	11,372	4	0	4	88
BLC4	11,054	4	0					4	86	11,520	4	0	4	89	11,745	4	0	4	91
RCCO	10,800	1	0					2	84	11,256	1	0	2	87	11,475	1	0	3	89
LCCO	10,800	1	0					2	84	11,255	1	0	2	87	11,475	1	0	3	89
AFR	15,704	3	0					3	122	16,366	3	0	3	127	16,685	4	0	4	130



# Dimensions

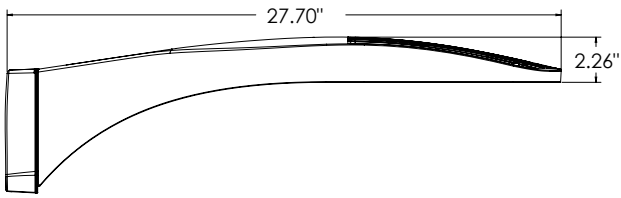


**DSX0 with RPA, RPA5, SPA5, SPA8N mount**  
**Weight: 25 lbs**

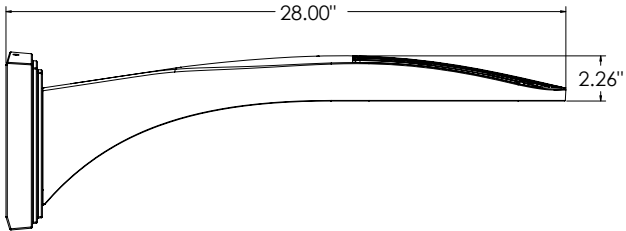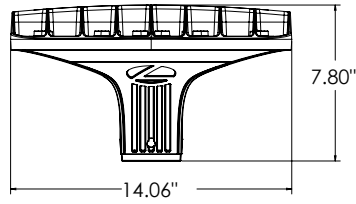


**DSX0 with WBA mount**  
**Weight: 27 lb**

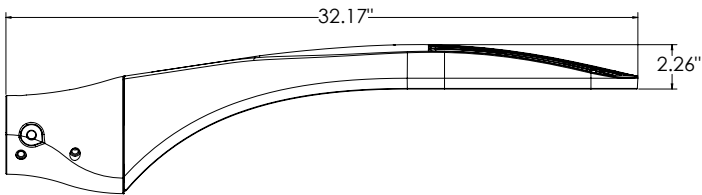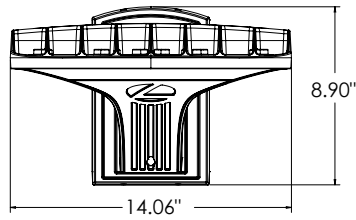


**DSX0 with MA mount**  
**Weight: 28 lbs**

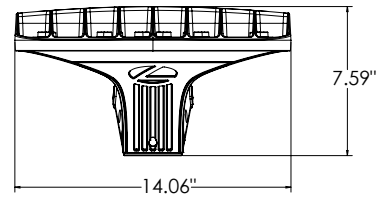


**SPA (STANDARD ARM)**

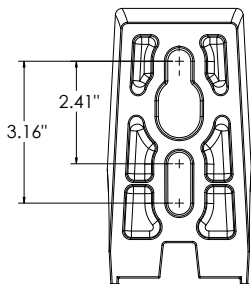


**RPA**

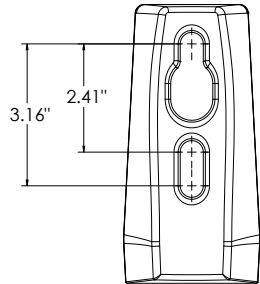


**SPA5**

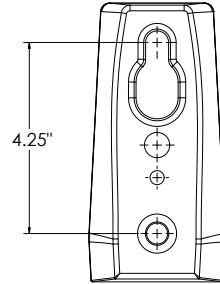

**RPA5**



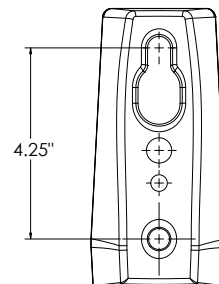


**SPA8N**

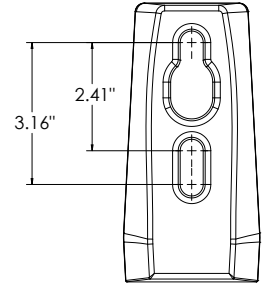

## nLight Sensor Coverage Pattern

### NLTAIR2 PIRHN

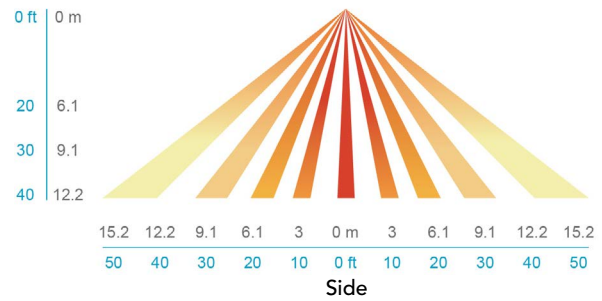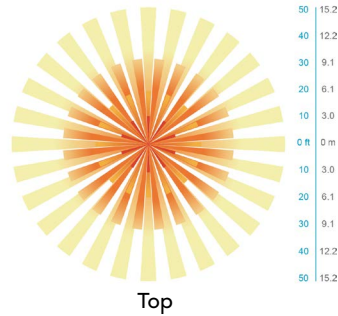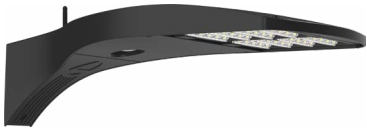

## FEATURES & SPECIFICATIONS

### INTENDED USE

The sleek design of the D-Series Size 0 reflects the embedded high performance LED technology. It is ideal for many commercial and municipal applications, such as parking lots, plazas, campuses, and pedestrian areas.

### CONSTRUCTION

Single-piece die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. Modular design allows for ease of maintenance and future light engine upgrades. The LED driver is mounted in direct contact with the casting to promote low operating temperature and long life. Housing driver compartment is completely sealed against moisture and environmental contaminants (IP66). Vibration rated per ANSI C136.31 for 3G. Low EPA (0.44 ft<sup>2</sup>) for optimized pole wind loading.

### FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Available in both textured and non-textured finishes.

### COASTAL CONSTRUCTION (CCE)

Optional corrosion resistant construction is engineered with added corrosion protection in materials and/or pre-treatment of base material under super durable paint. Provides additional corrosion protection for applications near coastal areas. Finish is salt spray tested to over 5,000 hours per ASTM B117 with scribe rating of 10. Additional lead-times may apply.

### OPTICS

Precision-molded proprietary silicone lenses are engineered for superior area lighting distribution, uniformity, and pole spacing. Light engines are available in 3000 K, 4000 K or 5000 K (70 CRI) configurations. 80CRI configurations are also available. The D-Series Size 0 has zero uplight and qualifies as a Nighttime Friendly™ product, meaning it is consistent with the LEED® and Green Globes™ criteria for eliminating wasteful uplight.

### ELECTRICAL

Light engine(s) configurations consist of high-efficacy LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life (up to L80/100,000 hours at 25°C). Class 1 electronic drivers are designed to have a power factor >90%, THD <20%, and an expected life of 100,000 hours with <1% failure rate. Easily serviceable 10kV surge protection device meets a minimum Category C Low operation (per ANSI/IEEE C62.41.2).

### STANDARD CONTROLS

The DSX0 LED area luminaire has a number of control options. DSX Size 0, comes standard with 0-10V dimming driver. Dusk to dawn controls can be utilized via optional NEMA twist-lock photocell receptacles. PIR integrated motion sensor with on-board photocell feature field-adjustable programming and are suitable for mounting heights up to 40 feet. Control option BL features a bi-level device that allows a second control circuit to switch all light engines to either 30% or 50% light output.

### nLIGHT AIR CONTROLS

The DSX0 LED area luminaire is also available with nLight® AIR for the ultimate in wireless control. This powerful controls platform provides out-of-the-box basic motion sensing and photocontrol functionality and is suitable for mounting heights up to 40 feet. Once commissioned using a smartphone and the easy-to-use CLAIRITY app, nLight AIR equipped luminaires can be grouped, resulting in motion sensor and photocell group response without the need for additional equipment. Scheduled dimming with motion sensor over-ride can be achieved when used with the nLight Eclipse. Additional information about nLight Air can be found [here](#).

### INSTALLATION

Integral mounting arm allows for fast mounting using Lithonia standard #8 drilling and accommodates pole drilling's from 2.41 to 3.12" on center. The standard "SPA" option for square poles and the "RPA" option for round poles use the #8 drilling. For #5 pole drillings, use SPA5 or RPA5. Additional mountings are available including a wall bracket (WBA) and mast arm (MA) option that allows luminaire attachment to a 2 3/8" horizontal mast arm.

### LISTINGS

UL listed to meet U.S. and Canadian standards. UL Listed for wet locations. Light engines are IP66 rated; luminaire is IP66 rated. Rated for -40°C minimum ambient.

DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product. Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org/QPL](http://www.designlights.org/QPL) to confirm which versions are qualified.

International Dark-Sky Association (IDA) Fixture Seal of Approval (FSA) is available for all products on this page utilizing 3000K color temperature only.

### GOVERNMENT PROCUREMENT

BAA – Buy America(n) Act: Product with the BAA option qualifies as a domestic end product under the Buy American Act as implemented in the FAR and DFARS. Product with the BAA option also qualifies as manufactured in the United States under DOT Buy America regulations.

BABA – Build America Buy America: Product with the BAA option also qualifies as produced in the United States under the definitions of the Build America, Buy America Act.

Please refer to [www.acuitybrands.com/buy-american](http://www.acuitybrands.com/buy-american) for additional information.

### WARRANTY

5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: [www.acuitybrands.com/support/warranty/terms-and-conditions](http://www.acuitybrands.com/support/warranty/terms-and-conditions)

**Note:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.



# D-Series Size 0 LED Area Luminaire



Catalog Number

Notes  
**25' Total Height**

Type  
**OU**

Hit the Tab key or mouse over the page to see all interactive elements.

## Specifications

**EPA:** 0.44 ft<sup>2</sup>  
(0.04 m<sup>2</sup>)


**Length:** 26.18"  
(66.5 cm)

**Width:** 14.06"  
(35.7 cm)

**Height H1:** 2.26"  
(5.7 cm)

**Height H2:** 7.46"  
(18.9 cm)

**Weight:** 23 lbs  
(10.4 kg)

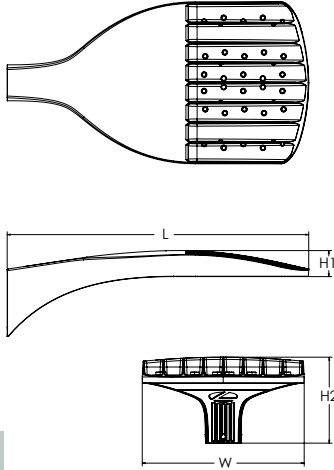

**ds** Design Select options indicated by this color background.

## Introduction

The modern styling of the D-Series features a highly refined aesthetic that blends seamlessly with its environment. The D-Series offers the benefits of the latest in LED technology into a high performance, high efficacy, long-life luminaire.

The photometric performance results in sites with excellent uniformity, greater pole spacing and lower power density. D-Series outstanding photometry aids in reducing the number of poles required in area lighting applications, with typical energy savings of 70% and expected service life of over 100,000 hours.



Items marked by a shaded background qualify for the Design Select program and ship in 15 days or less. To learn more about Design Select, visit [www.acuitybrands.com/designselect](http://www.acuitybrands.com/designselect).  
\*See ordering tree for details

## Ordering Information

**EXAMPLE: DSX0 LED P6 40K 70CRI T3M MVOLT SPA NLTAIR2 PIRHN DDBXD**

DSX0 LED	P2	40K	80CRI	TFTM	MVOLT	RPA		
Series	LEDs	Color temperature <sup>2</sup>	Color Rendering Index <sup>2</sup>	Distribution	Voltage	Mounting		
DSX0 LED	<b>Forward optics</b>		(this section 70CRI only)	AFR Automotive front row T1S Type I short T2M Type II medium T3M Type III medium T3LG Type III low glare <sup>3</sup> T4M Type IV medium T4LG Type IV low glare <sup>3</sup> TFTM Forward throw medium	T5M Type V medium T5LG Type V low glare T5W Type V wide BLC3 Type III backlight control <sup>3</sup> BLC4 Type IV backlight control <sup>3</sup> LCCO Left corner cutoff <sup>3</sup> RCCO Right corner cutoff <sup>3</sup>	MVOLT (120V-277V) <sup>4</sup> HVOLT (347V-480V) <sup>5,6</sup> XVOLT (277V-480V) <sup>7,8</sup> 120 <sup>16, 24</sup> 208 <sup>16, 24</sup> 240 <sup>16, 24</sup> 277 <sup>16, 24</sup> 347 <sup>16, 24</sup> 480 <sup>16, 24</sup>	<b>Shipped included</b> SPA Square pole mounting (#8 drilling, 3.5" min. SQ pole) RPA Round pole mounting (#8 drilling, 3" min. RND pole) SPA5 Square pole mounting (#5 drilling, 3" min. SQ pole) <sup>9</sup> RPA5 Round pole mounting (#5 drilling, 3" min. RND pole) <sup>9</sup> SPA8N Square narrow pole mounting (#8 drilling, 3" min. SQ pole) WBA Wall bracket <sup>10</sup> MA Mast arm adapter (mounts on 2 3/8" OD horizontal tenon)	
	P1	P5	30K 3000K					70CRI
	P2	P6	40K 4000K					70CRI
	P3	P7	50K 5000K					70CRI
	<b>Rotated optics</b>		(this section 80CRI only, extended lead times apply)					
	P10 <sup>1</sup>	P12 <sup>1</sup>	27K 2700K					80CRI
	P11 <sup>1</sup>	P13 <sup>1</sup>	30K 3000K					80CRI
			35K 3500K					80CRI
			40K 4000K					80CRI
			50K 5000K					80CRI
<b>DMG</b>		<b>HS</b>		<b>DDBXD</b>				
<b>Control options</b>		<b>Other options</b>		<b>Finish (required)</b>				
<b>Shipped installed</b>		<b>Shipped installed</b>		<b>DDBXD</b> Dark Bronze				
NLTAIR2 PIRHN	nLight AIR gen 2 enabled with bi-level motion / ambient sensor, 8-40' mounting height, ambient sensor enabled at 2fc. <sup>11, 12, 18, 19</sup>	PER7 Seven-pin receptacle only (controls ordered separate) <sup>14, 19</sup>	HS Houseside shield (black finish standard) <sup>20</sup>	<b>DBLXD</b> Black				
PIR	High/low, motion/ambient sensor, 8-40' mounting height, ambient sensor enabled at 2fc. <sup>13, 18, 19</sup>	FAO Field adjustable output <sup>15, 19</sup>	L90 Left rotated optics <sup>1</sup>	<b>DNAXD</b> Natural Aluminum				
PER	NEMA twist-lock receptacle only (controls ordered separate) <sup>14</sup>	BL30 Bi-level switched dimming, 30% <sup>16, 19</sup>	R90 Right rotated optics <sup>1</sup>	<b>DWHXD</b> White				
PER5	Five-pin receptacle only (controls ordered separate) <sup>14, 19</sup>	BL50 Bi-level switched dimming, 50% <sup>16, 19</sup>	CCE Coastal Construction <sup>21</sup>	<b>DDBTXD</b> Textured dark bronze				
		DMG 0-10v dimming wires pulled outside fixture (for use with an external control, ordered separately) <sup>17</sup>	HA 50°C ambient operation <sup>22</sup>	<b>DBLBXD</b> Textured black				
			BAA Buy America(n) Act Compliant	<b>DNATXD</b> Textured natural aluminum				
			SF Single fuse (120, 277, 347V) <sup>24</sup>	<b>DWHGXD</b> Textured white				
			DF Double fuse (208, 240, 480V) <sup>24</sup>					
			<b>Shipped separately</b>					
			ECSR External Glare Shield (reversible, field install required, matches housing finish)					
			BSDB Bird Spikes (field install required)					



One Lithonia Way • Conyers, Georgia 30012 • Phone: 1-800-705-SERV (7378) • [www.lithonia.com](http://www.lithonia.com)  
© 2011-2024 Acuity Brands Lighting, Inc. All rights reserved.

DSX0-LED  
Rev. 03/26/24  
Page 1 of 9

## Ordering Information

### Accessories


Ordered and shipped separately.

DLL127F 1.5 JU	Photocell - SSL twist-lock (120-277V) <sup>23</sup>
DLL347F 1.5 CUL JU	Photocell - SSL twist-lock (347V) <sup>23</sup>
DLL480F 1.5 CUL JU	Photocell - SSL twist-lock (480V) <sup>23</sup>
DSHORT SBK	Shorting cap <sup>23</sup>
DSX0HS P#	House-side shield (enter package number P1-7, P10-13 in place of #)
DSXRPA (FINISH)	Round pole adapter (#8 drilling, specify finish)
DSXRPA5 (FINISH)	Round pole adapter #5 drilling (specify finish)
DSXSPA5 (FINISH)	Square pole adapter #5 drilling (specify finish)
DSX0EGSR (FINISH)	External glare shield (specify finish)
DSX0SDB (FINISH)	Bird spike deterrent bracket (specify finish)


### NOTES

- Rotated optics available with packages P10, P11, P12 and P13. Must be combined with option L90 or R90.
- 30K, 40K, and 50K available in 70CRI and 80CRI. 27K and 35K only available with 80CRI. Contact Technical Support for other possible combinations.
- T3LG, T4LG, BLC3, BLC4, LCCO, RCCO not available with option HS.
- MVOLT driver operates on any line voltage from 120-277V (50/60 Hz).
- HVOLT driver operates on any line voltage from 347-480V (50/60 Hz).
- HVOLT not available with package P1, P2 and P10 when combined with option NLTAIR2 PIRHN or option PIR.
- XVOLT operates with any voltage between 277V and 480V (50/60 Hz).
- XVOLT not available in packages P1, P2 or P10. XVOLT not available with fusing (SF or DF).
- SPAS and RPA5 for use with #5 drilling only (Not for use with #8 drilling).
- WBA cannot be combined with Type 5 distributions plus photocell (PER).
- NLTAIR2 and PIRHN must be ordered together. For more information on nLight Air 2.
- NLTAIR2 PIRHN not available with other controls including PIR, PER, PER5, PER7, FAO, BL30, BL50 and DMG. NLTAIR2 PIRHN not available with P1, P2 and P10 using HVOLT. NLTAIR2 PIRHN not available with P1, P2 and P10 using XVOLT. NLTAIR2 PIRHN not available with P1 using MVOLT.
- PIR not available with NLTAIR2, PER, PER5, PER7, FAO BL30, BL50 and DMG. PIR not available with P1, P2 and P10 using HVOLT. PIR not available with P1, P2 and P10 using XVOLT. PIR not available with P1 using MVOLT.
- PER/PER5/PER7 not available with NLTAIR2, PIR, BL30, BL50. Photocell ordered and shipped as a separate line item from Acuity Brands Controls. See accessories. Shorting Cap included.
- FAO not available with other dimming control options NLTAIR2 PIRHN, PIR, PER5, PER7, BL30, BL50, or DMG.
- BL30 and BL50 are not available with NLTAIR2 PIRHN, PIR, PER, PER5, PER7, FAO and DMG. BL30 or BL50 must specify 120, 277 or 347V. Consult tech support for 208, 240 or 480V.
- DMG not available with NLTAIR2 PIRHN, PIR, PER, PER5, PER7, BL30, BL50 and FAO.
- Reference Motion Sensor Default Settings table on page 4 to see functionality.
- Reference Controls Options table on page 4.
- Option HS not available with T3LG, T4LG, BLC3, BLC4, LCCO and RCCO distribution. Also available as a separate accessory; see Accessories information.
- CCE option not available with option B5 and EGSR. Contact Technical Support for availability.
- Option HA not available with performance packages P6, P7, P12 and P13.
- Requires luminaire to be specified with PER, PER5 or PER7 option. See Controls Table on page 4.
- Single fuse (SF) requires 120V, 277V, or 347V. Double fuse (DF) requires 208V, 240V or 480V. XVOLT not available with fusing (SF or DF).

## Shield Accessories

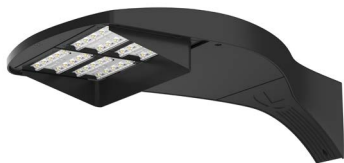

External Glare Shield (EGSR)


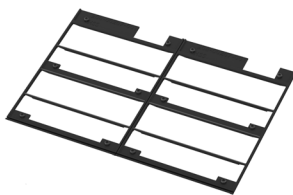


House Side Shield (HS)

## Drilling

### HANDHOLE ORIENTATION

(from top of pole)

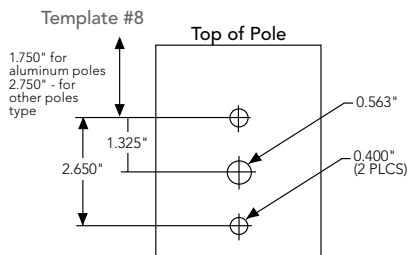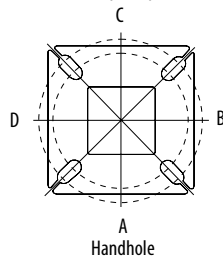

### Tenon Mounting Slipfitter

Tenon O.D.	Mounting	Single Unit	2 @ 180	2 @ 90	3 @ 90	3 @ 120	4 @ 90
2-3/8"	RPA	AS3-5 190	AS3-5 280	AS3-5 290	AS3-5 390	AS3-5 320	AS3-5 490
2-7/8"	RPA	AST25-190	AST25-280	AST25-290	AST25-390	AST25-320	AST25-490
4"	RPA	AST35-190	AST35-280	AST35-290	AST35-390	AST35-320	AST35-490

Mounting Option	Drilling Template	Single	2 @ 180	2 @ 90	3 @ 90	3 @ 120	4 @ 90
Head Location		Side B	Side B & D	Side B & C	Side B, C & D	Round Pole Only	Side A, B, C & D
Drill Nomenclature	#8	DM19AS	DM28AS	DM29AS	DM39AS	DM32AS	DM49AS
Minimum Acceptable Outside Pole Dimension							
SPA	#8	3.5"	3.5"	3.5"	3.5"		3.5"
RPA	#8	3"	3"	3"	3"	3"	3"
SPAS	#5	3"	3"	3"	3"		3"
RPA5	#5	3"	3"	3"	3"	3"	3"
SPA8N	#8	3"	3"	3"	3"		3"

### DSX0 Area Luminaire - EPA

\*Includes luminaire and integral mounting arm. Other tenons, arms, brackets or other accessories are not included in this EPA data.

Fixture Quantity & Mounting Configuration	Single DM19	2 @ 180 DM28	2 @ 90 DM29	3 @ 90 DM39	3 @ 120 DM32	4 @ 90 DM49
Mounting Type						
DSX0 with SPA	0.44	0.88	0.96	1.18	---	1.16
DSX0 with SPAS, SPA8N	0.51	1.02	1.06	1.26	---	1.29
DSX0 with RPA, RPA5	0.51	1.02	1.06	1.26	1.24	1.29
DSX0 with MA	0.64	1.28	1.24	1.67	1.70	1.93

Isofootcandle plots for the DSX0 LED P7 40K 70CRI. Distances are in units of mounting height (20').



## Performance Data

### Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient	Lumen Multiplier	
0°C	32°F	1.04
5°C	41°F	1.04
10°C	50°F	1.03
15°C	59°F	1.02
20°C	68°F	1.01
<b>25°C</b>	<b>77°C</b>	<b>1.00</b>
30°C	86°F	0.99
35°C	95°F	0.98
40°C	104°F	0.97

### Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the platforms noted in a **25°C ambient**, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	Lumen Maintenance Factor
0	1.00
25,000	0.94
50,000	0.89
100,000	0.80

### FAO Dimming Settings

FAO Position	% Wattage	% Lumen Output
8	100%	100%
7	93%	95%
6	80%	85%
5	66%	73%
4	54%	61%
3	41%	49%
2	29%	36%
1	15%	20%

\*Note: Calculated values are based on original performance package data. When calculating new values for given FAO position, use published values for each package based on input watts and lumens by optic type.

### Electrical Load

	Performance Package	LED Count	Drive Current (mA)	Wattage	Current (A)					
					120V	208V	240V	277V	347V	480V
Forward Optics (Non-Rotated)	P1	20	530	34	0.28	0.16	0.14	0.12	0.10	0.07
	P2	20	700	45	0.38	0.22	0.19	0.16	0.13	0.09
	P3	20	1050	69	0.57	0.33	0.29	0.25	0.20	0.14
	P4	20	1400	94	0.78	0.45	0.39	0.34	0.27	0.19
	P5	40	700	89	0.75	0.43	0.38	0.33	0.26	0.19
	P6	40	1050	136	1.14	0.66	0.57	0.49	0.39	0.29
	P7	40	1300	170	1.42	0.82	0.71	0.62	0.49	0.36
Rotated Optics (Requires L90 or R90)	P10	30	530	51	0.42	0.24	0.21	0.18	0.15	0.11
	P11	30	700	67	0.57	0.33	0.28	0.25	0.20	0.14
	P12	30	1050	103	0.86	0.50	0.43	0.37	0.30	0.22
	P13	30	1300	129	1.07	0.62	0.54	0.46	0.37	0.27

### LED Color Temperature / Color Rendering Multipliers

	70 CRI		80CRI		90CRI	
	Lumen Multiplier	Availability	Lumen Multiplier	Availability	Lumen Multiplier	Availability
5000K	102%	Standard	92%	Extended lead-time	71%	(see note)
4000K	100%	Standard	92%	Extended lead-time	67%	(see note)
3500K	100%	(see note)	90%	Extended lead-time	63%	(see note)
3000K	96%	Standard	87%	Extended lead-time	61%	(see note)
2700K	94%	(see note)	85%	Extended lead-time	57%	(see note)

Note: Some LED types are available as per special request. Contact Technical Support for more information.

### Motion Sensor Default Settings

Option	Unoccupied Dimmed Level	High Level (when occupied)	Photocell Operation	Dwell Time	Ramp-up Time	Dimming Fade Rate
PIR	30%	100%	Enabled @ 2FC	7.5 min	3 sec	5 min
NLTAIR2 PIRHN	30%	100%	Enabled @ 2FC	7.5 min	3 sec	5 min

### Controls Options

Nomenclature	Description	Functionality	Primary control device	Notes
FAO	Field adjustable output device installed inside the luminaire; wired to the driver dimming leads.	Allows the luminaire to be manually dimmed, effectively trimming the light output.	FAO device	Cannot be used with other controls options that need the 0-10V leads
DS (not available on DSX0)	Drivers wired independently for 50/50 luminaire operation	The luminaire is wired to two separate circuits, allowing for 50/50 operation.	Independently wired drivers	Requires two separately switched circuits. Consider nLight AIR as a more cost effective alternative.
PERS or PER7	Twist-lock photocell receptacle	Compatible with standard twist-lock photocells for dusk to dawn operation, or advanced control nodes that provide 0-10V dimming signals.	Twist-lock photocells such as DLL Elite or advanced control nodes such as ROAM.	Pins 4 & 5 to dimming leads on driver, Pins 6 & 7 are capped inside luminaire. Cannot be used with other controls options that need the 0-10V leads.
PIR	Motion sensor with integral photocell. Sensor suitable for 8' to 40' mounting height.	Luminaires dim when no occupancy is detected.	Acuity Controls rSBG	Cannot be used with other controls options that need the 0-10V leads.
NLTAIR2 PIRHN	nLight AIR enabled luminaire for motion sensing, photocell and wireless communication.	Motion and ambient light sensing with group response. Scheduled dimming with motion sensor over-ride when wirelessly connected to the nLight Eclipse.	nLight Air rSBG	nLight AIR sensors can be programmed and commissioned from the ground using the CIAIRity Pro app. Cannot be used with other controls options that need the 0-10V leads.
BL30 or BL50	Integrated bi-level device that allows a second control circuit to switch all light engines to either 30% or 50% light output	BLC device provides input to 0-10V dimming leads on all drivers providing either 100% or dimmed (30% or 50%) control by a secondary circuit	BLC UVOLT1	BLC device is powered off the 0-10V dimming leads, thus can be used with any input voltage from 120 to 480V



# Performance Data

## Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.

Forward Optics																							
Performance Package	System Watts	LED Count	Drive Current (mA)	Distribution Type	30K					40K					50K								
					(3000K, 70 CRI)					(4000K, 70 CRI)					(5000K, 70 CRI)								
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW				
P1	33W	20	530	T1S	4,906	1	0	1	148	5,113	1	0	1	154	5,213	1	0	1	157				
				T2M	4,545	1	0	2	137	4,736	1	0	2	143	4,829	1	0	2	145				
				T3M	4,597	1	0	2	138	4,791	1	0	2	144	4,885	1	0	2	147				
				T3LG	4,107	1	0	1	124	4,280	1	0	1	129	4,363	1	0	1	131				
				T4M	4,666	1	0	2	141	4,863	1	0	2	146	4,957	1	0	2	149				
				T4LG	4,244	1	0	1	128	4,423	1	0	1	133	4,509	1	0	1	136				
				TFTM	4,698	1	0	2	141	4,896	1	0	2	147	4,992	1	0	2	150				
				T5M	4,801	3	0	1	145	5,003	3	0	1	151	5,101	3	0	1	154				
				T5W	4,878	3	0	1	147	5,084	3	0	2	153	5,183	3	0	2	156				
				T5LG	4,814	2	0	1	145	5,018	2	0	1	151	5,115	2	0	1	154				
				BLC3	3,344	0	0	1	101	3,485	0	0	1	105	3,553	0	0	1	107				
				BLC4	3,454	0	0	2	104	3,599	0	0	2	108	3,670	0	0	2	111				
				RCCO	3,374	0	0	1	102	3,517	0	0	1	106	3,585	0	0	1	108				
				LCCO	3,374	0	0	1	102	3,517	0	0	1	106	3,585	0	0	1	108				
				AFR	4,906	1	0	1	148	5,113	1	0	1	154	5,213	1	0	1	157				
				P2	45W	20	700	T1S	6,328	1	0	1	140	6,595	1	0	1	146	6,724	1	0	1	149
								T2M	5,862	1	0	2	130	6,109	1	0	2	135	6,228	1	0	2	138
T3M	5,930	1	0					3	131	6,180	1	0	3	137	6,301	1	0	3	140				
T3LG	5,297	1	0					1	117	5,521	1	0	1	122	5,628	1	0	1	125				
T4M	6,018	1	0					3	133	6,272	1	0	3	139	6,395	1	0	3	142				
T4LG	5,474	1	0					1	121	5,705	1	0	1	126	5,816	1	0	1	129				
TFTM	6,060	1	0					3	134	6,316	1	0	3	140	6,439	1	0	3	143				
T5M	6,192	3	0					1	137	6,453	3	0	2	143	6,579	3	0	2	146				
T5W	6,293	3	0					2	139	6,558	3	0	2	145	6,686	3	0	2	148				
T5LG	6,210	2	0					1	138	6,472	3	0	1	143	6,598	3	0	1	146				
BLC3	4,313	0	0					2	96	4,495	0	0	2	100	4,583	0	0	2	102				
BLC4	4,455	0	0					2	99	4,643	0	0	2	103	4,733	0	0	2	105				
RCCO	4,352	0	0					2	96	4,536	0	0	2	100	4,624	0	0	2	102				
LCCO	4,352	0	0					2	96	4,536	0	0	2	100	4,624	0	0	2	102				
AFR	6,328	1	0					1	140	6,595	1	0	1	146	6,724	1	0	1	149				
P3	69W	20	1050					T1S	9,006	1	0	2	131	9,386	1	0	2	136	9,569	1	0	2	139
								T2M	8,343	2	0	3	121	8,694	2	0	3	126	8,864	2	0	3	129
				T3M	8,439	2	0	3	122	8,795	2	0	3	128	8,967	2	0	3	130				
				T3LG	7,539	1	0	2	109	7,857	1	0	2	114	8,010	1	0	2	116				
				T4M	8,565	2	0	3	124	8,926	2	0	3	129	9,100	2	0	3	132				
				T4LG	7,790	1	0	2	113	8,119	1	0	2	118	8,277	1	0	2	120				
				TFTM	8,624	1	0	3	125	8,988	1	0	3	130	9,163	2	0	3	133				
				T5M	8,812	3	0	2	128	9,184	4	0	2	133	9,363	4	0	2	136				
				T5W	8,955	4	0	2	130	9,333	4	0	2	135	9,515	4	0	2	138				
				T5LG	8,838	3	0	1	128	9,211	3	0	1	134	9,390	3	0	1	136				
				BLC3	6,139	0	0	2	89	6,398	0	0	2	93	6,522	0	0	2	95				
				BLC4	6,340	0	0	3	92	6,607	0	0	3	96	6,736	0	0	3	98				
				RCCO	6,194	1	0	2	90	6,455	1	0	2	94	6,581	1	0	2	95				
				LCCO	6,194	1	0	2	90	6,455	1	0	2	94	6,581	1	0	2	95				
				AFR	9,006	1	0	2	131	9,386	1	0	2	136	9,569	1	0	2	139				
				P4	93W	20	1400	T1S	11,396	1	0	2	122	11,877	1	0	2	128	12,109	2	0	2	130
								T2M	10,557	2	0	3	113	11,003	2	0	3	118	11,217	2	0	3	121
T3M	10,680	2	0					3	115	11,130	2	0	3	120	11,347	2	0	3	122				
T3LG	9,540	1	0					2	103	9,942	1	0	2	107	10,136	1	0	2	109				
T4M	10,839	2	0					3	117	11,296	2	0	3	121	11,516	2	0	4	124				
T4LG	9,858	1	0					2	106	10,274	1	0	2	110	10,474	1	0	2	113				
TFTM	10,914	2	0					3	117	11,374	2	0	3	122	11,596	2	0	3	125				
T5M	11,152	4	0					2	120	11,622	4	0	2	125	11,849	4	0	2	127				
T5W	11,332	4	0					3	122	11,811	4	0	3	127	12,041	4	0	3	129				
T5LG	11,184	3	0					1	120	11,656	3	0	2	125	11,883	3	0	2	128				
BLC3	7,768	0	0					2	83	8,096	0	0	2	87	8,254	0	0	2	89				
BLC4	8,023	0	0					3	86	8,362	0	0	3	90	8,524	0	0	3	92				
RCCO	7,838	1	0					2	84	8,169	1	0	2	88	8,328	1	0	2	90				
LCCO	7,838	1	0					2	84	8,169	1	0	2	88	8,328	1	0	2	90				
AFR	11,396	1	0					2	122	11,877	1	0	2	128	12,109	2	0	2	130				

# Performance Data

## Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.

Forward Optics																			
Performance Package	System Watts	LED Count	Drive Current (mA)	Distribution Type	30K					40K					50K				
					(3000K, 70 CRI)					(4000K, 70 CRI)					(5000K, 70 CRI)				
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
P5	90W	40	700	T1S	12,380	2	0	2	137	12,902	2	0	2	143	13,154	2	0	2	146
				T2M	11,468	2	0	3	127	11,952	2	0	3	133	12,185	2	0	3	135
				T3M	11,601	2	0	3	129	12,091	2	0	3	134	12,326	2	0	4	137
				T3LG	10,363	2	0	2	115	10,800	2	0	2	120	11,011	2	0	2	122
				T4M	11,774	2	0	4	131	12,271	2	0	4	136	12,510	2	0	4	139
				T4LG	10,709	1	0	2	119	11,160	2	0	2	124	11,378	2	0	2	126
				TFTM	11,856	2	0	3	132	12,356	2	0	4	137	12,596	2	0	4	140
				T5M	12,114	4	0	2	134	12,625	4	0	2	140	12,871	4	0	2	143
				T5W	12,310	4	0	3	137	12,830	4	0	3	142	13,080	4	0	3	145
				T5LG	12,149	3	0	2	135	12,662	3	0	2	141	12,908	3	0	2	143
				BLC3	8,438	0	0	2	94	8,794	0	0	2	98	8,966	0	0	2	99
				BLC4	8,715	0	0	3	97	9,083	0	0	3	101	9,260	0	0	3	103
				RCCO	8,515	1	0	2	94	8,874	1	0	2	98	9,047	1	0	2	100
				LCCO	8,515	1	0	2	94	8,874	1	0	2	98	9,047	1	0	2	100
				AFR	12,380	2	0	2	137	12,902	2	0	2	143	13,154	2	0	2	146
				P6	137W	40	1050	T1S	17,545	2	0	3	128	18,285	2	0	3	133	18,642
T2M	16,253	3	0					4	119	16,939	3	0	4	124	17,269	3	0	4	126
T3M	16,442	2	0					4	120	17,135	3	0	4	125	17,469	3	0	4	128
T3LG	14,687	2	0					2	107	15,306	2	0	2	112	15,605	2	0	2	114
T4M	16,687	2	0					4	122	17,391	3	0	5	127	17,730	3	0	5	129
T4LG	15,177	2	0					2	111	15,817	2	0	2	115	16,125	2	0	2	118
TFTM	16,802	2	0					4	123	17,511	2	0	4	128	17,852	2	0	5	130
T5M	17,168	4	0					2	125	17,893	5	0	3	131	18,241	5	0	3	133
T5W	17,447	5	0					3	127	18,183	5	0	3	133	18,537	5	0	3	135
T5LG	17,218	4	0					2	126	17,944	4	0	2	131	18,294	4	0	2	134
BLC3	11,959	0	0					3	87	12,464	0	0	3	91	12,707	0	0	3	93
BLC4	12,352	0	0					4	90	12,873	0	0	4	94	13,124	0	0	4	96
RCCO	12,067	1	0					3	88	12,576	1	0	3	92	12,821	1	0	3	94
LCCO	12,067	1	0					3	88	12,576	1	0	3	92	12,821	1	0	3	94
AFR	17,545	2	0					3	128	18,285	2	0	3	133	18,642	2	0	3	136
P7	171W	40	1300					T1S	20,806	2	0	3	122	21,683	2	0	3	127	22,106
				T2M	19,273	3	0	4	113	20,086	3	0	4	118	20,478	3	0	4	120
				T3M	19,497	3	0	5	114	20,319	3	0	5	119	20,715	3	0	5	121
				T3LG	17,416	2	0	2	102	18,151	2	0	2	106	18,504	2	0	2	108
				T4M	19,787	3	0	5	116	20,622	3	0	5	121	21,024	3	0	5	123
				T4LG	17,997	2	0	2	105	18,756	2	0	2	110	19,121	2	0	2	112
				TFTM	19,924	3	0	5	117	20,765	3	0	5	122	21,170	3	0	5	124
				T5M	20,359	5	0	3	119	21,217	5	0	3	124	21,631	5	0	3	127
				T5W	20,689	5	0	3	121	21,561	5	0	3	126	21,982	5	0	3	129
				T5LG	20,418	4	0	2	120	21,279	4	0	2	125	21,694	4	0	2	127
				BLC3	14,182	0	0	3	83	14,780	0	0	3	87	15,068	0	0	3	88
				BLC4	14,647	0	0	4	86	15,265	0	0	4	89	15,562	0	0	4	91
				RCCO	14,309	1	0	3	84	14,913	1	0	3	87	15,204	1	0	3	89
				LCCO	14,309	1	0	3	84	14,913	1	0	3	87	15,204	1	0	3	89
				AFR	20,806	2	0	3	122	21,683	2	0	3	127	22,106	2	0	3	129

# Performance Data


## Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.



Rotated Optics																							
Performance Package	System Watts	LED Count	Drive Current (mA)	Distribution Type	30K					40K					50K								
					(3000K, 70 CRI)					(4000K, 70 CRI)					(5000K, 70 CRI)								
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW				
P10	51W	30	530	T1S	7,399	3	0	3	145	7,711	3	0	3	151	7,862	3	0	3	154				
				T2M	6,854	3	0	3	135	7,144	3	0	3	140	7,283	3	0	3	143				
				T3M	6,933	3	0	3	136	7,225	3	0	3	142	7,366	3	0	3	145				
				T3LG	6,194	2	0	2	122	6,455	2	0	2	127	6,581	2	0	2	129				
				T4M	7,036	3	0	3	138	7,333	3	0	3	144	7,476	3	0	3	147				
				T4LG	6,399	2	0	2	126	6,669	2	0	2	131	6,799	2	0	2	134				
				TFTM	7,086	3	0	3	139	7,385	3	0	3	145	7,529	3	0	3	148				
				T5M	7,239	3	0	2	142	7,545	3	0	2	148	7,692	3	0	2	151				
				T5W	7,357	3	0	2	145	7,667	3	0	2	151	7,816	4	0	2	154				
				T5LG	7,260	3	0	1	143	7,567	3	0	1	149	7,714	3	0	1	152				
				BLC3	5,043	3	0	3	99	5,256	3	0	3	103	5,358	3	0	3	105				
				BLC4	5,208	3	0	3	102	5,428	3	0	3	107	5,534	3	0	3	109				
				RCCO	5,089	0	0	2	100	5,303	0	0	2	104	5,407	0	0	2	106				
				LCCO	5,089	0	0	2	100	5,303	0	0	2	104	5,407	0	0	2	106				
				AFR	7,399	3	0	3	145	7,711	3	0	3	151	7,862	3	0	3	154				
				P11	68W	30	700	T1S	9,358	3	0	3	138	9,753	3	0	3	143	9,943	3	0	3	146
								T2M	8,669	3	0	3	127	9,034	3	0	3	133	9,211	3	0	3	135
T3M	8,768	3	0					3	129	9,138	3	0	3	134	9,316	3	0	3	137				
T3LG	7,833	3	0					3	115	8,164	3	0	3	120	8,323	3	0	3	122				
T4M	8,899	3	0					3	131	9,274	3	0	3	136	9,455	3	0	3	139				
T4LG	8,093	3	0					3	119	8,435	3	0	3	124	8,599	3	0	3	126				
TFTM	8,962	3	0					3	132	9,340	3	0	3	137	9,522	3	0	3	140				
T5M	9,156	4	0					2	135	9,542	4	0	2	140	9,728	4	0	2	143				
T5W	9,304	4	0					2	137	9,696	4	0	2	143	9,885	4	0	2	145				
T5LG	9,182	3	0					1	135	9,569	3	0	1	141	9,756	3	0	1	143				
BLC3	6,378	3	0					3	94	6,647	3	0	3	98	6,777	3	0	3	100				
BLC4	6,587	3	0					3	97	6,865	3	0	3	101	6,999	3	0	3	103				
RCCO	6,436	0	0					2	95	6,707	0	0	2	99	6,838	0	0	2	101				
LCCO	6,436	0	0					2	95	6,707	0	0	2	99	6,838	0	0	2	101				
AFR	9,358	3	0					3	138	9,753	3	0	3	143	9,943	3	0	3	146				
P12	103W	30	1050					T1S	13,247	3	0	3	128	13,806	3	0	3	134	14,075	3	0	3	136
								T2M	12,271	4	0	4	119	12,789	4	0	4	124	13,038	4	0	4	126
				T3M	12,412	4	0	4	120	12,935	4	0	4	125	13,187	4	0	4	128				
				T3LG	11,089	3	0	3	107	11,556	3	0	3	112	11,782	3	0	3	114				
				T4M	12,597	4	0	4	122	13,128	4	0	4	127	13,384	4	0	4	129				
				T4LG	11,457	3	0	3	111	11,940	3	0	3	116	12,173	3	0	3	118				
				TFTM	12,686	4	0	4	123	13,221	4	0	4	128	13,479	4	0	4	130				
				T5M	12,960	4	0	2	125	13,507	4	0	2	131	13,770	4	0	2	133				
				T5W	13,170	4	0	3	127	13,726	4	0	3	133	13,994	4	0	3	135				
				T5LG	12,998	3	0	2	126	13,546	3	0	2	131	13,810	3	0	2	134				
				BLC3	9,029	3	0	3	87	9,409	3	0	3	91	9,593	3	0	3	93				
				BLC4	9,324	4	0	4	90	9,718	4	0	4	94	9,907	4	0	4	96				
				RCCO	9,110	1	0	2	88	9,495	1	0	2	92	9,680	1	0	2	94				
				LCCO	9,110	1	0	2	88	9,494	1	0	2	92	9,680	1	0	2	94				
				AFR	13,247	3	0	3	128	13,806	3	0	3	134	14,075	3	0	3	136				
				P13	129W	30	1300	T1S	15,704	3	0	3	122	16,366	3	0	3	127	16,685	4	0	4	130
								T2M	14,547	4	0	4	113	15,161	4	0	4	118	15,457	4	0	4	120
T3M	14,714	4	0					4	114	15,335	4	0	4	119	15,634	4	0	4	121				
T3LG	13,145	3	0					3	102	13,700	3	0	3	106	13,967	3	0	3	108				
T4M	14,933	4	0					4	116	15,563	4	0	4	121	15,867	4	0	4	123				
T4LG	13,582	3	0					3	105	14,155	3	0	3	110	14,431	3	0	3	112				
TFTM	15,039	4	0					4	117	15,673	4	0	4	122	15,979	4	0	4	124				
T5M	15,364	4	0					2	119	16,013	4	0	2	124	16,325	4	0	2	127				
T5W	15,613	5	0					3	121	16,272	5	0	3	126	16,589	5	0	3	129				
T5LG	15,409	3	0					2	120	16,059	3	0	2	125	16,372	4	0	2	127				
BLC3	10,703	4	0					4	83	11,155	4	0	4	87	11,372	4	0	4	88				
BLC4	11,054	4	0					4	86	11,520	4	0	4	89	11,745	4	0	4	91				
RCCO	10,800	1	0					2	84	11,256	1	0	2	87	11,475	1	0	3	89				
LCCO	10,800	1	0					2	84	11,255	1	0	2	87	11,475	1	0	3	89				
AFR	15,704	3	0					3	122	16,366	3	0	3	127	16,685	4	0	4	130				





# Dimensions

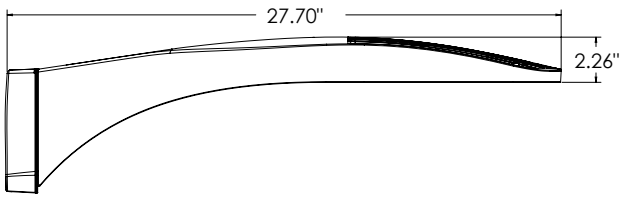


**DSX0 with RPA, RPA5, SPA5, SPA8N mount**  
**Weight: 25 lbs**

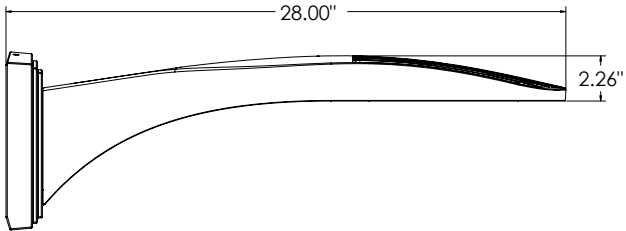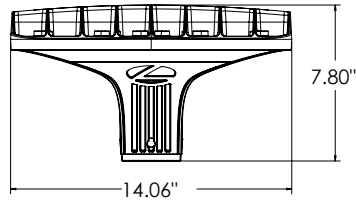


**DSX0 with WBA mount**  
**Weight: 27 lb**

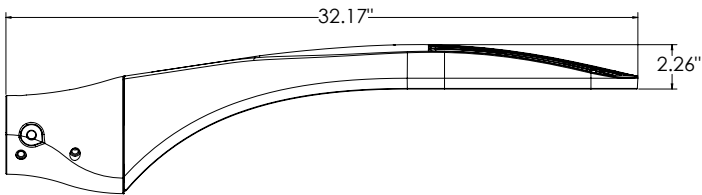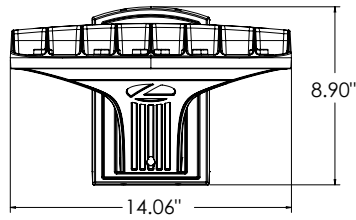


**DSX0 with MA mount**  
**Weight: 28 lbs**

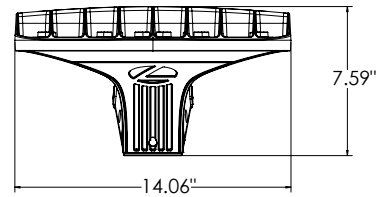


**SPA (STANDARD ARM)**

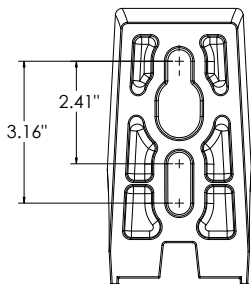


**RPA**

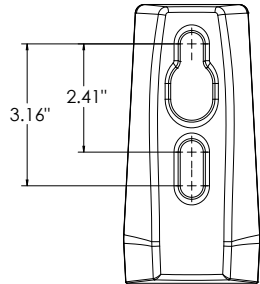


**SPA5**

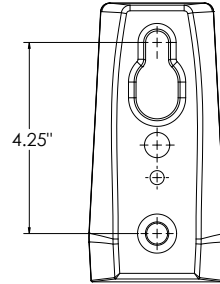

**RPA5**



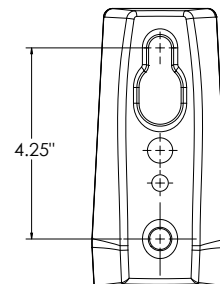


**SPA8N**

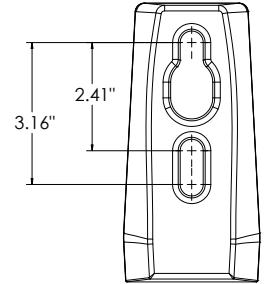

## nLight Sensor Coverage Pattern

### NLTAIR2 PIRHN

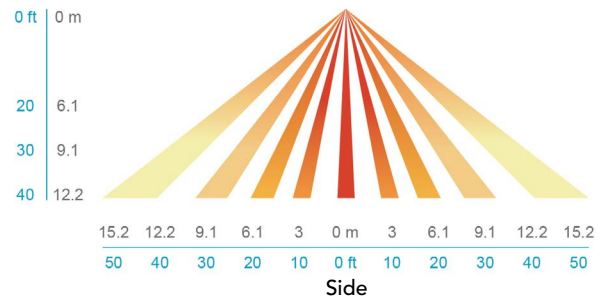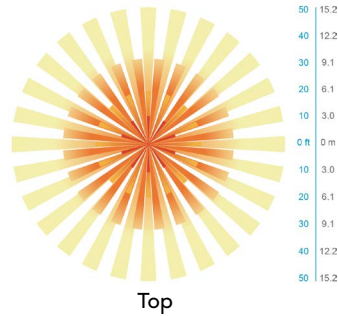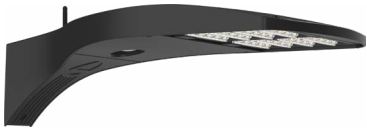

## FEATURES & SPECIFICATIONS

### INTENDED USE

The sleek design of the D-Series Size 0 reflects the embedded high performance LED technology. It is ideal for many commercial and municipal applications, such as parking lots, plazas, campuses, and pedestrian areas.

### CONSTRUCTION

Single-piece die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. Modular design allows for ease of maintenance and future light engine upgrades. The LED driver is mounted in direct contact with the casting to promote low operating temperature and long life. Housing driver compartment is completely sealed against moisture and environmental contaminants (IP66). Vibration rated per ANSI C136.31 for 3G. Low EPA (0.44 ft<sup>2</sup>) for optimized pole wind loading.

### FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Available in both textured and non-textured finishes.

### COASTAL CONSTRUCTION (CCE)

Optional corrosion resistant construction is engineered with added corrosion protection in materials and/or pre-treatment of base material under super durable paint. Provides additional corrosion protection for applications near coastal areas. Finish is salt spray tested to over 5,000 hours per ASTM B117 with scribe rating of 10. Additional lead-times may apply.

### OPTICS

Precision-molded proprietary silicone lenses are engineered for superior area lighting distribution, uniformity, and pole spacing. Light engines are available in 3000 K, 4000 K or 5000 K (70 CRI) configurations. 80CRI configurations are also available. The D-Series Size 0 has zero uplight and qualifies as a Nighttime Friendly™ product, meaning it is consistent with the LEED® and Green Globes™ criteria for eliminating wasteful uplight.

### ELECTRICAL

Light engine(s) configurations consist of high-efficacy LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life (up to L80/100,000 hours at 25°C). Class 1 electronic drivers are designed to have a power factor >90%, THD <20%, and an expected life of 100,000 hours with <1% failure rate. Easily serviceable 10kV surge protection device meets a minimum Category C Low operation (per ANSI/IEEE C62.41.2).

### STANDARD CONTROLS

The DSX0 LED area luminaire has a number of control options. DSX Size 0, comes standard with 0-10V dimming driver. Dusk to dawn controls can be utilized via optional NEMA twist-lock photocell receptacles. PIR integrated motion sensor with on-board photocell feature field-adjustable programming and are suitable for mounting heights up to 40 feet. Control option BL features a bi-level device that allows a second control circuit to switch all light engines to either 30% or 50% light output.

### nLIGHT AIR CONTROLS

The DSX0 LED area luminaire is also available with nLight® AIR for the ultimate in wireless control. This powerful controls platform provides out-of-the-box basic motion sensing and photocontrol functionality and is suitable for mounting heights up to 40 feet. Once commissioned using a smartphone and the easy-to-use CLAIRITY app, nLight AIR equipped luminaires can be grouped, resulting in motion sensor and photocell group response without the need for additional equipment. Scheduled dimming with motion sensor over-ride can be achieved when used with the nLight Eclipse. Additional information about nLight Air can be found [here](#).

### INSTALLATION

Integral mounting arm allows for fast mounting using Lithonia standard #8 drilling and accommodates pole drilling's from 2.41 to 3.12" on center. The standard "SPA" option for square poles and the "RPA" option for round poles use the #8 drilling. For #5 pole drillings, use SPA5 or RPA5. Additional mountings are available including a wall bracket (WBA) and mast arm (MA) option that allows luminaire attachment to a 2 3/8" horizontal mast arm.

### LISTINGS

UL listed to meet U.S. and Canadian standards. UL Listed for wet locations. Light engines are IP66 rated; luminaire is IP66 rated. Rated for -40°C minimum ambient.

DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product. Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org/QPL](http://www.designlights.org/QPL) to confirm which versions are qualified.

International Dark-Sky Association (IDA) Fixture Seal of Approval (FSA) is available for all products on this page utilizing 3000K color temperature only.

### GOVERNMENT PROCUREMENT

BAA – Buy America(n) Act: Product with the BAA option qualifies as a domestic end product under the Buy American Act as implemented in the FAR and DFARS. Product with the BAA option also qualifies as manufactured in the United States under DOT Buy America regulations.

BABA – Build America Buy America: Product with the BAA option also qualifies as produced in the United States under the definitions of the Build America, Buy America Act.

Please refer to [www.acuitybrands.com/buy-american](http://www.acuitybrands.com/buy-american) for additional information.

### WARRANTY

5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: [www.acuitybrands.com/support/warranty/terms-and-conditions](http://www.acuitybrands.com/support/warranty/terms-and-conditions)

**Note:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.



# D-Series Size 0 LED Area Luminaire



Catalog Number

Notes **25' Total Height**

Type **OV**

Hit the Tab key or mouse over the page to see all interactive elements.


## Introduction

The modern styling of the D-Series features a highly refined aesthetic that blends seamlessly with its environment. The D-Series offers the benefits of the latest in LED technology into a high performance, high efficacy, long-life luminaire.

The photometric performance results in sites with excellent uniformity, greater pole spacing and lower power density. D-Series outstanding photometry aids in reducing the number of poles required in area lighting applications, with typical energy savings of 70% and expected service life of over 100,000 hours.

## Specifications

EPA:	0.44 ft <sup>2</sup> (0.04 m <sup>2</sup> )
Length:	26.18" (66.5 cm)
Width:	14.06" (35.7 cm)
Height H1:	2.26" (5.7 cm)
Height H2:	7.46" (18.9 cm)
Weight:	23 lbs (10.4 kg)

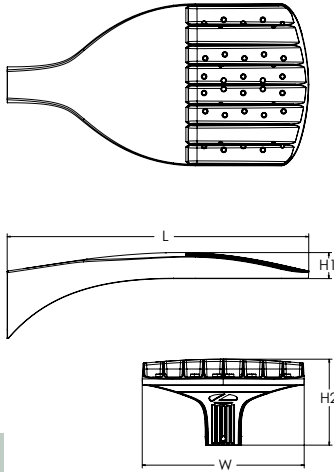

**ds** Design Select options indicated by this color background.



Items marked by a shaded background qualify for the Design Select program and ship in 15 days or less. To learn more about Design Select, visit [www.acuitybrands.com/designselect](http://www.acuitybrands.com/designselect). \*See ordering tree for details

## Ordering Information

**EXAMPLE: DSX0 LED P6 40K 70CRI T3M MVOLT SPA NLTAIR2 PIRHN DDBXD**

DSX0 LED	P3	40K	80CRI	TFTM	MVOLT	RPA		
Series	LEDs	Color temperature <sup>2</sup>	Color Rendering Index <sup>2</sup>	Distribution	Voltage	Mounting		
DSX0 LED	<b>Forward optics</b>		(this section 70CRI only)	AFR Automotive front row T1S Type I short T2M Type II medium T3M Type III medium T3LG Type III low glare <sup>3</sup> T4M Type IV medium T4LG Type IV low glare <sup>3</sup> TFTM Forward throw medium	T5M Type V medium T5LG Type V low glare T5W Type V wide BLC3 Type III backlight control <sup>3</sup> BLC4 Type IV backlight control <sup>3</sup> LCCO Left corner cutoff <sup>3</sup> RCCO Right corner cutoff <sup>3</sup>	MVOLT (120V-277V) <sup>4</sup> HVOLT (347V-480V) <sup>5,6</sup> XVOLT (277V-480V) <sup>7,8</sup> 120 <sup>16, 24</sup> 208 <sup>16, 24</sup> 240 <sup>16, 24</sup> 277 <sup>16, 24</sup> 347 <sup>16, 24</sup> 480 <sup>16, 24</sup>	<b>Shipped included</b> SPA Square pole mounting (#8 drilling, 3.5" min. SQ pole) RPA Round pole mounting (#8 drilling, 3" min. RND pole) SPA5 Square pole mounting (#5 drilling, 3" min. SQ pole) <sup>9</sup> RPA5 Round pole mounting (#5 drilling, 3" min. RND pole) <sup>9</sup> SPA8N Square narrow pole mounting (#8 drilling, 3" min. SQ pole) WBA Wall bracket <sup>10</sup> MA Mast arm adapter (mounts on 2 3/8" OD horizontal tenon)	
	P1 P5	30K 3000K	70CRI					
	P2 P6	40K 4000K	70CRI					
	P3 P7	50K 5000K	70CRI					
	P4	(this section 80CRI only, extended lead times apply)						
	<b>Rotated optics</b>							
	P10 <sup>1</sup> P12 <sup>1</sup>	27K 2700K	80CRI					
	P11 <sup>1</sup> P13 <sup>1</sup>	30K 3000K	80CRI					
		35K 3500K	80CRI					
		40K 4000K	80CRI					
	50K 5000K	80CRI						
DMG	--				DDBXD			
<b>Control options</b>				<b>Other options</b>		<b>Finish (required)</b>		
<b>Shipped installed</b>		PER7 Seven-pin receptacle only (controls ordered separate) <sup>14, 19</sup>		<b>Shipped installed</b>		DDBXD Dark Bronze		
NLTAIR2 PIRHN	nLight AIR gen 2 enabled with bi-level motion / ambient sensor, 8-40' mounting height, ambient sensor enabled at 2fc. <sup>11, 12, 18, 19</sup>	FAO Field adjustable output <sup>15, 19</sup>		HS Houseside shield (black finish standard) <sup>20</sup>	DBLXD Black			
PIR	High/low, motion/ambient sensor, 8-40' mounting height, ambient sensor enabled at 2fc. <sup>13, 18, 19</sup>	BL30 Bi-level switched dimming, 30% <sup>16, 19</sup>		L90 Left rotated optics <sup>1</sup>	DNAXD Natural Aluminum			
PER	NEMA twist-lock receptacle only (controls ordered separate) <sup>14</sup>	BL50 Bi-level switched dimming, 50% <sup>16, 19</sup>		R90 Right rotated optics <sup>1</sup>	DWHXD White			
PER5	Five-pin receptacle only (controls ordered separate) <sup>14, 19</sup>	DMG 0-10v dimming wires pulled outside fixture (for use with an external control, ordered separately) <sup>17</sup>		CCE Coastal Construction <sup>21</sup>	DDBTXD Textured dark bronze			
				HA 50°C ambient operation <sup>22</sup>	DBLBXD Textured black			
				BAA Buy America(n) Act Compliant	DNATXD Textured natural aluminum			
				SF Single fuse (120, 277, 347V) <sup>24</sup>	DWHGXD Textured white			
				DF Double fuse (208, 240, 480V) <sup>24</sup>				
				<b>Shipped separately</b>				
				ECSR External Glare Shield (reversible, field install required, matches housing finish)				
				BSDB Bird Spikes (field install required)				



## Ordering Information

### Accessories


Ordered and shipped separately.

DLL127F 1.5 JU	Photocell - SSL twist-lock (120-277V) <sup>23</sup>
DLL347F 1.5 CUL JU	Photocell - SSL twist-lock (347V) <sup>23</sup>
DLL480F 1.5 CUL JU	Photocell - SSL twist-lock (480V) <sup>23</sup>
DSHORT SBK	Shorting cap <sup>23</sup>
DSX0HS P#	House-side shield (enter package number P1-7, P10-13 in place of #)
DSXRPA (FINISH)	Round pole adapter (#8 drilling, specify finish)
DSXRPA5 (FINISH)	Round pole adapter #5 drilling (specify finish)
DSXSPA5 (FINISH)	Square pole adapter #5 drilling (specify finish)
DSX0EGSR (FINISH)	External glare shield (specify finish)
DSX0SDB (FINISH)	Bird spike deterrent bracket (specify finish)


### NOTES

- Rotated optics available with packages P10, P11, P12 and P13. Must be combined with option L90 or R90.
- 30K, 40K, and 50K available in 70CRI and 80CRI. 27K and 35K only available with 80CRI. Contact Technical Support for other possible combinations.
- T3LG, T4LG, BLC3, BLC4, LCCO, RCCO not available with option HS.
- MVOLT driver operates on any line voltage from 120-277V (50/60 Hz).
- HVOLT driver operates on any line voltage from 347-480V (50/60 Hz).
- HVOLT not available with package P1, P2 and P10 when combined with option NLTAIR2 PIRHN or option PIR.
- XVOLT operates with any voltage between 277V and 480V (50/60 Hz).
- XVOLT not available in packages P1, P2 or P10. XVOLT not available with fusing (SF or DF).
- SPAS and RPA5 for use with #5 drilling only (Not for use with #8 drilling).
- WBA cannot be combined with Type 5 distributions plus photocell (PER).
- NLTAIR2 and PIRHN must be ordered together. For more information on nLight Air 2.
- NLTAIR2 PIRHN not available with other controls including PIR, PER, PER5, PER7, FAO, BL30, BL50 and DMG. NLTAIR2 PIRHN not available with P1, P2 and P10 using HVOLT. NLTAIR2 PIRHN not available with P1, P2 and P10 using XVOLT. NLTAIR2 PIRHN not available with P1 using MVOLT.
- PIR not available with NLTAIR2, PER, PER5, PER7, FAO BL30, BL50 and DMG. PIR not available with P1, P2 and P10 using HVOLT. PIR not available with P1, P2 and P10 using XVOLT. PIR not available with P1 using MVOLT.
- PER/PER5/PER7 not available with NLTAIR2, PIR, BL30, BL50. Photocell ordered and shipped as a separate line item from Acuity Brands Controls. See accessories. Shorting Cap included.
- FAO not available with other dimming control options NLTAIR2 PIRHN, PIR, PER5, PER7, BL30, BL50, or DMG.
- BL30 and BL50 are not available with NLTAIR2 PIRHN, PIR, PER, PER5, PER7, FAO and DMG. BL30 or BL50 must specify 120, 277 or 347V. Consult tech support for 208, 240 or 480V.
- DMG not available with NLTAIR2 PIRHN, PIR, PER, PER5, PER7, BL30, BL50 and FAO.
- Reference Motion Sensor Default Settings table on page 4 to see functionality.
- Reference Controls Options table on page 4.
- Option HS not available with T3LG, T4LG, BLC3, BLC4, LCCO and RCCO distribution. Also available as a separate accessory; see Accessories information.
- CCE option not available with option B5 and EGSR. Contact Technical Support for availability.
- Option HA not available with performance packages P6, P7, P12 and P13.
- Requires luminaire to be specified with PER, PER5 or PER7 option. See Controls Table on page 4.
- Single fuse (SF) requires 120V, 277V, or 347V. Double fuse (DF) requires 208V, 240V or 480V. XVOLT not available with fusing (SF or DF).

## Shield Accessories

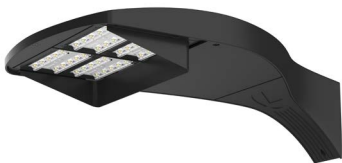

External Glare Shield (EGSR)


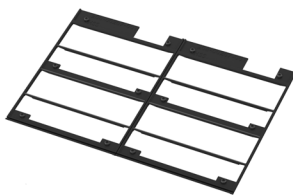


House Side Shield (HS)

## Drilling

### HANDHOLE ORIENTATION

(from top of pole)

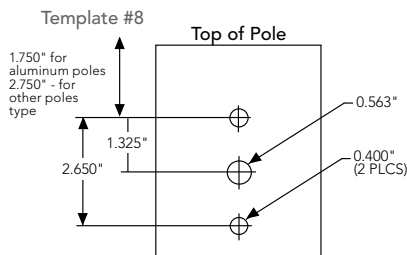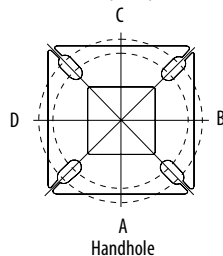

### Tenon Mounting Slipfitter

Tenon O.D.	Mounting	Single Unit	2 @ 180	2 @ 90	3 @ 90	3 @ 120	4 @ 90
2-3/8"	RPA	AS3-5 190	AS3-5 280	AS3-5 290	AS3-5 390	AS3-5 320	AS3-5 490
2-7/8"	RPA	AST25-190	AST25-280	AST25-290	AST25-390	AST25-320	AST25-490
4"	RPA	AST35-190	AST35-280	AST35-290	AST35-390	AST35-320	AST35-490

Mounting Option	Drilling Template	Single	2 @ 180	2 @ 90	3 @ 90	3 @ 120	4 @ 90
Head Location		Side B	Side B & D	Side B & C	Side B, C & D	Round Pole Only	Side A, B, C & D
Drill Nomenclature	#8	DM19AS	DM28AS	DM29AS	DM39AS	DM32AS	DM49AS
Minimum Acceptable Outside Pole Dimension							
SPA	#8	3.5"	3.5"	3.5"	3.5"		3.5"
RPA	#8	3"	3"	3"	3"	3"	3"
SPAS	#5	3"	3"	3"	3"		3"
RPA5	#5	3"	3"	3"	3"	3"	3"
SPA8N	#8	3"	3"	3"	3"		3"

### DSX0 Area Luminaire - EPA

\*Includes luminaire and integral mounting arm. Other tenons, arms, brackets or other accessories are not included in this EPA data.

Fixture Quantity & Mounting Configuration	Single DM19	2 @ 180 DM28	2 @ 90 DM29	3 @ 90 DM39	3 @ 120 DM32	4 @ 90 DM49
Mounting Type						
DSX0 with SPA	0.44	0.88	0.96	1.18	---	1.16
DSX0 with SPAS, SPA8N	0.51	1.02	1.06	1.26	---	1.29
DSX0 with RPA, RPA5	0.51	1.02	1.06	1.26	1.24	1.29
DSX0 with MA	0.64	1.28	1.24	1.67	1.70	1.93

Isofootcandle plots for the DSX0 LED P7 40K 70CRI. Distances are in units of mounting height (20').





## Performance Data

### Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient	Lumen Multiplier	
0°C	32°F	1.04
5°C	41°F	1.04
10°C	50°F	1.03
15°C	59°F	1.02
20°C	68°F	1.01
<b>25°C</b>	<b>77°C</b>	<b>1.00</b>
30°C	86°F	0.99
35°C	95°F	0.98
40°C	104°F	0.97

### Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the platforms noted in a **25°C ambient**, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	Lumen Maintenance Factor
0	1.00
25,000	0.94
50,000	0.89
100,000	0.80

### FAO Dimming Settings

FAO Position	% Wattage	% Lumen Output
8	100%	100%
7	93%	95%
6	80%	85%
5	66%	73%
4	54%	61%
3	41%	49%
2	29%	36%
1	15%	20%

\*Note: Calculated values are based on original performance package data. When calculating new values for given FAO position, use published values for each package based on input watts and lumens by optic type.

### Electrical Load

	Performance Package	LED Count	Drive Current (mA)	Wattage	Current (A)					
					120V	208V	240V	277V	347V	480V
Forward Optics (Non-Rotated)	P1	20	530	34	0.28	0.16	0.14	0.12	0.10	0.07
	P2	20	700	45	0.38	0.22	0.19	0.16	0.13	0.09
	P3	20	1050	69	0.57	0.33	0.29	0.25	0.20	0.14
	P4	20	1400	94	0.78	0.45	0.39	0.34	0.27	0.19
	P5	40	700	89	0.75	0.43	0.38	0.33	0.26	0.19
	P6	40	1050	136	1.14	0.66	0.57	0.49	0.39	0.29
	P7	40	1300	170	1.42	0.82	0.71	0.62	0.49	0.36
Rotated Optics (Requires L90 or R90)	P10	30	530	51	0.42	0.24	0.21	0.18	0.15	0.11
	P11	30	700	67	0.57	0.33	0.28	0.25	0.20	0.14
	P12	30	1050	103	0.86	0.50	0.43	0.37	0.30	0.22
	P13	30	1300	129	1.07	0.62	0.54	0.46	0.37	0.27

### LED Color Temperature / Color Rendering Multipliers

	70 CRI		80CRI		90CRI	
	Lumen Multiplier	Availability	Lumen Multiplier	Availability	Lumen Multiplier	Availability
5000K	102%	Standard	92%	Extended lead-time	71%	(see note)
4000K	100%	Standard	92%	Extended lead-time	67%	(see note)
3500K	100%	(see note)	90%	Extended lead-time	63%	(see note)
3000K	96%	Standard	87%	Extended lead-time	61%	(see note)
2700K	94%	(see note)	85%	Extended lead-time	57%	(see note)

Note: Some LED types are available as per special request. Contact Technical Support for more information.

### Motion Sensor Default Settings

Option	Unoccupied Dimmed Level	High Level (when occupied)	Photocell Operation	Dwell Time	Ramp-up Time	Dimming Fade Rate
PIR	30%	100%	Enabled @ 2FC	7.5 min	3 sec	5 min
NLTAIR2 PIRHN	30%	100%	Enabled @ 2FC	7.5 min	3 sec	5 min

### Controls Options

Nomenclature	Description	Functionality	Primary control device	Notes
FAO	Field adjustable output device installed inside the luminaire; wired to the driver dimming leads.	Allows the luminaire to be manually dimmed, effectively trimming the light output.	FAO device	Cannot be used with other controls options that need the 0-10V leads
DS (not available on DSX0)	Drivers wired independently for 50/50 luminaire operation	The luminaire is wired to two separate circuits, allowing for 50/50 operation.	Independently wired drivers	Requires two separately switched circuits. Consider nLight AIR as a more cost effective alternative.
PERS or PER7	Twist-lock photocell receptacle	Compatible with standard twist-lock photocells for dusk to dawn operation, or advanced control nodes that provide 0-10V dimming signals.	Twist-lock photocells such as DLL Elite or advanced control nodes such as ROAM.	Pins 4 & 5 to dimming leads on driver, Pins 6 & 7 are capped inside luminaire. Cannot be used with other controls options that need the 0-10V leads.
PIR	Motion sensor with integral photocell. Sensor suitable for 8' to 40' mounting height.	Luminaires dim when no occupancy is detected.	Acuity Controls rSBG	Cannot be used with other controls options that need the 0-10V leads.
NLTAIR2 PIRHN	nLight AIR enabled luminaire for motion sensing, photocell and wireless communication.	Motion and ambient light sensing with group response. Scheduled dimming with motion sensor over-ride when wirelessly connected to the nLight Eclipse.	nLight Air rSBG	nLight AIR sensors can be programmed and commissioned from the ground using the CIAIRity Pro app. Cannot be used with other controls options that need the 0-10V leads.
BL30 or BL50	Integrated bi-level device that allows a second control circuit to switch all light engines to either 30% or 50% light output	BLC device provides input to 0-10V dimming leads on all drivers providing either 100% or dimmed (30% or 50%) control by a secondary circuit	BLC UVOLT1	BLC device is powered off the 0-10V dimming leads, thus can be used with any input voltage from 120 to 480V

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.

Forward Optics																							
Performance Package	System Watts	LED Count	Drive Current (mA)	Distribution Type	30K					40K					50K								
					(3000K, 70 CRI)					(4000K, 70 CRI)					(5000K, 70 CRI)								
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW				
P1	33W	20	530	T1S	4,906	1	0	1	148	5,113	1	0	1	154	5,213	1	0	1	157				
				T2M	4,545	1	0	2	137	4,736	1	0	2	143	4,829	1	0	2	145				
				T3M	4,597	1	0	2	138	4,791	1	0	2	144	4,885	1	0	2	147				
				T3LG	4,107	1	0	1	124	4,280	1	0	1	129	4,363	1	0	1	131				
				T4M	4,666	1	0	2	141	4,863	1	0	2	146	4,957	1	0	2	149				
				T4LG	4,244	1	0	1	128	4,423	1	0	1	133	4,509	1	0	1	136				
				TFTM	4,698	1	0	2	141	4,896	1	0	2	147	4,992	1	0	2	150				
				T5M	4,801	3	0	1	145	5,003	3	0	1	151	5,101	3	0	1	154				
				T5W	4,878	3	0	1	147	5,084	3	0	2	153	5,183	3	0	2	156				
				T5LG	4,814	2	0	1	145	5,018	2	0	1	151	5,115	2	0	1	154				
				BLC3	3,344	0	0	1	101	3,485	0	0	1	105	3,553	0	0	1	107				
				BLC4	3,454	0	0	2	104	3,599	0	0	2	108	3,670	0	0	2	111				
				RCCO	3,374	0	0	1	102	3,517	0	0	1	106	3,585	0	0	1	108				
				LCCO	3,374	0	0	1	102	3,517	0	0	1	106	3,585	0	0	1	108				
				AFR	4,906	1	0	1	148	5,113	1	0	1	154	5,213	1	0	1	157				
				P2	45W	20	700	T1S	6,328	1	0	1	140	6,595	1	0	1	146	6,724	1	0	1	149
								T2M	5,862	1	0	2	130	6,109	1	0	2	135	6,228	1	0	2	138
T3M	5,930	1	0					3	131	6,180	1	0	3	137	6,301	1	0	3	140				
T3LG	5,297	1	0					1	117	5,521	1	0	1	122	5,628	1	0	1	125				
T4M	6,018	1	0					3	133	6,272	1	0	3	139	6,395	1	0	3	142				
T4LG	5,474	1	0					1	121	5,705	1	0	1	126	5,816	1	0	1	129				
TFTM	6,060	1	0					3	134	6,316	1	0	3	140	6,439	1	0	3	143				
T5M	6,192	3	0					1	137	6,453	3	0	2	143	6,579	3	0	2	146				
T5W	6,293	3	0					2	139	6,558	3	0	2	145	6,686	3	0	2	148				
T5LG	6,210	2	0					1	138	6,472	3	0	1	143	6,598	3	0	1	146				
BLC3	4,313	0	0					2	96	4,495	0	0	2	100	4,583	0	0	2	102				
BLC4	4,455	0	0					2	99	4,643	0	0	2	103	4,733	0	0	2	105				
RCCO	4,352	0	0					2	96	4,536	0	0	2	100	4,624	0	0	2	102				
LCCO	4,352	0	0					2	96	4,536	0	0	2	100	4,624	0	0	2	102				
AFR	6,328	1	0					1	140	6,595	1	0	1	146	6,724	1	0	1	149				
P3	69W	20	1050					T1S	9,006	1	0	2	131	9,386	1	0	2	136	9,569	1	0	2	139
								T2M	8,343	2	0	3	121	8,694	2	0	3	126	8,864	2	0	3	129
				T3M	8,439	2	0	3	122	8,795	2	0	3	128	8,967	2	0	3	130				
				T3LG	7,539	1	0	2	109	7,857	1	0	2	114	8,010	1	0	2	116				
				T4M	8,565	2	0	3	124	8,926	2	0	3	129	9,100	2	0	3	132				
				T4LG	7,790	1	0	2	113	8,119	1	0	2	118	8,277	1	0	2	120				
				TFTM	8,624	1	0	3	125	8,988	1	0	3	130	9,163	2	0	3	133				
				T5M	8,812	3	0	2	128	9,184	4	0	2	133	9,363	4	0	2	136				
				T5W	8,955	4	0	2	130	9,333	4	0	2	135	9,515	4	0	2	138				
				T5LG	8,838	3	0	1	128	9,211	3	0	1	134	9,390	3	0	1	136				
				BLC3	6,139	0	0	2	89	6,398	0	0	2	93	6,522	0	0	2	95				
				BLC4	6,340	0	0	3	92	6,607	0	0	3	96	6,736	0	0	3	98				
				RCCO	6,194	1	0	2	90	6,455	1	0	2	94	6,581	1	0	2	95				
				LCCO	6,194	1	0	2	90	6,455	1	0	2	94	6,581	1	0	2	95				
				AFR	9,006	1	0	2	131	9,386	1	0	2	136	9,569	1	0	2	139				
				P4	93W	20	1400	T1S	11,396	1	0	2	122	11,877	1	0	2	128	12,109	2	0	2	130
								T2M	10,557	2	0	3	113	11,003	2	0	3	118	11,217	2	0	3	121
T3M	10,680	2	0					3	115	11,130	2	0	3	120	11,347	2	0	3	122				
T3LG	9,540	1	0					2	103	9,942	1	0	2	107	10,136	1	0	2	109				
T4M	10,839	2	0					3	117	11,296	2	0	3	121	11,516	2	0	4	124				
T4LG	9,858	1	0					2	106	10,274	1	0	2	110	10,474	1	0	2	113				
TFTM	10,914	2	0					3	117	11,374	2	0	3	122	11,596	2	0	3	125				
T5M	11,152	4	0					2	120	11,622	4	0	2	125	11,849	4	0	2	127				
T5W	11,332	4	0					3	122	11,811	4	0	3	127	12,041	4	0	3	129				
T5LG	11,184	3	0					1	120	11,656	3	0	2	125	11,883	3	0	2	128				
BLC3	7,768	0	0					2	83	8,096	0	0	2	87	8,254	0	0	2	89				
BLC4	8,023	0	0					3	86	8,362	0	0	3	90	8,524	0	0	3	92				
RCCO	7,838	1	0					2	84	8,169	1	0	2	88	8,328	1	0	2	90				
LCCO	7,838	1	0					2	84	8,169	1	0	2	88	8,328	1	0	2	90				
AFR	11,396	1	0					2	122	11,877	1	0	2	128	12,109	2	0	2	130				

# Performance Data

## Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.

Forward Optics																							
Performance Package	System Watts	LED Count	Drive Current (mA)	Distribution Type	30K					40K					50K								
					(3000K, 70 CRI)					(4000K, 70 CRI)					(5000K, 70 CRI)								
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW				
P5	90W	40	700	T1S	12,380	2	0	2	137	12,902	2	0	2	143	13,154	2	0	2	146				
				T2M	11,468	2	0	3	127	11,952	2	0	3	133	12,185	2	0	3	135				
				T3M	11,601	2	0	3	129	12,091	2	0	3	134	12,326	2	0	4	137				
				T3LG	10,363	2	0	2	115	10,800	2	0	2	120	11,011	2	0	2	122				
				T4M	11,774	2	0	4	131	12,271	2	0	4	136	12,510	2	0	4	139				
				T4LG	10,709	1	0	2	119	11,160	2	0	2	124	11,378	2	0	2	126				
				TFTM	11,856	2	0	3	132	12,356	2	0	4	137	12,596	2	0	4	140				
				T5M	12,114	4	0	2	134	12,625	4	0	2	140	12,871	4	0	2	143				
				T5W	12,310	4	0	3	137	12,830	4	0	3	142	13,080	4	0	3	145				
				T5LG	12,149	3	0	2	135	12,662	3	0	2	141	12,908	3	0	2	143				
				BLC3	8,438	0	0	2	94	8,794	0	0	2	98	8,966	0	0	2	99				
				BLC4	8,715	0	0	3	97	9,083	0	0	3	101	9,260	0	0	3	103				
				RCCO	8,515	1	0	2	94	8,874	1	0	2	98	9,047	1	0	2	100				
				LCCO	8,515	1	0	2	94	8,874	1	0	2	98	9,047	1	0	2	100				
				AFR	12,380	2	0	2	137	12,902	2	0	2	143	13,154	2	0	2	146				
				P6	137W	40	1050	T1S	17,545	2	0	3	128	18,285	2	0	3	133	18,642	2	0	3	136
								T2M	16,253	3	0	4	119	16,939	3	0	4	124	17,269	3	0	4	126
T3M	16,442	2	0					4	120	17,135	3	0	4	125	17,469	3	0	4	128				
T3LG	14,687	2	0					2	107	15,306	2	0	2	112	15,605	2	0	2	114				
T4M	16,687	2	0					4	122	17,391	3	0	5	127	17,730	3	0	5	129				
T4LG	15,177	2	0					2	111	15,817	2	0	2	115	16,125	2	0	2	118				
TFTM	16,802	2	0					4	123	17,511	2	0	4	128	17,852	2	0	5	130				
T5M	17,168	4	0					2	125	17,893	5	0	3	131	18,241	5	0	3	133				
T5W	17,447	5	0					3	127	18,183	5	0	3	133	18,537	5	0	3	135				
T5LG	17,218	4	0					2	126	17,944	4	0	2	131	18,294	4	0	2	134				
BLC3	11,959	0	0					3	87	12,464	0	0	3	91	12,707	0	0	3	93				
BLC4	12,352	0	0					4	90	12,873	0	0	4	94	13,124	0	0	4	96				
RCCO	12,067	1	0					3	88	12,576	1	0	3	92	12,821	1	0	3	94				
LCCO	12,067	1	0					3	88	12,576	1	0	3	92	12,821	1	0	3	94				
AFR	17,545	2	0					3	128	18,285	2	0	3	133	18,642	2	0	3	136				
P7	171W	40	1300					T1S	20,806	2	0	3	122	21,683	2	0	3	127	22,106	2	0	3	129
								T2M	19,273	3	0	4	113	20,086	3	0	4	118	20,478	3	0	4	120
				T3M	19,497	3	0	5	114	20,319	3	0	5	119	20,715	3	0	5	121				
				T3LG	17,416	2	0	2	102	18,151	2	0	2	106	18,504	2	0	2	108				
				T4M	19,787	3	0	5	116	20,622	3	0	5	121	21,024	3	0	5	123				
				T4LG	17,997	2	0	2	105	18,756	2	0	2	110	19,121	2	0	2	112				
				TFTM	19,924	3	0	5	117	20,765	3	0	5	122	21,170	3	0	5	124				
				T5M	20,359	5	0	3	119	21,217	5	0	3	124	21,631	5	0	3	127				
				T5W	20,689	5	0	3	121	21,561	5	0	3	126	21,982	5	0	3	129				
				T5LG	20,418	4	0	2	120	21,279	4	0	2	125	21,694	4	0	2	127				
				BLC3	14,182	0	0	3	83	14,780	0	0	3	87	15,068	0	0	3	88				
				BLC4	14,647	0	0	4	86	15,265	0	0	4	89	15,562	0	0	4	91				
				RCCO	14,309	1	0	3	84	14,913	1	0	3	87	15,204	1	0	3	89				
				LCCO	14,309	1	0	3	84	14,913	1	0	3	87	15,204	1	0	3	89				
				AFR	20,806	2	0	3	122	21,683	2	0	3	127	22,106	2	0	3	129				

# Performance Data


## Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.



Rotated Optics																			
Performance Package	System Watts	LED Count	Drive Current (mA)	Distribution Type	30K					40K					50K				
					(3000K, 70 CRI)					(4000K, 70 CRI)					(5000K, 70 CRI)				
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
P10	51W	30	530	T1S	7,399	3	0	3	145	7,711	3	0	3	151	7,862	3	0	3	154
				T2M	6,854	3	0	3	135	7,144	3	0	3	140	7,283	3	0	3	143
				T3M	6,933	3	0	3	136	7,225	3	0	3	142	7,366	3	0	3	145
				T3LG	6,194	2	0	2	122	6,455	2	0	2	127	6,581	2	0	2	129
				T4M	7,036	3	0	3	138	7,333	3	0	3	144	7,476	3	0	3	147
				T4LG	6,399	2	0	2	126	6,669	2	0	2	131	6,799	2	0	2	134
				TFTM	7,086	3	0	3	139	7,385	3	0	3	145	7,529	3	0	3	148
				T5M	7,239	3	0	2	142	7,545	3	0	2	148	7,692	3	0	2	151
				T5W	7,357	3	0	2	145	7,667	3	0	2	151	7,816	4	0	2	154
				T5LG	7,260	3	0	1	143	7,567	3	0	1	149	7,714	3	0	1	152
				BLC3	5,043	3	0	3	99	5,256	3	0	3	103	5,358	3	0	3	105
				BLC4	5,208	3	0	3	102	5,428	3	0	3	107	5,534	3	0	3	109
				RCCO	5,089	0	0	2	100	5,303	0	0	2	104	5,407	0	0	2	106
				LCCO	5,089	0	0	2	100	5,303	0	0	2	104	5,407	0	0	2	106
				AFR	7,399	3	0	3	145	7,711	3	0	3	151	7,862	3	0	3	154
				P11	68W	30	700	T1S	9,358	3	0	3	138	9,753	3	0	3	143	9,943
T2M	8,669	3	0					3	127	9,034	3	0	3	133	9,211	3	0	3	135
T3M	8,768	3	0					3	129	9,138	3	0	3	134	9,316	3	0	3	137
T3LG	7,833	3	0					3	115	8,164	3	0	3	120	8,323	3	0	3	122
T4M	8,899	3	0					3	131	9,274	3	0	3	136	9,455	3	0	3	139
T4LG	8,093	3	0					3	119	8,435	3	0	3	124	8,599	3	0	3	126
TFTM	8,962	3	0					3	132	9,340	3	0	3	137	9,522	3	0	3	140
T5M	9,156	4	0					2	135	9,542	4	0	2	140	9,728	4	0	2	143
T5W	9,304	4	0					2	137	9,696	4	0	2	143	9,885	4	0	2	145
T5LG	9,182	3	0					1	135	9,569	3	0	1	141	9,756	3	0	1	143
BLC3	6,378	3	0					3	94	6,647	3	0	3	98	6,777	3	0	3	100
BLC4	6,587	3	0					3	97	6,865	3	0	3	101	6,999	3	0	3	103
RCCO	6,436	0	0					2	95	6,707	0	0	2	99	6,838	0	0	2	101
LCCO	6,436	0	0					2	95	6,707	0	0	2	99	6,838	0	0	2	101
AFR	9,358	3	0					3	138	9,753	3	0	3	143	9,943	3	0	3	146
P12	103W	30	1050					T1S	13,247	3	0	3	128	13,806	3	0	3	134	14,075
				T2M	12,271	4	0	4	119	12,789	4	0	4	124	13,038	4	0	4	126
				T3M	12,412	4	0	4	120	12,935	4	0	4	125	13,187	4	0	4	128
				T3LG	11,089	3	0	3	107	11,556	3	0	3	112	11,782	3	0	3	114
				T4M	12,597	4	0	4	122	13,128	4	0	4	127	13,384	4	0	4	129
				T4LG	11,457	3	0	3	111	11,940	3	0	3	116	12,173	3	0	3	118
				TFTM	12,686	4	0	4	123	13,221	4	0	4	128	13,479	4	0	4	130
				T5M	12,960	4	0	2	125	13,507	4	0	2	131	13,770	4	0	2	133
				T5W	13,170	4	0	3	127	13,726	4	0	3	133	13,994	4	0	3	135
				T5LG	12,998	3	0	2	126	13,546	3	0	2	131	13,810	3	0	2	134
				BLC3	9,029	3	0	3	87	9,409	3	0	3	91	9,593	3	0	3	93
				BLC4	9,324	4	0	4	90	9,718	4	0	4	94	9,907	4	0	4	96
				RCCO	9,110	1	0	2	88	9,495	1	0	2	92	9,680	1	0	2	94
				LCCO	9,110	1	0	2	88	9,494	1	0	2	92	9,680	1	0	2	94
				AFR	13,247	3	0	3	128	13,806	3	0	3	134	14,075	3	0	3	136
				P13	129W	30	1300	T1S	15,704	3	0	3	122	16,366	3	0	3	127	16,685
T2M	14,547	4	0					4	113	15,161	4	0	4	118	15,457	4	0	4	120
T3M	14,714	4	0					4	114	15,335	4	0	4	119	15,634	4	0	4	121
T3LG	13,145	3	0					3	102	13,700	3	0	3	106	13,967	3	0	3	108
T4M	14,933	4	0					4	116	15,563	4	0	4	121	15,867	4	0	4	123
T4LG	13,582	3	0					3	105	14,155	3	0	3	110	14,431	3	0	3	112
TFTM	15,039	4	0					4	117	15,673	4	0	4	122	15,979	4	0	4	124
T5M	15,364	4	0					2	119	16,013	4	0	2	124	16,325	4	0	2	127
T5W	15,613	5	0					3	121	16,272	5	0	3	126	16,589	5	0	3	129
T5LG	15,409	3	0					2	120	16,059	3	0	2	125	16,372	4	0	2	127
BLC3	10,703	4	0					4	83	11,155	4	0	4	87	11,372	4	0	4	88
BLC4	11,054	4	0					4	86	11,520	4	0	4	89	11,745	4	0	4	91
RCCO	10,800	1	0					2	84	11,256	1	0	2	87	11,475	1	0	3	89
LCCO	10,800	1	0					2	84	11,255	1	0	2	87	11,475	1	0	3	89
AFR	15,704	3	0					3	122	16,366	3	0	3	127	16,685	4	0	4	130





# Dimensions

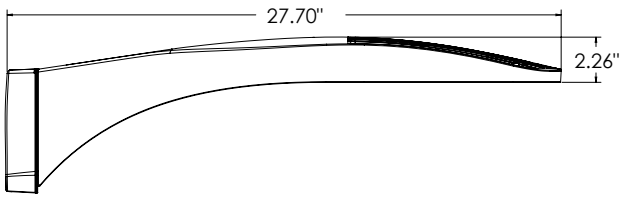


**DSX0 with RPA, RPA5, SPA5, SPA8N mount**  
**Weight: 25 lbs**

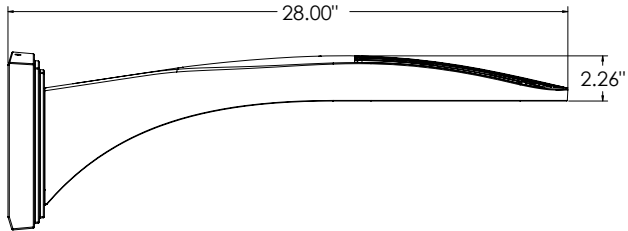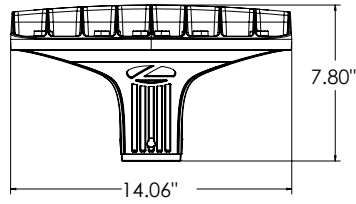


**DSX0 with WBA mount**  
**Weight: 27 lb**

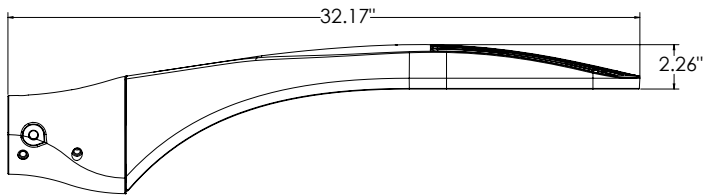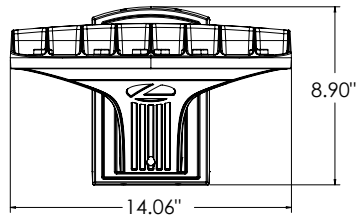


**DSX0 with MA mount**  
**Weight: 28 lbs**

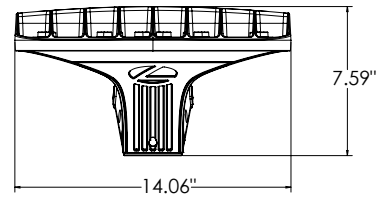


**SPA (STANDARD ARM)**

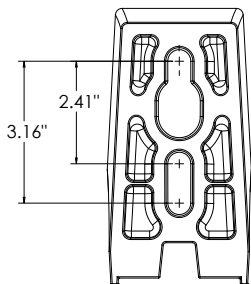


**RPA**

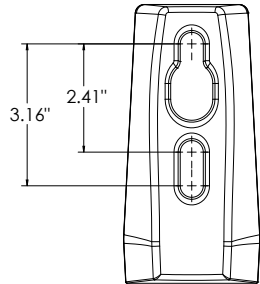


**SPA5**

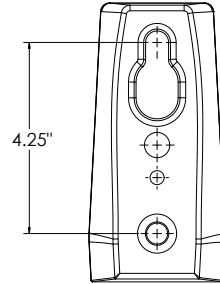

**RPA5**



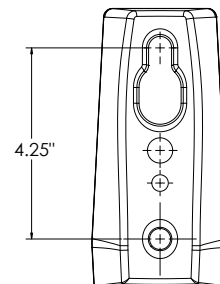


**SPA8N**

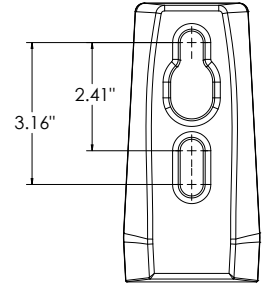

## nLight Sensor Coverage Pattern

### NLTAIR2 PIRHN

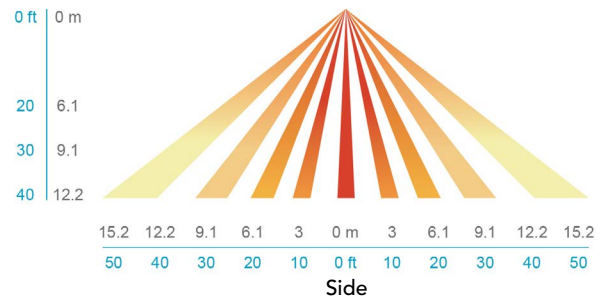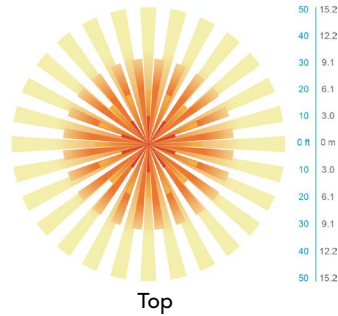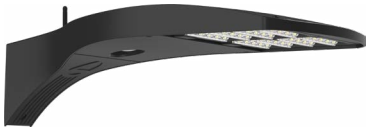

## FEATURES & SPECIFICATIONS

### INTENDED USE

The sleek design of the D-Series Size 0 reflects the embedded high performance LED technology. It is ideal for many commercial and municipal applications, such as parking lots, plazas, campuses, and pedestrian areas.

### CONSTRUCTION

Single-piece die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. Modular design allows for ease of maintenance and future light engine upgrades. The LED driver is mounted in direct contact with the casting to promote low operating temperature and long life. Housing driver compartment is completely sealed against moisture and environmental contaminants (IP66). Vibration rated per ANSI C136.31 for 3G. Low EPA (0.44 ft<sup>2</sup>) for optimized pole wind loading.

### FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Available in both textured and non-textured finishes.

### COASTAL CONSTRUCTION (CCE)

Optional corrosion resistant construction is engineered with added corrosion protection in materials and/or pre-treatment of base material under super durable paint. Provides additional corrosion protection for applications near coastal areas. Finish is salt spray tested to over 5,000 hours per ASTM B117 with scribe rating of 10. Additional lead-times may apply.

### OPTICS

Precision-molded proprietary silicone lenses are engineered for superior area lighting distribution, uniformity, and pole spacing. Light engines are available in 3000 K, 4000 K or 5000 K (70 CRI) configurations. 80CRI configurations are also available. The D-Series Size 0 has zero uplight and qualifies as a Nighttime Friendly™ product, meaning it is consistent with the LEED® and Green Globes™ criteria for eliminating wasteful uplight.

### ELECTRICAL

Light engine(s) configurations consist of high-efficacy LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life (up to L80/100,000 hours at 25°C). Class 1 electronic drivers are designed to have a power factor >90%, THD <20%, and an expected life of 100,000 hours with <1% failure rate. Easily serviceable 10kV surge protection device meets a minimum Category C Low operation (per ANSI/IEEE C62.41.2).

### STANDARD CONTROLS

The DSX0 LED area luminaire has a number of control options. DSX Size 0, comes standard with 0-10V dimming driver. Dusk to dawn controls can be utilized via optional NEMA twist-lock photocell receptacles. PIR integrated motion sensor with on-board photocell feature field-adjustable programming and are suitable for mounting heights up to 40 feet. Control option BL features a bi-level device that allows a second control circuit to switch all light engines to either 30% or 50% light output.

### nLIGHT AIR CONTROLS

The DSX0 LED area luminaire is also available with nLight® AIR for the ultimate in wireless control. This powerful controls platform provides out-of-the-box basic motion sensing and photocontrol functionality and is suitable for mounting heights up to 40 feet. Once commissioned using a smartphone and the easy-to-use CLAIRITY app, nLight AIR equipped luminaires can be grouped, resulting in motion sensor and photocell group response without the need for additional equipment. Scheduled dimming with motion sensor over-ride can be achieved when used with the nLight Eclipse. Additional information about nLight Air can be found [here](#).

### INSTALLATION

Integral mounting arm allows for fast mounting using Lithonia standard #8 drilling and accommodates pole drilling's from 2.41 to 3.12" on center. The standard "SPA" option for square poles and the "RPA" option for round poles use the #8 drilling. For #5 pole drillings, use SPA5 or RPA5. Additional mountings are available including a wall bracket (WBA) and mast arm (MA) option that allows luminaire attachment to a 2 3/8" horizontal mast arm.

### LISTINGS

UL listed to meet U.S. and Canadian standards. UL Listed for wet locations. Light engines are IP66 rated; luminaire is IP66 rated. Rated for -40°C minimum ambient.

DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product. Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org/QPL](http://www.designlights.org/QPL) to confirm which versions are qualified.

International Dark-Sky Association (IDA) Fixture Seal of Approval (FSA) is available for all products on this page utilizing 3000K color temperature only.

### GOVERNMENT PROCUREMENT

BAA – Buy America(n) Act: Product with the BAA option qualifies as a domestic end product under the Buy American Act as implemented in the FAR and DFARS. Product with the BAA option also qualifies as manufactured in the United States under DOT Buy America regulations.

BABA – Build America Buy America: Product with the BAA option also qualifies as produced in the United States under the definitions of the Build America, Buy America Act.

Please refer to [www.acuitybrands.com/buy-american](http://www.acuitybrands.com/buy-american) for additional information.

### WARRANTY

5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: [www.acuitybrands.com/support/warranty/terms-and-conditions](http://www.acuitybrands.com/support/warranty/terms-and-conditions)

**Note:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.



# D-Series Size 0 LED Area Luminaire



Catalog Number
Notes
Type <b>OW</b>

Hit the Tab key or mouse over the page to see all interactive elements.


## Introduction

The modern styling of the D-Series features a highly refined aesthetic that blends seamlessly with its environment. The D-Series offers the benefits of the latest in LED technology into a high performance, high efficacy, long-life luminaire.

The photometric performance results in sites with excellent uniformity, greater pole spacing and lower power density. D-Series outstanding photometry aids in reducing the number of poles required in area lighting applications, with typical energy savings of 70% and expected service life of over 100,000 hours.

## Specifications

EPA:	0.44 ft <sup>2</sup> (0.04 m <sup>2</sup> )
Length:	26.18" (66.5 cm)
Width:	14.06" (35.7 cm)
Height H1:	2.26" (5.7 cm)
Height H2:	7.46" (18.9 cm)
Weight:	23 lbs (10.4 kg)

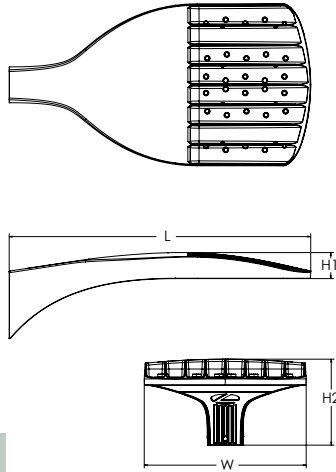

**ds** Design Select options indicated by this color background.



Items marked by a shaded background qualify for the Design Select program and ship in 15 days or less. To learn more about Design Select, visit [www.acuitybrands.com/designselect](http://www.acuitybrands.com/designselect). \*See ordering tree for details

## Ordering Information

**EXAMPLE: DSX0 LED P6 40K 70CRI T3M MVOLT SPA NLTAIR2 PIRHN DDBXD**

DSX0 LED	P2	40K	80CRI	BLC4	MVOLT	WBA			
Series	LEDs	Color temperature <sup>2</sup>	Color Rendering Index <sup>2</sup>	Distribution	Voltage	Mounting			
DSX0 LED	<b>Forward optics</b>		(this section 70CRI only)	AFR Automotive front row T1S Type I short T2M Type II medium T3M Type III medium T3LG Type III low glare <sup>3</sup> T4M Type IV medium T4LG Type IV low glare <sup>3</sup> TFTM Forward throw medium	T5M Type V medium T5LG Type V low glare T5W Type V wide BLC3 Type III backlight control <sup>3</sup> BLC4 Type IV backlight control <sup>3</sup> LCCO Left corner cutoff <sup>3</sup> RCCO Right corner cutoff <sup>3</sup>	<b>Shipped included</b> SPA Square pole mounting (#8 drilling, 3.5" min. SQ pole) RPA Round pole mounting (#8 drilling, 3" min. RND pole) SPA5 Square pole mounting (#5 drilling, 3" min. SQ pole) <sup>9</sup> RPA5 Round pole mounting (#5 drilling, 3" min. RND pole) <sup>9</sup> SPA8N Square narrow pole mounting (#8 drilling, 3" min. SQ pole) WBA Wall bracket <sup>10</sup> MA Mast arm adapter (mounts on 2 3/8" OD horizontal tenon)			
	P1	P5	30K 3000K				70CRI	MVOLT (120V-277V) <sup>4</sup>	120 <sup>16, 24</sup> 208 <sup>16, 24</sup> 240 <sup>16, 24</sup> 277 <sup>16, 24</sup> 347 <sup>16, 24</sup> 480 <sup>16, 24</sup>
	P2	P6	40K 4000K				70CRI	HVOLT (347V-480V) <sup>5,6</sup>	
	P3	P7	50K 5000K				70CRI	XVOLT (277V-480V) <sup>7,8</sup>	
	<b>Rotated optics</b>		(this section 80CRI only, extended lead times apply)				80CRI	208 <sup>16, 24</sup> 240 <sup>16, 24</sup> 277 <sup>16, 24</sup> 347 <sup>16, 24</sup> 480 <sup>16, 24</sup>	
	P10 <sup>1</sup>	P12 <sup>1</sup>	27K 2700K				80CRI		
	P11 <sup>1</sup>	P13 <sup>1</sup>	30K 3000K				80CRI		
			35K 3500K				80CRI		
			40K 4000K				80CRI		
			50K 5000K				80CRI		
DMG	--				DDBXD				
<b>Control options</b>				<b>Other options</b>		<b>Finish (required)</b>			
<b>Shipped installed</b>		PER7 Seven-pin receptacle only (controls ordered separate) <sup>14, 19</sup>		<b>Shipped installed</b>		DDBXD Dark Bronze			
NLTAIR2 PIRHN	nLight AIR gen 2 enabled with bi-level motion / ambient sensor, 8-40' mounting height, ambient sensor enabled at 2fc. <sup>11, 12, 18, 19</sup>		FAO Field adjustable output <sup>15, 19</sup>	HS Houseside shield (black finish standard) <sup>20</sup>	DBLXD Black				
PIR	High/low, motion/ambient sensor, 8-40' mounting height, ambient sensor enabled at 2fc. <sup>13, 18, 19</sup>		BL30 Bi-level switched dimming, 30% <sup>16, 19</sup>	L90 Left rotated optics <sup>1</sup>	DNAXD Natural Aluminum				
PER	NEMA twist-lock receptacle only (controls ordered separate) <sup>14</sup>		BL50 Bi-level switched dimming, 50% <sup>16, 19</sup>	R90 Right rotated optics <sup>1</sup>	DWHXD White				
PER5	Five-pin receptacle only (controls ordered separate) <sup>14, 19</sup>		DMG 0-10v dimming wires pulled outside fixture (for use with an external control, ordered separately) <sup>17</sup>	CCE Coastal Construction <sup>21</sup>	DOBTXD Textured dark bronze				
				HA 50°C ambient operation <sup>22</sup>	DBLBXD Textured black				
				BAA Buy America(n) Act Compliant	DNATXD Textured natural aluminum				
				SF Single fuse (120, 277, 347V) <sup>24</sup>	DWHGXD Textured white				
				DF Double fuse (208, 240, 480V) <sup>24</sup>					
				<b>Shipped separately</b>					
				EGSR External Glare Shield (reversible, field install required, matches housing finish)					
				BSDB Bird Spikes (field install required)					



## Ordering Information

### Accessories


Ordered and shipped separately.

DLL127F 1.5 JU	Photocell - SSL twist-lock (120-277V) <sup>23</sup>
DLL347F 1.5 CUL JU	Photocell - SSL twist-lock (347V) <sup>23</sup>
DLL480F 1.5 CUL JU	Photocell - SSL twist-lock (480V) <sup>23</sup>
DSHORT SBK	Shorting cap <sup>23</sup>
DSX0HS P#	House-side shield (enter package number P1-7, P10-13 in place of #)
DSXRPA (FINISH)	Round pole adapter (#8 drilling, specify finish)
DSXRPA5 (FINISH)	Round pole adapter #5 drilling (specify finish)
DSXSPA5 (FINISH)	Square pole adapter #5 drilling (specify finish)
DSX0EGSR (FINISH)	External glare shield (specify finish)
DSX0SDB (FINISH)	Bird spike deterrent bracket (specify finish)


### NOTES

- Rotated optics available with packages P10, P11, P12 and P13. Must be combined with option L90 or R90.
- 30K, 40K, and 50K available in 70CRI and 80CRI. 27K and 35K only available with 80CRI. Contact Technical Support for other possible combinations.
- T3LG, T4LG, BLC3, BLC4, LCCO, RCCO not available with option HS.
- MVOLT driver operates on any line voltage from 120-277V (50/60 Hz).
- HVOLT driver operates on any line voltage from 347-480V (50/60 Hz).
- HVOLT not available with package P1, P2 and P10 when combined with option NLTAIR2 PIRHN or option PIR.
- XVOLT operates with any voltage between 277V and 480V (50/60 Hz).
- XVOLT not available in packages P1, P2 or P10. XVOLT not available with fusing (SF or DF).
- SPAS and RPA5 for use with #5 drilling only (Not for use with #8 drilling).
- WBA cannot be combined with Type 5 distributions plus photocell (PER).
- NLTAIR2 and PIRHN must be ordered together. For more information on nLight Air 2.
- NLTAIR2 PIRHN not available with other controls including PIR, PER, PER5, PER7, FAO, BL30, BL50 and DMG. NLTAIR2 PIRHN not available with P1, P2 and P10 using HVOLT. NLTAIR2 PIRHN not available with P1, P2 and P10 using XVOLT. NLTAIR2 PIRHN not available with P1 using MVOLT.
- PIR not available with NLTAIR2, PER, PER5, PER7, FAO BL30, BL50 and DMG. PIR not available with P1, P2 and P10 using HVOLT. PIR not available with P1, P2 and P10 using XVOLT. PIR not available with P1 using MVOLT.
- PER/PER5/PER7 not available with NLTAIR2, PIR, BL30, BL50. Photocell ordered and shipped as a separate line item from Acuity Brands Controls. See accessories. Shorting Cap included.
- FAO not available with other dimming control options NLTAIR2 PIRHN, PIR, PER5, PER7, BL30, BL50, or DMG.
- BL30 and BL50 are not available with NLTAIR2 PIRHN, PIR, PER, PER5, PER7, FAO and DMG. BL30 or BL50 must specify 120, 277 or 347V. Consult tech support for 208, 240 or 480V.
- DMG not available with NLTAIR2 PIRHN, PIR, PER, PER5, PER7, BL30, BL50 and FAO.
- Reference Motion Sensor Default Settings table on page 4 to see functionality.
- Reference Controls Options table on page 4.
- Option HS not available with T3LG, T4LG, BLC3, BLC4, LCCO and RCCO distribution. Also available as a separate accessory; see Accessories information.
- CCE option not available with option B5 and EGSR. Contact Technical Support for availability.
- Option HA not available with performance packages P6, P7, P12 and P13.
- Requires luminaire to be specified with PER, PER5 or PER7 option. See Controls Table on page 4.
- Single fuse (SF) requires 120V, 277V, or 347V. Double fuse (DF) requires 208V, 240V or 480V. XVOLT not available with fusing (SF or DF).

## Shield Accessories

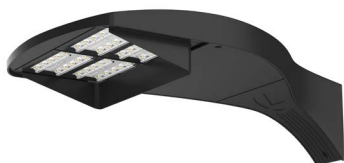

External Glare Shield (EGSR)

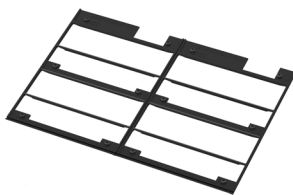


House Side Shield (HS)


## Drilling

### HANDHOLE ORIENTATION

(from top of pole)

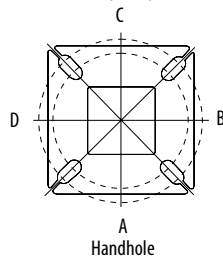

A Handhole

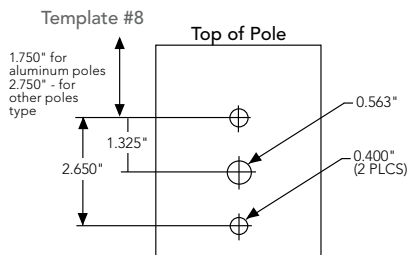

### Tenon Mounting Slipfitter

Tenon O.D.	Mounting	Single Unit	2 @ 180	2 @ 90	3 @ 90	3 @ 120	4 @ 90
2-3/8"	RPA	AS3-5 190	AS3-5 280	AS3-5 290	AS3-5 390	AS3-5 320	AS3-5 490
2-7/8"	RPA	AST25-190	AST25-280	AST25-290	AST25-390	AST25-320	AST25-490
4"	RPA	AST35-190	AST35-280	AST35-290	AST35-390	AST35-320	AST35-490

Mounting Option	Drilling Template	Single	2 @ 180	2 @ 90	3 @ 90	3 @ 120	4 @ 90
Head Location		Side B	Side B & D	Side B & C	Side B, C & D	Round Pole Only	Side A, B, C & D
Drill Nomenclature	#8	DM19AS	DM28AS	DM29AS	DM39AS	DM32AS	DM49AS
Minimum Acceptable Outside Pole Dimension							
SPA	#8	3.5"	3.5"	3.5"	3.5"		3.5"
RPA	#8	3"	3"	3"	3"	3"	3"
SPAS	#5	3"	3"	3"	3"		3"
RPA5	#5	3"	3"	3"	3"	3"	3"
SPA8N	#8	3"	3"	3"	3"		3"

### DSX0 Area Luminaire - EPA

\*Includes luminaire and integral mounting arm. Other tenons, arms, brackets or other accessories are not included in this EPA data.

Fixture Quantity & Mounting Configuration	Single DM19	2 @ 180 DM28	2 @ 90 DM29	3 @ 90 DM39	3 @ 120 DM32	4 @ 90 DM49
Mounting Type						
DSX0 with SPA	0.44	0.88	0.96	1.18	---	1.16
DSX0 with SPAS, SPA8N	0.51	1.02	1.06	1.26	---	1.29
DSX0 with RPA, RPA5	0.51	1.02	1.06	1.26	1.24	1.29
DSX0 with MA	0.64	1.28	1.24	1.67	1.70	1.93



Isofootcandle plots for the DSX0 LED P7 40K 70CRI. Distances are in units of mounting height (20').



## Performance Data

### Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient	Lumen Multiplier	
0°C	32°F	1.04
5°C	41°F	1.04
10°C	50°F	1.03
15°C	59°F	1.02
20°C	68°F	1.01
<b>25°C</b>	<b>77°C</b>	<b>1.00</b>
30°C	86°F	0.99
35°C	95°F	0.98
40°C	104°F	0.97

### Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the platforms noted in a **25°C ambient**, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	Lumen Maintenance Factor
0	1.00
25,000	0.94
50,000	0.89
100,000	0.80

### FAO Dimming Settings

FAO Position	% Wattage	% Lumen Output
8	100%	100%
7	93%	95%
6	80%	85%
5	66%	73%
4	54%	61%
3	41%	49%
2	29%	36%
1	15%	20%

\*Note: Calculated values are based on original performance package data. When calculating new values for given FAO position, use published values for each package based on input watts and lumens by optic type.

### Electrical Load

	Performance Package	LED Count	Drive Current (mA)	Wattage	Current (A)					
					120V	208V	240V	277V	347V	480V
Forward Optics (Non-Rotated)	P1	20	530	34	0.28	0.16	0.14	0.12	0.10	0.07
	P2	20	700	45	0.38	0.22	0.19	0.16	0.13	0.09
	P3	20	1050	69	0.57	0.33	0.29	0.25	0.20	0.14
	P4	20	1400	94	0.78	0.45	0.39	0.34	0.27	0.19
	P5	40	700	89	0.75	0.43	0.38	0.33	0.26	0.19
	P6	40	1050	136	1.14	0.66	0.57	0.49	0.39	0.29
	P7	40	1300	170	1.42	0.82	0.71	0.62	0.49	0.36
Rotated Optics (Requires L90 or R90)	P10	30	530	51	0.42	0.24	0.21	0.18	0.15	0.11
	P11	30	700	67	0.57	0.33	0.28	0.25	0.20	0.14
	P12	30	1050	103	0.86	0.50	0.43	0.37	0.30	0.22
	P13	30	1300	129	1.07	0.62	0.54	0.46	0.37	0.27

### LED Color Temperature / Color Rendering Multipliers

	70 CRI		80CRI		90CRI	
	Lumen Multiplier	Availability	Lumen Multiplier	Availability	Lumen Multiplier	Availability
5000K	102%	Standard	92%	Extended lead-time	71%	(see note)
4000K	100%	Standard	92%	Extended lead-time	67%	(see note)
3500K	100%	(see note)	90%	Extended lead-time	63%	(see note)
3000K	96%	Standard	87%	Extended lead-time	61%	(see note)
2700K	94%	(see note)	85%	Extended lead-time	57%	(see note)

Note: Some LED types are available as per special request. Contact Technical Support for more information.

### Motion Sensor Default Settings

Option	Unoccupied Dimmed Level	High Level (when occupied)	Photocell Operation	Dwell Time	Ramp-up Time	Dimming Fade Rate
PIR	30%	100%	Enabled @ 2FC	7.5 min	3 sec	5 min
NLTAIR2 PIRHN	30%	100%	Enabled @ 2FC	7.5 min	3 sec	5 min

### Controls Options

Nomenclature	Description	Functionality	Primary control device	Notes
FAO	Field adjustable output device installed inside the luminaire; wired to the driver dimming leads.	Allows the luminaire to be manually dimmed, effectively trimming the light output.	FAO device	Cannot be used with other controls options that need the 0-10V leads
DS (not available on DSX0)	Drivers wired independently for 50/50 luminaire operation	The luminaire is wired to two separate circuits, allowing for 50/50 operation.	Independently wired drivers	Requires two separately switched circuits. Consider nLight AIR as a more cost effective alternative.
PERS or PER7	Twist-lock photocell receptacle	Compatible with standard twist-lock photocells for dusk to dawn operation, or advanced control nodes that provide 0-10V dimming signals.	Twist-lock photocells such as DLL Elite or advanced control nodes such as ROAM.	Pins 4 & 5 to dimming leads on driver, Pins 6 & 7 are capped inside luminaire. Cannot be used with other controls options that need the 0-10V leads.
PIR	Motion sensor with integral photocell. Sensor suitable for 8' to 40' mounting height.	Luminaires dim when no occupancy is detected.	Acuity Controls rSBG	Cannot be used with other controls options that need the 0-10V leads.
NLTAIR2 PIRHN	nLight AIR enabled luminaire for motion sensing, photocell and wireless communication.	Motion and ambient light sensing with group response. Scheduled dimming with motion sensor over-ride when wirelessly connected to the nLight Eclipse.	nLight Air rSBG	nLight AIR sensors can be programmed and commissioned from the ground using the CIAIRity Pro app. Cannot be used with other controls options that need the 0-10V leads.
BL30 or BL50	Integrated bi-level device that allows a second control circuit to switch all light engines to either 30% or 50% light output	BLC device provides input to 0-10V dimming leads on all drivers providing either 100% or dimmed (30% or 50%) control by a secondary circuit	BLC UVOLT1	BLC device is powered off the 0-10V dimming leads, thus can be used with any input voltage from 120 to 480V

# Performance Data

## Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.

Forward Optics																							
Performance Package	System Watts	LED Count	Drive Current (mA)	Distribution Type	30K					40K					50K								
					(3000K, 70 CRI)					(4000K, 70 CRI)					(5000K, 70 CRI)								
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW				
P1	33W	20	530	T1S	4,906	1	0	1	148	5,113	1	0	1	154	5,213	1	0	1	157				
				T2M	4,545	1	0	2	137	4,736	1	0	2	143	4,829	1	0	2	145				
				T3M	4,597	1	0	2	138	4,791	1	0	2	144	4,885	1	0	2	147				
				T3LG	4,107	1	0	1	124	4,280	1	0	1	129	4,363	1	0	1	131				
				T4M	4,666	1	0	2	141	4,863	1	0	2	146	4,957	1	0	2	149				
				T4LG	4,244	1	0	1	128	4,423	1	0	1	133	4,509	1	0	1	136				
				TFTM	4,698	1	0	2	141	4,896	1	0	2	147	4,992	1	0	2	150				
				T5M	4,801	3	0	1	145	5,003	3	0	1	151	5,101	3	0	1	154				
				T5W	4,878	3	0	1	147	5,084	3	0	2	153	5,183	3	0	2	156				
				T5LG	4,814	2	0	1	145	5,018	2	0	1	151	5,115	2	0	1	154				
				BLC3	3,344	0	0	1	101	3,485	0	0	1	105	3,553	0	0	1	107				
				BLC4	3,454	0	0	2	104	3,599	0	0	2	108	3,670	0	0	2	111				
				RCCO	3,374	0	0	1	102	3,517	0	0	1	106	3,585	0	0	1	108				
				LCCO	3,374	0	0	1	102	3,517	0	0	1	106	3,585	0	0	1	108				
				AFR	4,906	1	0	1	148	5,113	1	0	1	154	5,213	1	0	1	157				
				P2	45W	20	700	T1S	6,328	1	0	1	140	6,595	1	0	1	146	6,724	1	0	1	149
								T2M	5,862	1	0	2	130	6,109	1	0	2	135	6,228	1	0	2	138
T3M	5,930	1	0					3	131	6,180	1	0	3	137	6,301	1	0	3	140				
T3LG	5,297	1	0					1	117	5,521	1	0	1	122	5,628	1	0	1	125				
T4M	6,018	1	0					3	133	6,272	1	0	3	139	6,395	1	0	3	142				
T4LG	5,474	1	0					1	121	5,705	1	0	1	126	5,816	1	0	1	129				
TFTM	6,060	1	0					3	134	6,316	1	0	3	140	6,439	1	0	3	143				
T5M	6,192	3	0					1	137	6,453	3	0	2	143	6,579	3	0	2	146				
T5W	6,293	3	0					2	139	6,558	3	0	2	145	6,686	3	0	2	148				
T5LG	6,210	2	0					1	138	6,472	3	0	1	143	6,598	3	0	1	146				
BLC3	4,313	0	0					2	96	4,495	0	0	2	100	4,583	0	0	2	102				
BLC4	4,455	0	0					2	99	4,643	0	0	2	103	4,733	0	0	2	105				
RCCO	4,352	0	0					2	96	4,536	0	0	2	100	4,624	0	0	2	102				
LCCO	4,352	0	0					2	96	4,536	0	0	2	100	4,624	0	0	2	102				
AFR	6,328	1	0					1	140	6,595	1	0	1	146	6,724	1	0	1	149				
P3	69W	20	1050					T1S	9,006	1	0	2	131	9,386	1	0	2	136	9,569	1	0	2	139
								T2M	8,343	2	0	3	121	8,694	2	0	3	126	8,864	2	0	3	129
				T3M	8,439	2	0	3	122	8,795	2	0	3	128	8,967	2	0	3	130				
				T3LG	7,539	1	0	2	109	7,857	1	0	2	114	8,010	1	0	2	116				
				T4M	8,565	2	0	3	124	8,926	2	0	3	129	9,100	2	0	3	132				
				T4LG	7,790	1	0	2	113	8,119	1	0	2	118	8,277	1	0	2	120				
				TFTM	8,624	1	0	3	125	8,988	1	0	3	130	9,163	2	0	3	133				
				T5M	8,812	3	0	2	128	9,184	4	0	2	133	9,363	4	0	2	136				
				T5W	8,955	4	0	2	130	9,333	4	0	2	135	9,515	4	0	2	138				
				T5LG	8,838	3	0	1	128	9,211	3	0	1	134	9,390	3	0	1	136				
				BLC3	6,139	0	0	2	89	6,398	0	0	2	93	6,522	0	0	2	95				
				BLC4	6,340	0	0	3	92	6,607	0	0	3	96	6,736	0	0	3	98				
				RCCO	6,194	1	0	2	90	6,455	1	0	2	94	6,581	1	0	2	95				
				LCCO	6,194	1	0	2	90	6,455	1	0	2	94	6,581	1	0	2	95				
				AFR	9,006	1	0	2	131	9,386	1	0	2	136	9,569	1	0	2	139				
				P4	93W	20	1400	T1S	11,396	1	0	2	122	11,877	1	0	2	128	12,109	2	0	2	130
								T2M	10,557	2	0	3	113	11,003	2	0	3	118	11,217	2	0	3	121
T3M	10,680	2	0					3	115	11,130	2	0	3	120	11,347	2	0	3	122				
T3LG	9,540	1	0					2	103	9,942	1	0	2	107	10,136	1	0	2	109				
T4M	10,839	2	0					3	117	11,296	2	0	3	121	11,516	2	0	4	124				
T4LG	9,858	1	0					2	106	10,274	1	0	2	110	10,474	1	0	2	113				
TFTM	10,914	2	0					3	117	11,374	2	0	3	122	11,596	2	0	3	125				
T5M	11,152	4	0					2	120	11,622	4	0	2	125	11,849	4	0	2	127				
T5W	11,332	4	0					3	122	11,811	4	0	3	127	12,041	4	0	3	129				
T5LG	11,184	3	0					1	120	11,656	3	0	2	125	11,883	3	0	2	128				
BLC3	7,768	0	0					2	83	8,096	0	0	2	87	8,254	0	0	2	89				
BLC4	8,023	0	0					3	86	8,362	0	0	3	90	8,524	0	0	3	92				
RCCO	7,838	1	0					2	84	8,169	1	0	2	88	8,328	1	0	2	90				
LCCO	7,838	1	0					2	84	8,169	1	0	2	88	8,328	1	0	2	90				
AFR	11,396	1	0					2	122	11,877	1	0	2	128	12,109	2	0	2	130				

# Performance Data

## Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.

Forward Optics																							
Performance Package	System Watts	LED Count	Drive Current (mA)	Distribution Type	30K					40K					50K								
					(3000K, 70 CRI)					(4000K, 70 CRI)					(5000K, 70 CRI)								
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW				
P5	90W	40	700	T1S	12,380	2	0	2	137	12,902	2	0	2	143	13,154	2	0	2	146				
				T2M	11,468	2	0	3	127	11,952	2	0	3	133	12,185	2	0	3	135				
				T3M	11,601	2	0	3	129	12,091	2	0	3	134	12,326	2	0	4	137				
				T3LG	10,363	2	0	2	115	10,800	2	0	2	120	11,011	2	0	2	122				
				T4M	11,774	2	0	4	131	12,271	2	0	4	136	12,510	2	0	4	139				
				T4LG	10,709	1	0	2	119	11,160	2	0	2	124	11,378	2	0	2	126				
				TFTM	11,856	2	0	3	132	12,356	2	0	4	137	12,596	2	0	4	140				
				T5M	12,114	4	0	2	134	12,625	4	0	2	140	12,871	4	0	2	143				
				T5W	12,310	4	0	3	137	12,830	4	0	3	142	13,080	4	0	3	145				
				T5LG	12,149	3	0	2	135	12,662	3	0	2	141	12,908	3	0	2	143				
				BLC3	8,438	0	0	2	94	8,794	0	0	2	98	8,966	0	0	2	99				
				BLC4	8,715	0	0	3	97	9,083	0	0	3	101	9,260	0	0	3	103				
				RCCO	8,515	1	0	2	94	8,874	1	0	2	98	9,047	1	0	2	100				
				LCCO	8,515	1	0	2	94	8,874	1	0	2	98	9,047	1	0	2	100				
				AFR	12,380	2	0	2	137	12,902	2	0	2	143	13,154	2	0	2	146				
				P6	137W	40	1050	T1S	17,545	2	0	3	128	18,285	2	0	3	133	18,642	2	0	3	136
								T2M	16,253	3	0	4	119	16,939	3	0	4	124	17,269	3	0	4	126
T3M	16,442	2	0					4	120	17,135	3	0	4	125	17,469	3	0	4	128				
T3LG	14,687	2	0					2	107	15,306	2	0	2	112	15,605	2	0	2	114				
T4M	16,687	2	0					4	122	17,391	3	0	5	127	17,730	3	0	5	129				
T4LG	15,177	2	0					2	111	15,817	2	0	2	115	16,125	2	0	2	118				
TFTM	16,802	2	0					4	123	17,511	2	0	4	128	17,852	2	0	5	130				
T5M	17,168	4	0					2	125	17,893	5	0	3	131	18,241	5	0	3	133				
T5W	17,447	5	0					3	127	18,183	5	0	3	133	18,537	5	0	3	135				
T5LG	17,218	4	0					2	126	17,944	4	0	2	131	18,294	4	0	2	134				
BLC3	11,959	0	0					3	87	12,464	0	0	3	91	12,707	0	0	3	93				
BLC4	12,352	0	0					4	90	12,873	0	0	4	94	13,124	0	0	4	96				
RCCO	12,067	1	0					3	88	12,576	1	0	3	92	12,821	1	0	3	94				
LCCO	12,067	1	0					3	88	12,576	1	0	3	92	12,821	1	0	3	94				
AFR	17,545	2	0					3	128	18,285	2	0	3	133	18,642	2	0	3	136				
P7	171W	40	1300					T1S	20,806	2	0	3	122	21,683	2	0	3	127	22,106	2	0	3	129
								T2M	19,273	3	0	4	113	20,086	3	0	4	118	20,478	3	0	4	120
				T3M	19,497	3	0	5	114	20,319	3	0	5	119	20,715	3	0	5	121				
				T3LG	17,416	2	0	2	102	18,151	2	0	2	106	18,504	2	0	2	108				
				T4M	19,787	3	0	5	116	20,622	3	0	5	121	21,024	3	0	5	123				
				T4LG	17,997	2	0	2	105	18,756	2	0	2	110	19,121	2	0	2	112				
				TFTM	19,924	3	0	5	117	20,765	3	0	5	122	21,170	3	0	5	124				
				T5M	20,359	5	0	3	119	21,217	5	0	3	124	21,631	5	0	3	127				
				T5W	20,689	5	0	3	121	21,561	5	0	3	126	21,982	5	0	3	129				
				T5LG	20,418	4	0	2	120	21,279	4	0	2	125	21,694	4	0	2	127				
				BLC3	14,182	0	0	3	83	14,780	0	0	3	87	15,068	0	0	3	88				
				BLC4	14,647	0	0	4	86	15,265	0	0	4	89	15,562	0	0	4	91				
				RCCO	14,309	1	0	3	84	14,913	1	0	3	87	15,204	1	0	3	89				
				LCCO	14,309	1	0	3	84	14,913	1	0	3	87	15,204	1	0	3	89				
				AFR	20,806	2	0	3	122	21,683	2	0	3	127	22,106	2	0	3	129				

# Performance Data


## Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.



Rotated Optics																			
Performance Package	System Watts	LED Count	Drive Current (mA)	Distribution Type	30K					40K					50K				
					(3000K, 70 CRI)					(4000K, 70 CRI)					(5000K, 70 CRI)				
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
P10	51W	30	530	T1S	7,399	3	0	3	145	7,711	3	0	3	151	7,862	3	0	3	154
				T2M	6,854	3	0	3	135	7,144	3	0	3	140	7,283	3	0	3	143
				T3M	6,933	3	0	3	136	7,225	3	0	3	142	7,366	3	0	3	145
				T3LG	6,194	2	0	2	122	6,455	2	0	2	127	6,581	2	0	2	129
				T4M	7,036	3	0	3	138	7,333	3	0	3	144	7,476	3	0	3	147
				T4LG	6,399	2	0	2	126	6,669	2	0	2	131	6,799	2	0	2	134
				TFTM	7,086	3	0	3	139	7,385	3	0	3	145	7,529	3	0	3	148
				T5M	7,239	3	0	2	142	7,545	3	0	2	148	7,692	3	0	2	151
				T5W	7,357	3	0	2	145	7,667	3	0	2	151	7,816	4	0	2	154
				T5LG	7,260	3	0	1	143	7,567	3	0	1	149	7,714	3	0	1	152
				BLC3	5,043	3	0	3	99	5,256	3	0	3	103	5,358	3	0	3	105
				BLC4	5,208	3	0	3	102	5,428	3	0	3	107	5,534	3	0	3	109
				RCCO	5,089	0	0	2	100	5,303	0	0	2	104	5,407	0	0	2	106
				LCCO	5,089	0	0	2	100	5,303	0	0	2	104	5,407	0	0	2	106
				AFR	7,399	3	0	3	145	7,711	3	0	3	151	7,862	3	0	3	154
				P11	68W	30	700	T1S	9,358	3	0	3	138	9,753	3	0	3	143	9,943
T2M	8,669	3	0					3	127	9,034	3	0	3	133	9,211	3	0	3	135
T3M	8,768	3	0					3	129	9,138	3	0	3	134	9,316	3	0	3	137
T3LG	7,833	3	0					3	115	8,164	3	0	3	120	8,323	3	0	3	122
T4M	8,899	3	0					3	131	9,274	3	0	3	136	9,455	3	0	3	139
T4LG	8,093	3	0					3	119	8,435	3	0	3	124	8,599	3	0	3	126
TFTM	8,962	3	0					3	132	9,340	3	0	3	137	9,522	3	0	3	140
T5M	9,156	4	0					2	135	9,542	4	0	2	140	9,728	4	0	2	143
T5W	9,304	4	0					2	137	9,696	4	0	2	143	9,885	4	0	2	145
T5LG	9,182	3	0					1	135	9,569	3	0	1	141	9,756	3	0	1	143
BLC3	6,378	3	0					3	94	6,647	3	0	3	98	6,777	3	0	3	100
BLC4	6,587	3	0					3	97	6,865	3	0	3	101	6,999	3	0	3	103
RCCO	6,436	0	0					2	95	6,707	0	0	2	99	6,838	0	0	2	101
LCCO	6,436	0	0					2	95	6,707	0	0	2	99	6,838	0	0	2	101
AFR	9,358	3	0					3	138	9,753	3	0	3	143	9,943	3	0	3	146
P12	103W	30	1050					T1S	13,247	3	0	3	128	13,806	3	0	3	134	14,075
				T2M	12,271	4	0	4	119	12,789	4	0	4	124	13,038	4	0	4	126
				T3M	12,412	4	0	4	120	12,935	4	0	4	125	13,187	4	0	4	128
				T3LG	11,089	3	0	3	107	11,556	3	0	3	112	11,782	3	0	3	114
				T4M	12,597	4	0	4	122	13,128	4	0	4	127	13,384	4	0	4	129
				T4LG	11,457	3	0	3	111	11,940	3	0	3	116	12,173	3	0	3	118
				TFTM	12,686	4	0	4	123	13,221	4	0	4	128	13,479	4	0	4	130
				T5M	12,960	4	0	2	125	13,507	4	0	2	131	13,770	4	0	2	133
				T5W	13,170	4	0	3	127	13,726	4	0	3	133	13,994	4	0	3	135
				T5LG	12,998	3	0	2	126	13,546	3	0	2	131	13,810	3	0	2	134
				BLC3	9,029	3	0	3	87	9,409	3	0	3	91	9,593	3	0	3	93
				BLC4	9,324	4	0	4	90	9,718	4	0	4	94	9,907	4	0	4	96
				RCCO	9,110	1	0	2	88	9,495	1	0	2	92	9,680	1	0	2	94
				LCCO	9,110	1	0	2	88	9,494	1	0	2	92	9,680	1	0	2	94
				AFR	13,247	3	0	3	128	13,806	3	0	3	134	14,075	3	0	3	136
				P13	129W	30	1300	T1S	15,704	3	0	3	122	16,366	3	0	3	127	16,685
T2M	14,547	4	0					4	113	15,161	4	0	4	118	15,457	4	0	4	120
T3M	14,714	4	0					4	114	15,335	4	0	4	119	15,634	4	0	4	121
T3LG	13,145	3	0					3	102	13,700	3	0	3	106	13,967	3	0	3	108
T4M	14,933	4	0					4	116	15,563	4	0	4	121	15,867	4	0	4	123
T4LG	13,582	3	0					3	105	14,155	3	0	3	110	14,431	3	0	3	112
TFTM	15,039	4	0					4	117	15,673	4	0	4	122	15,979	4	0	4	124
T5M	15,364	4	0					2	119	16,013	4	0	2	124	16,325	4	0	2	127
T5W	15,613	5	0					3	121	16,272	5	0	3	126	16,589	5	0	3	129
T5LG	15,409	3	0					2	120	16,059	3	0	2	125	16,372	4	0	2	127
BLC3	10,703	4	0					4	83	11,155	4	0	4	87	11,372	4	0	4	88
BLC4	11,054	4	0					4	86	11,520	4	0	4	89	11,745	4	0	4	91
RCCO	10,800	1	0					2	84	11,256	1	0	2	87	11,475	1	0	3	89
LCCO	10,800	1	0					2	84	11,255	1	0	2	87	11,475	1	0	3	89
AFR	15,704	3	0					3	122	16,366	3	0	3	127	16,685	4	0	4	130





# Dimensions

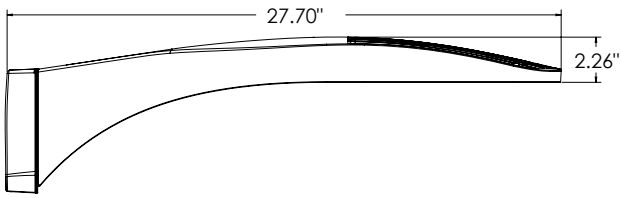


**DSX0 with RPA, RPA5, SPA5, SPA8N mount**  
**Weight: 25 lbs**

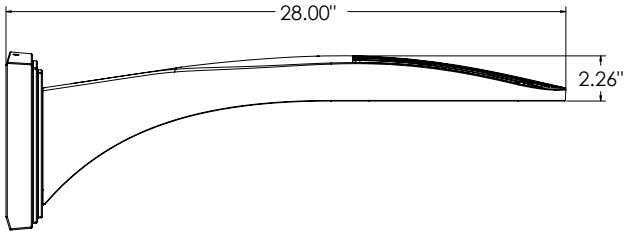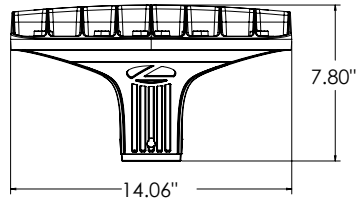


**DSX0 with WBA mount**  
**Weight: 27 lb**

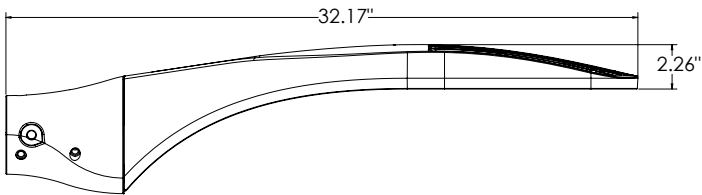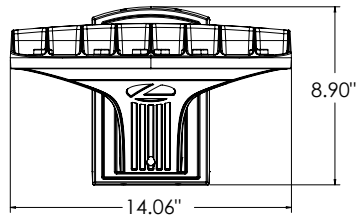


**DSX0 with MA mount**  
**Weight: 28 lbs**

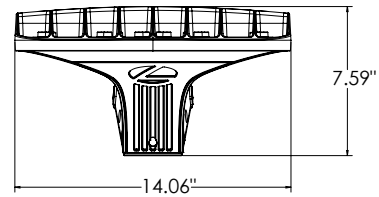


**SPA (STANDARD ARM)**

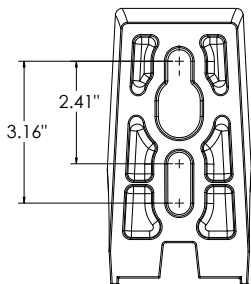


**RPA**

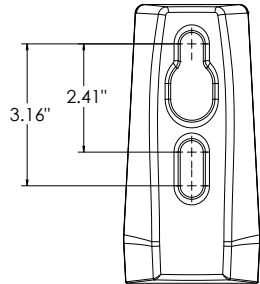


**SPA5**

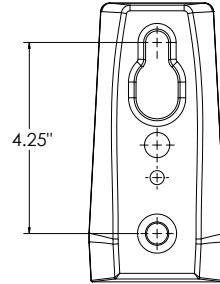

**RPA5**



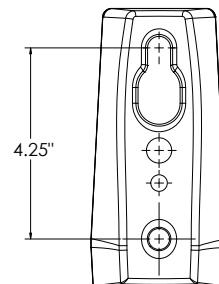


**SPA8N**

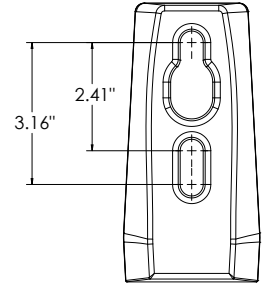

## nLight Sensor Coverage Pattern

### NLTAIR2 PIRHN

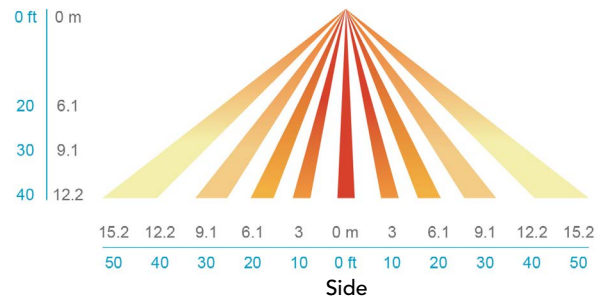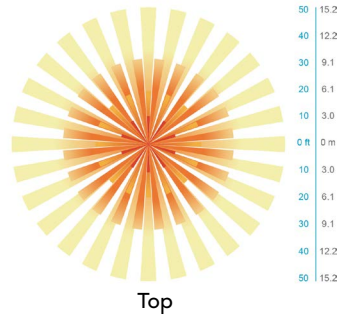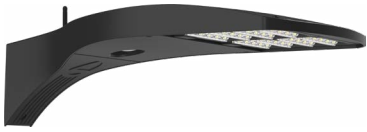

## FEATURES & SPECIFICATIONS

### INTENDED USE

The sleek design of the D-Series Size 0 reflects the embedded high performance LED technology. It is ideal for many commercial and municipal applications, such as parking lots, plazas, campuses, and pedestrian areas.

### CONSTRUCTION

Single-piece die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. Modular design allows for ease of maintenance and future light engine upgrades. The LED driver is mounted in direct contact with the casting to promote low operating temperature and long life. Housing driver compartment is completely sealed against moisture and environmental contaminants (IP66). Vibration rated per ANSI C136.31 for 3G. Low EPA (0.44 ft<sup>2</sup>) for optimized pole wind loading.

### FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Available in both textured and non-textured finishes.

### COASTAL CONSTRUCTION (CCE)

Optional corrosion resistant construction is engineered with added corrosion protection in materials and/or pre-treatment of base material under super durable paint. Provides additional corrosion protection for applications near coastal areas. Finish is salt spray tested to over 5,000 hours per ASTM B117 with scribe rating of 10. Additional lead-times may apply.

### OPTICS

Precision-molded proprietary silicone lenses are engineered for superior area lighting distribution, uniformity, and pole spacing. Light engines are available in 3000 K, 4000 K or 5000 K (70 CRI) configurations. 80CRI configurations are also available. The D-Series Size 0 has zero uplight and qualifies as a Nighttime Friendly™ product, meaning it is consistent with the LEED® and Green Globes™ criteria for eliminating wasteful uplight.

### ELECTRICAL

Light engine(s) configurations consist of high-efficacy LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life (up to L80/100,000 hours at 25°C). Class 1 electronic drivers are designed to have a power factor >90%, THD <20%, and an expected life of 100,000 hours with <1% failure rate. Easily serviceable 10kV surge protection device meets a minimum Category C Low operation (per ANSI/IEEE C62.41.2).

### STANDARD CONTROLS

The DSX0 LED area luminaire has a number of control options. DSX Size 0, comes standard with 0-10V dimming driver. Dusk to dawn controls can be utilized via optional NEMA twist-lock photocell receptacles. PIR integrated motion sensor with on-board photocell feature field-adjustable programming and are suitable for mounting heights up to 40 feet. Control option BL features a bi-level device that allows a second control circuit to switch all light engines to either 30% or 50% light output.

### nLIGHT AIR CONTROLS

The DSX0 LED area luminaire is also available with nLight® AIR for the ultimate in wireless control. This powerful controls platform provides out-of-the-box basic motion sensing and photocontrol functionality and is suitable for mounting heights up to 40 feet. Once commissioned using a smartphone and the easy-to-use CLAIRITY app, nLight AIR equipped luminaires can be grouped, resulting in motion sensor and photocell group response without the need for additional equipment. Scheduled dimming with motion sensor over-ride can be achieved when used with the nLight Eclipse. Additional information about nLight Air can be found [here](#).

### INSTALLATION

Integral mounting arm allows for fast mounting using Lithonia standard #8 drilling and accommodates pole drilling's from 2.41 to 3.12" on center. The standard "SPA" option for square poles and the "RPA" option for round poles use the #8 drilling. For #5 pole drillings, use SPA5 or RPA5. Additional mountings are available including a wall bracket (WBA) and mast arm (MA) option that allows luminaire attachment to a 2 3/8" horizontal mast arm.

### LISTINGS

UL listed to meet U.S. and Canadian standards. UL Listed for wet locations. Light engines are IP66 rated; luminaire is IP66 rated. Rated for -40°C minimum ambient.

DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product. Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org/QPL](http://www.designlights.org/QPL) to confirm which versions are qualified.

International Dark-Sky Association (IDA) Fixture Seal of Approval (FSA) is available for all products on this page utilizing 3000K color temperature only.

### GOVERNMENT PROCUREMENT

BAA – Buy America(n) Act: Product with the BAA option qualifies as a domestic end product under the Buy American Act as implemented in the FAR and DFARS. Product with the BAA option also qualifies as manufactured in the United States under DOT Buy America regulations.

BABA – Build America Buy America: Product with the BAA option also qualifies as produced in the United States under the definitions of the Build America, Buy America Act.

Please refer to [www.acuitybrands.com/buy-american](http://www.acuitybrands.com/buy-american) for additional information.

### WARRANTY

5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: [www.acuitybrands.com/support/warranty/terms-and-conditions](http://www.acuitybrands.com/support/warranty/terms-and-conditions)

**Note:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

## FEATURES & SPECIFICATIONS

### INTENDED USE

The OLB LED Bullet Floodlight is a long-lasting energy-efficient landscape flood light. Available with spot or flood optics making it ideal for many commercial and residential outdoor applications such as lighting of landscapes, building details and flag poles.

### CONSTRUCTION

Die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. The LED driver is mounted in the lower housing promoting a low operating temperature and long life. Housing is sealed against moisture and environmental contaminants (IP65).  
Finish: Exterior parts are protected by a thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling.

### OPTICS

Optics are engineered for superior field-to-beam ratios, uniformity and spacing. Available with 5H x 4V flood optics for illuminating larger objects or 2H x 2V spot optics for illuminating targets up to 50 feet away. Light engines are available in 3000K (80 CRI min.) or 5000K (66 CRI min.) configurations.

### ELECTRICAL

MVOLT driver operates on any line voltage from 120-277V (50/60 Hz).

Light engine consists of four (4) discrete LEDs directly mounted directly to the heat sink to maximize heat dissipation and promote long life (100,000 hrs at 40°C, L82).

Driver is thermally isolated in base to promote long-life.

Operating temperature -30°C to 40°C.

### INSTALLATION

Integral adjustable knuckle with 1/2-14 NPS threaded pipe facilitates quick and easy installation in a variety of mounting methods.

### LISTINGS

UL Listed to U.S. and Canadian safety standards for wet locations within four feet of the ground.

Tested in accordance with IESNA LM-79 and LM-80 standards.

### WARRANTY

5-year limited warranty. Complete warranty terms located at [www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx)


Note: Actual performance may differ as a result of end-user environment and application.

Specifications subject to change without notice.

Catalog Number
Notes
Type <b>OX</b>

# OLB

## LED Bullet Flood Light

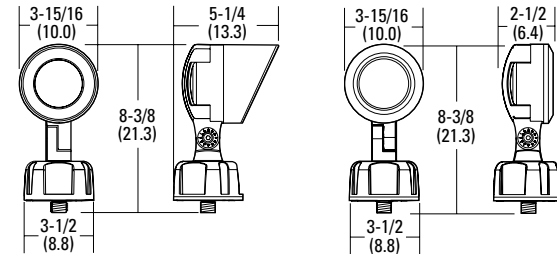

All dimensions are inches (centimeters) unless otherwise indicated.

### ORDERING INFORMATION

Example: OLB 8 30K DDB

OLBF	8	30K		DDB
Series	Light engine	Color temperature (CCT)	Voltage	Finish
OLBF 5x4 flood optics	8	30K 3000K	(blank) MVOLT	DDB Dark bronze
OLBS 2x2 spot optics <sup>1</sup>		50K 5000K		

Series	System Wattage	Lumens
OLBF 8 30K	11W	592
OLBF 8 50K	11W	839
OLBS 8 50K	11W	832

### Notes

1 Not available with 30K.



## FEATURES & SPECIFICATIONS

### INTENDED USE

The OLB LED Bullet Floodlight is a long-lasting energy-efficient landscape flood light. Available with spot or flood optics making it ideal for many commercial and residential outdoor applications such as lighting of landscapes, building details and flag poles.

### CONSTRUCTION

Die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. The LED driver is mounted in the lower housing promoting a low operating temperature and long life. Housing is sealed against moisture and environmental contaminants (IP65).

Finish: Exterior parts are protected by a thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling.

### OPTICS

Optics are engineered for superior field-to-beam ratios, uniformity and spacing. Available with 5H x 4V flood optics for illuminating larger objects or 2H x 2V spot optics for illuminating targets up to 50 feet away. Light engines are available in 3000K (80 CRI min.) or 5000K (66 CRI min.) configurations.

### ELECTRICAL

MVOLT driver operates on any line voltage from 120-277V (50/60 Hz).

Light engine consists of four (4) discrete LEDs directly mounted directly to the heat sink to maximize heat dissipation and promote long life (100,000 hrs at 40°C, L82).

Driver is thermally isolated in base to promote long-life.

Operating temperature -30°C to 40°C.

### INSTALLATION

Integral adjustable knuckle with 1/2-14 NPS threaded pipe facilitates quick and easy installation in a variety of mounting methods.

### LISTINGS

UL Listed to U.S. and Canadian safety standards for wet locations within four feet of the ground.

Tested in accordance with IESNA LM-79 and LM-80 standards.

### WARRANTY

5-year limited warranty. Complete warranty terms located at [www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx)


Note: Actual performance may differ as a result of end-user environment and application.

Specifications subject to change without notice.

Catalog Number
Notes
Type <b>OY</b>

# OLB

## LED Bullet Flood Light

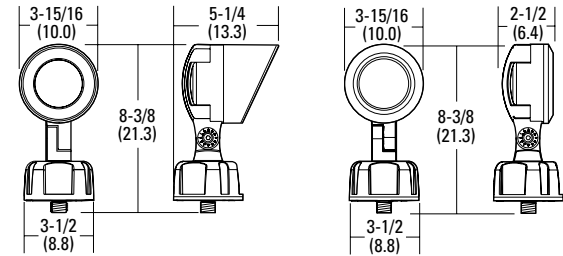

All dimensions are inches (centimeters) unless otherwise indicated.

### ORDERING INFORMATION

Example: OLB 8 30K DDB

OLBF	8	50K		DDB
Series	Light engine	Color temperature (CCT)	Voltage	Finish
OLBF 5x4 flood optics	8	30K 3000K	(blank) MVOLT	DDB Dark bronze
OLBS 2x2 spot optics <sup>1</sup>		50K 5000K		

Series	System Wattage	Lumens
OLBF 8 30K	11W	592
OLBF 8 50K	11W	839
OLBS 8 50K	11W	832

### Notes

1 Not available with 30K.

# LITESPHERE 2.0

Fixture OZ




tivoli®




Project: \_\_\_\_\_ TYPE: \_\_\_\_\_

- Tivoli's next evolution of Litesphere delivers a robust specification-grade strand with factory molded standard spacing for consistent quality from start to finish
- Litesphere 2.0 design provides optional suspended mounting or a twist-off cap for surface applications
- 12V DC Low voltage system for long runs
- IP67
- cULus
- 3 Year warranty

## Dimensions

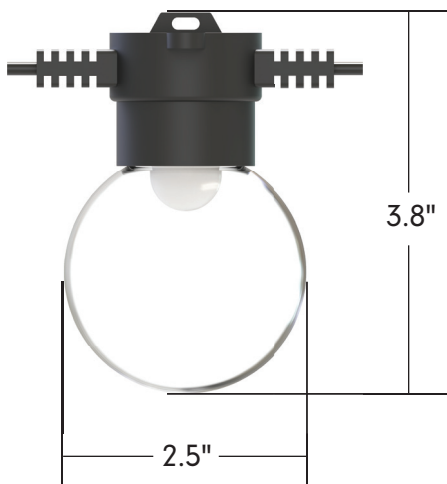

System Configuration Example

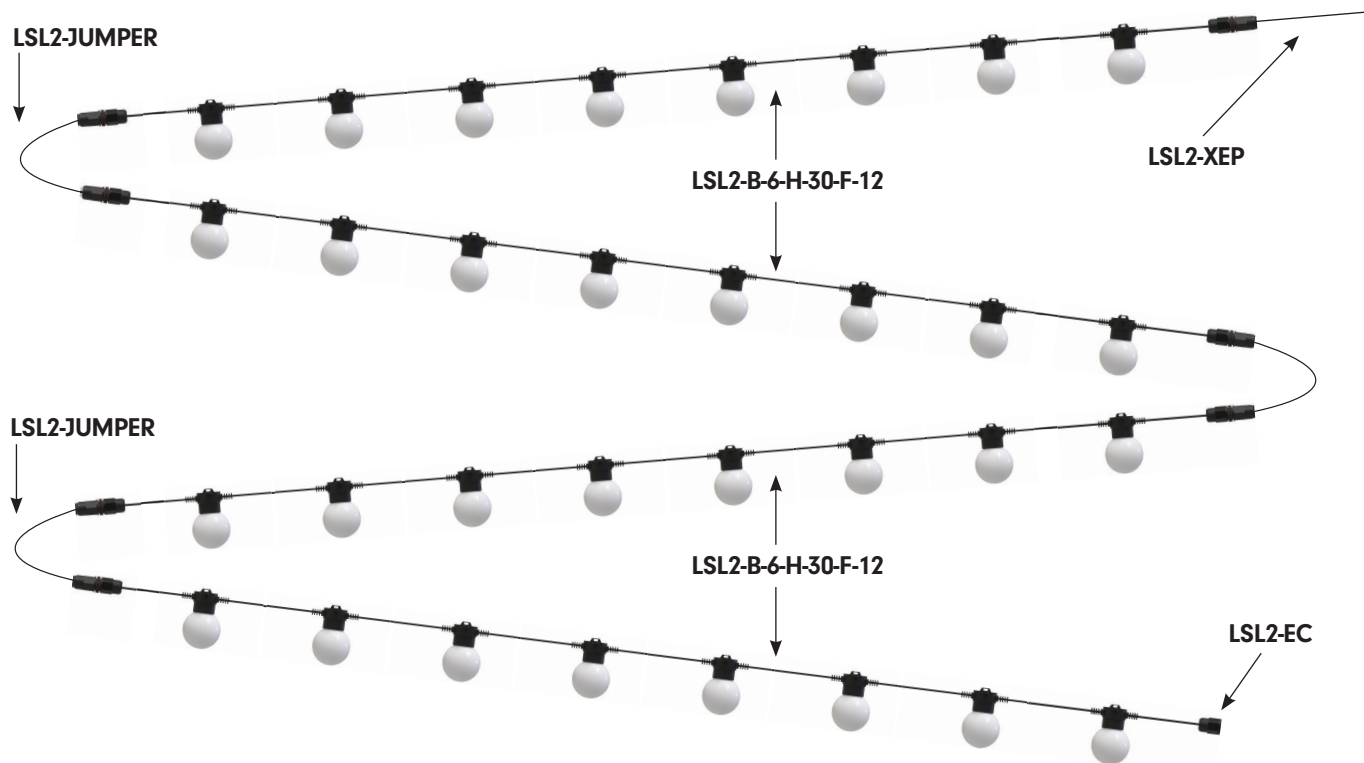

Strand Order Guide

**Note:** For suspension application, a catenary cable is required for proper installation. Please contact Tivoli for recommendations on unique mounting applications.

Product	Wire	Spacing	LED Type	LED Color	Globe	Voltage
<b>LSL2</b>	<b>B</b>	<b>18</b>	<b>H</b>	<b>35</b>	<b>F</b>	<b>12</b>
Litesphere 2.0	<b>B</b> Black <b>W</b> White	<b>06</b> 6" OC <b>12</b> 12" OC <b>18</b> 18" OC <b>24</b> 24" OC <b>36</b> 36" OC <b>48</b> 48" OC	<b>V</b> Very High Output <b>H</b> High Output <b>S</b> Standard Output	<b>19</b> 1900K <b>27</b> 2700K <b>30</b> 3000K <b>35</b> 3500K <b>40</b> 4000K <b>50</b> 5000K* <b>AM</b> Amber* <b>RB</b> Royal Blue* <b>RD</b> Red* <b>GN</b> Green* <b>YL</b> Yellow* <b>TS</b> Turtle Safe*	<b>C</b> Clear <b>F</b> Frosted <b>O</b> Opal <b>R</b> Red <b>N</b> Orange <b>Y</b> Yellow <b>G</b> Green <b>B</b> Blue <b>P</b> Purple <b>Z</b> Varried Colors	<b>12</b> 12V DC

\*Available in VHO LED only


**Power Lead Order Guide**

Figure A - All Litesphere 2.0 are evenly cut between globes according to specified spacing.  
 Figure B - Power leads are added to the end cut, extending the total length of the power lead.


**LSL2-XEP-X-XX**

X = B (Black), W (White)  
 XX = 05 (5'), 10 (10'), 15 (15'), 20 (20'), 25 (25')  
 For custom length consult factory

**Figure A**

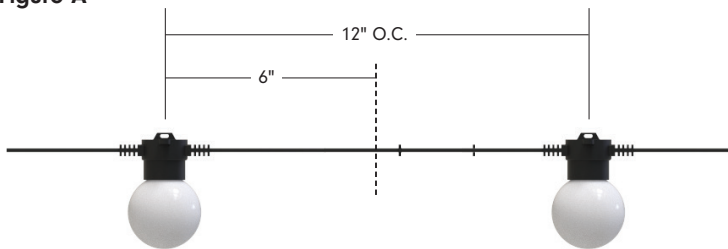

**Figure B**

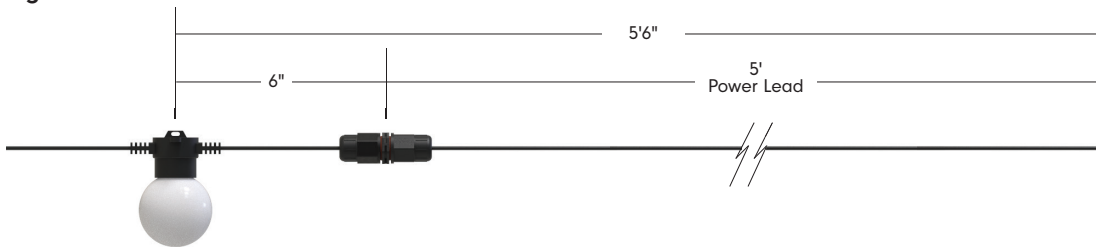


**Jumper Order Guide**


**LSL2-JUMPER-X-XX**

X = B (Black), W (White)  
 XX = 05 (5'), 10 (10')  
 For custom length, consult factory

**Figure A**

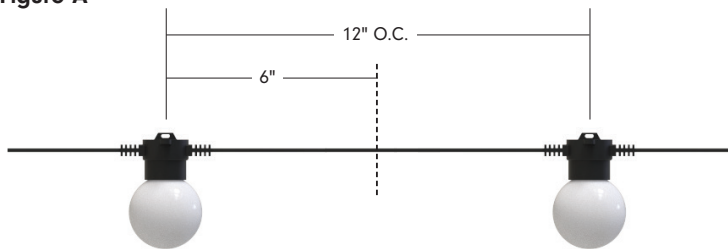

**Figure B**

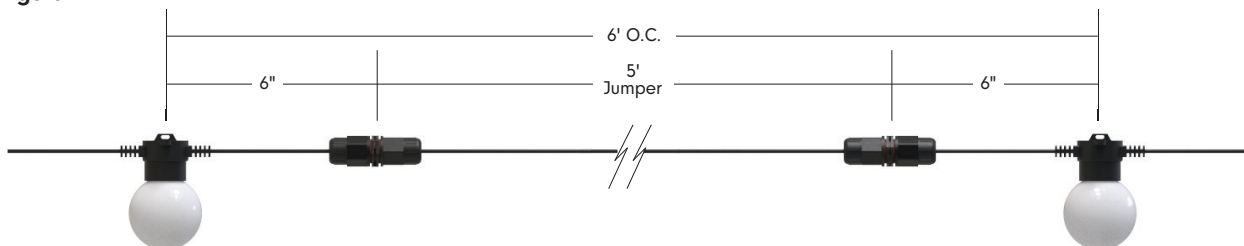

## Specifications

Output - Standard Brightness	6"	12"	18"	24"	36"	48"
Lumens/ft	11	6	4	3	2	N/A
Watts/ft	0.17	0.09	0.06	0.04	0.03	0.02
Maximun Electrical Run	130'	180'	230'	250'	275'	275'

Output - High Output	6"	12"	18"	24"	36"	48"
Lumens/ft	29.9	15	10	7	5	N/A
Watts/ft	0.46	0.23	0.15	0.12	0.08	0.05
Maximun Electrical Run	80'	110'	130'	150'	175'	200'

Output - Very High Output	6"	12"	18"	24"	36"	48"
Lumens/ft	180	90.2	60	45	30	N/A
Watts/ft	1.92	0.96	0.64	0.48	0.32	0.24
Maximun Electrical Run	30'	55'	70'	80'	90	100'

Output - Based on 3000K Clear Globe	
Efficacy	Standard Brightness (40), High Output (46), Very High Output (94)
Electrical	
Input Voltage	12V DC
Power Consumption (W/LED)	Standard Brightness (.09), High Output (.23), Very High Output (.96)
Control	
Control System	0-10V, ELV, MLV, DMX 512 (Dim to 1% with an Infinity power supply and a 0-10V Lutron Diva dimmer)
Physical	
Dimensions	2.5"W x 3.8"H
Socket Housing	PVC
American Wire Gauge	14 AWG
Globe	PE
Mounting	Surface Mount, Suspended
Operating Temperature	-20°C to 50°C (-4°F to 122°F)
Storage Temperature	-40°C to 80°C (-40°F to 176°F)
Certification and Testing	
Certification	cULus
Environment	Wet Location
Lumen Maintenance (L70) Hours	70,000
IP Rating	IP67
Warranty	3 Years

## Specifications

EPA	6"	12"	18"	24"
Standard	0.10	0.06	0.05	0.04
Hat 8"	N/A	0.53	0.37	0.28
Hat 13"	N/A	N/A	0.93	0.71
Dish 10"	N/A	0.82	0.55	0.42
Flower 10"	N/A	0.82	0.55	0.42
Flower 13"	N/A	N/A	0.93	0.71

Weights	6"	12"	18"	24"	36"	48"
lb/ft	0.33	0.28	0.24	0.20	0.17	0.13
lb/ft with catenary cable	0.35	0.30	0.26	0.22	0.19	0.15

## Mounting Options

### SURFACE/FLUSH

For surface mount applications, remove the top suspension-plate by turning counter-clockwise until off. Place socket flush against the desired surface and mount using proper screws according to substrate.



### SUSPENDED

Suspended mounting will use a combination of LS-Cable, LS-Locks with LS-UVZP. Tension the cable wire with our LS-TT (Tension Tool) for desired sag (Please adhere to local city code for suspended application).

**Note:** For suspension application, a catenary cable is required for proper installation. Please contact Tivoli for recommendations on unique mounting applications.



## Mounting Accessories



### LS-CABLE-X

**X = 60 (60'), 110 (110'), 500 (500')**  
1/8" Stainless steel cable includes (2) cable locks for use with loads up to 200lbs  
Note: 500' no locks included



### LS-LOCK-X

**X = 2 (2 pcs), 4 (4 pcs)**  
Includes (1) release key  
Cable Lock for 1/8" cable, support loads up to 200 lbs.



### LS-TT

Cable tensioning tool up to 880lbs with 6:1 gear drive with integral torque gauge controls




### LS-UVZP-BK-XX

**XX = 30 (30 pcs), 50 (50 pcs)**  
Black UV resistant, heavy duty ties maximum weight up to 100 lbs./per tie


### Light Shade Accessories

Hat

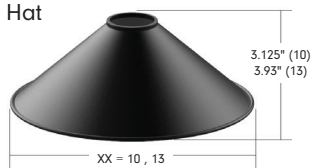


**SHADE-HT-BK-XX-XX**  
**XX = BK** (black), **CO\*** (copper)  
**XX = 8** (8.3"), **13\*\*** (12.6")  
 Black top, black/copper bottom  
 Weight: 0.46 lb (10), 1.2 lb (13)

Dish

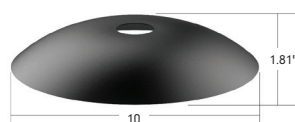


**SHADE-DS-BK-BK-10**  
 10.2"  
 Black top, black bottom  
 Weight: 0.76 lb

Flower

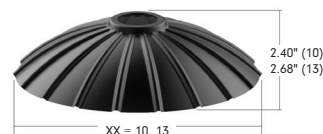

**SHADE-FL-BK-BK-XX**  
**XX = 10** (9.8"), **13** (13.8")  
 Black top, black bottom  
 Weight: 0.63 lb (10), 1.48 lb (13)

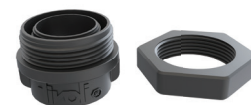

**SHADE-ADP-LSL2-XX-XX**  
**XX = BK** (Black), **WH** (White)  
**XX = 01** (1 pc), **25** (25 pcs),  
**50** (pcs)  
 PVC shade adapters black

\*Only available for 13 (Hat)    \*\*Consult factory for lead time and MOQ

### Replacement Parts



**LSL-XX-V-12**  
**XX = 19, 27, 30, 35, 40, 50,**  
**AM, RD, RB, GR, YL, TS**  
 12V VHO Wedge Base LED  
 Sold each



**LSL-XX-X-12**  
**XX = 19, 27, 30, 35, 40**  
**X = S** (standard), **H** (high  
 output)  
 12V Wedge base



**LST-XX**  
**XX = CG** (Clear Globe), **FG**  
 (Frosted Globe), **OG** (Opal  
 Globe), **OR** (Orange Globe),  
**YG** (Yellow Globe), **GG** (Green  
 Globe), **BG** (Blue Globe), **PG**  
 (Purple Globe)



**LSL2-EC-X**  
**X = B** (black), **W** (white)  
 Litesphere 2.0 End-Cap  
 Weight: 0.0375 lb  
 sold each

### In-Wall Controls



Touchscreen

**TVOQ-1-WH**  
 White



Touchscreen

**TVOQ-10-XX-7**  
**XX = BK** (Black), **WH** (White)



Touchscreen

**TVOQ-2-BK**  
 Black



Photometrics

Note: Based on 3000K

Standard Brightness


High Output

Very High Output

Opal Globe

PHOTOMETRIC AND ELECTRICAL MEASUREMENTS - DISTRIBUTION METHOD (25°C +/- 1°C)


POLAR GRAPH AND MAXIMUM CANDELA INTENSITY			
Maximum Candela	Location - Horizontal Angle	Location - Vertical Angle	
0.5	0	7.5	

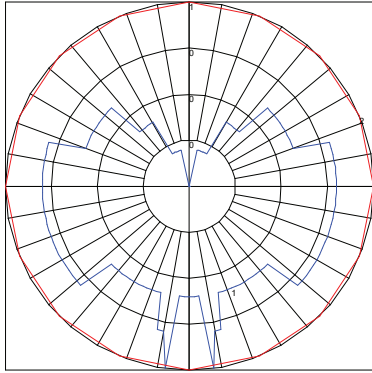

Maximum Candela = .5 Located At Horizontal Angle = 0, Vertical Angle = 7.5  
 # 1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)  
 # 2 - Horizontal Cone Through Vertical Angle (7.5) (Through Max. Cd.)

PHOTOMETRIC AND ELECTRICAL MEASUREMENTS - DISTRIBUTION METHOD (25°C +/- 1°C)


POLAR GRAPH AND MAXIMUM CANDELA INTENSITY			
Maximum Candela	Location - Horizontal Angle	Location - Vertical Angle	
1	0	50	

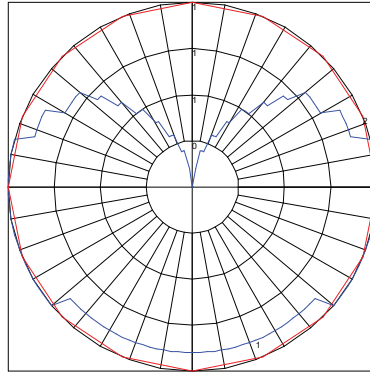

Maximum Candela = 1 Located At Horizontal Angle = 0, Vertical Angle = 50  
 # 1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)  
 # 2 - Horizontal Cone Through Vertical Angle (50) (Through Max. Cd.)

PHOTOMETRIC AND ELECTRICAL MEASUREMENTS - DISTRIBUTION METHOD (25°C +/- 1°C)

POLAR GRAPH AND MAXIMUM CANDELA INTENSITY			
Maximum Candela	Location - Horizontal Angle	Location - Vertical Angle	
5.9	0	77.5	

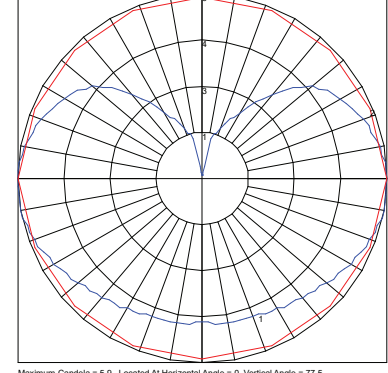


Maximum Candela = 5.9 Located At Horizontal Angle = 0, Vertical Angle = 77.5  
 # 1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)  
 # 2 - Horizontal Cone Through Vertical Angle (77.5) (Through Max. Cd.)

Clear Globe

PHOTOMETRIC AND ELECTRICAL MEASUREMENTS - DISTRIBUTION METHOD (25°C +/- 1°C)


POLAR GRAPH AND MAXIMUM CANDELA INTENSITY			
Maximum Candela	Location - Horizontal Angle	Location - Vertical Angle	
2.3	0	10	

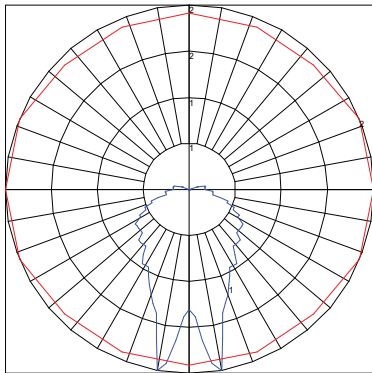

Maximum Candela = 2.3 Located At Horizontal Angle = 0, Vertical Angle = 10  
 # 1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)  
 # 2 - Horizontal Cone Through Vertical Angle (10) (Through Max. Cd.)

PHOTOMETRIC AND ELECTRICAL MEASUREMENTS - DISTRIBUTION METHOD (25°C +/- 1°C)


POLAR GRAPH AND MAXIMUM CANDELA INTENSITY			
Maximum Candela	Location - Horizontal Angle	Location - Vertical Angle	
6.1	0	10	

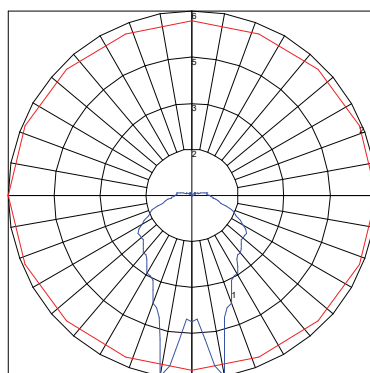

Maximum Candela = 6.1 Located At Horizontal Angle = 0, Vertical Angle = 10  
 # 1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)  
 # 2 - Horizontal Cone Through Vertical Angle (10) (Through Max. Cd.)

PHOTOMETRIC AND ELECTRICAL MEASUREMENTS - DISTRIBUTION METHOD (25°C +/- 1°C)

POLAR GRAPH AND MAXIMUM CANDELA INTENSITY			
Maximum Candela	Location - Horizontal Angle	Location - Vertical Angle	
25.3	0	22.5	

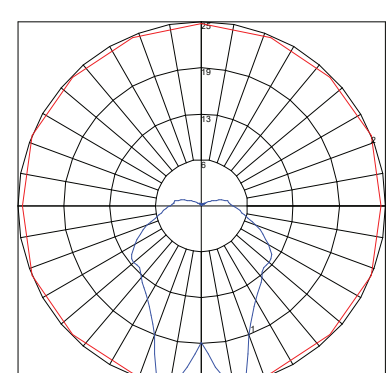


Maximum Candela = 25.3 Located At Horizontal Angle = 22.5, Vertical Angle = 12.5  
 # 1 - Vertical Plane Through Horizontal Angles (22.5 - 202.5) (Through Max. Cd.)  
 # 2 - Horizontal Cone Through Vertical Angle (12.5) (Through Max. Cd.)

Frosted Globe

PHOTOMETRIC AND ELECTRICAL MEASUREMENTS - DISTRIBUTION METHOD (25°C +/- 1°C)


POLAR GRAPH AND MAXIMUM CANDELA INTENSITY			
Maximum Candela	Location - Horizontal Angle	Location - Vertical Angle	
1.6	0	7.5	

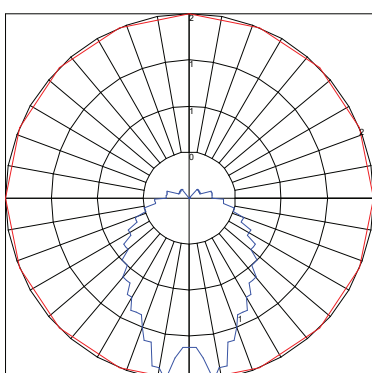

Maximum Candela = 1.6 Located At Horizontal Angle = 0, Vertical Angle = 7.5  
 # 1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)  
 # 2 - Horizontal Cone Through Vertical Angle (7.5) (Through Max. Cd.)

PHOTOMETRIC AND ELECTRICAL MEASUREMENTS - DISTRIBUTION METHOD (25°C +/- 1°C)


POLAR GRAPH AND MAXIMUM CANDELA INTENSITY			
Maximum Candela	Location - Horizontal Angle	Location - Vertical Angle	
4	0	10	

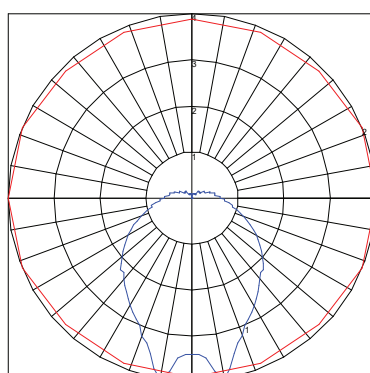

Maximum Candela = 4 Located At Horizontal Angle = 0, Vertical Angle = 10  
 # 1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)  
 # 2 - Horizontal Cone Through Vertical Angle (10) (Through Max. Cd.)

PHOTOMETRIC AND ELECTRICAL MEASUREMENTS - DISTRIBUTION METHOD (25°C +/- 1°C)

POLAR GRAPH AND MAXIMUM CANDELA INTENSITY			
Maximum Candela	Location - Horizontal Angle	Location - Vertical Angle	
18.5	0	7.5	

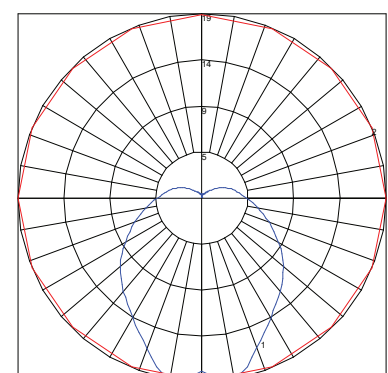

Maximum Candela = 18.5 Located At Horizontal Angle = 0, Vertical Angle = 7.5  
 # 1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)  
 # 2 - Horizontal Cone Through Vertical Angle (7.5) (Through Max. Cd.)

**Power Supplies**

**ADNM - NON DIMMING**

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADNM Series Class 2 Transformer	ADNM-60-1-5-12-D	Indoor / Outdoor	100-277V AC 50/60 HZ	12V DC	1	60W	5A
	ADNM-80-1-5-12-D				1	60W	5A
	ADNM-150-2-5-12-D				2	2x60W	2x5A
	ADNM-240-3-5-12-D				3	3x60W	3x5A
	ADNM-320-4-5-12-D				4	4x60W	4x5A

**ADNM - 0-10V DIMMING**

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADNM Series Class 2 Transformer	ADNM-60-1-5-12-DOT	Indoor / Outdoor	100-277V AC 50/60 HZ	12V DC	1	60W	5A
	ADNM-80-1-5-12-DOT				1	60W	5A
	ADNM-150-2-5-12-DOT				2	2x60W	2x5A
	ADNM-240-3-5-12-DOT				3	3x60W	3x5A
	ADNM-320-4-5-12-DOT				4	4x60W	4x5A

**ADNM - DMX SINGLE ADDRESS**

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADNM Series Class 2 Transformer	ADNM-60-1-5-12-DIN	Indoor / Outdoor	100-277V AC 50/60 HZ	12V DC	1	60W	5A
	ADNM-80-1-5-12-DIN				1	60W	5A
	ADNM-150-2-5-12-DIN				2	2x60W	2x5A
	ADNM-240-3-5-12-DIN				3	3x60W	3x5A
	ADNM-320-4-5-12-DIN				4	4x60W	4x5A

**ADNM - DMX MULTI ADDRESS**

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADNM Series Class 2 Transformer	ADNM-150-2-5-12-DIN-2	Indoor / Damp	100-277V AC 50/60 Hz	12V DC	2	2x60W	5A
	ADNM-240-3-5-12-din-3				3	3x60W	3x5A

**INFINITY - MLV / ELV / 0-10V / PWM / TRIAC**

Dim to 1% with a 0-10V Lutron Diva dimmer (by others)


DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	MIN LOAD	CIRCUIT CAPACITY
Infinity Series Class 2 Transformer	INF-J-30-1-2.5-12	Indoor / Outdoor	100 - 277V AC	12V DC	1	30W	3W	2.5A
	INF-J-60-1-5-12				1	60W	6W	5A
	INF-J-180-3-5-12				3	3x60W	3x6W	3x5A
	INF-J-300-5-5-12				5	5x60W	5x6W	5x5A



Project: \_\_\_\_\_ TYPE: \_\_\_\_\_


- UL wet weather seal option available
- Optional switch
- Available GFCI or standard dual 3 prong outlet
- Heavy-gauge extruded aluminum
- Available in 6", 12", 18" and 24" OC standard spacing
- 2.188" x 2.188" Standard Profile extrusion available
- Wiring and components are concealed
- Anti-corrosion coated (custom finished on request)
- Available in: Satin Aluminum, Powder Coated White or Powder coated black
- Custom radial bends
- Optional 4 channel chase wiring is available
- Pre-wired for quick and easy installation
- 7/8" diameter knockouts on mounting side (custom optional end cap knockouts)

**Dimensions**

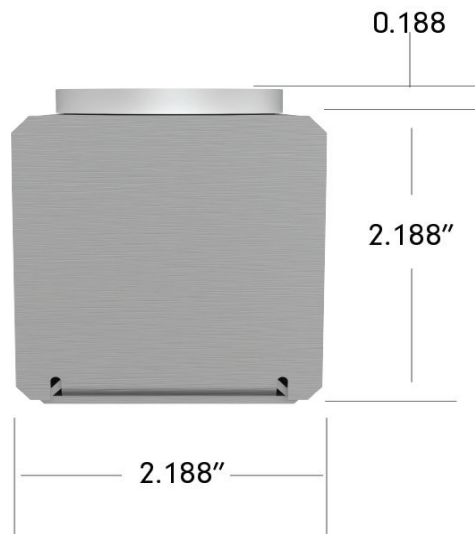

## Order Guide

AC Standard Architectural Channel maximum length 12'

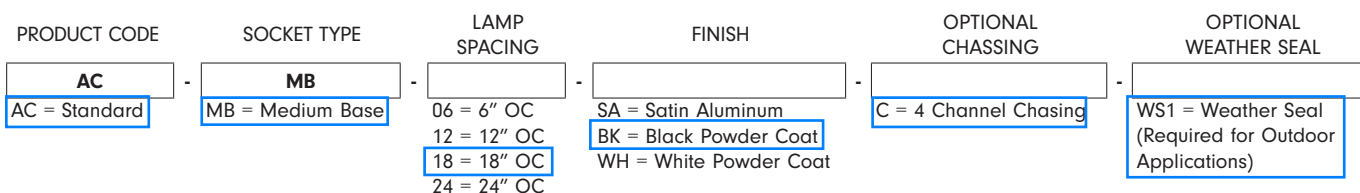


## Specification

<b>Electrical</b>	
Operating Voltage	120V AC/ 240V AC
<b>Physical</b>	
Dimensions	AC Standard 2.188" W x 2.188" H (without bulb)
Socket Spacing*	6", 12", 18" and 24" OC
Order increments	1' (12' max)
Housing	Aluminum
American Wire Gauge	20 AWG
Mounting	Surface Mount, Suspended
Knock-out Holes	Every 24" along mounting face of channel
Sockets	Medium Base, E26/E27
Lamps (By others)	60W max
<b>Certification and Testing</b>	
Certification	cULus
Environment	Dry/Wet Location
IP Rating	IP54/IP65
Warranty	3 Years


\*Custom lamp spacing available (consult factory)

\*\*Custom paint or anodizing available (consult factory)


**Accessories and Joiners**




**AC-90**  
Flat 90° (Standard)  
Internal 90° Bracket




**AC-45**  
45° Bracket (Standard)  
Internal 45° Bracket




**AC-T**  
T Bracket (Standard)  
internal T-bracket




**AC-180**  
Internal Connector (Standard)



**AC-EC-XX**  
**XX = SA** (Satin Aluminum),  
**PW** (Powder Coated White),  
**PB** (Powder Coated Black)  
End Caps




**AC-90-OI**  
90° (Standard Outside/Inside)  
Internal 90° Bracket




**CC-120V**  
120V 4 Channel , 8 Pattern  
Chase Controller


**Channel Configurations**




**RADIUS**  
Radius bend set up charge  
(Over 3' Radius)  
Note: Indicate lamp position at  
time of ordering




**RADIUS-3**  
Radius bend set up charge  
(Under 3' Radius)  
Note: Indicate lamp position at  
time of ordering



**R-UNITS**  
Radius unit charge, Per 8' Max  
length  
Note: Indicate lamp position at  
time of ordering

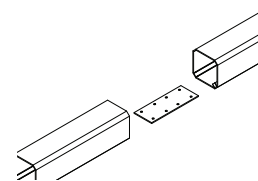

**AC-RADIUS**  
Internal Bracket



**AC-MITER**  
Factory Miter Cut