


Statistics

Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
PROPERTY LINE - FC @ GRADE	X	0.3 Fc	3.3 Fc	0.0 Fc	N/A	N/A
SITE - FC @ GRADE	+	0.6 Fc	11.3 Fc	0.0 Fc	N/A	N/A

Schedule

Symbol	Label	Quantity	Manufacturer	Catalog Number	Description	Lamp	Filename	Lumens Lamp	Pct Light Factor	Loss	Wattage
[Symbol]	F1	4	Lithonia Lighting	WST LED P1 40K VF MVOLT DBBXD	WST LED, Performance package K, visual comfort forward throw	LE4000 4000K COLOR TEMP MVOLT	WST_LED_P1_40K_VF_MVOLT.es	1639	0.95		12
[Symbol]	F1E	7	Lithonia Lighting	WST LED P1 40K VF MVOLT DBBXD	WST LED, Performance package K, visual comfort forward throw	LE4000 4000K COLOR TEMP MVOLT	WST_LED_P1_40K_VF_MVOLT.es	1639	0.95		12
[Symbol]	K2	3	Lithonia Lighting	WRT 2 32 AI2125 MVOLT GEB10IS	WET LOCATION TROFFER 1' X 4'	TWO 32-WATT T8 LINEAR FLUORESCENTS.	WRT_2_32_A19_TUBI.es	2850	0.75		59
[Symbol]	K2E	2	Lithonia Lighting	WRT 2 32 AI2125 MVOLT GEB10IS	WET LOCATION TROFFER 1' X 4'	TWO 32-WATT T8 LINEAR FLUORESCENT.	WRT_2_32_A19_TUBI.es	2850	0.75		59
[Symbol]	SA	2	Lithonia Lighting	DSX2 LED P4 40K T4M MVOLT HS SSS 22' POLE WITH 3' BASE	DSX2/LED P4 40K T4M MVOLT with houseside shield	LED - 4000K COLOR TEMP	DSX2_LED_P4_40K_T4M_MVOLT_HS.es	25364	0.95		270
[Symbol]	SB	1	Lithonia Lighting	DSX2 LED P4 40K T1S MVOLT HS SSS 22' POLE WITH 3' BASE	DSX2/LED P4 40K T1S MVOLT with houseside shield	LED - 4000K COLOR TEMP	DSX2_LED_P4_40K_T1S_MVOLT_HS.es	28762	0.95		270

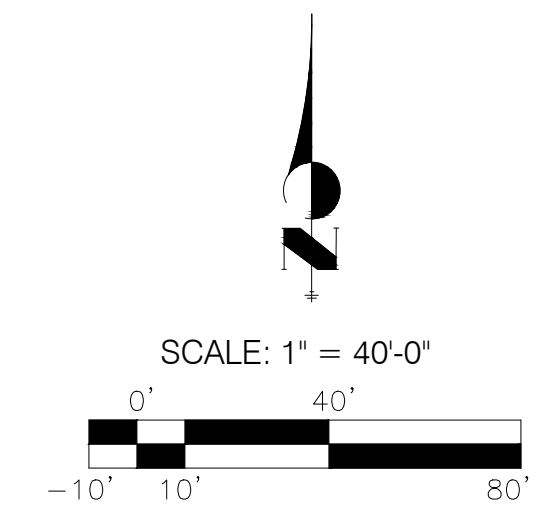

REVISIONS:

NO.	DATE	INITIALS	NOTES
1	03/24/22	BLC	REVS PER EJS REVIEW
2	5-5-22	zi	Site photometric plan
3			
4			
5			
6			
7			
8			

PROFESSIONAL SEAL:

PRELIMINARY DOCUMENTS;
NOT FOR CONSTRUCTION;
FOR INFORMATION ONLY

ARCHITECT LOGO:



CONSTRUCTION DEPARTMENT
2727 NORTH CENTRAL AVENUE
PHOENIX, ARIZONA 85004
P: (602) 263-6502

SITE ADDRESS:

U-Haul of Fox Cities North
1550 Arbor Way
Kaukauna, WI 54130

SHEET CONTENTS:

Proposed Site Plan

868077

DRAWN:	BLC	SP1
CHECKED:	NH	
DATE:	03/23/22	

© 2022 AMERCO REAL ESTATE COMPANY