

City of Ketchum

November 7, 2022

Mayor Bradshaw and City Councilors City of Ketchum Ketchum, Idaho

Mayor Bradshaw and City Councilors:

Recommendation to Approve Right-of-Way Encroachment Agreement 22810 for the placement of a paver driveway in the public right-of-way adjacent to 100 Edelweiss Ave.

Recommendation and Summary

Staff recommends the Ketchum City Council approve the attached Right-of-Way Encroachment Agreement 22810 and adopt the following motion:

"I move to authorize the Mayor to sign Right-of-Way Encroachment Agreement 22810 between the City and Michael and Lynn Christian."

The reasons for the recommendation are as follows:

- The improvements will not impact the use or operation of Edelweiss Ave or First Street.
- The improvements will not impact drainage or snow removal within the public right-of-way.
- The project complies with all standards for Right-of-Way Encroachment Permit issuance specified in Ketchum Municipal Code §12.12.060.
- No snowmelt is being proposed.

Introduction and History

The City of Ketchum receive a building permit application on August 12, 2022, for the construction of a new single-family residence. The project proposes to improve the right-of-way along Edelweiss Ave and First Street per the City of Ketchum's street standards. The project proposes to construct a paver driveway without snowmelt from the garage to the edge of asphalt of Edelweiss Ave.

A public right-of-way is defined as improved or unimproved public property dedicated or deeded to the City for the purpose of providing vehicular, pedestrian, and public use. In Ketchum, the public rights-of-way consist of roadways, curbs, gutters, sidewalks, signage, and drainage facilities. The public rights-of-way are also used for public parking, wintertime snow storage, and conveyance of utilities, such as water, sewer, electricity, telephone, and cable.

<u>Analysis</u>

Pursuant to Ketchum Municipal Code §12.12.040.C, a Right-of-Way Encroachment Permit is required for any permanent encroachment of the public right-of-way where a permanent fixture to the ground or a building will occur. The associated Right-of-Way Encroachment Agreement is intended to help protect the City in the event the proposed encroachments were to ever pose an issue requiring repair,

relocation, or removal of the encroachment. The standards for issuance of a Right-of-Way Encroachment Permit are specified in Ketchum Municipal Code §12.12.060. The encroachments proposed for the 100 Edelweiss Ave project complies with all standards.

<u>Sustainability</u>

The proposed project does not limit the city's ability to reach its sustainability goals outlined in the 2020 Ketchum Sustainability Action Plan.

<u>Financial Impact</u> There is no financial requirement from the city for this action.

<u>Attachments</u> ROW Encroachment Agreement 22810 and Exhibits

WHEN RECORDED, PLEASE RETURN TO:

OFFICE OF THE CITY CLERK CITY OF KETCHUM POST OFFICE BOX 2315 KETCHUM, IDAHO 83340

RIGHT-OF-WAY ENCROACHMENT AGREEMENT 22810

THIS AGREEMENT, made and entered into this _____day of ____, 2022, by and between the CITY OF KETCHUM, IDAHO, a municipal corporation ("Ketchum"), whose address is Post Office Box 2315, Ketchum, Idaho and Michael and Lynn Christian, (Collectively referred to as "Owners"), whose mailing address is 20808 NE 141st Street, Woodinville, WA 98077 and who owns real property located at 100 Edelweiss Ave, Ketchum, ID 83340 ("subject property").

RECITALS

WHEREAS, Owner wishes to permit placement of a paver driveway adjacent to the subject property from the property line to the edge of asphalt on Edelweiss Ave. These improvements are shown in Exhibit "A" attached hereto and incorporated herein (collectively referred to as the "Improvements"); and,

WHEREAS, Ketchum finds that said Improvements will not impede the use of said public right-of-way at this time subject to the terms and provisions of this Agreement;

WHEREAS, following construction of the Improvements, the Owner will restore the rightof-way, as shown in Exhibit A, acceptable to the Streets and Facilities Director;

NOW, THEREFORE, in contemplation of the above stated facts and objectives, it is hereby agreed as follows:

TERMS AND CONDITIONS

1. Ketchum shall permit Owner to install a paver driveway identified in Exhibit "A" within the public right-of-way adjacent to 100 Edelweiss Ave until notified by Ketchum to remove the infrastructure at which time Owner shall remove infrastructure at Owner's expense.

2. Owner shall be responsible for the maintenance of said Improvements and shall repair said improvements within 48 hours upon notice from Ketchum that repairs are needed. Any modification to the improvements identified in Exhibit "A" shall be approved by the City prior to any modifications taking place.

3. Owner shall be responsible for restoring the street, curb and gutter and landscaping that is altered due to the construction and installation of the Improvements, to the satisfaction of the Director of Streets and Facilities.

4. In consideration of Ketchum allowing Owner to maintain the Improvements in the public right-of-way, Owner agrees to indemnify and hold harmless Ketchum from and against any and all claims of liability for any injury or damage to any person or property arising from the

Improvements constructed, installed and maintained in the public right-of-way. Owner shall further indemnify and hold Ketchum harmless from and against any and all claims arising from any breach or default in the performance of any obligation on Owner's part to be performed under this Agreement, or arising from any negligence of Owner or Owner's agents, contractors or employees and from and against all costs, attorney's fees, expenses and liabilities incurred in the defense of any such action or proceeding brought thereon. In the event any action or proceeding is brought against Ketchum by reason of such claim, Owner, upon notice from Ketchum, shall defend Ketchum at Owner's expense by counsel satisfactory to Ketchum. Owner, as a material part of the consideration to Ketchum, hereby assumes all risk of damages to property or injury to persons in, upon or about the Improvements constructed, installed and maintained in the public right-of-way arising from the construction, installation and maintenance of said Improvements and Owner hereby waives all claims in respect thereof against Ketchum.

5. Ketchum shall not be liable for injury to Owner's business or loss of income therefrom or for damage which may be sustained by the person, goods, wares, merchandise or property of Owner, its tenants, employees, invitees, customers, agents or contractors or any other person in or about the Subject Property caused by or resulting from the Improvements constructed, installed, removed or maintained in the public right-of-way.

6. Owner understands and agrees that by maintaining the Improvements in the public right-of-way pursuant to this Agreement, Owner obtains no claim or interest in said public right-of-way which is adverse to that of Ketchum and that Owner obtains no exclusive right to said public right-of-way nor any other right to use the public right-of-way not specifically described herein.

7. In the event either party hereto retains an attorney to enforce any of the rights, duties and obligations arising out of this Agreement, the prevailing party shall be entitled to recover from the non-prevailing party reasonable attorney's fees at the trial and appellate levels and, whether or not litigation is actually instituted.

8. This Agreement shall be governed by, construed, and enforced in accordance with the laws and decisions of the State of Idaho. Venue shall be in the District Court of the fifth Judicial District of the State of Idaho.

9. This Agreement sets forth the entire understanding of the parties hereto and shall not be changed or terminated orally. It is understood and agreed by the parties hereto that there are no verbal promises or implied promises, agreements, stipulations or other representations of any kind or character pertaining to the Improvements maintained in the public right-of-way other than as set forth in this Agreement.

10. No presumption shall exist in favor of or against any party to this Agreement as the result of the drafting and preparation of this document.

11. This Agreement shall be recorded with the Blaine County Recorder by Ketchum.

12. The parties fully understand all of the provisions of this Agreement, and believe them to be fair, just, adequate, and reasonable, and accordingly accept the provisions of this Agreement freely and voluntarily. OWNER:

CITY OF KETCHUM:

Ву:_____

By: <u>Neil Bradshaw</u> Its: Mayor

STATE OF _____,) County of _____.)

On this _____ day of _____, 2022, before me, the undersigned Notary Public in and for said State, personally appeared ______, known to me to be the person who executed the foregoing instrument and acknowledged to me that he executed the same.

IN WITNESS WHEREOF, I have hereunto set my hand and affixed my official seal the day and year first above written.

Notary Public for	
Residing at	
Commission expir	es


STATE OF IDAHO)) ss. County of Blaine)

On this _____ day of ______, 2022, before me, the undersigned Notary Public in and for said State, personally appeared NEIL BRADSHAW, known or identified to me to be the Mayor of the CITY OF KETCHUM, IDAHO, and the person who executed the foregoing instrument on behalf of said municipal corporation and acknowledged to me that said municipal corporation executed the same.

IN WITNESS WHEREOF, I have hereunto set my hand and seal the day and year in this certificate first above written.

Notary Public for	
Residing at	
Commission expires	


EXHIBIT "A"

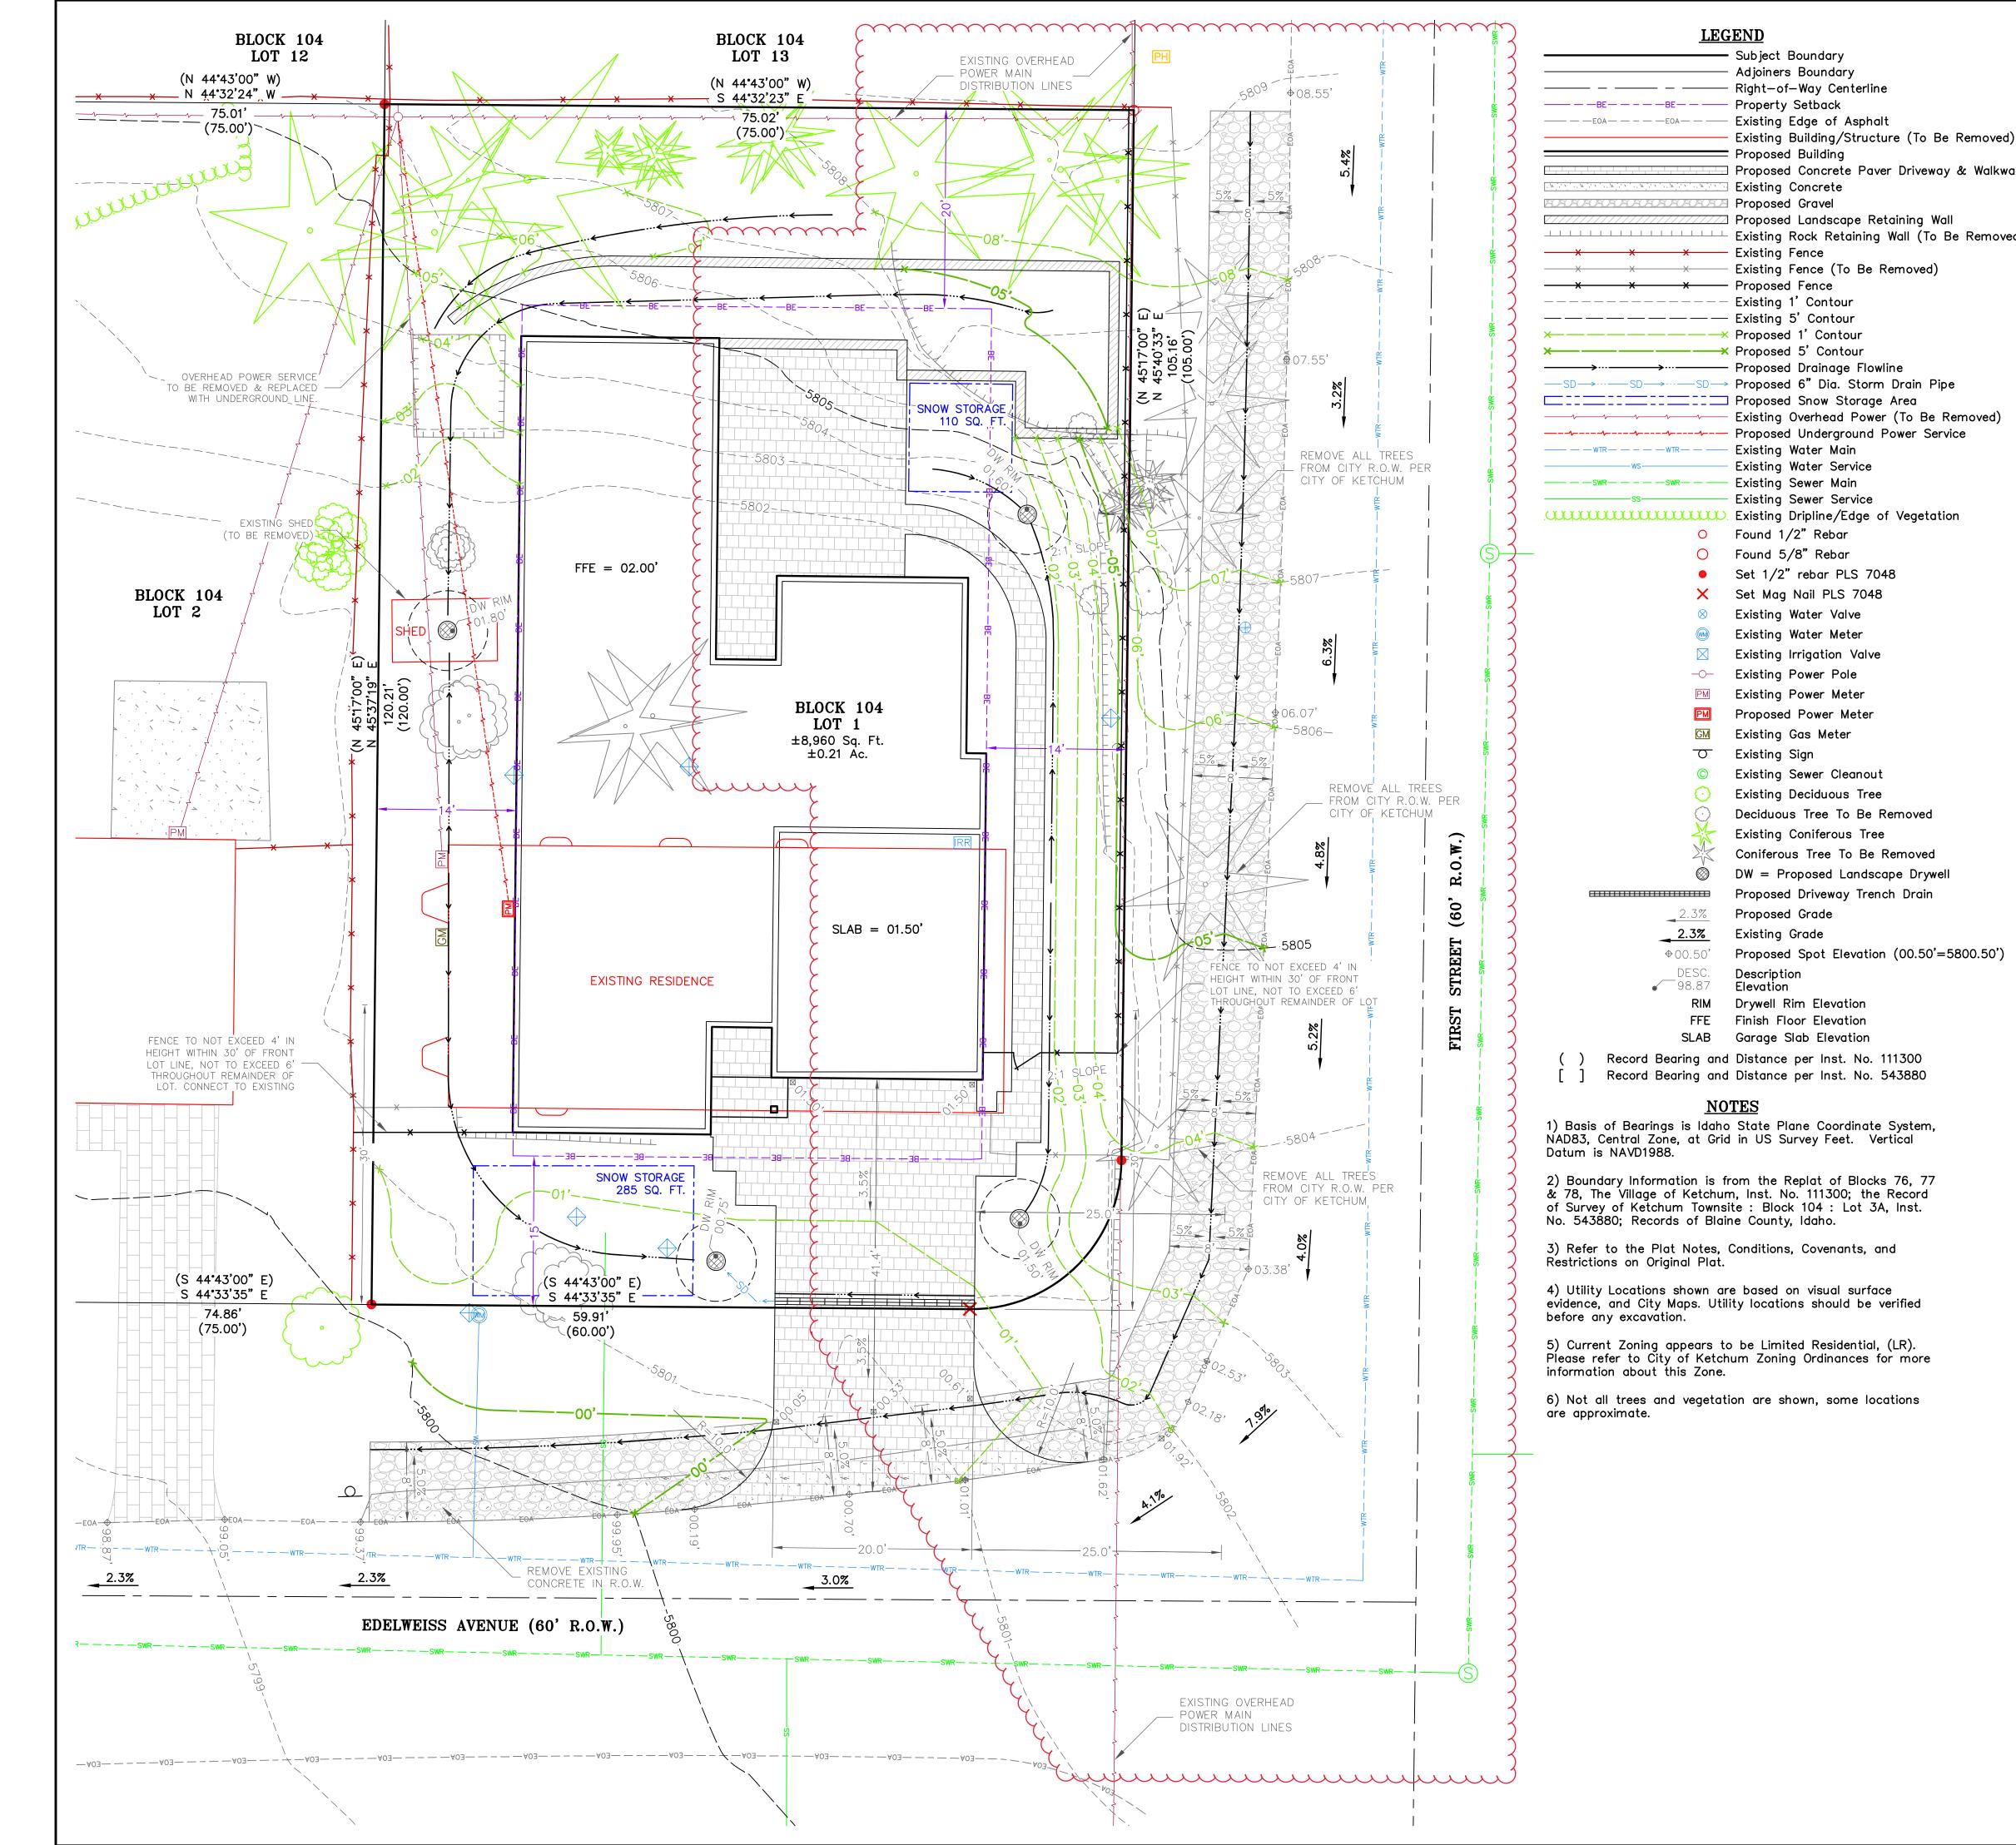


 2) The design of the driveway and drainage improvements have only been performed within the public Right-of-Way. See the Landscape Grading Plan from N.S. Consulting for the remainder of the design. 3) Contractor shall assure positive drainage away from the house and driveway. 4) Contractor shall be responsible for dust control during construction of all items hereon. Dust control shall be continuous during construction, 24 hours per day 7 days per week. The contractor shall follow the requirements of the Storm Water Pollution Prevention Program at all times until permanent erosion control is established. 5) The Trench Drain shall be a 6" wide HDPE channel with a 0.75 built in channel slope (Zurn Flo-Thru Model Z886 or equivalent). Grate shall be ductile iron with a slotted pattern. All components shall be rated for H-20 loading. 6) All construction shall be in accordance with the most current edition of the Idaho Standards for Public Works Construction, ISPWC, and the City of Ketchum, Idaho, Codes and Standards. The contractor shall retain and protect all monuments, accessories to corners, benchmarks, and points set in control 7) Per Idaho Code, 55-1613, the contractor shall retain and protect all monuments, accessories to corners, benchmarks, and points set in control 	<u>CONSTRUCTION NOTES</u> 1) Utility Locations shown are based on Digline locates and visual surface evidence. They are approximate. Contractor shall be responsible for locating existing utilities prior to commencing and during construction.				TY, IDAHO DFSIGN
 Controctor shall assue patilike drinkings may from the hause and driversy. Controctor shall be reasonable for dust control during construction of all liters by the during on the output patient of the Strim Wester Paluton Provention Program at all three until permentent croise control is established. The controctor shall field the Strim Wester Paluton Provention Program at all three until permentent croise control is the strim wester during construction shall be a 2% of the Strim Wester Construction. Since the strip Messaria and the DLY of Ketchum Standards for Palue Wester Control, and the DLY of Ketchum Standards on an and the strip during during dur	performed within the public Right—of—Way. See the Landscape Grading Plan from		MING		NNO:+
 b) Al construction shall be in accordance with the most current equiped of the the current the current equiped of the the current the most current the current equiped of the the substituent of the current the current the current the current the current equiped of the current equiped of the current equiped of the current the cu	3) Contractor shall assure positive drainage away from the house and driveway.		SHC	μJ	LLRF CLRF
 b) Al construction shall be in accordance with the most current equiped of the the current the current equiped of the the current the most current the current equiped of the the substituent of the current the current the current the current the current equiped of the current equiped of the current equiped of the current the cu	hereon. Dust control shall be continuous during construction, 24 hours per day 7 days per week. The contractor shall follow the requirements of the Storm Water Pollution Prevention Program at all times until permanent erosion control is		T PLAN	TOWNSI	JM, BLAIN RCHITECT
 b) Al construction shall be in accordance with the most current equiped of the the current the current equiped of the the current the most current the current equiped of the the substituent of the current the current the current the current the current equiped of the current equiped of the current equiped of the current the cu	slope (Zurn Flo-Thru Model Z886 or equivalent). Grate shall be ductile iron with a		CHMEN	- MUH	RAW A
 surveys that are lost or disturbed by construction shall be beestablished and re-monumented, at the expense of the agency or paysion causing their loss or disturbance under the direction of a professional land surveys. a) The contractor shall be regulated that are construction so that it is in a condition equal to or better than that which existed prior to construction. b) The contractor shall be regulated to action all the necessary permits prior to construction and shall check with the CIV of Ketchum for permits the owner may have dready obtained. c)) The contractor shall be regulated to a minimum of 95% of maximum density as determined by AASHIO T-99. c)) All execution and embonkement shall conform to ISPWC Section 202 and City of Ketchum standards of excovation and bockfill. c)) All execution and embonkement shall conform to ISPWC Section 202 and City of Ketchum standards. c) The compacted and all unsultable Sections 202 and the City of Ketchum standards. c) The compacted and all unsultable sections 202 and the City of Ketchum standards. c) The compacted per ISPWC Section 202 and the City of Ketchum standards. c) The result be compacted per ISPWC Section 202 and the City of Ketchum standards. c) The result be compacted per ISPWC Section 202 and the City of Ketchum standards. c) The result be compacted per ISPWC Section 202 and the City of Ketchum standards. c) Hading adgregate shall be placed for loss of maximum laboratory density as determined by AASHIO T-99 or IDT T-91. d) All system segnetable controls performing to Table A-1 in ISPWC Section (a) 805, 610, 604 Bit for Closs of the Improved Parking and Pedastrian Circulation. The section and 3/4" minus capated and all be applicable and to the City of Ketchum standards. Asphot bandar shall be applicable and the provement and to the City of Ketchum standards. f) All adges of existing aphalt paving shall be saw cut a minimum	Idaho Standards for Public Works Construction, ISPWC, and the City of Ketchum, Idaho, Codes and Standards. The contractor shall be responsible for obtaining and keeping a copy of the ISPWC and the City of Ketchum Codes and Standards on				ЧО ЧО
 B) The contractor shall clean up the site after construction so that it is in a condition equal to or better than that which existed prior to construction. B) The contractor shall be required to obtain all the necessary permits prior to construction and shall check with the City of Ketchum for permits the owner may have already obtained. D) Trenches shall be backfilled and compacted to a minimum of 95% of maximum data determined by AASHTO T-99. H) All clearing and grubbing shall conform to ISPWC Section 202 and City of Ketchum standards of excavation and backfill. (2) All excavation and methankment shall conform to ISPWC Section 202 and City of Ketchum standards of excavation and backfill. Excavated subgrade shall be compacted per ISPWC Section 202 and the City of Ketchum standards. (3) All 2' minus aggregate shall be placed in conformance with ISPWC Section 802. The shall be compacted per ISPWC Section 202 and the City of Ketchum standards. 3/4 minus uncertaid shall be 95% of maximum laboratory density as determined by AASHTO T-99 on DT T-91. H) All All 3/4" minus aggregate shall be placed in conformance with ISPWC Section 802. The H and 10 to form to ISPWC Section 802. The H and 10 to the City of Ketchum specifications. Minimum compaction of placed material shall be 95% of maximum laboratory density as determined by AASHTO T-99 on DT T-91. H) All All 3/4" minus aggregate shall be placed in conformance with ISPWC Section 802. The Back The clear and the the City of Ketchum specifications. Minimum compaction of placed material shall be placed for leveling curve shall conform to ISPWC Section 803. Asphalt binder shall be pays of the City of Ketchum standards. Asphalt shall be compoleted per ISPWC Section 803. Asphalt binder shall be pays of the Intervent damage to the cut edge. H) All edges of existing esphalte concrete powernet work shall conform to ISPWC Section 803. Asphalt binder shall be pays of the improvent damage to the cut e	monuments, accessories to corners, benchmarks, and points set in control surveys. All monuments, accessories to corners, benchmarks, and points set in control surveys that are lost or disturbed by construction shall be reestablished and re-monumented, at the expense of the agency or person causing their loss or		R.0	Ч	ы. С
 9) The contractor shall be required to obtain all the necessary permits prior to construction and shall check with the City of Ketchum for permits the owner may have already obtained. 10) Trenches shall be backfilled and compacted to a minimum of 95% of maximum density as determined by AASHTO T-99. 11) All clearing and grubbing shall conform to ISPWC Section 202 and City of Ketchum standards for excavation and backfill. Excavated subgrade shall be compacted and all unsultable Sections removed and replaced with structural fill as determined by Athen to T T-91. 13) All 2' minus aggregate shall be placed in conformance with ISPWC Section 802. It shall be compacted per ISPWC Section 202 and the City of Ketchum standards. 74* minus cargaregate for level maximum laboratory density as determined by AASHTO T-99 or IDT T-91. 14) All 3/A⁴ minus aggregate shall be placed in conformance with ISPWC Section 802. It shall be compacted per ISPWC Section 202 and the City of Ketchum standards. Ashint T-99 or IDT T-91. 15) All caphaltic concrete powernent work shall conform to ISPWC Section sol Type I and to the City of Ketchum standards. Ashint T-99 or IDT T-91. 16) All edges of existing asphalt paving shall be saw cut a minimum of 24* to provide a clean powernent edge for maximum laboratory density as determined by AASHTO T-99 or IDT T-91. 16) All edges of existing asphalt paving shall be saw cut a minimum of 24* to provide a clean powernent edge for maximum laboratory density as determined by Cather 1000 For City and the standards. The powernet may be prevent danage to the current diverse what ble be topic topic topic paves hall be clowed. Provement shall be of 50 or TL. Topic Tubic 50 or TL. To			ILITY	<u>,</u>	R.17
 deneity as determined by AASHTO T-99. 11) All clearing and grubbing shall conform to ISPWC Section 201 and City of Ketchum standards for excavation and backfill. Excavated subgrade shall be compacted and all unsultable Sections 204. Minimum compaction of placed material shall be compacted per ISPWC Section 202 and the City of Ketchum standards. 13) All 27 minus aggregate shall be placed in conformance with ISPWC Section 802. It shall be compacted per ISPWC Section 202 and the City of Ketchum standards. 14) All 3/4" minus aggregate shall be placed in conformance with ISPWC Section 802. It shall be compacted per ISPWC Section 202 and the City of Ketchum standards. 39.44 minus acushed aggregate noterial shall be offer the section 302 and the City of Ketchum standards. 39.47 minus aggregate shall be placed in conformance with ISPWC Section 802. It shall be compacted per ISPWC Section 202 and the City of Ketchum standards. 39.47 minus aggregate shall be placed in conformance with ISPWC Section 802. The Section 202 and the City of Ketchum standards. 39.47 minus aggregate shall be placed in conformance with ISPWC Section 802. The Section 802 and the City of Ketchum standards. 39.47 minus arcushed aggregate for leveling course shall conform to ISPWC Section 802. The Section 802 and the City of Ketchum standards. 39.47 minus arcushed aggregate for leveling course shall conform to ISPWC Section 802. The Section 803. Asphalt binder shall be 958–28 conforming to Table A-1 in ISPWC Section 802. The Section 803. Asphalt binder shall be p12° noming to prevent damage to the cut edge. 10) Show Storage based on 30% of the Improved Parking and Pedestrian Circulation Areas. Driveway = 460 SS, Ft. Section 205 Sq. Ft. 30% of Table A = 245 Sq. Ft. 10 Sq. Ft. = 395 Sq. Ft. of Snew Storage 18) The contractor shall be responsible for providing traffic control per the current edition of the US Department of Transportation Manual of Uniform Traffic Control Devices (MUTCD). 19)	construction and shall check with the City of Ketchum for permits the owner may			LOT	•
 of Ketchum standards for execuation and backfill. Excavated subgrade shall be compacted and all mailtable Sections removed and replaced with structural fill as determined by the engineer per ISPWC Section 204. Minimum compaction of placed material shall be placed in conformance with ISPWC Section 802. It shall be compacted per ISPWC Section 202 and the City of Ketchum standards. 2° minus aggregate shall be placed in conformance with ISPWC Section 802. The Side Walk state of the City of Ketchum standards. 3/4 minus crushed aggregate indeficients. Minimum compaction of placed material shall be 95% of maximum laboratory density as determined by AASHTO T-99 or IDT T-91. 14) All 3/4" minus aggregate shall be placed in conformance with ISPWC Section 802. It shall be compacted per ISPWC Section 204 and the City of Ketchum standards. 3/4 minus crushed aggregate for leveling course shall conform to ISPWC Table 802 Type I and to the City of Ketchum specifications. Minimum compaction of placed material shall be 95% of maximum laboratory density as determined by AASHTO T-99 or IDT T-91. 15) All apphaltic concrete powement and to the City of Ketchum standards. Asphalt aggregate shall be regonerate age for maximum laboratory density as determined by AASHTO T-99 or IDT T-91. 16) All edges of existing asphalt paving shall be saw cut a minimum of 24" to provide a clean pavement adq to prevent damage to the cut edge. 17) Snew Storage based and 30% of the Improved Parking and Pedestrian Circulation Areas. 18) The contractor shall be responsible for providing traffic control per the current edition of the US Department of Transportation Manual of Uniform Traffic Control per the current edition of the US Department of Transportation Manual of Uniform Traffic Control per the current edition of the US Department of Transportation Manual of Uniform Traffic Control per the current edition of the City. 16) All right-of-way improvements per sheet C1.0 must be campleted prior					3, T
of Ketchum standards for excavation and backfill. Excavated subgrade shall be compacted and all unsultable Sections removed and replaced with structural fill as determined by the engineer per ISPWC Section 202. Minimum compaction of placed material shall be 95% of maximum laboratory density as determined by AASHTO T-99 or IDT T-91. INM WITH SPWC Section 202. And the City of Ketchum standards. 2" minus crushed aggregate shall be placed in conformance with ISPWC Section 802. Type II and to the City of Ketchum specifications. Minimum compaction of placed shall be 95% of maximum laboratory density as determined by AASHTO T-99 or IDT T-91. INM WITH SPWC Section 802. Type II and to the City of Ketchum specifications. Minimum compaction of placed shall be 95% of maximum laboratory density as determined by AASHTO T-99 or IDT T-91. INM WITH SPWC Section 802. It shall be compacted per ISPWC Section 202 and the City of Ketchum standards. 3/4" minus aggregate shall be placed in conformance with ISPWC Section 805. ISP AI logan aggregate shall be placed in conformance with ISPWC Section 805. ISP AI logan aggregate shall be placed in conformatory density as determined by AASHTO T-99 or IDT T-91. ISP AI logan aggregate for leweling course shall be city of Ketchum standards. Apphotic concrete pavement work shall conform to ISPWC Section 805. ISP AI logan aggregate shall be 100 be 35% of the Improved Parking and Pedestrian Circulation Areas. ISP AI logan aggregate work shall conform to ISPWC Section 805. ISP AI logan aggregate work shall conform to ISPWC Section 805. ISP AI logan aggregate work shall conform to ISPWC Section 805. ISP AI logan aggregate work shall conform to ISPWC Section 805. ISP AI logan aggregate work shall conform to ISPWC Section 805. ISP AI logan aggregate shall be 100 be 200 be appro					I S1
 13) All 2" minus aggregate shall be placed in conformance with ISPWC Section 802. It shall be compacted per ISPWC Section 202 and the City of Ketchum standards. 2" minus crushed aggregate material shall conform to ISPWC Section 202 and the City of Ketchum specifications. Minimum compaction of placed material shall be placed in conformance with ISPWC Section 802. Type II and to the City of Ketchum standards. 3/4" minus aggregate shall be placed in conformance with ISPWC Section 802. Type II and to the City of Ketchum standards. 3/4" minus crushed aggregate for leveling course shall conform to ISPWC Table 802. Type II and to the City of Ketchum standards. Asphalt aggregate shall be 10 year. The City of Ketchum standards. Asphalt aggregate shall be 12" nominal size conforming to Table 802. The ISPWC Section 803. Asphalt binder shall be g58 of maximum laboratory density as determined by AASHTO T-99 or IDI T-91. 15) All agpenditic concrete powement work shall conform to ISPWC Section (s) 805, 810, and 811 for Class II powement and to the City of Ketchum standards. Asphalt aggregate shall be 12" nominal size conforming to Table AD-1 in ISPWC Section 803. Asphalt binder shall be g58 of the Improved Parking and Pedestrian Circulation Areas. Driveway = 460 Sq. Ft. Trot Walk = 105 Sq. Ft. Trot Walk = 105 Sq. Ft. Trot Walk = 105 Sq. Ft. Total = 1,285 Sq. Ft. 10 Sq. Ft. = 395 Sq. Ft. of Snow Storage 18) All right-of-way improvements per sheet C1.0 must be completed prior to Issuance of a temporary or final Certificate of Occupancy unless otherwise agreed upon in writing by the City. 20) Alpine Enterprises Inc. is not responsible for any deviation from these plans, unless such changes have been authorized in writing. 	of Ketchum standards for excavation and backfill. Excavated subgrade shall be compacted and all unsuitable Sections removed and replaced with structural fill as determined by the engineer per ISPWC Section 204. Minimum compaction of placed material shall be 95% of maximum laboratory density as determined by AASHTO	AST			WITHIN
 14) All 3/4 minus aggregate shall be placed in conformance with IS-WC section 802. It shall be compacted parents in SPWC Section 202 and the City of Ketchum standards. 3/4" minus crushed aggregate for leveling course shall conform to ISPWC Table 802 Type I and to the City of Ketchum standards. Asphalt in SPWC Section 803. Asphalt binder shall be 95% of maximum laboratory density as determined by AASHTO T-99 or IDT T-91. 15) All asphaltic concrete pavement work shall conform to ISPWC Section 803. Asphalt binder shall be 1/2" nominal size conforming to Table 803b in ISPWC Section 803. Asphalt binder shall be pg 58–28 conforming to Table 803b in ISPWC Section 805. 16) All edges of existing asphalt paving shall be saw cut a minimum of 24" to provide a clean pavement edge for matching. No wheel cutting shall be allowed. Prevent damage to the cut edge. 17) Snow Storage based on 30% of the Improved Parking and Pedestrian Circulation Areas. Driveway = 460 Sq. Ft. Front Walk = 105 Sq. Ft. Total = 1,285 Sq. Ft. 110 Sq. Ft. = 395 Sq. Ft. of Snow Storage 18) The contractor shall be responsible for providing traffic control per the current edition of the US Department of Transportation Manual of Uniform Traffic Control Devices (MUTCD). 19) All right-of-way improvements per sheet C1.0 must be completed prior to issuance of a temporary or final Certificate of Occupancy unless otherwise agreed upon in writing by the City. 20) Alpine Enterprises Inc. is not responsible for any deviation from these plans, unless such changes have been authorized in writing. 	It shall be compacted per ISPWC Section 202 and the City of Ketchum standards. 2" minus crushed aggregate material shall conform to ISPWC Section 802 Type II and to the City of Ketchum specifications. Minimum compaction of placed material shall be 95% of maximum laboratory density as determined by AASHTO T—99 or	47:43 PM	· ·	igineering, isulting	3340 USA 987 fax
 15) All asphaltic concrete pavement work shall conform to ISPWC Section(s) 805, 810, and 811 for Class II pavement and to the City of Ketchum standards. Asphalt aggregate shall be 1/2" nominal size conforming to Table A-1 in ISPWC Section 805. 16) All edges of existing asphalt paving shall be saw cut a minimum of 24" to provide a clean pavement edge for matching. No wheel cutting shall be allowed. Pavement shall be cut prior to paving to prevent damage to the cut edge. 17) Snow Storage based on 30% of the Improved Parking and Pedestrian Circulation Areas. Driveway = 460 Sq. Ft. Front Walk = 105 Sq. Ft. Side Walk = 245 Sq. Ft. Jow of Total = 1,285 Sq. Ft 30% of Total = 386 Sq. Ft. Area Designated = 285 Sq. Ft. + 110 Sq. Ft. = 395 Sq. Ft. of Snow Storage 18) The contractor shall be responsible for providing traffic control per the current edition of the US Department of Transportation Manual of Uniform Traffic Control Devices (MUTCD). 19) All right-of-way improvements per sheet C1.0 must be completed prior to issuance of a temporary or final Certificate of Occupancy unless otherwise agreed upon in writing by the City. 20) Alpine Enterprises Inc. is not responsible for any deviation from these plans, unless such changes have been authorized in writing. 	802. It shall be compacted per ISPWC Section 202 and the City of Ketchum standards. 3/4" minus crushed aggregate for leveling course shall conform to ISPWC Table 802 Type I and to the City of Ketchum specifications. Minimum compaction of placed material shall be 95% of maximum laboratory density as	/2022	terpris	Hazards C	Bell Dr., Unit 1 Ketchum, ID 8, 1988 727-1
 16) All edges of existing asphalt paving shall be saw cut a minimum of 24" to provide a clean pavement edge for matching. No wheel cutting shall be allowed. Pavement shall be cut prior to paving to prevent damage to the cut edge. 17) Snow Storage based on 30% of the Improved Parking and Pedestrian Circulation Areas. Driveway = 460 Sq. Ft. Back Patio = 475 Sq. Ft. Front Walk = 105 Sq. Ft. Side Walk = 245 Sq. Ft. Total = 1,285 Sq. Ft. 30% of Total = 386 Sq. Ft. Area Designated = 285 Sq. Ft. + 110 Sq. Ft. = 395 Sq. Ft. of Snow Storage 18) The contractor shall be responsible for providing traffic control per the current edition of the US Department of Transportation Manual of Uniform Traffic Control Devices (MUTCD). 19) All right-of-way improvements per sheet C1.0 must be completed prior to issuance of a temporary or final Certificate of Occupancy unless otherwise agreed upon in writing by the City. 20) Alpine Enterprises Inc. is not responsible for any deviation from these plans, unless such changes have been authorized in writing. 	810, and 811 for Class II pavement and to the City of Ketchum standards. Asphalt aggregate shall be 1/2" nominal size conforming to Table 803b in ISPWC Section 803. Asphalt binder shall be pg 58-28 conforming to Table A-1 in ISPWC Section	6 bwp			.0. Box 2037, (208) 727-
Driveway = 460 Sq. Ft. Back Patio = 475 Sq. Ft. Front Walk = 105 Sq. Ft. Side Walk = 245 Sq. Ft. Total = 1,285 Sq. Ft. 30% of Total = 386 Sq. Ft. Area Designated = 285 Sq. Ft. + 110 Sq. Ft. = 395 Sq. Ft. of Snow Storage 18) The contractor shall be responsible for providing traffic control per the current edition of the US Department of Transportation Manual of Uniform Traffic Control Devices (MUTCD). 19) All right-of-way improvements per sheet C1.0 must be completed prior to issuance of a temporary or final Certificate of Occupancy unless otherwise agreed upon in writing by the City. 20) Alpine Enterprises Inc. is not responsible for any deviation from these plans, unless such changes have been authorized in writing.	provide a clean pavement edge for matching. No wheel cutting shall be allowed.	_Civil20	\triangleleft °)	-
 18) The contractor shall be responsible for providing traffic control per the current edition of the US Department of Transportation Manual of Uniform Traffic Control Devices (MUTCD). 19) All right-of-way improvements per sheet C1.0 must be completed prior to issuance of a temporary or final Certificate of Occupancy unless otherwise agreed upon in writing by the City. 20) Alpine Enterprises Inc. is not responsible for any deviation from these plans, unless such changes have been authorized in writing. 	Areas. Driveway = 460 Sq. Ft. Back Patio = 475 Sq. Ft. Front Walk = 105 Sq. Ft. Side Walk = 245 Sq. Ft. Total = 1,285 Sq. Ft. 30% of Total = 386 Sq. Ft.	_K_BIk104_	ESIONAL ENC.	R NONEXE	30SEP22
	18) The contractor shall be responsible for providing traffic control per the current edition of the US Department of Transportation Manual of Uniform Traffic Control		10		
	issuance of a temporary or final Certificate of Occupancy unless otherwise agreed	2\dwg\	ΒY		
		k104Lt:	DATE		07SEP22 30SEP22
			N		- 0

GRAPHIC SCALE (IN FEET) 1 inch = 8 ft.

티믜띰티

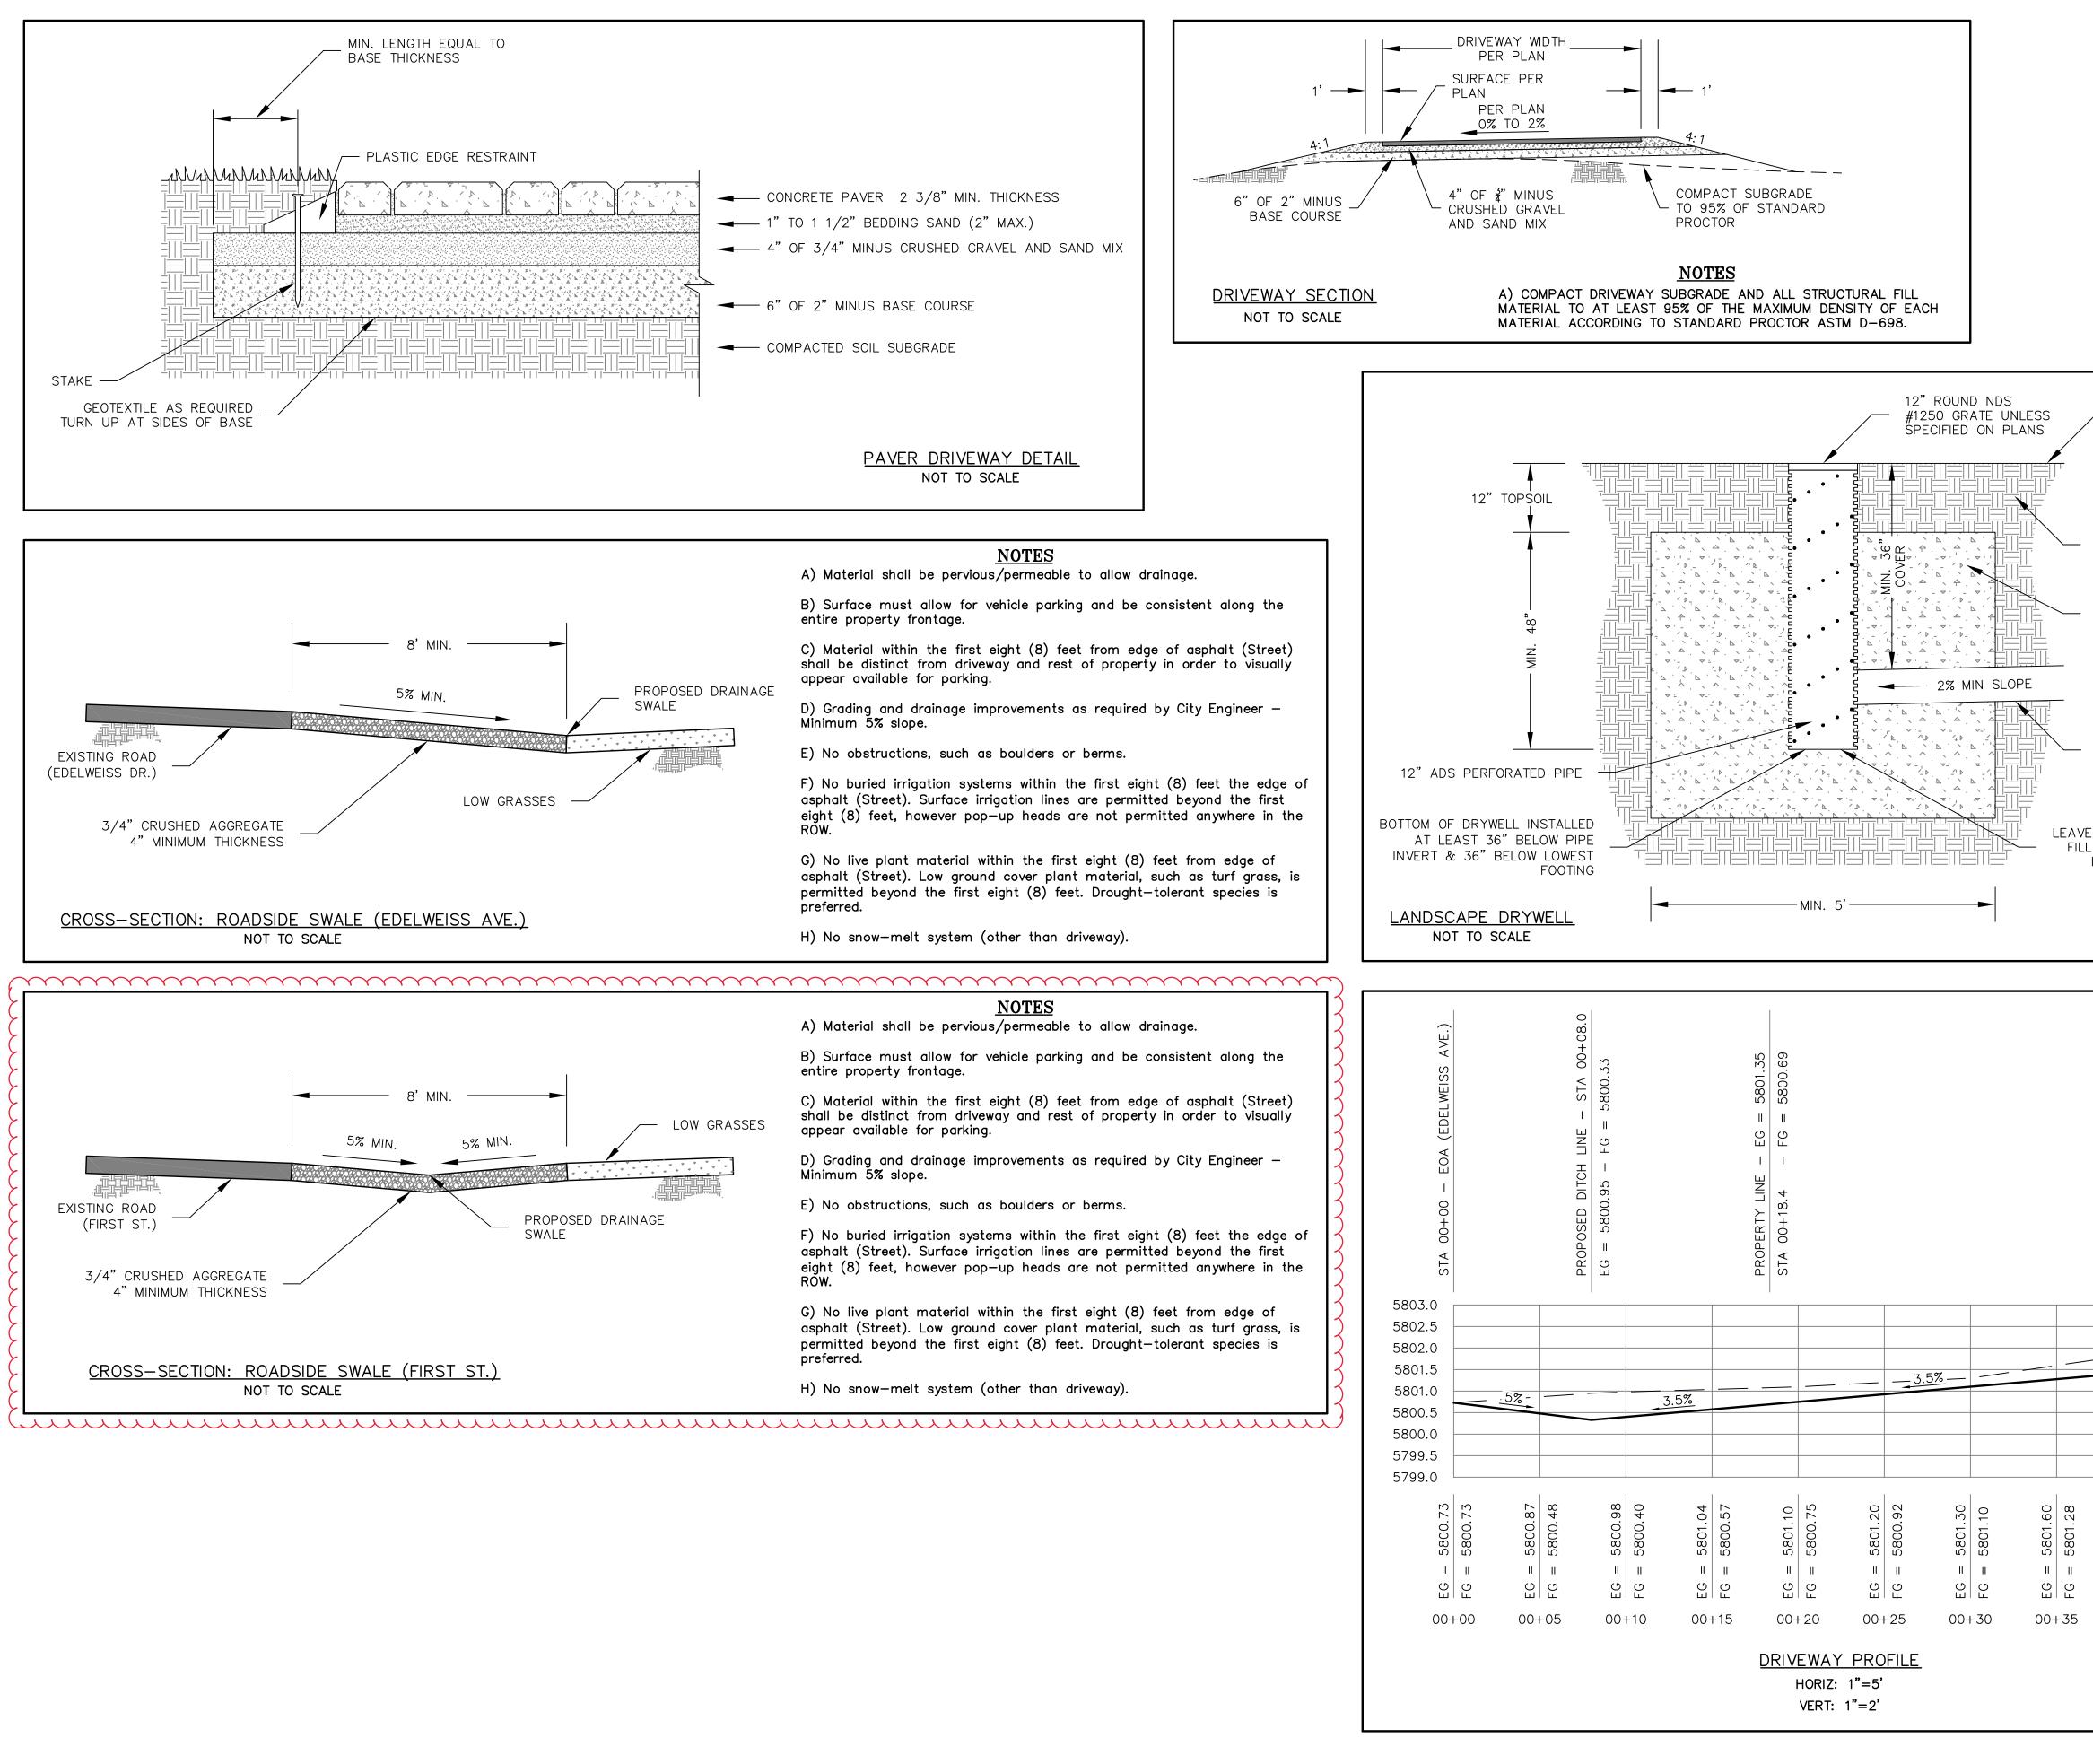

P.O. Box 2037; Ketchum, ID 83340 USA WITHIN S13, T.4N., R.17E., E (208) 727-1988 727-1987 fax	ALPLITE LITCT PITES TITC. A SHE, UTLIT & A SHE, UTLIT & A SHE, UTLIT & A SUrveying, Mapping, Civil Engineering, and Natural Hazards Consulting and Natural Hazards Consulting P.O. Box 2037, Ketchum, ID 83340 USA (208) 727–1988 727–1987 fax PREPARED FOR MICHAEL email: bsmith@albineenterprisesinc.com	ALPLITE LITCET PITSCS IITC. A SHE, UTILITY & Surveying, Mapping, Civil Engineering, and Natural Hazards Consulting 660 Bell Dr., Unit 1 P.O. Box 2037, Ketchum, ID 83340 USA (208) 727–1988 727–1987 fax email: bsmith@alpineenterprisesinc.com PREPARED FOR MICHAEL
B-0. Box 2037, Ketchum, ID 83340 USA WITHIN S13, T.4N., R.17E., (208) 727–1988 727–1987 fax DEFEADED FOR AND FOR	P.O. Box 2037, Ketchum, ID 83340 USA (208) 727-1988 727-1987 fax email: bsmith@albineenterprisesinc.com PREPARED FOR MICHAEL	P.O. Box 2037, Ketchum, ID 83340 USA (208) 727-1988 727-1987 fax email: bsmith@alpineenterprisesinc.com
208) 727–1988 727–1987 fax DDFDADFD FOD MICLIAFI	(208) 727–1988 727–1987 fax email: bsmith@alpineenterprisesinc.com	(208) 727-1988 727-1987 fax email: bsmith@alpineenterprisesinc.com
		NELSON email: bsmith@alpineenterprisesinc.com in the interprise interpri

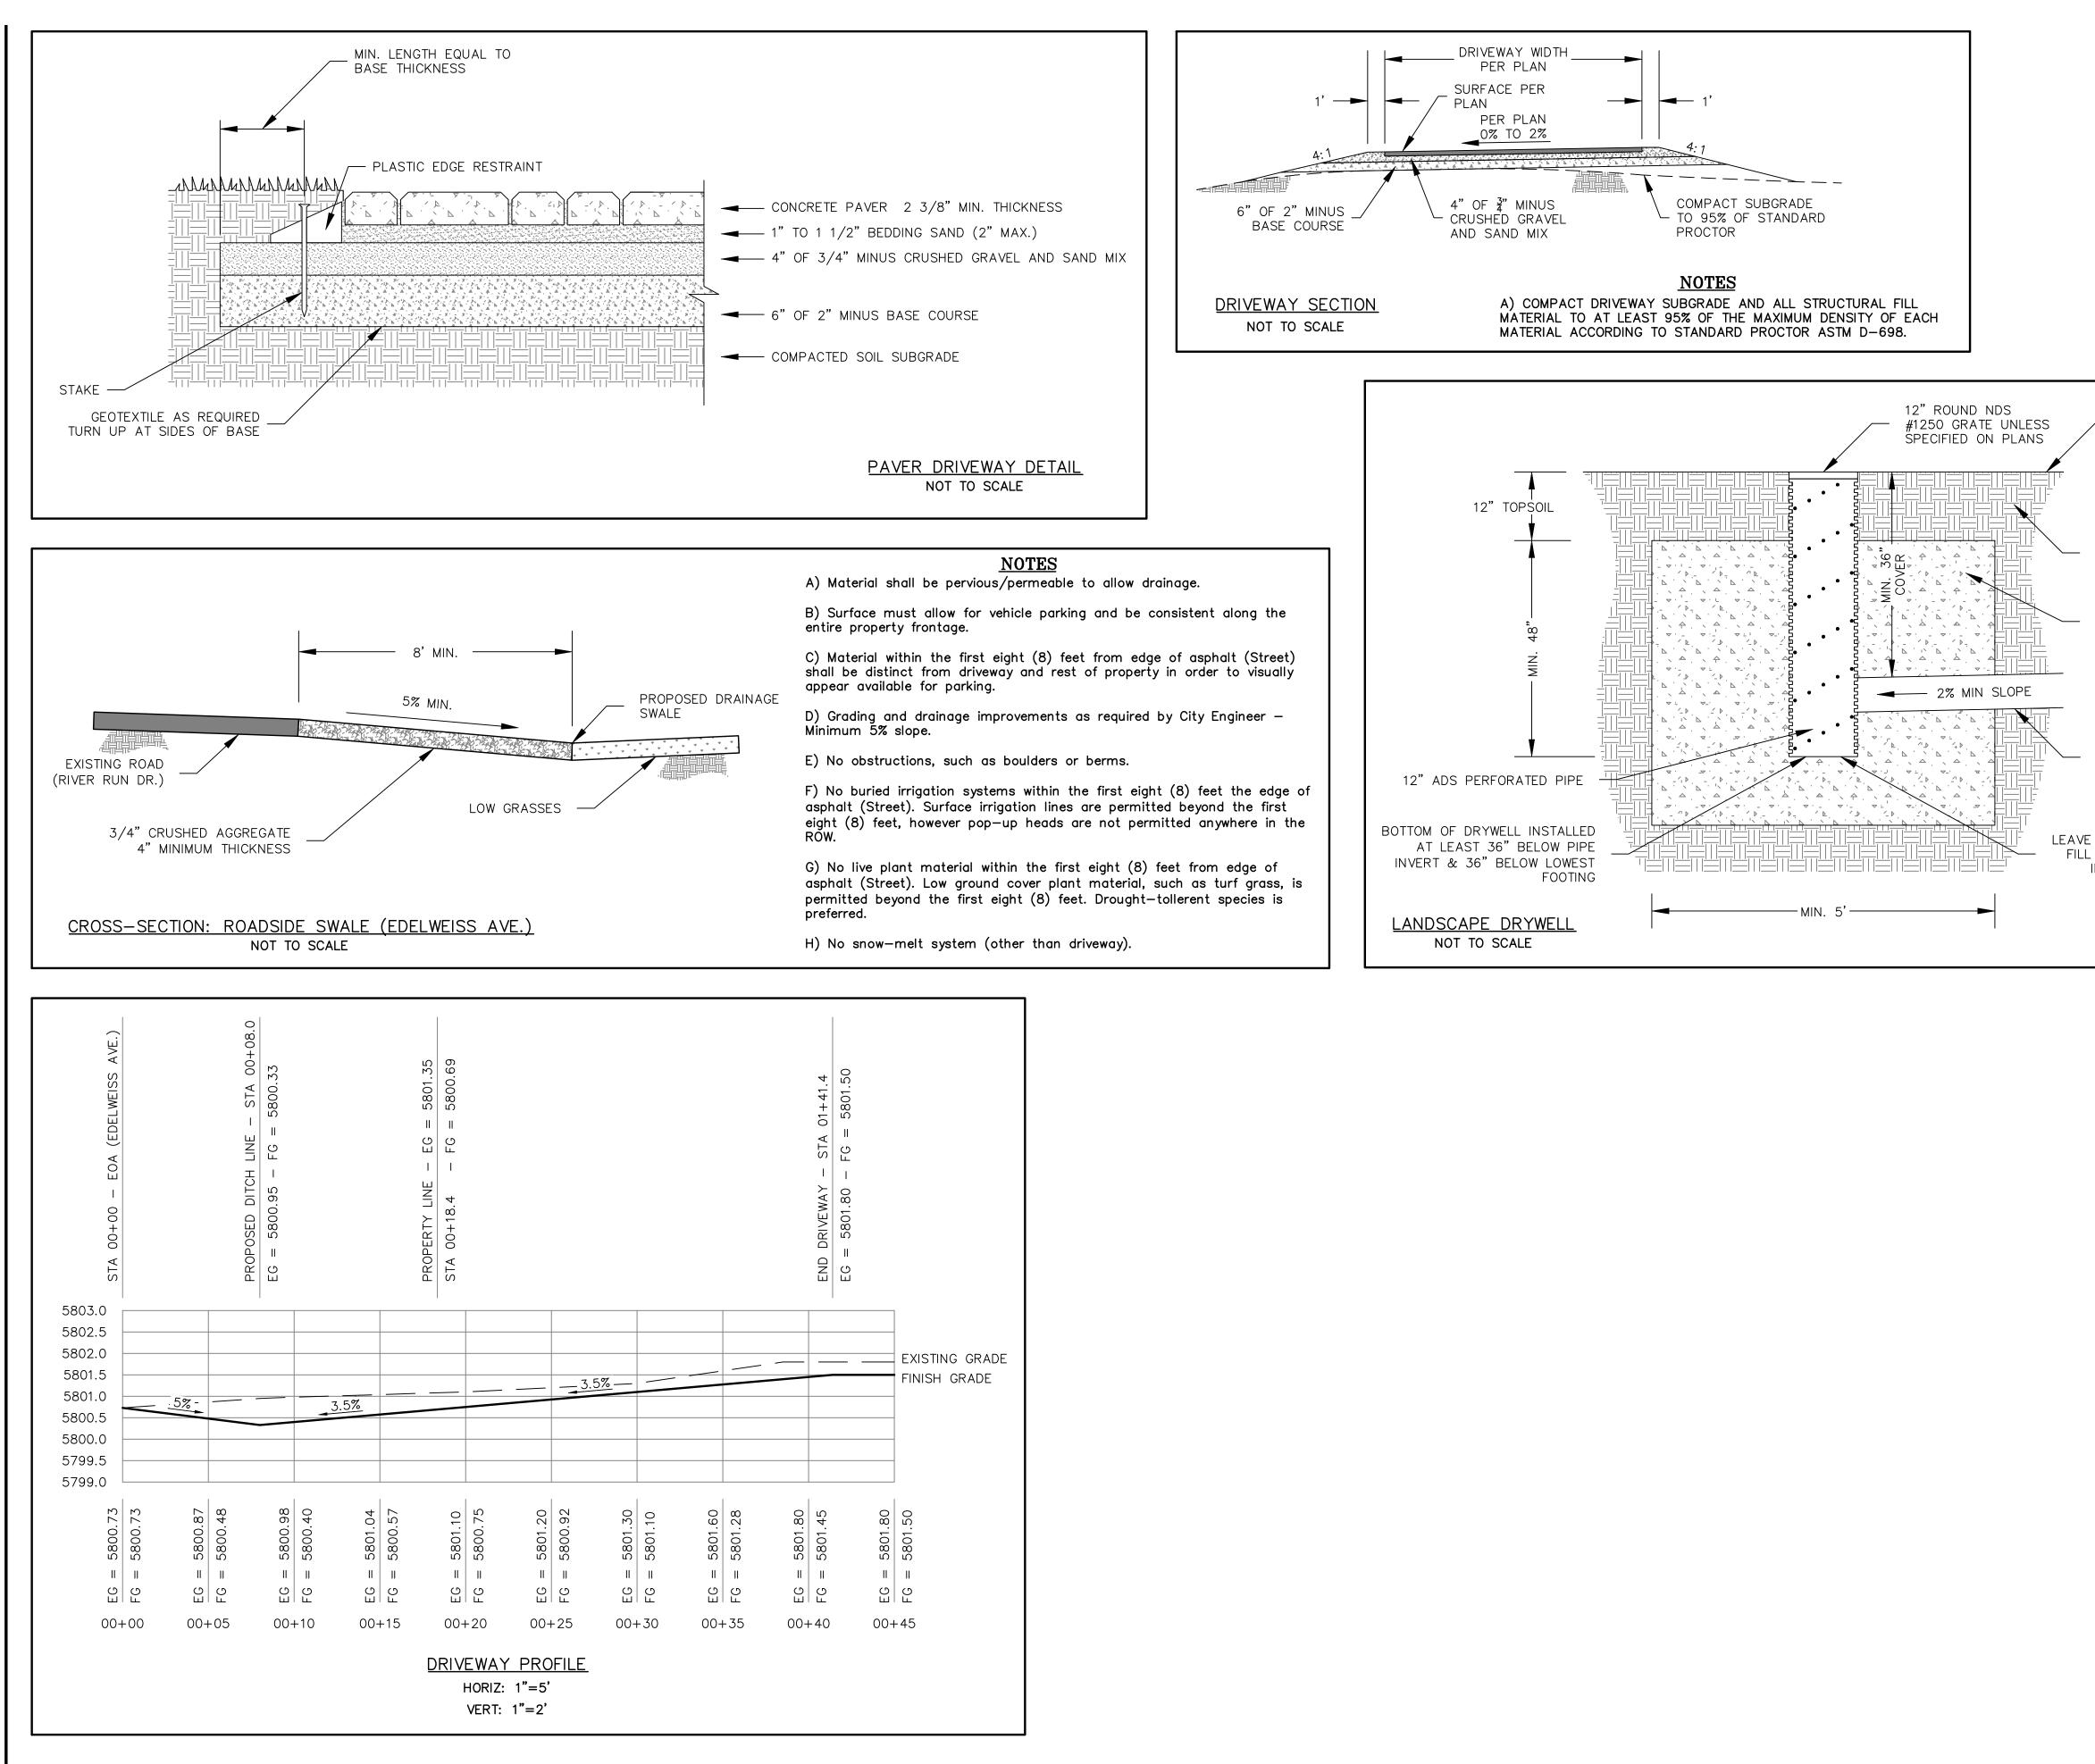

ST	A SITE, UTILITY & ENCROACHMENT PLAN SHOWING	LOT 1. BLK 104. KETCHUM TOWNSITE		WITHIN S13, T.4N., R.17E., B.M., CITY OF KETCHUM, BLAINE COUNTY, IDAHC	PREPARED FOR MICHAEL CHRISTIAN	
_Civil2022.dwg 5/18/2022 3:58:54 PM MST	Alpine Enterprises Inc.	auveying, indping, eivir Engineening, and Natural Hazarda Consulting	dita ratara riazaras consatung 660 Ball Dr. Ilnit 1	P.O. Box 2037, Ketchum, ID 83340 USA	(208) 727–1988 727–1987 fax	
878_K_BIk104_Lt2\dwg\1878_CS_K_BIk104_Lt1_Civil2022.dwg	CELECENSED FAC	ER STATIO		T (VIBMAY22) /	A TE OF UP	NETSON LESS
	NO DATE BY					
roject Path and Print date U: \LandProjects2004\1878_	REVISIONS	PRELIMINARY ONLY: NOT FOR CONSTRUCTION	BUILDING REVIEW SUBMITTAL			
ROJECT P		C		2		

				_
∕── FII	NISH G	RADE		
NATIVE	SAND	AND	GRAVE	ΞL
ENVELC DIA. WA SURROU	ASHED	GRA\	/EL	2
6" DIA. FROM E FOUND/ SYSTEM 24" BE	DOWNS Ation 1 inst/	POUTS DRAIN ALLED	5 & IAGE MIN.	-
BOTTO WITH S IMPORTE	SEVERA	L INC	HES O	F