

200 SqFt Price Sign- 48" LED- N

*All sign components to be UL listed. All wiring to conform to UL specifications. Installations to be per NEC requirements. All signs to bear UL labels.

STAMPED, SEALED ENGINEERING REQUIRED


FOUNDATION INFORMATION PROVIDED BY RACETRAC. MANUFACTURER RESPONSIBLE FOR HAVING A LICENSED ENGINEER VALIDATE FOUNDATION DESIGN PRIOR TO INSTALL

DOUBLE FACED

QUANTITY 1

ALL FUEL GRADE PANELS TO BE ACCESSIBLE FROM TOP OF SIGN

PRICER SPECIFIC COLORS			
C1	LOGO RED	C7	PRICER GREEN
C23	SW 7048 URBANE BRONZE	C8	PRICER RED
C6	PRICER BLACK		

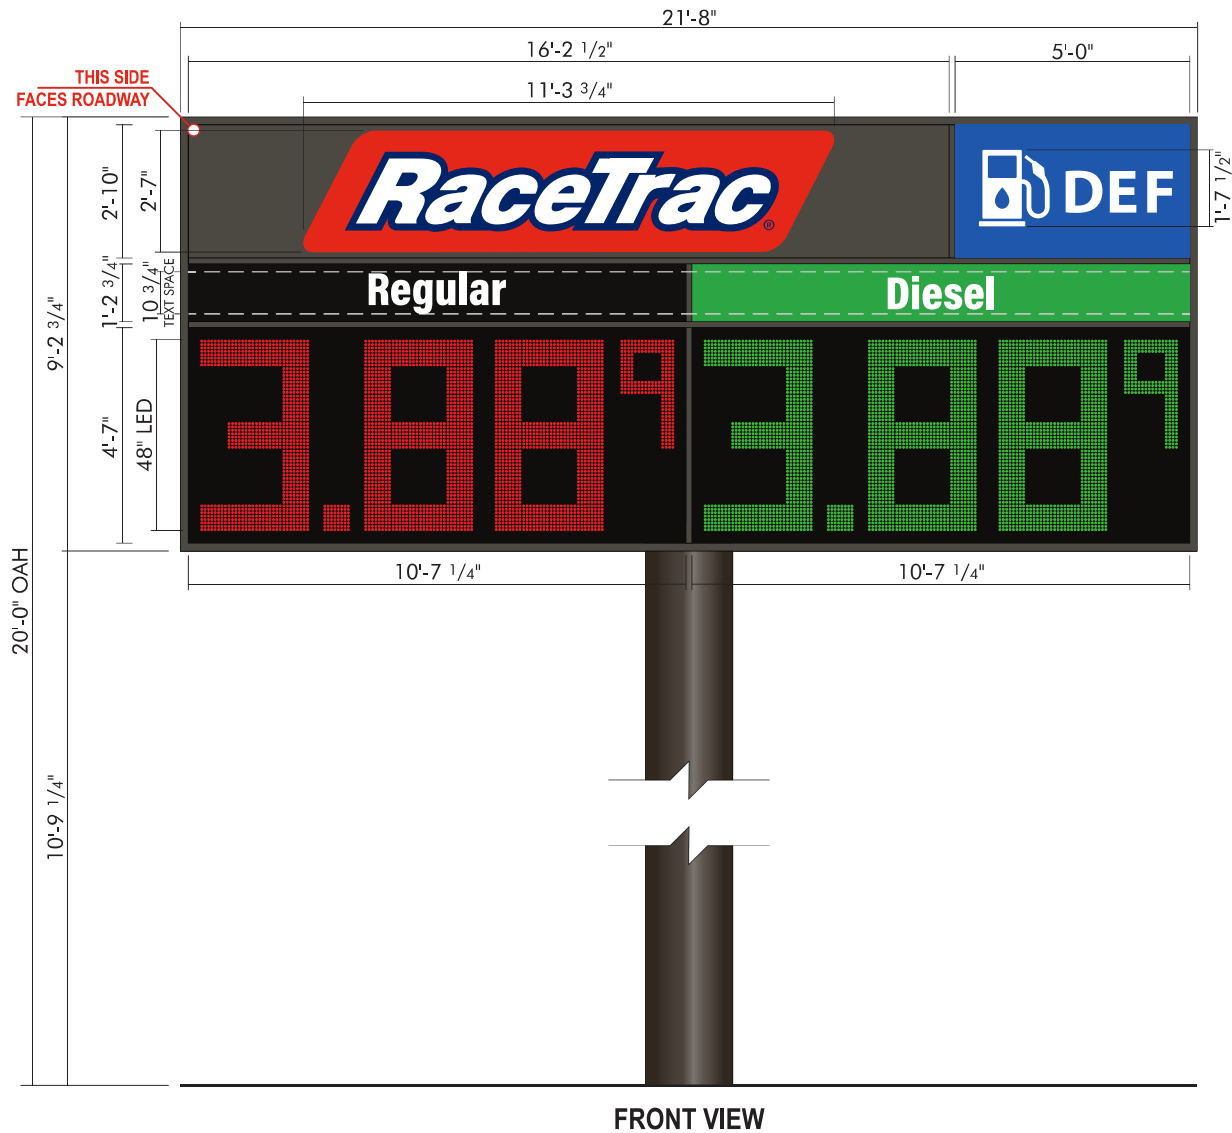

SPECIFICATIONS:

SIGN FACES:

- **LOGO PANEL:** Aluminum panel painted **EFC Standard C23** with parallelogram mounted to the surface. Parallelogram to be channel letter-type construction with .177" thick Polycarbonate face panels with 1st surface applied translucent vinyl graphics. Parallelogram copy to be digital print provided by Miratec. Systems with red background and with blue area of logo graphic also printed. Cabinet and trim cap to be painted Red C1.
- **REGULAR UNLEADED PRODUCT PANEL:** Solar Grade Polycarbonate; Background to be 1st surface applied opaque vinyl Black C6; "Regular" to be show-through white.
- **DIESEL PRODUCT PANEL:** Solar Grade Polycarbonate; Background to be 1st surface applied translucent vinyl Green C7; "Diesel" to be show-through white.

INTERIOR ILLUMINATION: Sloan Sign Box 3 LED Interior Illumination powered by low voltage power supplies.

THIS IS BEHIND THE LOGO PANEL, FUEL GRADE PANELS & DEF/CAT/DRIVE THRU (IF APPLICABLE) PANELS.

SIGN FRAME: 2" x 2" x .25" steel tube with .063" aluminum cladding painted **EFC Standard C23**. Extruded aluminum 1-1/2" wide Divider Bars installed to retain sign panels. Face dividers and retainer to be painted **EFC Standard C23**.


**SLOAN SIGN BOX 3
LED Interior Illumination**

FUEL GRADE FONT:

ACUMIN PRO
CONDENSED BLACK



 316 S. 6th Street St. Joseph, MO 64501 800. 821. 9013	Client	Install Location	Sales	Date: Nov 2020	Job #:	
	RaceTrac	TBA			Revisions:	Date:
	Client Approval:		Date:			

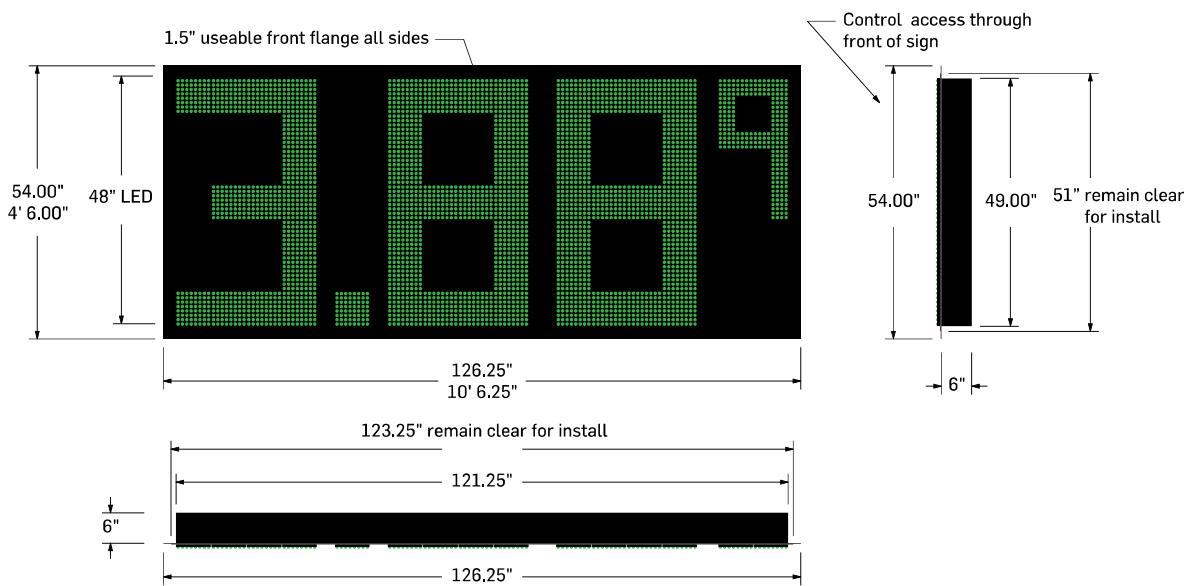

* All units same build specs



Cabinet Specs		Label Specs	Other
Digit Size & Style:	48" LED		* Minimum digit spacing
Digit Color:	Green/Amber		* 47.3 sq ft per unit
Overall Cabinet Size:	4'6"h x 10'6.25"w x 6"d		* 21.58 total AC amps including both cabinets and sides
Cabinet Color:	Black		* Cabinet(s) will have lifting/install eyebolt(s)
Single or Double Face:	Double		* Electrical to be knocked out and ran at installer's preference
Build type:	Drop-in		

This original drawing is provided as part of a planned project and is not to be exhibited, copied or reproduced without the written permission of Sunshine Electronic Display Corporation or its authorized agent. All installation details are suggested only. All signs must be installed in accordance with NATIONAL, STATE, ELECTRICAL AND BUILDING CODES. Sunshine Electronic Display Corporation has no responsibility for wind loads, installations or electrical circuits. These are the sole responsibility of the Buyer/user.

* Actual LED size and configuration may vary




UL LISTED
UL File Number: E340294
CCN: UXYT



ETL LISTED
CONFORMS TO
UL STD 48
UL STD 1433
102482
CERTIFIED TO
CAN/CSA STD C22.2 NO. 207

 316 S. 6th Street St. Joseph, MO 64501 800.821.9013	Client		Install Location		Sales		Date:		Job #:	
	Racetrac						Revisions:		Date:	
		Client Approval:		Date:						

For install help call: 800-821-9013 ext. 4216

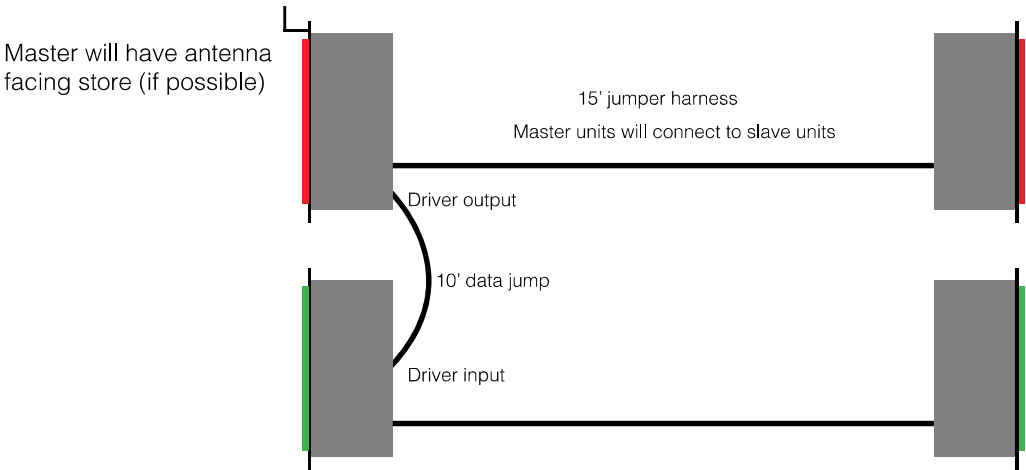

POS wireless board mounted in store



15 amp 120V circuit on 24 hours connected to each box.

Junction boxes located inside cabinet.

Must be dedicated circuit and have their own neutral and ground