

## Chapter 14.22 R3-1.8 MULTIPLE-FAMILY DISTRICT

### Sections:

#### 14.22.010 R3-1.8 District.

The regulations, general provisions, and exceptions set forth in this chapter and in Chapter 14.66 shall apply in the R3-1.8 District.

(Prior code § 10-2.1001)

#### 14.22.020 Permitted uses (R3-1.8).

The following uses shall be permitted in the R3-1.8 District:

- A. Multi-family residential dwelling units ~~with not more than one dwelling unit for each one thousand eight hundred (1,800) square feet of lot area; and~~
- B. ~~For affordable housing requirements, see Chapter 14.28 of this title;~~
- C. ~~For density bonus provisions, see Chapter 14.30 of this title; and~~
- D. ~~Animals as provided in Chapter 5.10 of this code.~~

(Ord. 02-410 § 2; prior code § 10-2.1002)

#### 14.22.030 Maximum density development requirement.

The maximum density permitted shall be constructed unless it is determined by the city council that a less dense project would be in the best interests of the community. In approving a less dense project, the city council shall make at least one of the following findings:

- A. That a maximum density project would be detrimental to the health, safety, comfort, convenience, prosperity, or welfare of persons residing or working in the vicinity or injurious to property or improvements in the vicinity;
- B. That the development of fewer units would enhance opportunities for the development of affordable housing within the project.

(Prior code § 10-2.1002.1)

#### ~~14.22.040 Site area (R3-1.8).~~

~~The minimum site area shall be seven thousand one hundred (7,100) square feet on vacant property and fourteen thousand (14,000) square feet on properties with existing structures.~~

(Prior code § 10-2.1003)

---

#### **14.22.050040 Coverage (R3-1.8).**

The maximum coverage for all structures shall be ~~fortysixty-five (4065)~~ percent of the total ~~gross site area of the site, including garages (not including driveways or off street parking areas).~~

(Prior code § 10-2.1004)

#### **14.22.060050 Front yard (R3-1.8).**

The minimum depth of front yards shall be twenty (20) feet. ~~The minimum width on a public street shall be fifty (50) feet on vacant property and one hundred (100) feet on property with existing structures.~~

(Prior code § 10-2.1005)

#### **14.22.070060 Side yards (R3-1.8).**

The minimum width of side yards shall be seven and one-half feet, except that on a corner lot, the minimum width of the side yard adjoining the street shall be fifteen (15) feet. ~~Five feet shall be added to each side yard for each story above the first story or for each ten (10) feet of height, or fraction thereof, above the lowest twelve (12) feet of the height of the structure, whichever is the lesser, except on the secondary setback on a corner lot. When a garage or carport faces a side yard adjoining a street, the minimum setback to the face of the structure shall be twenty (20) feet. Where R3-1.8 District property abuts on R1-10 District property, the minimum side yard shall be twenty five (25) feet for one-story structures, of which the ten (10) feet abutting the property in the R1-10 District shall have a six-foot solid fence or wall outside a planting screen of evergreen trees or bushes of a variety, height, and spacing as approved by the building and planning department, all of which shall be permanently maintained by the property owner. Such ten-foot planting strip shall be used exclusively for landscaping purposes.~~

(Prior code § 10-2.1006)

(Ord. No. 2012-375, § 5, 1-24-2012)

#### **14.22.080070 Rear yard (R3-1.8).**

The minimum depth of rear yards shall be twenty-five (25) feet, ~~and no structure shall be placed within the required rear yard. When the rear yard~~ Where R3-1.8 District property abuts on R1-10 District property, the ~~minimum depth of rear yards shall be thirty (30) feet, of which the first~~ ten (10) feet abutting on the property in the R1-10 District shall have a six-foot solid fence or wall outside a planting screen of evergreen trees or bushes of a variety, height, and spacing as approved by the ~~Zoning Administrator, building and planning department, all of which shall be permanently maintained by the property owner. Such ten (10) foot planting strip shall be used exclusively for landscaping purposes.~~

(Prior code § 10-2.1007)

#### **14.22.090080 Off-street parking (R3-1.8).**

(As provided in Chapter 14.74 of this title.)

(Prior code § 10-2.1008)

---

## 14.22.10090 Height of structures (R3-1.8).

No structure shall exceed ~~twethree~~ stories or thirty-six (3036) feet in height as measured from the existing natural grade immediately adjacent to the proposed structure, whichever is the lesser. ~~No structure shall exceed one story or fifteen (15) feet in height if located within one hundred (100) feet of the R1-10 District. In no case shall this preclude a basement when used for parking and/or storage.~~

(Prior code § 10-2.1009)

## 14.22.110100 Design control (R3-1.8).

### A. Building Massing and Articulation.

#### 1. Upper-story step-backs.


- a. Front: Minimum five feet from ground floor façade for third story and above for building façades fifty (50) feet or greater in width.
- b. Street side: Minimum five feet from ground floor façade for third story and above for building façades fifty (50) feet or greater in width.
- c. For buildings exceeding the height limit established in the applicable base and overlay zone, the right-of-way-facing façades of the uppermost floor must be embedded in a sloped roof form as allowed by Section 14.22.110.A.4.

#### 2. Vertical Articulation.

- a. Each building volume shall be defined according to one of the following classifications:
  - i. Main body (one per building): The widest volumes of the structure, containing main entrances and the most public interior spaces.
  - ii. Wing (optional, multiple per main body allowed): A narrower volume attached to a main body volume.
- b. Each main body volume shall contain at least one entrance.
- c. Street-facing wings shall be recessed by no less than three feet relative to the front façade of the main body.
- d. The eave/roof of a wing shall be no higher than the corresponding elements of the main body.

#### 3. R-1 Adjacencies.

- a. Building façade planes abutting an R-1 district may not exceed forty-eight (48) feet in width.
- b. When a building façade abutting an R-1 district exceeds forty-eight (48) feet in width, it must be separated into façade bays no greater than forty-eight (48) feet by a recess five feet wide and five feet deep.
- c. Balconies, roof decks and other habitable outdoor space is not allowed on upper-story façades abutting R-1 zones.
- d. Sliding glass doors, French doors, and floor-to-ceiling windows are not allowed on upper-story façades abutting R-1 zones.

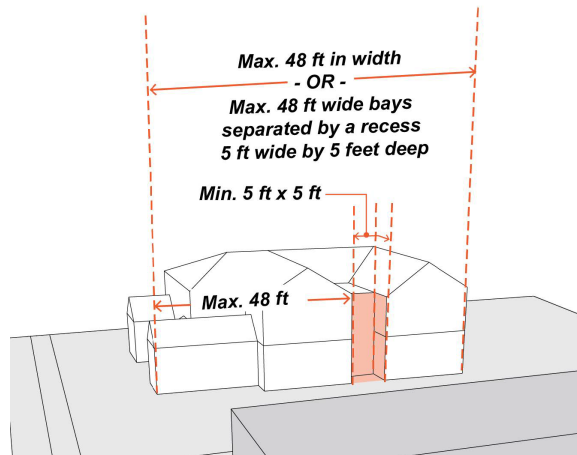


4. Roofline and Roof Design.

a. Acceptable roof forms:

- i. Hipped.
- ii. Gable.
- iii. Dormer.

b. When the top story is stepped back and embedded in a sloped roof form such as a mansard roof or a hipped and/or gabled roof with dormers, the floor below must (and other floors may) be stepped back to meet the slope of the top story.

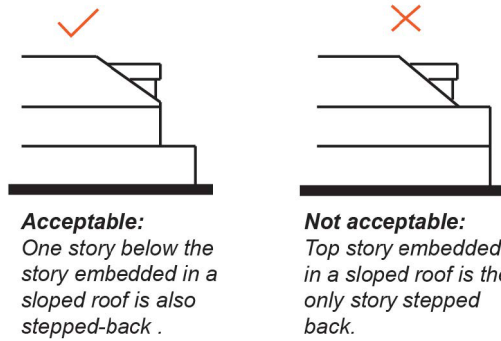


c. Façade facing R-1 Zone must utilize a hipped or gable roof and may incorporate dormers.

d. Roofline at corners shall not exceed roofline of adjacent wallplanes by more than twenty-four (24) inches.

B. Building Design.

1. Façade Composition. Building façades shall be arranged in an orderly composition of bays, defined by vertically aligned openings alternating horizontally with solid walls or columns. The pattern shall be visually expressed through the spacing of openings, recesses, eaves, cornices, overhangs, trellises, exposed rafters, columns, or bay windows.

- 
2. Building Entrances. Building entrances must incorporate one of the following entry features. See Section 14.66.275 (Entrance Type Standards) for design standards applicable to each entrance type listed.
    - a. Stoop.
    - b. Porch.
    - c. Dooryard.
  3. Primary Entrance Location(s). Locate primary entrance on the front ROW and/or interior courtyard.
  4. Ground Floor Floor-to-Ceiling Height. Minimum twelve (12) inches taller than typical upper floor floor-to-ceiling height.

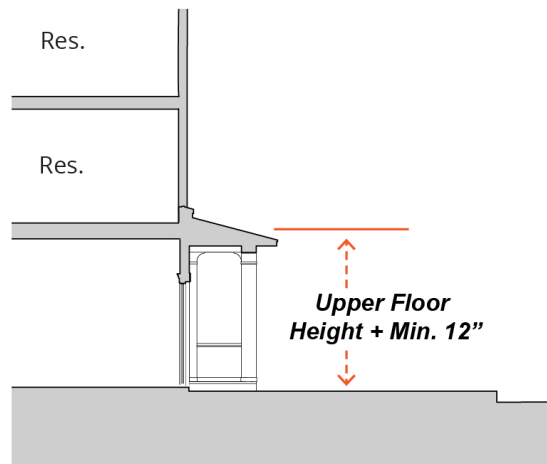

- C. Storage. Each multi-family residential dwelling unit shall have a minimum of ninety-six (96) cubic feet of enclosed storage, excluding closet and garage areas.
- D. Window Design.
  1. All windows must have a sill.
  2. Vinyl sliding windows are prohibited on façades visible from a right-of-way.
- E. Building Materials.
  1. Primary shall mean fifty (50) percent or more of a façade surface area excluding transparent surfaces. Permitted primary cladding materials are limited to:
    - a. Stucco (minimum two-coat stucco; synthetic stucco or EIFS not allowed).
    - b. Siding (lap, vertical, or shingle).
      - i. All siding shall be wood, composite wood, or cement fiberboard.
      - ii. Wood siding shall be painted or stained.
      - iii. Vinyl and aluminum siding are not permitted.
    - c. Stone.
    - d. Brick.
  2. Secondary shall mean less than fifty (50) percent of a façade surface area excluding transparent surfaces. Permitted secondary cladding materials are limited to:

- 
- a. Stucco (minimum two-coat stucco; synthetic stucco not allowed, EIFS not allowed).
  - b. Siding (lap, vertical, or shingle).
    - i. All siding shall be wood, composite wood, or cement fiberboard.
    - ii. Wood siding shall be painted or stained.
    - iii. Vinyl and aluminum siding are not permitted.
  - c. Stone (watertable and building base only).
  - d. Brick (watertable and building base only).
  - e. Tile.
  - f. Concrete (watertable and building base only, board-form only, cast concrete not permitted).
- F. Landscaping.
- 1. Landscaping must be placed on each side of a driveway at grade or in raised planters.
  - 2. Low walls and/or hedges must screen the parking along the sidewalk. When walls are used, the materials and design must be compatible with and not obscure the architectural style of the building.
- G. Screening.
- 1. Service, trash, and utility areas must be screened from view of the right-of-way.
  - 2. Screening must be architecturally consistent with primary building in terms of materials, colors, and style.
- H. Additional Design Standards. See Section 14.66.280 for additional design standards applicable to all multi-family development in the R3-1.8 District.

(Amended during 2/06 supplement; Ord. 02-410 § 3; prior code § 10-2.1011)

( Ord. No. 2021-478 , § 1, 9-14-2021)

#### **14.22.~~120~~110 Exceptions (R3-1.8).**

On lots facing on Gabilan Street and known as Lots 4 through 14 and Lot 24 of Block 34, Map No. 3, town of Los Altos, the side yard abutting the R1-10 District shall be not less than ten (10) feet for a one-story building, of which five feet shall be landscaped as provided in Section 14.22.070 of this chapter, and no structure shall exceed one story or fifteen (15) feet in height if located within fifty (50) feet of the R1-10 District.

(Prior code § 10-2.1012)

#### **14.22.~~130~~120 Signs (R3-1.8).**

(As provided in Chapter 14.68 of this code.)

(Prior code § 10-2.1013; Ord. No. 2015-414 , § 12, 9-8-2015)

#### **14.22.~~140~~130 Fences (R3-1.8).**

(As provided in Chapter 14.72 of this title.)

---

(Prior code § 10-2.1014)

**14.22.~~150~~140 Nonconforming use regulations (R3-1.8).**

(As provided in Chapter 14.66 of this title.)

(Prior code § 10-2.1015)

**14.22.~~160~~150 Accessory structures.**

As provided in Chapter 14.15 of this title.

(Ord. No. 2018-440 , § 3, 3-13-2018)