



Highland Plumbing, Inc.

2340 Copper Ct., Unit C, Crest Hill, IL 60403

(815) 725-1050

Estimate

20600 City Center Blvd.
Crest Hill, IL 60403

Date	Estimate #
1/7/2026	2161
Project	
City of Crest Hill	

Description

Furnish labor and material to complete the following plumbing work to men's and women's restrooms, located in the police station locker rooms, to prevent sewer backups due to back pitched sewer line.

Project to consist of installing (1) new ejector pit in corner of men's locker room and reroute men's & women's bathroom plumbing into ejector pit to prevent sewer from backing up by pumping it through existing piping.

PHASE 1 OF THIS SCOPE OF WORK TO INCLUDE:

1. Install floor and wall protection from sally port, down hallway and into men's restroom.
2. Remove (2) urinals from wall to perform the above scope of work.
3. Remove drywall from urinals and lavatory area to perform the above scope of work.
4. Layout job.
5. Machine rental to perform the above scope of work.
6. Saw cut and remove concrete in bathroom area.
7. Dispose of concrete and debris from site into dumpster.
8. Excavate to locate existing plumbing and for new plumbing and lift station.
9. Install new lift station and pumps.
10. Install new PVC waste and vent lines tying into existing plumbing.
11. Backfill trenches to grade and remove excess debris from site.
12. Install rebar and plastic to prevent trenches from settling.
13. Re-pour concrete floor removed to perform the above scope of work and to vibrate concrete under existing slab to prevent settling; 4 yards of concrete included in bid.
14. Remove floor and wall protection.
15. Install new vent lines above restroom ceiling for lift station tying into existing plumbing stack.
16. Patch and paint drywall that was removed to perform the above scope of work.

WORK NOT INCLUDED IN THIS SCOPE OF WORK:

- Permit fees, if required, to be paid by the City of Crest Hill.
- Electric for lift station to be completed by the City of Crest Hill.
- Epoxy floor coating to be completed by the City of Crest Hill.
- Final clean up of restroom and hallway to be completed by the City of Crest Hill.

* Highland Plumbing assumes no liability for underground electric or private utilities cut or damaged during the above scope of work that are not marked prior to the above scope of work is started.

"Committed to the pursuit of excellence since 2003!"



Highland Plumbing, Inc.

2340 Copper Ct., Unit C, Crest Hill, IL 60403

(815) 725-1050

Estimate

20600 City Center Blvd.
Crest Hill, IL 60403

Date	Estimate #
1/7/2026	2161
Project	
City of Crest Hill	

Description

* Highland Plumbing assumes no liability for any structural problems in the future that may be a result of the above scope of work.

* Highland Plumbing assumes no liability for any minor damage to existing walls and flooring while work is being performed.

HIGHLAND PLUMBING CANNOT GUARANTEE THAT THIS PHASE WILL COMPLETELY RECTIFY THE SEWER ISSUES DUE TO EXISTING BACK-PITCHED SEWER LINES. ADDITIONAL WORK MAY BE REQUIRED.

TOTAL LABOR & MATERIAL \$60,139.00 (Sixty thousand one hundred thirty-nine and 00/100 dollars)
50% to be paid before work begins. Balance due upon completion.

"Committed to the pursuit of excellence since 2003!"

June 10th, 2026

Re: Crest Hill-Front Lobby Glazing Replacements

Valley Security Company is pleased to provide you with this proposal for the Crest Hill Public Safety Building.

Our base proposal includes furnish and install of the following:

- (4) 70-1/2" x 44-3/4" Bullet resistant level 4 Glass Clad Polycarbonate Glazing
- (1) 36-3/4" x 44-1/4" Bullet resistant level 4 Glass Clad Polycarbonate Glazing
- (1) 41" x 56-3/4" Bullet resistant level 4 Glass Clad Polycarbonate Glazing
- Reusing the existing window mount speak port.

Base Price \$44,750.00

Alternate Pricing to furnish and install (4) countertop speaker system- \$ 8,750.00

- Uses 120v outlet

Bid Exclusions:

- Electrical
- Low Voltage
- Drywall Repairs/Painting
- Countertops

Valley Security Company would like to thank you for the opportunity to submit this proposal. If you should have any questions on the proposal, please feel free to contact me.

Respectfully submitted,

Max Miller
Project Manager
Valley Security Company

ACCEPTANCE:

Valley Security Company is hereby authorized to furnish all materials and / or labor required to complete the work referred to in this proposal for which the undersigned agrees to pay the amount mentioned in said proposal, and per the terms thereof.


SIGNED _____ DATE _____

Please sign, date, and return a copy of this contract for our files.

Armortex® SC-300 Electronic Two-Way Communicator


Specifications | CAD & PDF Drawings

- Aluminum Construction
- Two way Hands Free communication
- Voice Activated Switch
- Background Noise Level Monitoring
- Level Detection and
- Attenuation Control
- Linear Volume Control
- 4" wide x 8" high

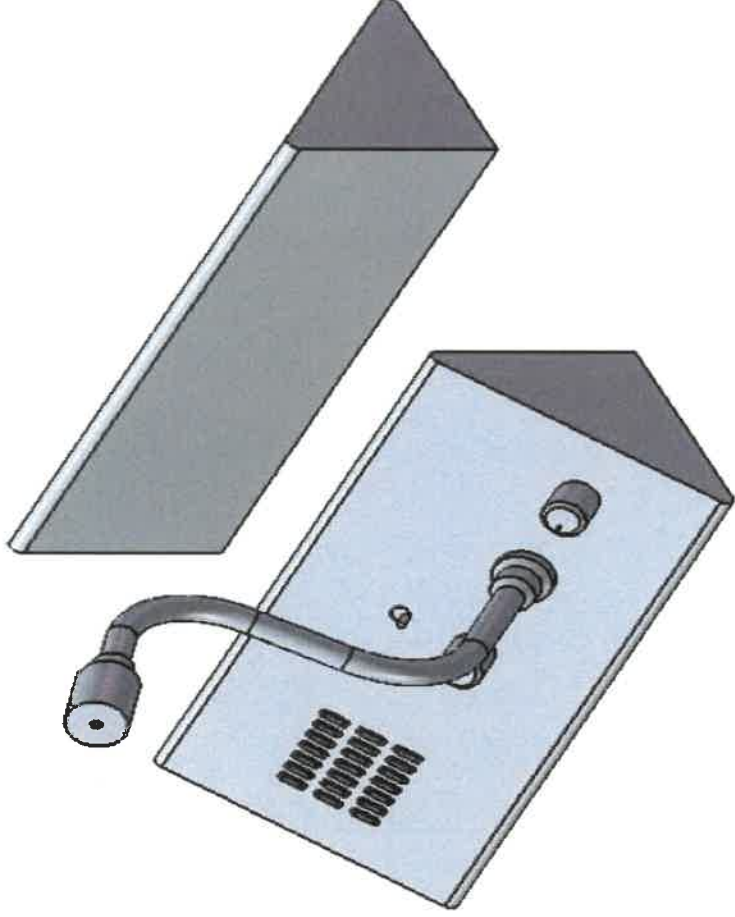

ARMORTEX® 5926 Corridor Pkwy, Schertz, TX 78154
armortex.com | T 800-880-8306 | F 210-661-8308

TOOLS REQUIRED:
 9/64" HEX KEY (INCLUDED)


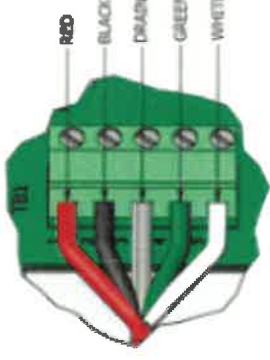


DETAIL A
 SCALE 1:33 = 3/8

FACTORY FURNISHED
 FIELD CABLE. CONNECT TO
 CORRESPONDING TERMINALS
 AS SHOWN (CLASS II WIRING)
 BELDEN #67723.

**REMOTE
 STATION**

**MASTER
 STATION**

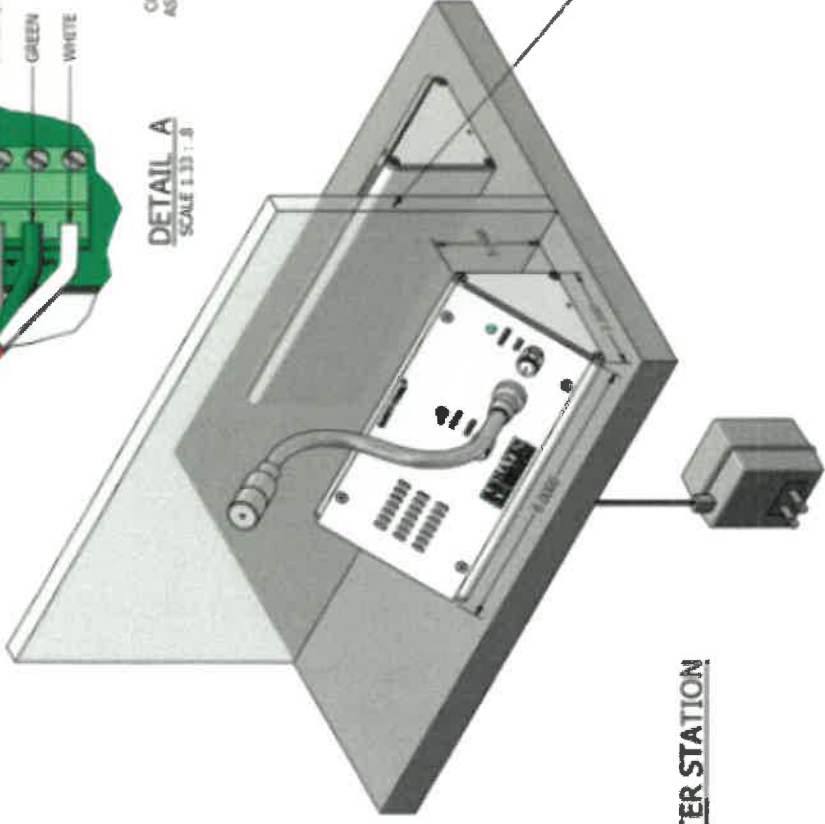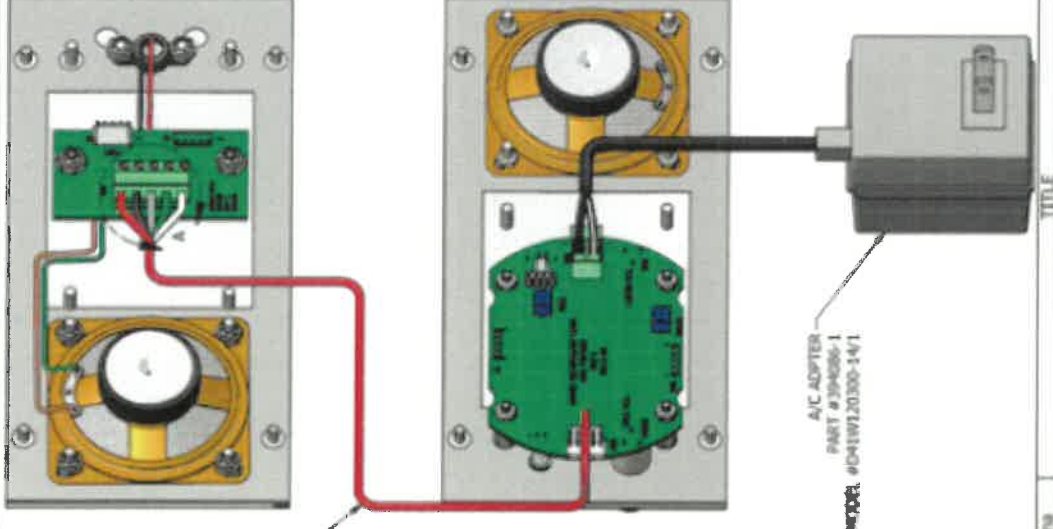

REVISION A:	DRAWN BY: T Collins	TITLE	PAGE
REVISION B:	DATE: 7/16/2010	INSTALLATION DIAGRAM	1
REVISION C:	SHOP ORDER #	FOR MODEL #SC-300	
REVISION D:	DRAWING SIZE: 11	SHEET 1 OF 1 (DWG NO: 16201)	

**HAVEN
 TECHNOLOGY
 CORPORATION**