













SUPER Jumbo Tc
Weather-Resistive Barriers

ASTM E2556 Type II
Equivalent to Federal Spec. SS-SP-700A Type 1, Grade "60" Sheet 2

ES

ESB-1027

SUPER Jumbo Tc
Weather-Resistive Barriers

ASTM E2556 Type II
Equivalent to Federal Spec. SS-SP-700A Type 1, Grade "60" Sheet 2

ES

ESB-1027

SUPER Jumbo Tc
Weather-Resistive Barriers

ASTM E2556 Type II
Equivalent to Federal Spec. SS-SP-700A Type 1, Grade "60" Sheet 2

ES

ESB-1027

SUPER Jumbo Tc
Weather-Resistive Barriers

ASTM E2556 Type II
Equivalent to Federal Spec. SS-SP-700A Type 1, Grade "60" Sheet 2

ES

ESB-1027

SUPER Jumbo Tc
Weather-Resistive Barriers

ASTM E2556 Type II
Equivalent to Federal Spec. SS-SP-700A Type 1, Grade "60" Sheet 2

ES

ESB-1027

SUPER Jumbo Tc
Weather-Resistive Barriers

ASTM E2556 Type II
Equivalent to Federal Spec. SS-SP-700A Type 1, Grade "60" Sheet 2

ES

ESB-1027


















SUPER Jumbo Tex 60
Weather-Resistant Barrier

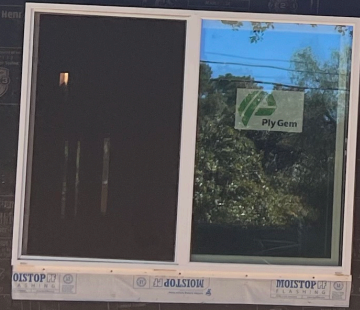

SUPER Jumbo Tex 60
Weather-Resistant Barrier



SUPER Jumbo Tex 60
Weather-Resistant Barrier

SUPER Jumbo Tex 60
Weather-Resistant Barrier



SUPER Jumbo Tc3
Weather-Resistive Sheathing

SUPER Jumbo Tc3
Weather-Resistive Sheathing

SUPER Jumbo Tc3
Weather-Resistive Sheathing

SUPER Jumbo Tc3
Weather-Resistive Sheathing

SUPER Jumbo Tc3
Weather-Resistive Sheathing

SUPER Jumbo Tc3
Weather-Resistive Sheathing

SUPER Jumbo Tc3
Weather-Resistive Sheathing

SUPER Jumbo Tc3
Weather-Resistive Sheathing



Jumbo Tex
Weather-Resistive Barrier
15 mil
100' x 48'

Product Description:
This product is a 15 mil thick, black, non-woven polyethylene membrane that is designed to be applied over a wood or gypsum board substrate to provide a weather-resistant barrier for exterior walls and roofs.

Installation:
1. Apply to a smooth, clean, and dry substrate.
2. Overlap joints by a minimum of 6 inches.
3. Seal all joints and penetrations with a compatible sealant.

ES 1000

Jumbo Tex
Weather-Resistive Barrier
15 mil
100' x 48'

Product Description:
This product is a 15 mil thick, black, non-woven polyethylene membrane that is designed to be applied over a wood or gypsum board substrate to provide a weather-resistant barrier for exterior walls and roofs.

Installation:
1. Apply to a smooth, clean, and dry substrate.
2. Overlap joints by a minimum of 6 inches.
3. Seal all joints and penetrations with a compatible sealant.

ES 1000

Super Jumbo Tex
Weather-Resistive Barrier
15 mil
100' x 48'

Product Description:
This product is a 15 mil thick, black, non-woven polyethylene membrane that is designed to be applied over a wood or gypsum board substrate to provide a weather-resistant barrier for exterior walls and roofs.

Installation:
1. Apply to a smooth, clean, and dry substrate.
2. Overlap joints by a minimum of 6 inches.
3. Seal all joints and penetrations with a compatible sealant.

ES 1000

WEST VALLEY
COLLECTION & RECYCLING