



Quote

08/04/2021

To:

Mangum Regional Medical Center
Sarah Dillahunty
sdillahunty@mangumregional.org

Project:

Mangum Reg Med Ctr Dishwasher

From:

Markham Restaurant Supply, Inc.
Greg Williams
420 South Fresno Street
P. O. Box 6356 (72906-6356)
Ft. Smith, AR 72906-
(479)782-3233
(479)782-3233 (Contact)
(479)782-3433 (Fax)
greg@markhamrs.com

Job Reference Number: 7245

THANK YOU FOR THE OPPORTUNITY TO QUOTE

| Item | Qty | Description | Sell | Sell Total |
|------|------|--|-------------|-------------|
| 1 | 1 ea | DISHWASHER, DOOR TYPE, VENTLESS Hobart Model No. AM16VLT-BAS-2 Ventless Dishwashing Machine, tall chamber (27"), door type, energy recovery, high temp sanitizing, 208-240/60/3 (field convertible to single phase), internal condensing system, 40 racks/hour, straight-thru or corner installation, user-friendly smart touchscreen controls, Sense-A-Temp™ booster, electric tank heat, X-shaped wash arms, scrap screen and basket, door actuated start, door lock, stainless steel tank, tank shelf, chamber, trim panels, frame & feet, cULus, NSF, ENERGY STAR®. Factory Startup - Free for installations within 100 miles of a Hobart Service Office during normal business hours with appropriate notice; installation beyond 100 miles will be quoted by Service. | \$23,485.00 | \$23,485.00 |
| | | 1 ea Standard warranty - 1-Year parts, labor & travel time during normal working hours within the USA | | |
| | | 1 ea Hobart Care Unlimited: M-F, 8am - 5pm, weekday coverage for all calls, unlimited number of calls, (1) business day response for emergency calls, (3) business day response for non-emergency calls (2nd year extended warranty preference) (NET) | | |
| | | 1 ea Service Contract prices represent 1 Year of specified coverage plan and are valid until 12.31.2021 | | |
| | | 1 ea DWT2-AM16 Drain water tempering (dual valve) kit with Pumped Drain Air Gap for VL-BAS and VLT-BAS models | | |
| | | 1 ea SELF-INSTALL Installation by others - Qualified Technicians or Contractors only. Hobart not responsible for damages to equipment during installation by others or any resulting warranty issues. | | |
| | 2 ea | RACK-6PAN 6 pan rack to hold sheet pans (Tall only) | | |

install included
Mangum Reg Med Ctr Dishwasher

Mangum Regional Medical Center

ITEM TOTAL: \$23,485.00

Initial: _____

Page 1 of 2

Markham Restaurant Supply, Inc.**08/04/2021**

| | |
|-------------|-------------|
| Merchandise | \$23,485.00 |
| Tax 9.5% | \$2,231.08 |
| Total | \$25,716.08 |

We have not finished pricing the custom stainless steel work that will be required for installation of dishwasher. We hope to have pricing by end of week.

Dishmachine to ship direct to facility from vendor.

Thank you,
Greg Williams

Acceptance: _____ Date: _____

Printed Name: _____

Project Grand Total: \$25,716.08

RECEIVED
Mangum Regional Medical Center
8/4/2021
Dishwasher
\$25,716.08


RECEIVED
Mangum Regional Medical Center
8/4/2021
Dishwasher
\$25,716.08

HOBART

Project _____
 AIA # _____ SIS # _____
 Item # _____ Quantity _____ C.S.I. Section 114000

COMMERCIAL
DISHWASHERS

AM16VLT-BAS TALL BASE ELECTRIC High Temperature Ventless Door-Style Dishwashing Machine

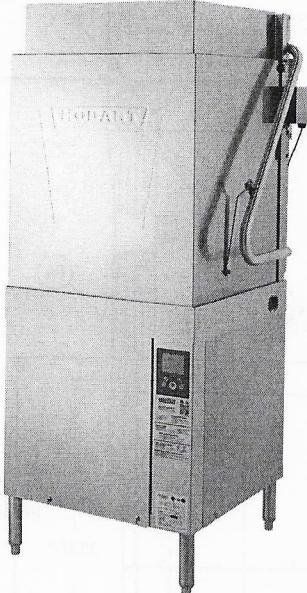

SPECIFIER STATEMENT

Specified unit will be a Hobart AM16 Tall Base electric high temperature ventless dishwashing machine. Features include 3-sided pillarless hood, ventless operation & energy recovery, door lock, touchscreen controls with WiFi connectivity, NSF pot and pan rating for 2-, 4- & 6-minute cycles, 27" door opening, pumped drain, auto door start with auto fill, interchangeable stainless steel rinse arms and X-shaped wash arms, delime cycle, advanced diagnostics and service connection, up to 40 racks per hour, .67 U.S. gallons per rack pumped final rinse.

1 year parts and labor warranty.

STANDARD FEATURES

- + .67 gallons per rack pumped final rinse
- + 40 racks per hour – hot water sanitizing
- + Ventless energy recovery
- + User-friendly smart touchscreen controls
- + WiFi connectivity
- + SmartConnect app and cloud with machine status, temperature logs, error code reporting, and cost, consumption and usage analysis
- + Two stage filtration
- + Pillarless opening
- + 3-sided hood
- + Single point electrical connection standard, field convertible to dual point connection
- + 3 phase standard, field convertible to single phase
- + Temperature and chemical lock outs (with Hobart equipped chemical pumps)
- + Pumped drain
- + Door lock
- + Timed wash cycles for 1, 2, 4 or 6 minutes
- + NSF pot and pan rating for 2-, 4- & 6- minute cycles
- + Sense-A-Temp™ 70°F rise electric booster heater
- + Self-draining, high efficiency wash pump with stainless steel impeller
- + 27" door opening for 18" x 26" sheet pans or 60-quart mixing bowl
- + Stainless steel drawn tank, tank shelf, chamber, trim panels, frame and feet
- + Spring counterbalanced chamber with UHMW guides
- + X-shaped revolving, interchangeable upper and lower anticlogging wash arms
- + Revolving, interchangeable upper and lower rinse arms
- + Slanted, self-locating, one-piece scrap screen and basket system
- + Automatic fill
- + Door actuated start
- + AutoClean
- + Factory startup
- + Service diagnostics
- + Straight-through or corner installation
- + Delime cycle with notification (field activated)
- + Sheet pan rack

OPTIONS & ACCESSORIES (Available at extra cost)


- Peg, combination and wine rack
- Chemical pumps
- Splash shield for corner installations
- Flanged and seismic feet
- Water hammer arrestor kit
- Rapid fill kit
- Sink integration kit
 - Sink saddle & 3" leg extension
 - Sink rail kit
 - Fold down table
- Drain water tempering kit
- Prison package
- Marine package
- Pumped drain air gap kit

Approved by _____ Date _____ Approved by _____ Date _____


HOBART

AM16VLT-BAS TALL BASE ELECTRIC


High Temperature Ventless Door-Style Dishwashing Machine

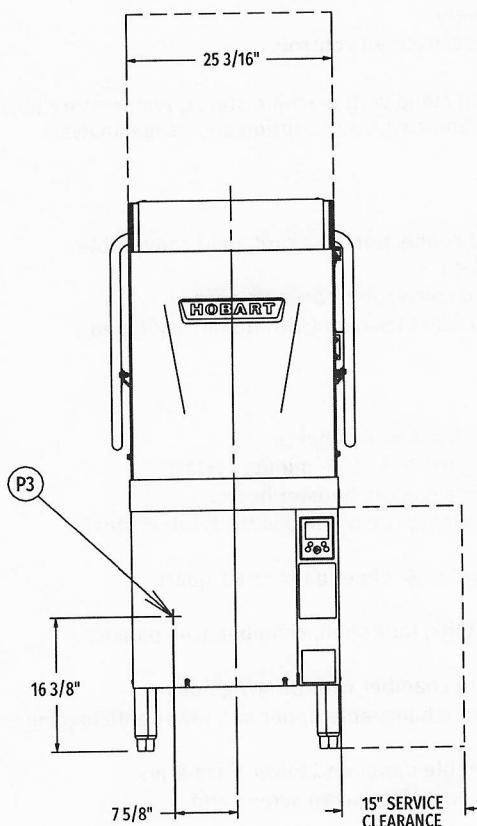


Front View

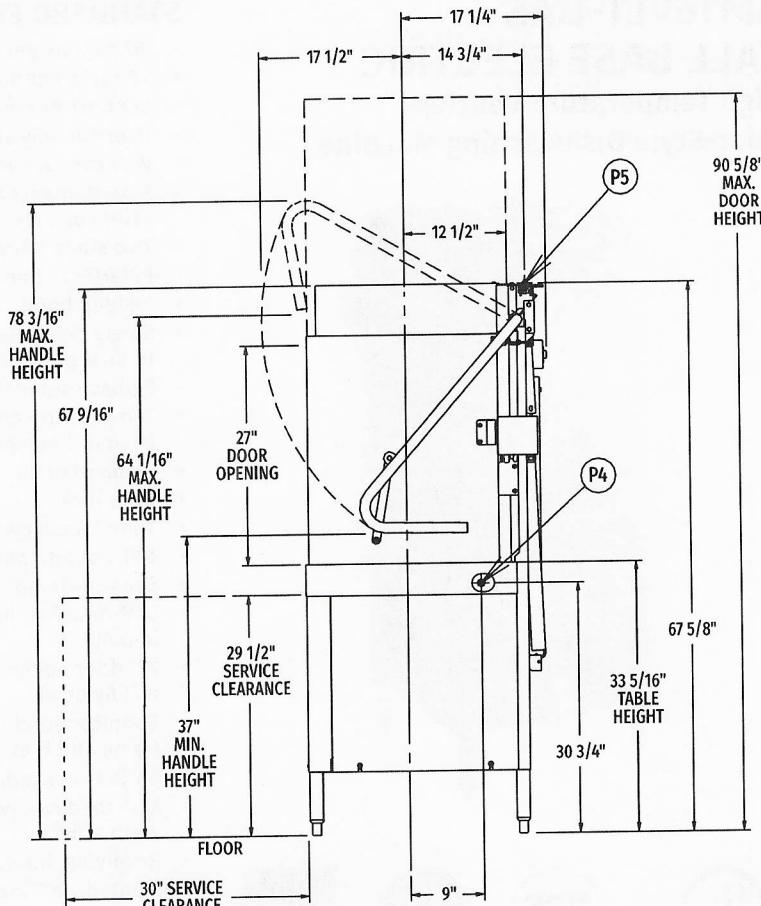

Right Side View

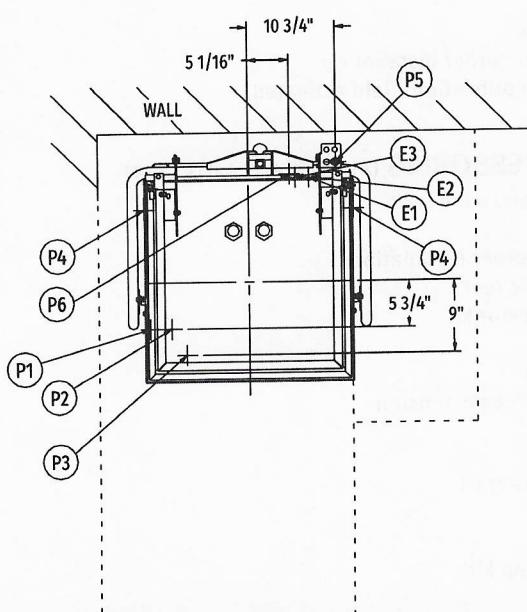

Top View

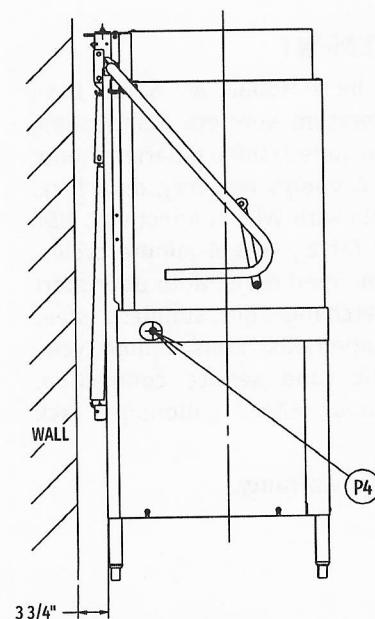

Left Side View

MODEL:
AM16VLT-BAS
E-950440


HOBART

AM16VLT-BAS TALL BASE ELECTRIC


High Temperature Ventless Door-Style Dishwashing Machine

WARNING: Electrical and grounding connections must comply with the applicable portion of the National Electrical Code and/or other local electrical codes.

Plumbing connections must comply with applicable sanitary, safety, and plumbing codes.

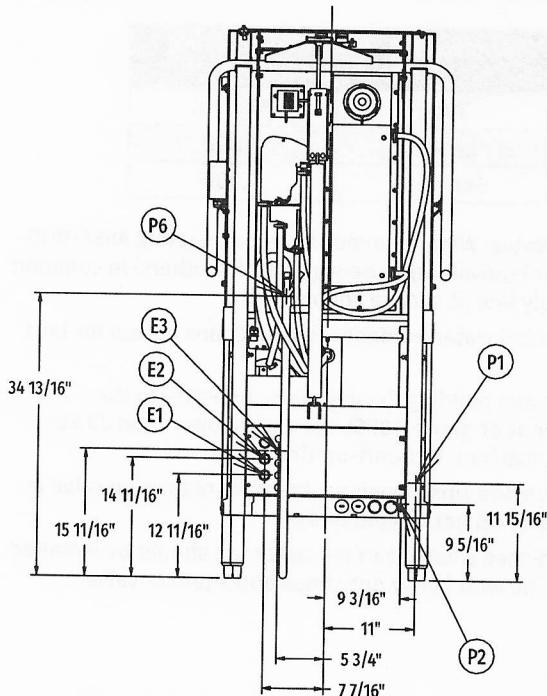

Rear View

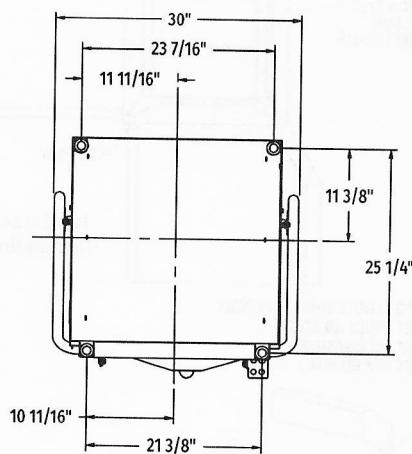

Bottom View

LEGEND

| Electrical Connections | |
|------------------------|---|
| E1 | Electrical connection: wash pump motor & sump heater, 1" or 3/4" conduit hole; 12-11/16" AFF. |
| E2 | Electrical connection: electric booster & controls only or single point electrical connection (3PH only), 1" or 3/4" conduit hole; 14-11/16" AFF. |
| E3 | Electrical connection: detergent & rinse agent feeders, (DPS1 & DPS2) 1.5 amps @ nameplate supply voltage, (RPS1 & RPS2) 1.5 amps @ nameplate supply voltage; 1/2" conduit hole, 15-11/16" AFF. |
| Plumbing Connections | |
| P1 | Common water connection including booster heater: 55°F water minimum; 15-65 PSI recommended; 3/4" female garden hose fitting on 6' long hose supplied with machine; 11-15/16". |
| P2 | Optional – hot water connection: 110°F water minimum (rapid fill accessory – when ordered); 3/4" female garden hose fitting on 6' long hose; 9-5/16" AFF. |
| P3 | Detergent probe sensor: remove cap and stud assembly to access 7/8" hole; 16-3/8" AFF. |
| P4 | Detergent feeder: two locations available. Remove cap and stud assembly to access 7/8" hole; 30-3/4" AFF. |
| P5 | Rinse agent feeder: remove 1/8" NPT pipe plug to access 1/8" NPT tapped hole; 67-5/8" AFF. |
| P6 | Drain connection: 5/8" barb fitting with 6' long hose supplied with machine; 34-13/16" AFF. Maximum height 40" AFF. |

SPECIFICATIONS

Capacities

| | |
|--|-------|
| Racks Per Hour (maximum)..... | 40 |
| Dishes per Hour (average 25 per rack) | 1,000 |
| Glasses per Hour (average 45 per rack) | 1,800 |
| Wash Tank (U.S. gallons)..... | 10.5 |

Motor Horsepower

| | |
|------------------|------|
| Rinse Pump | 0.18 |
| Wash Pump..... | 2 |
| Drain Pump..... | 0.21 |
| Blower..... | 0.05 |

Rinse

| | |
|--|------|
| Gallons per Rack | 0.67 |
| Gallons per Hour (maximum consumption) | 26.8 |

Peak Rate of Drain Flow

| | |
|--|------|
| Gallons per Minute (initial rate with full tank) | 18.5 |
|--|------|

Heating

| | |
|---------------------------------|-----|
| Electric Booster (kW)..... | 7.1 |
| Electric Heating Unit (kW)..... | 5.4 |

| | |
|-------------------------------------|----------|
| Shipping Weight (approximate) | 372 lbs. |
|-------------------------------------|----------|

| | |
|------------------------|---------------------------|
| Crated Dimensions..... | 73.75"H x 36.5"W x 36.5"L |
|------------------------|---------------------------|

HOBART

AM16VLT-BAS TALL BASE ELECTRIC

High Temperature Ventless Door-Style Dishwashing Machine

| E1 AM16 with Electric Heat (When Field Converted to Dual Point) | | | |
|--|------------|---------------------------------|---------------------------|
| Voltage | Rated Amps | Minimum Supply Circuit Ampacity | Maximum Protective Device |
| 208-240/60/1 | 39.6 | 50 | 50 |
| 208-240/60/3 | 26.9 | 30 | 30 |
| 480/60/3 | 10.5 | 15 | 15 |

| E2 9.5 kW Booster & Controls Ampacity Ratings (When Field Converted to Dual Point) | | | |
|---|------------|---------------------------------|---------------------------|
| Voltage | Rated Amps | Minimum Supply Circuit Ampacity | Maximum Protective Device |
| 208-240/60/1 | 43.5 | 50 | 50 |
| 208-240/60/3 | 26.8 | 30 | 30 |
| 480/60/3 | 13.5 | 15 | 15 |

| E2 AM16 Single Point Electrical Service Connection as Shown Below | | | |
|---|------------|---------------------------------|---------------------------|
| Voltage | Rated Amps | Minimum Supply Circuit Ampacity | Maximum Protective Device |
| 208-240/60/3 | 53.7 | 60 | 60 |
| 480/60/3 | 24.0 | 30 | 30 |

Miscellaneous Notes: All dimensions taken from floor line may increase 7/8" or decrease 3/8" depending on leg adjustment.

Vent hood (if required) to provide a minimum 450 CFM exhaust (ref installation instructions).

Net weight of machine including booster: 355 lbs.

Domestic shipping weight including booster: 375 lbs.

Size of racks - 19 3/4" x 19 3/4".

| Approximate Heat Gain to Space without Vent Hood | |
|--|---------|
| Type | BTU/Hr. |
| Latent | 6,800 |
| Sensible | 5,000 |

Plumbing Notes: Water hammer arrestor (meeting ASSE-1010 standard or equivalent) to be supplied (by others) in common water supply line at service connection.


Recommended water hardness to be 3 grains or less for best results.

Recommended building flowing water pressure to the dishwasher at or above 20PSI. Pressures lower than 20 PSI may affect machine fill/start-up times.


This is a pumped rinse machine. Pressure regulating valve is not necessary on hot or cold lines.

For convenience when cleaning, water tap should be installed near machine with heavy duty hose and squeeze valve.


AM16VLT-BAS TABLING CONFIGURATIONS AND TRACK DESIGN

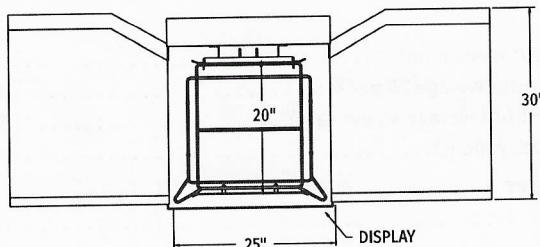


Pass Thru Installation

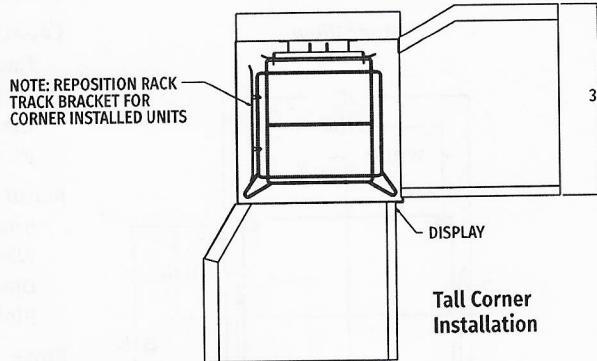

Tall Corner Installation

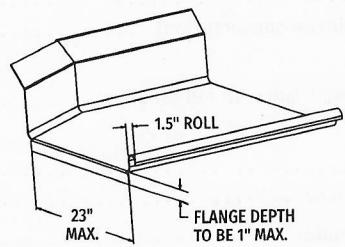

Suggested Table Design

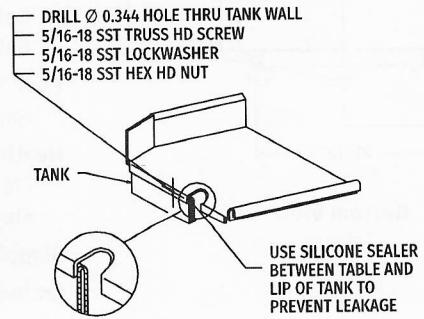

As continued product improvement is a policy of Hobart, specifications are subject to change without notice.