

Public Hearings

SID No. 202401-1

SID No. 202401-2


Presented by: Loretta A. Marshik, Assistant City Engineer

Tuesday, December 19, 2023


2024 Road Maintenance Project



SID No. 202401-1

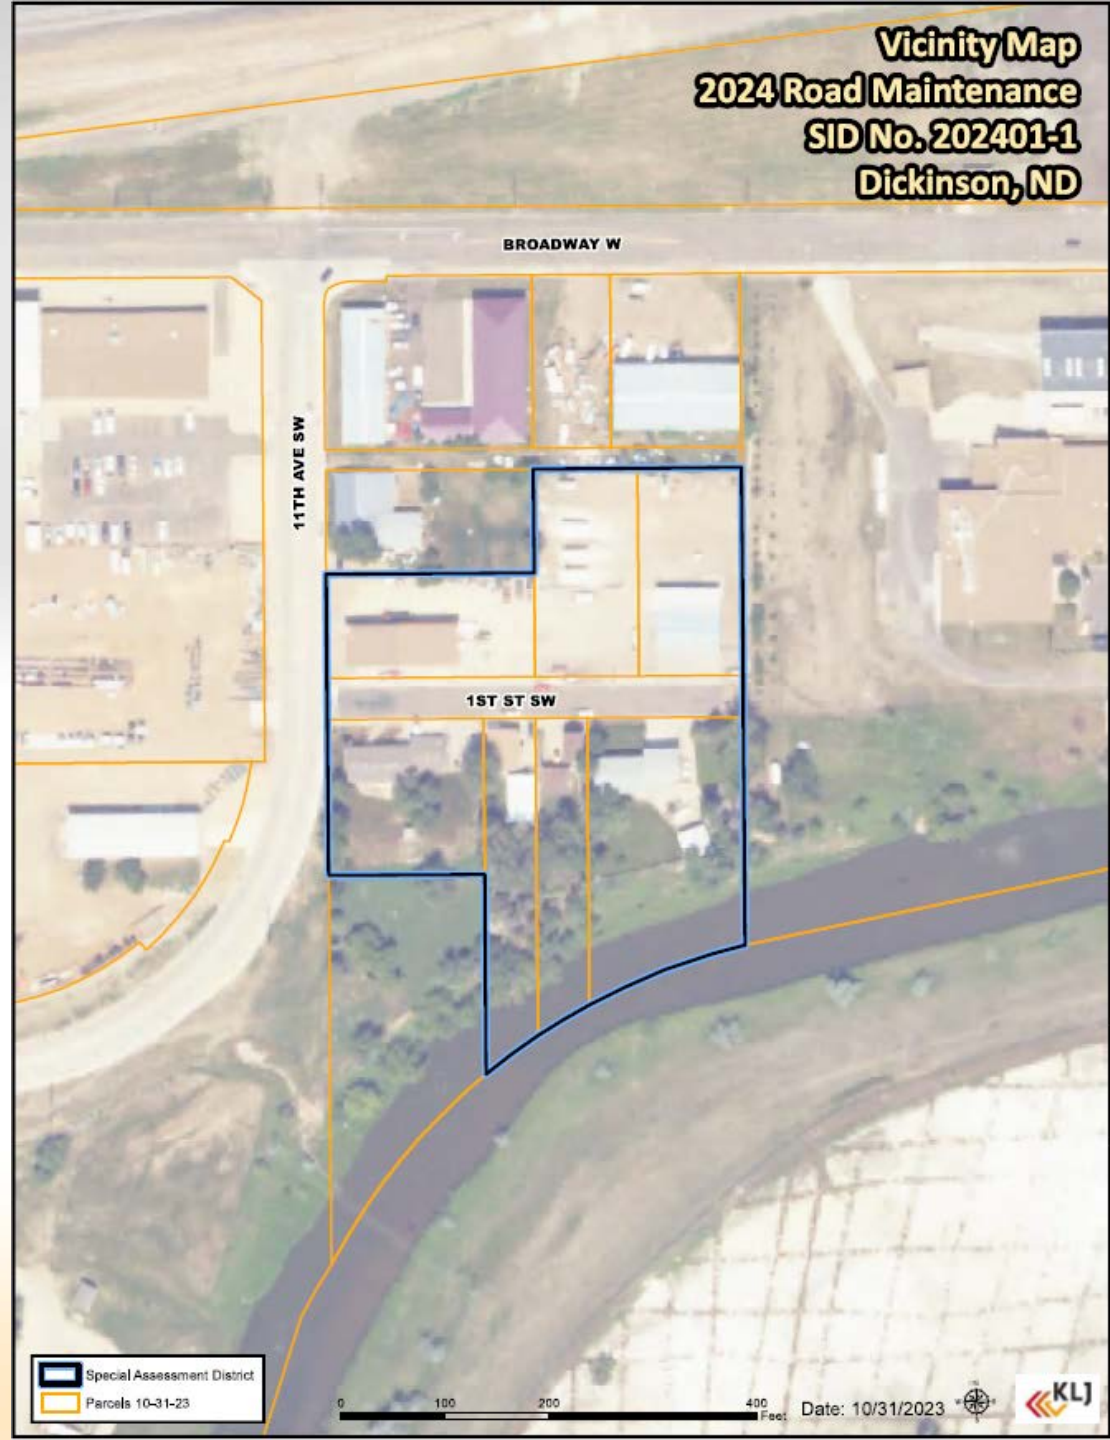

SID No. 202401-2

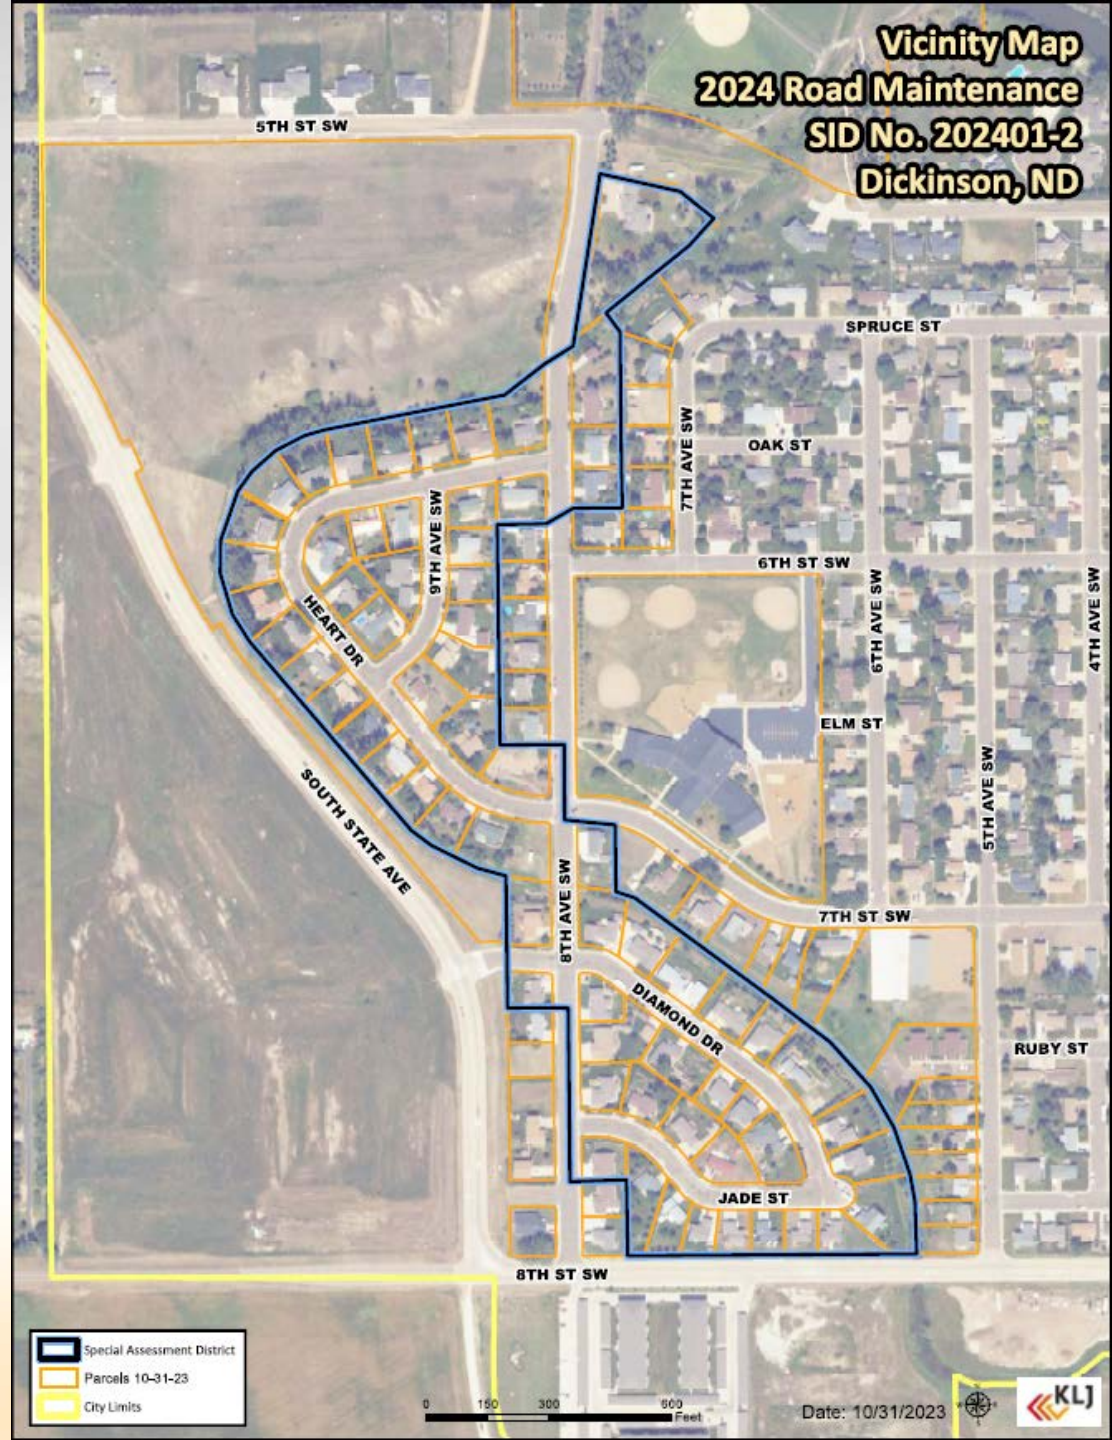

Estimated Cost

Only assessed areas are included in the estimate.



ENGINEER'S OPINION OF PROBABLE CONSTRUCTION COST

DICKINSON 2024 ROAD MAINTENANCE (CITY PROJECT NO. 202401)
CITY OF DICKINSON, NORTH DAKOTA

Item No.	Description	Unit	Total Quantity	Unit Cost	Total Sum
1	MOBILIZATION & CONTRACT BOND	LS	1	\$ 181,061.00	\$ 181,061.00
2*	REMOVAL OF CONCRETE	SY	986	\$ 32.00	\$ 31,552.00
3*	REMOVAL OF CURB & GUTTER	LF	4,014	\$ 8.00	\$ 32,112.00
4	REMOVAL OF BITUMINOUS SURFACING	SY	9,319	\$ 13.00	\$ 121,147.00
5	GEOSYNTHETIC MATERIAL TYPE R1	SY	9,304	\$ 4.50	\$ 41,868.00
6	AGGREGATE BASE COURSE - CL. 5	CY	3,104	\$ 100.00	\$ 310,400.00
7*	CURB & GUTTER	LF	4,014	\$ 60.00	\$ 240,840.00
8*	CONCRETE SIDEWALK	SY	1,003	\$ 115.00	\$ 115,345.00
9*	CONCRETE DRIVEWAY 6IN	SY	157	\$ 145.00	\$ 22,765.00
10	CONCRETE VALLEY GUTTER	SY	220	\$ 215.00	\$ 47,300.00
11	DETECTABLE WARNING PANEL	SF	90	\$ 40.00	\$ 3,600.00
12	MILLING PAVEMENT SURFACE	SY	13,768	\$ 5.00	\$ 68,840.00
13	ADJUST MANHOLE	EA	21	\$ 2,250.00	\$ 47,250.00
14	ADJUST GATE VALVE BOX	EA	12	\$ 925.00	\$ 11,100.00
15	ADJUST INLET	EA	4	\$ 500.00	\$ 2,000.00
16	ASPHALT REPAIR	TON	2,070	\$ 190.00	\$ 393,300.00
17	ASPHALT PAVEMENT	TON	1,832	\$ 160.00	\$ 293,120.00
18	FLAGGING	MH	290	\$ 60.00	\$ 17,400.00
19	TRAFFIC CONTROL	LS	1	\$ 65,000.00	\$ 65,000.00
Construction Subtotal					\$ 2,046,000.00

5% Contingency \$ 102,300.00
Opinion of Construction Cost \$ 2,148,300.00

*Eligible for special assessment

November 15, 2023
 KLJ Project No. 2304-01041



Thank you!

QUESTIONS AND COMMENTS ARE WELCOME



www.DickinsonGov.com

