

	Call Us first, fo	r all of your Fleet Automotive, & Li	ght Truck needs.		Quote
PHONE (800) ALANJ	IAY (252-6529)	DIRECT 863-402-4234	WWW.A	LANJAY.COM	52178-2
Corporate 2003 U.S.	. 27 South	MOBILE 863-273-1105	Maili	ng P.O. BOX 92	00
Office Sebring,	FL 33870	FAX 863-402-4221	Addre		33871-9200
			~	_	
		QUICK QUOTE S	SHEET	REVISED QUO 1/29/202	
REQUESTING AGENCY					
CONTACT PERSON	MEGAN WEPFER	EMAIL	mwepfer@madeirabea	achfl.gov	
PHONE	727-543-8154	MOBILE	FAX		
	CONTRACT	NUMBER 5179 - 2023 CIT	Y OF TALLAHAS	SEE	
MODEL	CC56403 R7N 1WT			MSRP	\$63,301.64
-	23 CHEVY SILVERADO 55	500 MEDIUM DUTY REGULAR CAB 2W	D 1WT		
			GOVERNMEN		\$49,590.00
	60"CA		OOVERRIMEN		φ+0,000.00
BED LENGTH		or unless clearly stated otherwise on purc	hasa ordor		
	a ca winte w/ uarkest intent		11435 UIUSI.		
FACTORY OPTIONS		DESCRIPTION			<i></i>
066	OPTIONS Rear axle, 4.10				\$0.0
1WT	Work Truck Preferred Equ	uipment Group			\$0.0
9L3	Spare tire delete				\$0.0
A31		ver express up and down and express down c	n all other windows		\$285.0
AE7	Seats, front 40/20/40 spl	it-bench, 3-passenger			\$0.0
AQQ	Remote Keyless Entry				\$170.0
BJA	Fuel Fill Kit \$120.0				
BTN	Battery, top post threaded, battery jump start stud \$45.0				
DPN					\$350.0
ED9	Wheelbase, 165" (419.1 cm), 84" CA				\$170.0
F59	Front stabilizer bar				\$170.0
FTC	Front axle, 6,250 lb. (2,835 kg), Dana Spicer D800-N, "I"-beam, non-driving			\$0.0	
FTW	Front suspension, 6,250 lb. (2,835 kg) multi-leaf, includes shock absorbers			\$0.0	
G68	Shock Absorbers, rear			\$0.0	
G7C	Red Hot				\$0.0
G86	Axle, limited slip, Dana Spicer Truetrac, torque proportioning limited slip			\$390.0	
GR4	Rear suspension, 13,500	lb. (6,123 kg) multi-leaf, vari-rate			\$20.0
GZG	GVWR, 19,500 lb. (8845 l	<g)< td=""><td></td><td></td><td>\$2,250.0</td></g)<>			\$2,250.0
H2Q	Dark Ash seats with Jet B	lack interior accents, Vinyl seat trim			\$0.0
HD2	Rear axle, 13,500 lb. (6,12	24 kg) Dana Spicer S14-110, single reduction			\$350.0
IOB	Audio system, 7" diagona	l color touch-screen with Chevrolet Infotainm	ent		\$270.0
L5D	Engine, Duramax 6.6L Tu	rbo-Diesel V8, B20-Diesel compatible			\$0.0
MIU	Rugged Duty Service Transmission, Automatic close-ratio 6 SPD with double overdrive, Allison, A1700RDS				\$285.0
N12	Exhaust system, rear exit				\$45.0
РТО	Power Take Off, engine c				\$275.0
PWR	Wheels, 19.5" x 6.75", steel, Grey painted, 8-holes, hub piloted \$75				\$75.0
R6G	26,000 lb. GCWR (11,793 kg) \$0.0				
R7N	5500 HD Series \$0.				\$0.0
UQ3	6-speaker audio system				\$0.0
V76	Recovery hooks, front, fra	ame-mounted, Black			\$20.0
XDK	Tires, front 225/70R19.50	G highway blackwall Goodyear			\$0.0
YAL	Tires, rear 225/70R19.5G	highway blackwall Goodyear			\$0.0
ZY1	Paint, solid				\$0.0
	Bluetooth for phone, per	sonal cell phone connectivity to vehicle audio	system		\$0.0
			FACTOR	Y OPTIONS	\$5,290.00



	CONTRACT NUMBER 5179 - 2023 CITY OF TALLAHASSEE	
AFTERMARKET OPTIO	NS DESCRIPTION	
CHASSIS ONLY	CUSTOMER TO FACILITATE COMPLETED VEHICLE CERTIFICATION & REGISTER WITH 2ND STAGE MSO AT A LATER TIME ONCE BODY IS SWAPPED.	\$0.00
EWD	EXTENDED WARRANTY DECLINED	\$0.00
NO-TEMP	TEMP TAG NOT REQUESTED, CUSTOMER WILL HANDLE THEIR OWN TAG WORK.	\$0.00
	AFTERMARKET OPTIONS	\$0.00
TRADE IN	TOTAL COST	\$5 <u>4,880.00</u>
	YES WE TAKE TRADE INS ~~~ ASK ABOUT MUNICIPAL FINANCING ~~~	\$0.00
	TOTAL COST LESS TRADE IN(S) QTY 1	\$54,880.00
Estimate	d Annual payments for 60 months paid in advance: \$12,290.86 Municipal finance for any essential use vehicle, requires lender approval, WAC.	
Comments C	RDERED UNIT VIN: [PH624540]	
VEHICLE QUOTED BY	ASHLEE WILSON GOVERNMENT ACCOUNT MANAGER <u>Ashlee.Wilson@AlanJay.com</u>	
l appreciate the opportun	"I Want to be <u>Your</u> Fleet Provider" ity to submit this quotation. Please review it carefully. If there are any errors or changes, please feel free to contac I am always happy to be of assistance.	t me at any time.





Note:Photo may not represent exact vehicle or selected equipment.

Window Sticker

SUMMARY

[Fleet] 2023 Chevrolet Silverado MD (CC56403) 2WD Reg Cab Work Truck

Interior:Dark Ash seats with Jet Black interior accents, Vinyl seat trim

Exterior 1:Red Hot

Exterior 2:No color has been selected.

Engine, Duramax 6.6L Turbo-Diesel V8, B20-Diesel compatible

Rugged Duty Service Transmission, Automatic close-ratio 6 SPD with double overdrive, Allison, A1700RDS

OPTIONS

TIONS				
CODE	MODEL	MSRP		
CC56403	[Fleet] 2023 Chevrolet Silverado MD (CC56403) 2WD Reg Cab Work Truck	\$56,105.00		
	OPTIONS			
066	Rear axle, 4.10 ratio	\$0.00		
1WT	Work Truck Preferred Equipment Group	\$0.00		
9L3	Spare tire delete	\$0.00		
A31	Windows, power with driver express up and down and express down on all other windows	\$290.00		
AE7	Seats, front 40/20/40 split-bench, 3-passenger	\$0.00		
AQQ	Remote Keyless Entry	\$175.00		
BJA	Fuel Fill Kit	\$125.00		
BTN	Battery, top post threaded, battery jump start stud	\$50.00		
DPN	Mirrors, outside heated power-adjustable vertical trailering, upper glass, manual-folding and extending, black.	\$355.00		
ED9	Wheelbase, 165" (419.1 cm), 84" CA	\$175.00		
F59	Front stabilizer bar	\$175.00		

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.

Data Version: 17875. Data Updated: Nov 3, 2022 6:50:00 PM PDT.

MSRP:\$56,105.00



FTC	Front axle, 6,250 lb. (2,835 kg), Dana Spicer D800-N, "I"-beam, non- driving	\$0.00
FTW	Front suspension, 6,250 lb. (2,835 kg) multi-leaf, includes shock absorbers	\$0.00
G68	Shock Absorbers, rear Inc.	
G7C	Red Hot	\$0.00
G86	Axle, limited slip, Dana Spicer Truetrac, torque proportioning limited slip	\$395.00
GR4	Rear suspension, 13,500 lb. (6,123 kg) multi-leaf, vari-rate	\$25.00
GZG	GVWR, 19,500 lb. (8845 kg)	\$2,255.00
H2Q	Dark Ash seats with Jet Black interior accents, Vinyl seat trim	\$0.00
HD2	Rear axle, 13,500 lb. (6,124 kg) Dana Spicer S14-110, single reduction	\$355.00
IOB	Audio system, 7" diagonal color touch-screen with Chevrolet Infotainment	\$275.00
L5D	Engine, Duramax 6.6L Turbo-Diesel V8, B20-Diesel compatible	\$0.00
MIU	Rugged Duty Service Transmission, Automatic close-ratio 6 SPD with double overdrive, Allison, A1700RDS	\$290.00
N12	Exhaust system, rear exit	\$50.00
PTO	Power Take Off, engine control provisions	\$280.00
PWR	Wheels, 19.5" x 6.75", steel, Grey painted, 8-holes, hub piloted	\$80.00
R6G	26,000 lb. GCWR (11,793 kg)	\$0.00
R7N	5500 HD Series Inc.	
UQ3	6-speaker audio system Inc.	
V76	Recovery hooks, front, frame-mounted, black	\$25.00
XDK	Tires, front 225/70R19.5G highway blackwall Goodyear	\$0.00
YAL	Tires, rear 225/70R19.5G highway blackwall Goodyear	\$0.00
ZY1	Paint, solid	\$0.00
	Bluetooth for phone, personal cell phone connectivity to vehicle Inc. audio system	
	SUBTOTAL	\$61,480.00
	Adjustments Total	\$0.00
	Tire Weight Tax	\$26.64

Destination Charge

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.

Data Version: 17875. Data Updated: Nov 3, 2022 6:50:00 PM PDT.

\$1,795.00



TOTAL PRICE

\$63,301.64

Standard Equipment

Mechanical	
	GVWR, 16,500 lb. (7484 kg) (Silverado 4500 HD 2WD Regular Cab models require one of the following combinations: (1) (FTC) 6.25k front axle and (FTW) 6.25k front suspension and (GL4) 11k rear axle and (GR3) 11k rear suspension. (2) (FTC) 6.25k front axle and (FTW) 6.25k front suspension and one of the following rear axles: (HD2) 13.5k rear axle, (HD1) 15k rear axle or (J27) 15.5k rear axle and (GR4) 13.5k rear suspension. (3) (FTA) 7k front axle and (FK6) 7k front suspension and (FN1) 10k rear axle or (GL4) 11k rear axle and (GR3) 11k rear suspension or (G40) 12K Rear air suspension. (4) (FTA) 7k front axle and (FK6) 7k front suspension and (HD1) 15k rear axle or (J27) 15.5k rear axle and one of the following rear suspension; (GP4) 13.5k rear suspension, (FU7) 15.5k rear suspension, (GP1) 13.5K rear air suspension, (91B) 13.5k LiquidSpring prep single volume rear suspension or (91E) 15.5k LiquidSpring prep stacked volume rear suspension or (91D) 15.5k LiquidSpring prep single volume rear suspension or (91E) 15.5k LiquidSpring prep stacked volume rear suspension or (91E) 15.5k LiquidSpring prep stacked volume rear suspension or (91E) 15.5k LiquidSpring prep stacked volume rear suspension or (91E) 15.5k LiquidSpring prep stacked volume rear suspension or (91E) 15.5k LiquidSpring prep stacked volume rear suspension or (91E) 15.5k LiquidSpring prep stacked volume rear suspension or (91E) 15.5k LiquidSpring prep stacked volume rear suspension or (91E) 15.5k LiquidSpring prep stacked volume rear suspension or (91E) 15.5k LiquidSpring prep stacked volume rear suspension.) (STD)
	Emissions, 50 state certification
	Emissions, USA 50 State certified
	Engine, Duramax 6.6L Turbo-Diesel V8, B20-Diesel compatible 350 hp @ 2700 rpm, 700 lbft. torque @ 1600 rpm (STD)
	Highway Service Transmission, Automatic close-ratio 6 SPD with double overdrive, Allison, A1700HS ratios: 3.10 1ST, 1.80 2ND, 1.40 3RD, 1.00 4TH, 0.70 5TH, 0.61 6TH Highway Series, 19.5K GVW & 26K GCW Max., requires PTX and park pawl. Available with GVWs less than or equal to 19.5K (Requires (C7Y) 14,001 lb. GVWR, (C5B) 15,000 lb. GVWR, (C7P) 16,000 lb. GVWR, (C7R) 16,500 lb. GVWR, (GZX) 17,500 lb. GVWR, (GZJ) 18,000 lb. GVWR or (GZG) 19,500 lb. GVWR. Requires (R6G) 26,000 lb. GCWR (11,793 kg).) (STD)
	Rear axle, 4.10 ratio Max road speed: 79 MPH
	Wheelbase, 141" (358.1 cm), 60" CA (Requires (F0C) 49" axle to end of frame, (F0D) 63" axle to end of frame or (F0K) 91" axle to end of frame and (NPR) exhaust. Requires (PCJ) Vocational Specific Heavy Suspension Package, when ordering (FTA) 7,000 lb. Front axle/(FK6) 7,000 lb. Front suspension or (FTL) 8,000 lb. Front axle/(FSN) 8,000 lb. Front suspension and/or (FU7) 15,500 lb. rear suspension. Not available with rear air suspensions or (91B), (91C), (91D) or (91E) prep for LiquidSpring rear suspension.) (STD)
	Front axle, 6,250 lb. (2,835 kg), Dana Spicer D800-N, "I"-beam, non-driving (Requires (FTW) 6,250 lb. front suspension. Includes (G68) rear shock absorbers. Not available with rear air suspensions.)
	Front suspension, 6,250 lb. (2,835 kg) multi-leaf, includes shock absorbers (Not available with rear air suspensions.) (STD)
	Rear axle, 11,000 lb. (4,999 kg) Dana Spicer S14-110, single reduction
	Rear suspension, 11,000 lb. (4,990 kg) multi-leaf, vari-rate (Not available with air suspension.) (STD)
	Neutral-at-Stop Automatic transmission shifts to neutral when the service brake is depressed while the vehicle is at a complete stop, and remains in neutral until the service brake is released
	Transmission shift control calibration, fuel sense Performance
	Rear wheel drive
	Batteries, heavy-duty dual 1100 cold-cranking amps includes battery box mounted to left side under cab
	ion considered Confidential between CM and its Clients uniquely. The information provided is not intended for public disclosure. Drives

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.



Mechanical	
	Alternator, 150 amps
	Trailering provisions, trailering wire harness only, trailer combined (Stop/Tail/Turn) connection socket and harness mounted at rear of frame.
	Trailer brake controller, integrated
	Incomplete vehicle
	Axle to End of Frame, 49" (Requires wheelbase (ED5) 201", (ED9) 165", (ER2) 189" or (FQT) 141". Not available with (G40), (GP1) or (GP8) rear air suspension.)
	Axle, Open rear axle, non-locking rear
	Axle lubricant, rear, synthetic oil EmGard FE -75W-90
	Shock Absorbers, rear (Included with (FTC) 6,250 lb. front axle.)
	Steering, power (Bosch S2 8014 Plus)
	Brakes, hydraulic, heavy duty Bosch/Meritor/Wabco system with 4-channel (ABS) (Includes (J69) driveline park brake.)
	Fuel tank, rear only, 40 gallon mounted between frame side rails and behind rear axle
	Fuel, diesel B20
	Capped Fuel Fill
	Exhaust system, right side exit, behind rear wheels (Requires (FQT) 141" wheelbase.)
	Exhaust brake
Exterior	
	Wheels, 19.5" x 6.75", steel, Black painted, 8-holes, hub piloted (STD)
	Tires, front 225/70R19.5G highway blackwall Goodyear Max Axle Load: 7,940 lb. (Requires (YAL) Tires, rear 225/70R19.5G highway blackwall Goodyear, Max Axle Load: 15,000 lb. or (YMF) Tires, rear 225/70R19.5G traction blackwall Goodyear, Max Axle Load: 15,000 lb.) (STD)
	Tires, rear 225/70R19.5G highway blackwall Goodyear Max Axle Load: 15,000 lb. (STD)
	Spare tire delete (STD)
	Wheel, spare delete
	Bumper, front, Black
	Assist steps
	Front fender extension, painted body color
	Grille, base, molded in color, Black
	Grille guard screen, insect protection (mounted behind grille)
	Headlamps, halogen projector-beam

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.



Exterior	
	Lamps, cargo area, cab mounted with switch on center switch bank
	Lamps, Smoked Amber roof marker
	Lamps, rear, stop/turn/backup (1-piece assembly) with license plate light
	Mirrors, outside high-visibility vertical camper-style, Black with manual folding and extension and lower convex spotter glass
	Glass, solar absorbing, tinted
	Antenna, fixed mast
	Door handles, Black
Entertainment	
	Audio system, 4.2" diagonal color display AM/FM stereo with USB port and auxiliary jack (Requires (AE7) front 40/20/40 split-bench seat. Not available with (UE1) OnStar or (U2K) SiriusXM Radio.) (STD)
	SiriusXM, delete
	Audio system feature, 4-speaker system
Interior	
	Seats, front 40/20/40 split-bench, 3-passenger driver and front passenger recline with outboard head restraints and center fold-down armrest with storage. Vinyl has fixed lumbar and cloth has manually adjustable driver lumbar. (STD)
	Interior trim, Jet Black/Dark Ash (Required and only available with (H2Q/H2R) Dark Ash seats with Jet Black interior accents.)
	Seat trim, Vinyl
	Seat Belt, Black
	Floor covering, Graphite-colored rubberized-vinyl
	Steering wheel, urethane
	Steering column, manual Tilt-Wheel
	Instrumentation, 6-gauge cluster featuring speedometer, fuel level, engine temperature, tachometer, voltage and oil pressure
	Speedometer, miles/kilometers
	Driver Information Center, 3.5-inch diagonal monochromatic display, provides warning messages and basic vehicle information
	Upfitter switch kit provides up to 4-30 amp circuits to facilitate installation of aftermarket electrical accessories located on the instrument panel
	Windows, manual driver and front passenger
	Door locks, power

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.



Interior	
	Cruise control, steering wheel-mounted
	Air conditioning, single-zone
	Mirror, inside rearview manual day/night
	Visors, driver and front passenger, vinyl
	Assist handle, front passenger and driver on A-pillars
Safety-Mechanical	
	Brake, parking, driveline park brake system
	StabiliTrak, Electronic Stability Control System with Traction Control includes Electronic Trailer Sway Control and Hill Start Assist
	Traction control
Safety-Exterior	
	Daytime Running Lamps, with automatic exterior lamp control
Safety-Interior	
	Airbags, Single-stage frontal airbags for driver and front outboard passenger; Seat-mounted side-impact airbags for driver and front outboard passenger; Head-curtain airbags for front outboard seating positions; Includes airbag deactivation switch for front outboard passenger airbag (Always use seat belts and child restraints. Children are safer when properly secured in a rear seat in the appropriate child restraint. See the Owner's Manual for more information.)
	Airbag deactivation switch, frontal passenger-side (Included and only available with (AY0) airbags.)
	OnStar, delete
	Rear Vision Camera, display integrated into Radio (Shipped loose in cab for upfitter installation.)
	Horn, single-note

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.



WARRANTY

Warranty Note: <<< Preliminary 2023 Warranty >>> Basic Years: 3 Basic Miles/km: 36,000 Drivetrain Years (Allison Basic): 5 Drivetrain Years: 5 Drivetrain Miles/km (Allison Basic): Unlimited Drivetrain Miles/km (Allison Basic): Unlimited Drivetrain Note: Duramax Diesel Corrosion Years (Rust-Through): 6 Corrosion Years: 3 Corrosion Miles/km (Rust-Through): 100,000 Corrosion Miles/km: 36,000 Roadside Assistance Years: 5 Roadside Assistance Miles/km: 100,000 Maintenance Note: 1 Year/1 Visit

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.



Dimensions

Vehicle: [Fleet] 2023 Chevrolet Silverado MD (CC56403) 2WD Reg Cab Work Truck (Complete)

Technical Specifications

In	terior Dimensions			
	Passenger Capacity	3	Front Head Room	42.8 in
	Front Leg Room	45.28 in	Front Shoulder Room	66.02 in
	Front Hip Room	60.75 in		
E	xterior Dimensions			
	Wheelbase	165 in	Length, Overall w/o rear bumper	N/A
	Length, Overall	248.5 in	Width, Max w/o mirrors	92.7 in
	Height, Overall	82.81 in	Overhang, Front	34.4 in
	Overhang, Rear w/o bumper	49 in	Front Bumper to Back of Cab	115.47 in
	Cab to Axle	84 in	Cab to End of Frame	133.1 in
	Ground to Top of Load Floor	N/A	Ground to Top of Frame	N/A
	Frame Width, Rear	34.1 in	Ground Clearance, Front	N/A
	Ground Clearance, Rear	N/A	Body Length	0.0 ft
	Cab to Body	3.0 in	Frontal Area	ft²

Medium Duty

Medium Duty Performance

Front Axle %	63.64	Rear Axle %	36.36
Driver Weight	350.0 lbs	Front Ground Load	5085.00 lbs
Rear Ground Load	2905.00 lbs	1st gear High Speed (High Axle Gear)	21.39 MPH
2nd gear High Speed (High Axle Gear)	36.84 MPH	3rd gear High Speed (High Axle Gear)	47.36 MPH
4th gear High Speed (High Axle Gear)	66.31 MPH	5th gear High Speed (High Axle Gear)	94.73 MPH
6th gear High Speed (High Axle Gear)	108.71 MPH	1st gear Low Speed (High Axle Gear)	11.80 MPH
2nd gear Low Speed (High Axle Gear)	20.33 MPH	3rd gear Low Speed (High Axle Gear)	26.13 MPH
4th gear Low Speed (High Axle Gear)	36.59 MPH	5th gear Low Speed (High Axle Gear)	52.26 MPH
6th gear Low Speed (High Axle Gear)	59.98 MPH	1st gear High Speed (Low Axle Gear)	N/A
2nd gear High Speed (Low Axle Gear)	N/A	3rd gear High Speed (Low Axle Gear)	N/A
4th gear High Speed (Low Axle Gear)	N/A	5th gear High Speed (Low Axle Gear)	N/A

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.



Medium Duty

Medium Duty Performance


6th gear High Speed (Low Axle Gear)	N/A	1st gear Low Speed (Low Axle Gear)	N/A
2nd gear Low Speed (Low Axle Gear)	N/A	3rd gear Low Speed (Low Axle Gear)	N/A
4th gear Low Speed (Low Axle Gear)	N/A	5th gear Low Speed (Low Axle Gear)	N/A
6th gear Low Speed (Low Axle Gear)	N/A	Reduction	22.42
Torque @ Clutch Engage	N/A	Starting Grade Index	N/A
1st Gear Tractive Effort (High Axle Gear)	5921.84	2nd Gear Tractive Effort (High Axle Gear)	3438.49
3rd Gear Tractive Effort (High Axle Gear)	2674.38	4th Gear Tractive Effort (High Axle Gear)	1910.27
5th Gear Tractive Effort (High Axle Gear)	1337.19	6th Gear Tractive Effort (High Axle Gear)	1165.27
1st Gear Tractive Effort (Low Axle Gear)	N/A	2nd Gear Tractive Effort (Low Axle Gear)	N/A
3rd Gear Tractive Effort (Low Axle Gear)	N/A	4th Gear Tractive Effort (Low Axle Gear)	N/A
5th Gear Tractive Effort (Low Axle Gear)	N/A	6th Gear Tractive Effort (Low Axle Gear)	N/A
1st Gear Gradeability (High Axle Gear)	27.43	2nd Gear Gradeability (High Axle Gear)	14.86
3rd Gear Gradeability (High Axle Gear)	10.53	4th Gear Gradeability (High Axle Gear)	5.29
5th Gear Gradeability (High Axle Gear)	-0.76	6th Gear Gradeability (High Axle Gear)	-3.61
1st Gear Gradeability (Low Axle Gear)	50.71	2nd Gear Gradeability (Low Axle Gear)	28.95
3rd Gear Gradeability (Low Axle Gear)	22.11	4th Gear Gradeability (Low Axle Gear)	14.98
5th Gear Gradeability (Low Axle Gear)	8.97	6th Gear Gradeability (Low Axle Gear)	6.84
Geared Road Speed	108.71 MPH	Actual Loaded Speed	66.3 MPH Hi @ 290 MPH
Grade (%)	2.0	Maximum Speed Gradeability	14.2% @ RPM @ 7
Torque Converter	1.764	Maximum Capacity @ 0° F	2200.00
% of Body on Front Axle	49.09	% of Body on Rear Axle	50.91
Body Weight Front	0.00 lbs	Body Weight Rear	0.00 lbs
Actual Loaded Speed (First Part, MPH)	66.3 MPH	Actual Loaded Speed (Second Part, RPM)	2900
Actual Loaded Speed (Third Part, Gear)	4	Road Type	Concrete
Body Weight	0.0 lbs	Driver Weight Front	350.00 lb
Driver Weight Rear	0.00 lbs	Medium Duty Body Type	None
Front Total Load	5085.00 lbs	Rear Total Load	2905.00 I

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.



Weight Distribution

SPECIFICATION SUMMARY		
Model #	CC56403	
Truck/Tractor		
Wheelbase (WB)	165 in	
Cab to Axle (CA)	84 in	
Cab to Body/Swing Clear (BOC)	3.0 in	
Body Length	0.0 ft	
Body Weight	0.0 lbs	
Cargo Weight	0.00 lbs	
Front GAWR	6250 lbs	
Rear GAWR	13500 lbs	
GVWR	19500.00 lbs	

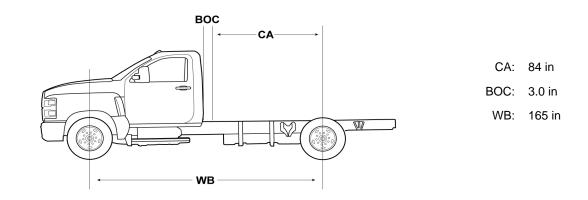

F	r%: 63.	64	Rr%	6: 3	36.36	
Front	Wt: 508	35.00 lbs	Rear W	t: 2	2905.00 lbs	
GAWR/GVWR		GVW		Remaining Payload Wt		
19500.00 lbs		7990.	00 lbs		11,510.00 lb	s

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.



Weight Distribution

SPECIFICATION DETAILS


	Front Axle	Rear Axle	Tota
Actual			
Chassis	4735.00 lbs	2905.00 lbs	7640.00 lbs
Body	0.00 lbs	0.00 lbs	0.0 lbs
Payload	0.00 lbs	0.00 lbs	0.00 lbs
Trailer			0.0 lb
Totals	5085.00 lbs	2905.00 lbs	7990.00 lb
apacity			
Axle	6250 lbs	13500 lbs	19750.00 lb
Suspension	6250 lbs	13500 lbs	19,750.00 lb
Tire	7940 lbs	15000 lbs	22940.0
Total Axle Rating	6250.00 lbs	13500.00 lbs	19750.00 lb

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.




Geared Road Speed	
SPECIFICATION SUMMARY	
Model #	CC56403
Engine Order Code	L5D
Model Manufacturer	Duramax
Туре	Turbocharged Diesel V8
Displacement	6.6L/402
Horsepower	350 @ 2700
Starting Torque	N/A
Transmission Order Code	MIU
Model Manufacturer	Allison
Туре	6-Speed Automatic
Rear Axle Order Code	HD2
Model Manufacturer	A1700RDS Allison
Weight Rating	13500 lbs
Ratio:1	4.10
Rear Tires	225/70R19.5G
Revolutions/Mile Front	640
Revolutions/Mile Rear	640
Surface Type	Concrete
Desired Grade	2%

Geared Road Speed



0% Grade in 4th gear

Actual Loaded Speed




2% Grade in 4th gear

Note: Simulated speedometer appearance may not correspond with selected equipment.

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.



Gradeability Chart	
SPECIFICATION SUMMARY	
Model #	CC56403
Engine Order Code	L5D
Model Manufacturer	Duramax
Туре	Turbocharged Diesel V8
Displacement	6.6L/402
Horsepower	350 @ 2700
Starting Torque	N/A
Transmission Order Code	MIU
Model Manufacturer	Allison
Туре	6-Speed Automatic
Rear Axle Order Code	HD2
Model Manufacturer	A1700RDS Allison
Weight Rating	13500 lbs
Ratio:1	4.10
Rear Tires	225/70R19.5G
Revolutions/Mile Front	640
Revolutions/Mile Rear	640
Surface Type	Concrete
Desired Grade	2%

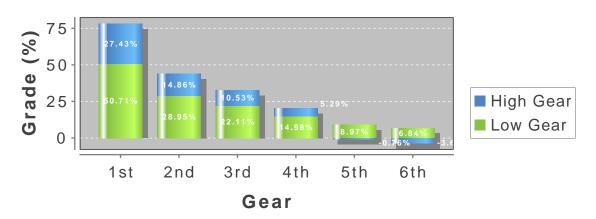

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.




Turning Circle

SPECIFICATION SUMMARY	
Model #	CC56403
Front Axle Order Code	FTC
Capacity (lbs)	6250 lbs
Wheelbase Order Code	ED9
Wheelbase (in)	165 in
Front Wheel Order Code	
Size/Type (in)	19.5 x 6.75 in
Front Tire Order Code	XDK
Size/Type	225/70R19.5G

Wall to Wall (ft): 48.8 ft

Wall to Wall diameter is measured from the outermost part of the cab.



Curb to Curb (ft): 47.2 ft

Curb to Curb diameter is measured from the outside of the front tire.

This document contains information considered Confidential between GM and its Clients uniquely. The information provided is not intended for public disclosure. Prices, specifications, and availability are subject to change without notice, and do not include certain fees, taxes and charges that may be required by law or vary by manufacturer or region. Performance figures are guidelines only, and actual performance may vary. Photos may not represent actual vehicles or exact configurations. Content based on report preparer's input is subject to the accuracy of the input provided.





