

STAFF REPORT

COMMUNITY DEVELOPMENT DEPARTMENT




HEARING DATE: 11/4/2020

TO: Mayor & City Council

FROM: Sonya Allen, Associate Planner
208-884-5533

SUBJECT: FP-2020-0001
Shelburne South No. 1

LOCATION: North side of E. Amity Rd. midway
between S. Eagle Rd. and S. Cloverdale
Rd., in the SE ¼ of Section 28,
Township 3N., Range 1E.

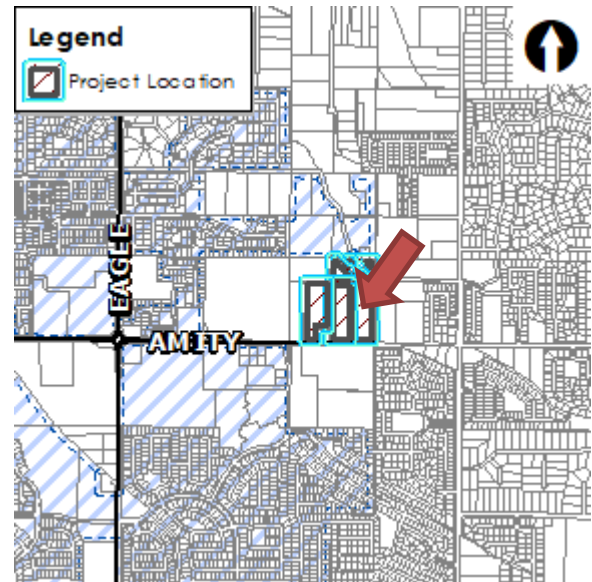

I. PROJECT DESCRIPTION

Final plat consisting of 59 buildable lots and 16 common lots on 16.61 acres of land in the R-8 zoning district.

II. APPLICANT INFORMATION

A. Applicant:

Ian Connair, Kimley-Horn & Associates – 7740 N. 16th St. #300, Phoenix, AZ 85020

B. Owner:

Pinnacle Land Development, LLC – 7629 E. Pinnacle Peak Rd., Scottsdale, AZ 85255

C. Representative:



Same as Applicant

III. STAFF ANALYSIS

Staff has reviewed the proposed final plat for substantial compliance with the approved preliminary plat (H-2019-0106) in accord with the requirements listed in UDC 11-6B-3C.2.

In order for the proposed final plat to be deemed in substantial compliance with the approved preliminary plat as set forth in UDC 11-6B-3C.2, the number of buildable lots cannot increase and the amount of common area cannot decrease. Staff has reviewed the proposed plat and the number of

B. Final Plat (dated: 8/18/20)

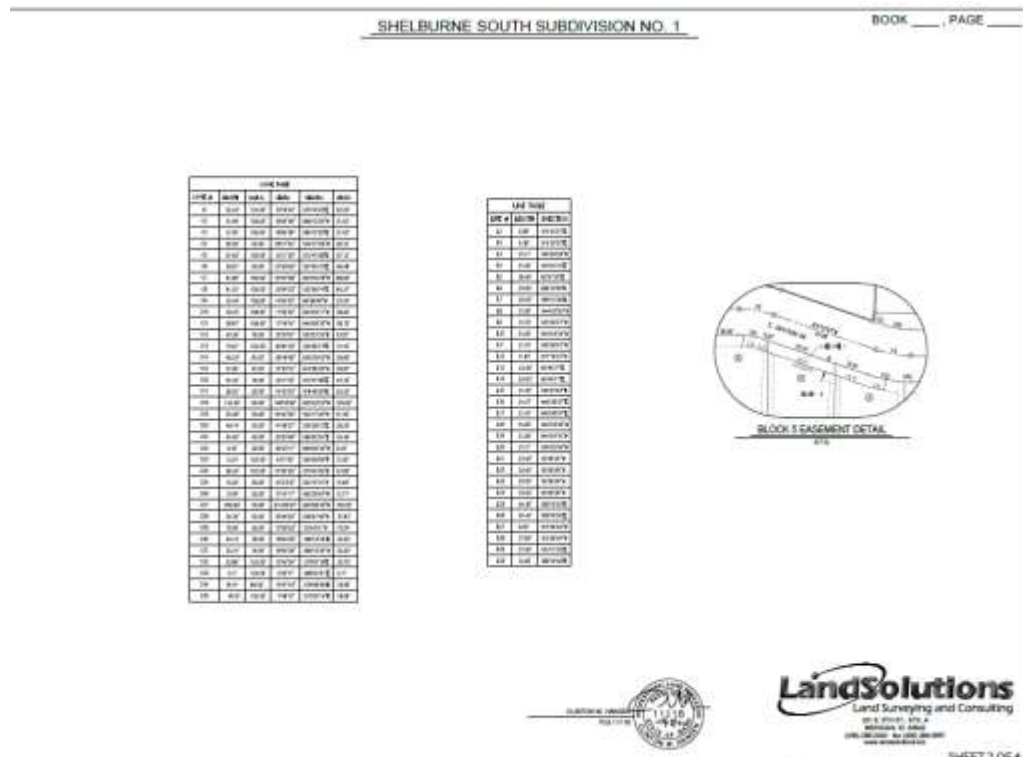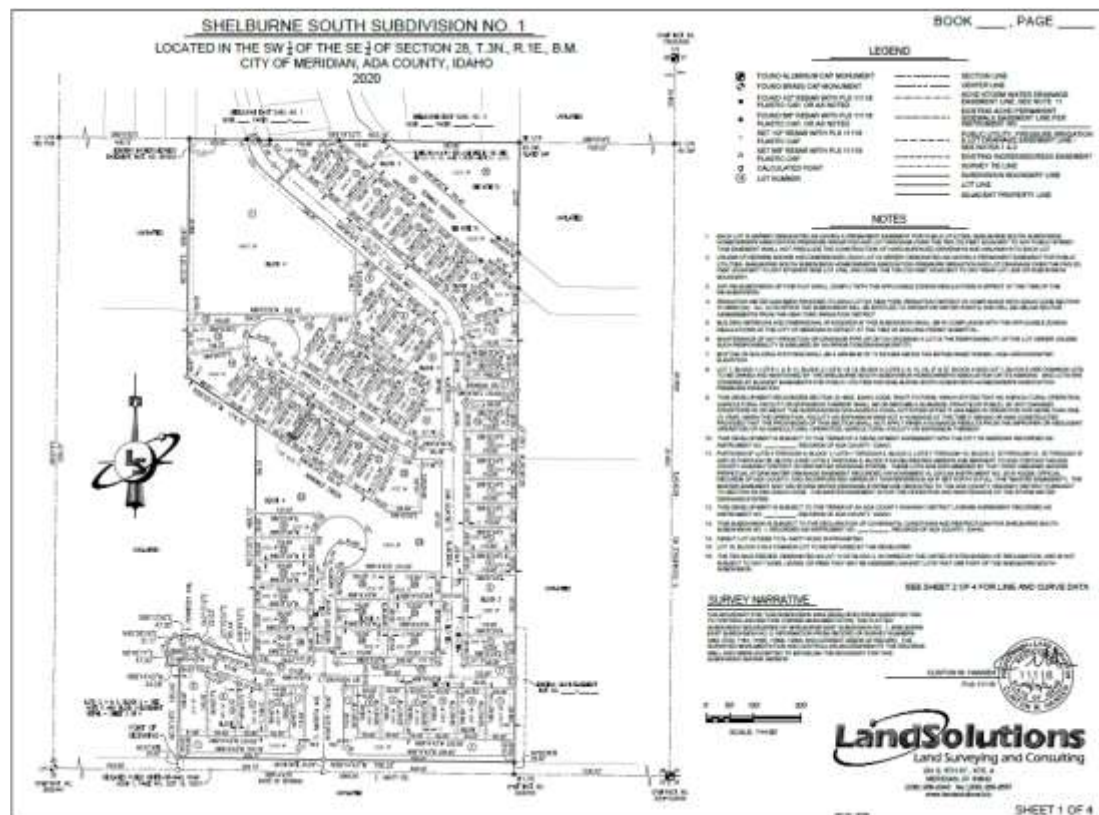

LANDSCAPE IMPROVEMENT PLANS FOR SHELburne SOUTH - PHASE 1 SUBDIVISION

LOCATED IN THE NW 1/4 OF THE SE 1/4 OF SECTION 28, TOWNSHIP 3
NORTH, RANGE 1 EAST
MERIDIAN, ADA COUNTY, IDAHO

LANDSCAPE OBJECTIVES

1. Provide a high quality landscape design for the subdivision.

2. Provide a landscape design that is aesthetically pleasing and functional.

3. Provide a landscape design that is sustainable and low maintenance.

4. Provide a landscape design that is compatible with the surrounding environment.

DESIGN STANDARDS

1. All landscape design shall be in accordance with the current standards of the International Association of Professional Landscape Architects (IALA).

2. All landscape design shall be in accordance with the current standards of the American Society of Landscape Architects (ASLA).

3. All landscape design shall be in accordance with the current standards of the National Association of Professional Landscape Architects (NALA).

DESIGN REQUIREMENTS

1. All landscape design shall be in accordance with the current standards of the International Association of Professional Landscape Architects (IALA).

2. All landscape design shall be in accordance with the current standards of the American Society of Landscape Architects (ASLA).

3. All landscape design shall be in accordance with the current standards of the National Association of Professional Landscape Architects (NALA).

LANDSCAPE MEASUREMENTS (PHASE 1, N.E.)

MEASUREMENT	VALUE
Overall width of Phase 1	100.00' (30.48m)
Overall depth of Phase 1	100.00' (30.48m)
Overall area of Phase 1	10,000.00' (2,590,900.00m ²)
Overall perimeter of Phase 1	400.00' (121.92m)

PLANTING LIST

PLANT	QUANTITY
1. Tree (10' x 12')	10
2. Tree (8' x 10')	20
3. Tree (6' x 8')	30
4. Tree (4' x 6')	40
5. Tree (2' x 4')	50
6. Tree (1' x 2')	60
7. Tree (0.5' x 1')	70
8. Tree (0.2' x 0.5')	80
9. Tree (0.1' x 0.2')	90
10. Tree (0.05' x 0.1')	100

DESIGN NOTES

1. All landscape design shall be in accordance with the current standards of the International Association of Professional Landscape Architects (IALA).

2. All landscape design shall be in accordance with the current standards of the American Society of Landscape Architects (ASLA).

3. All landscape design shall be in accordance with the current standards of the National Association of Professional Landscape Architects (NALA).

DESIGN STANDARDS

1. All landscape design shall be in accordance with the current standards of the International Association of Professional Landscape Architects (IALA).

2. All landscape design shall be in accordance with the current standards of the American Society of Landscape Architects (ASLA).

3. All landscape design shall be in accordance with the current standards of the National Association of Professional Landscape Architects (NALA).

DESIGN REQUIREMENTS


1. All landscape design shall be in accordance with the current standards of the International Association of Professional Landscape Architects (IALA).



2. All landscape design shall be in accordance with the current standards of the American Society of Landscape Architects (ASLA).



3. All landscape design shall be in accordance with the current standards of the National Association of Professional Landscape Architects (NALA).


1" = 100' (1" = 30.48m)

DATE: 10/10/2010
BY: [Signature]
FOR: [Signature]

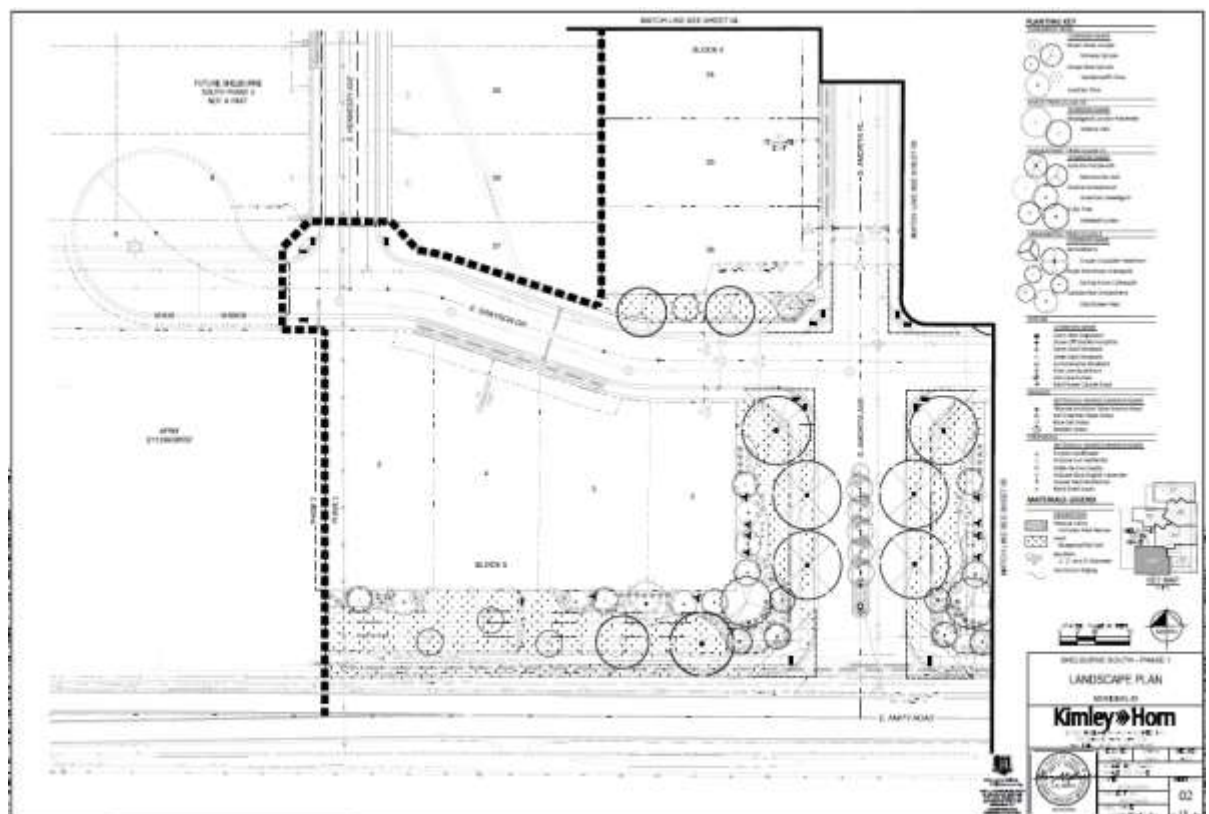


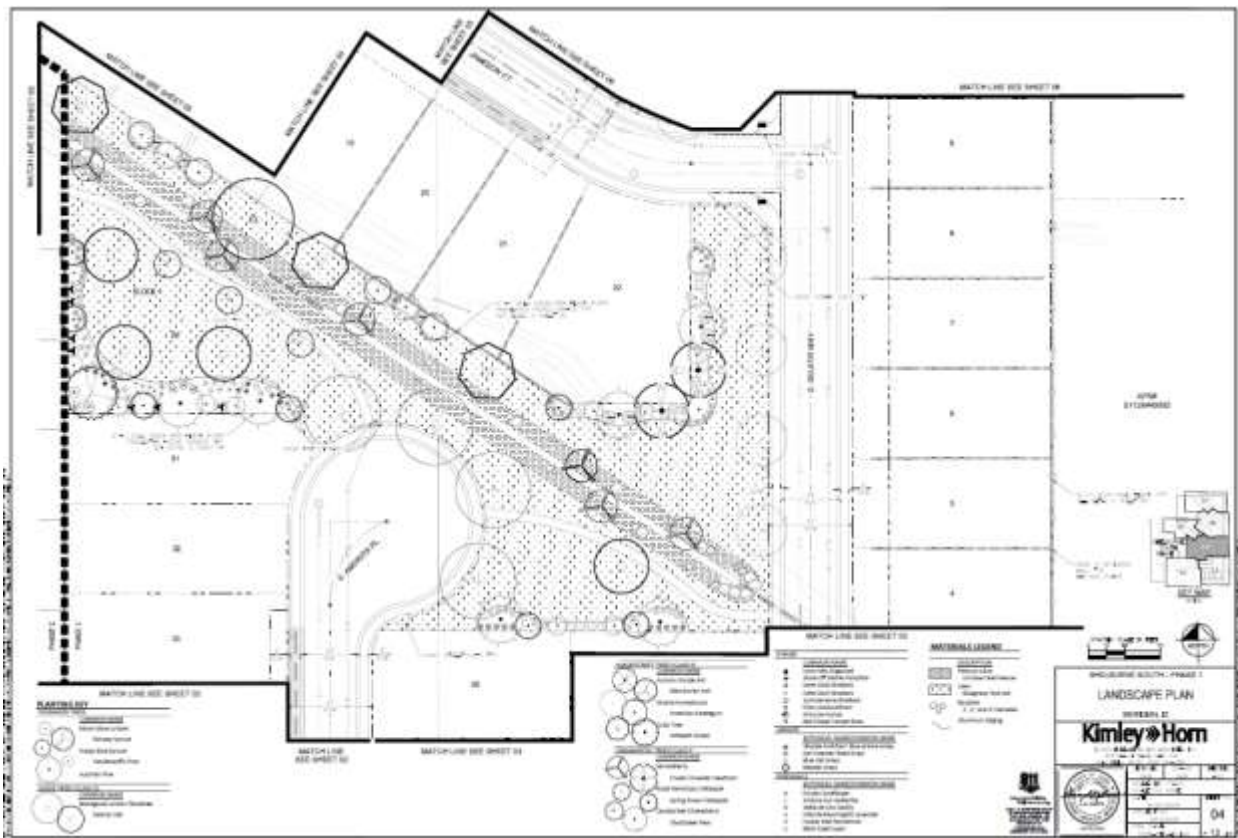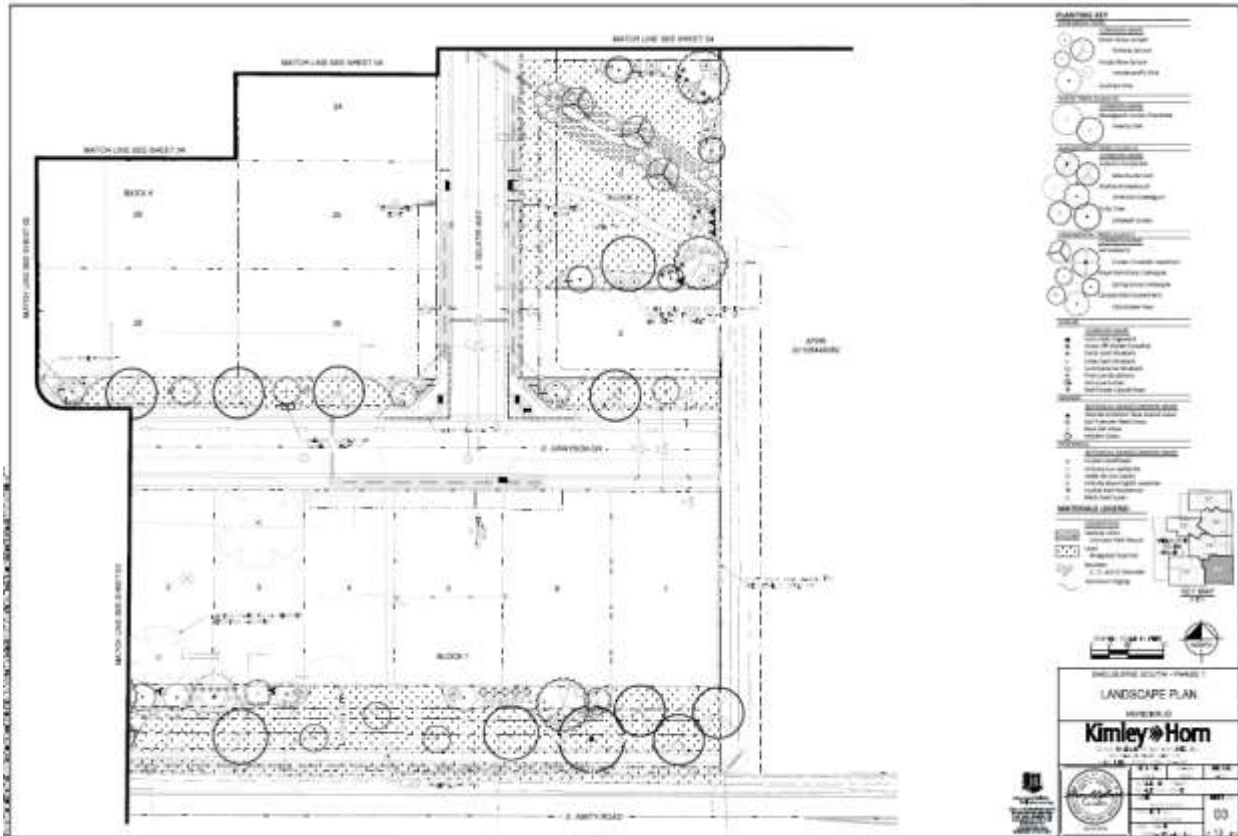

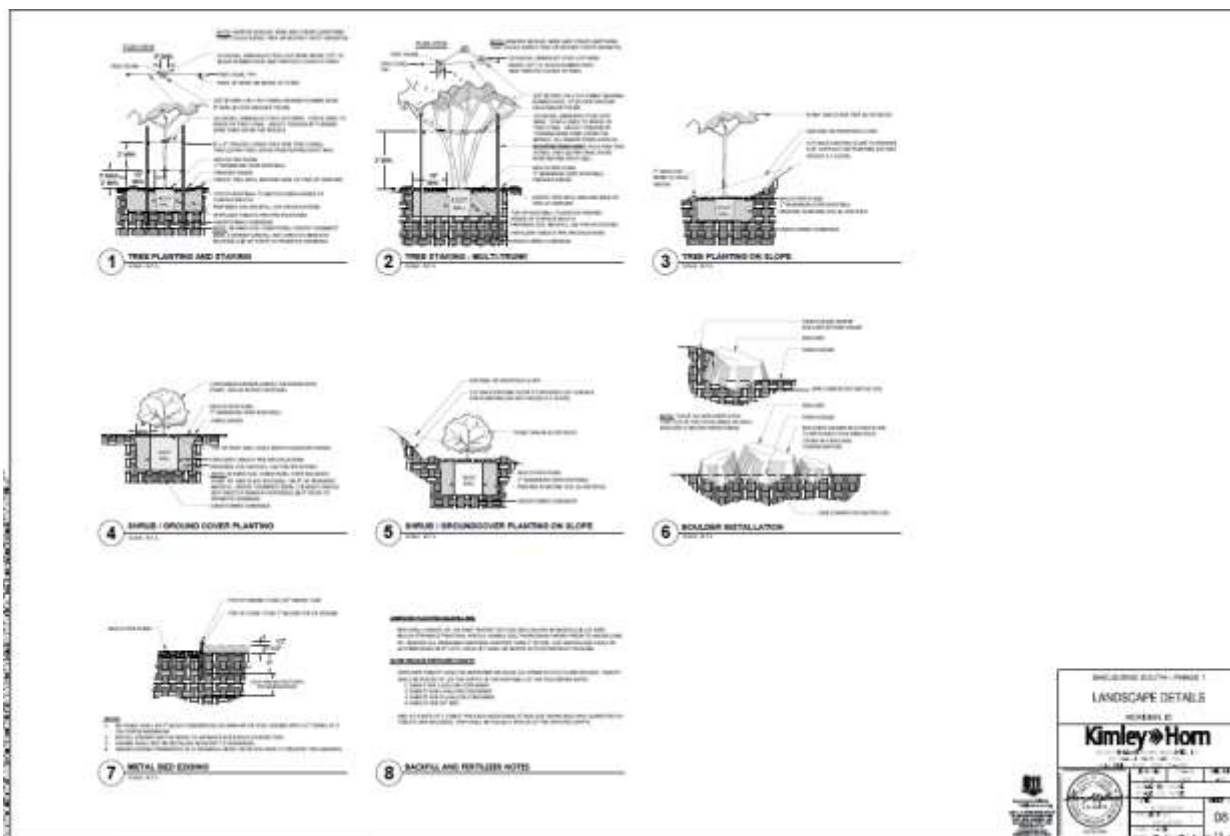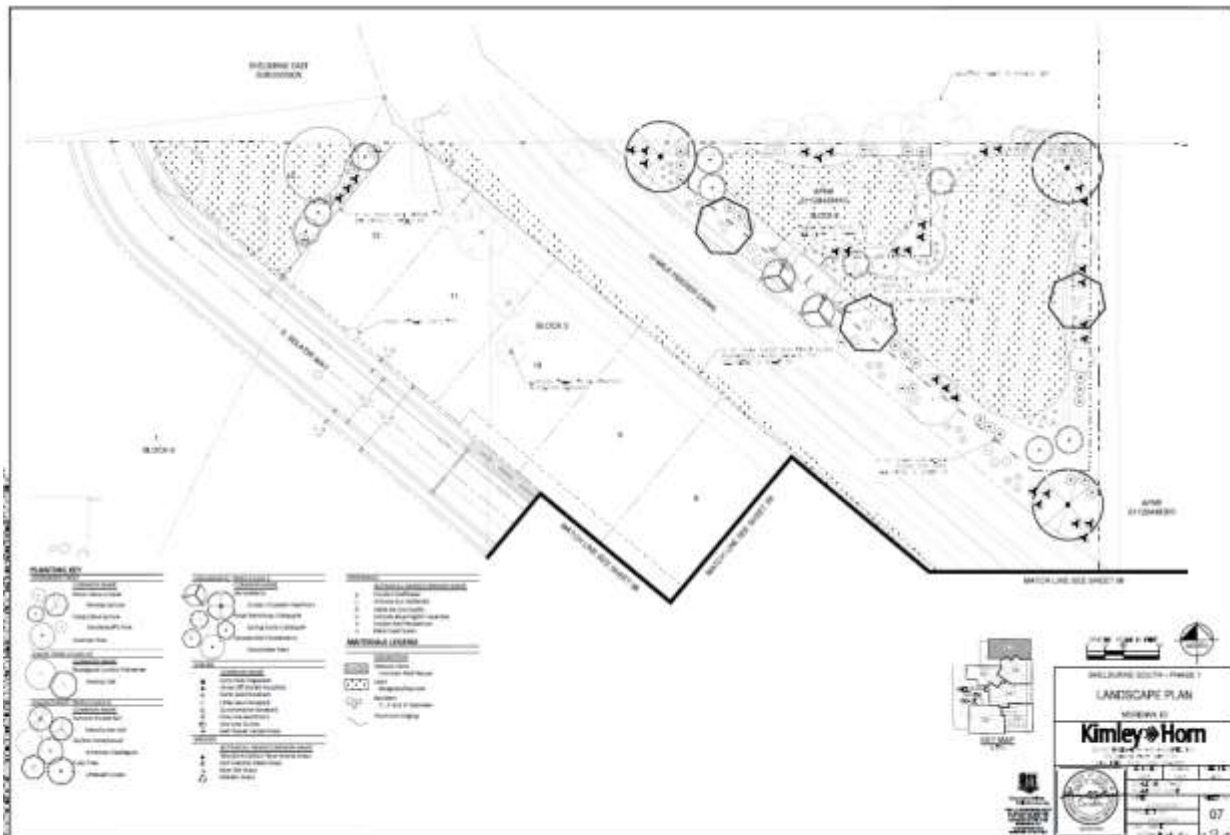


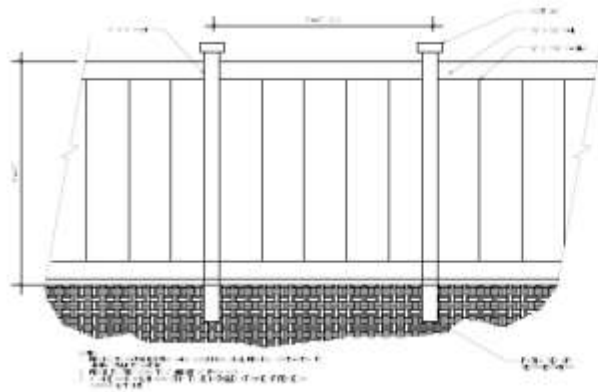


1 SOLID VINYL PRIVACY FENCE (TO MATCH SHRUBBERY EAST)

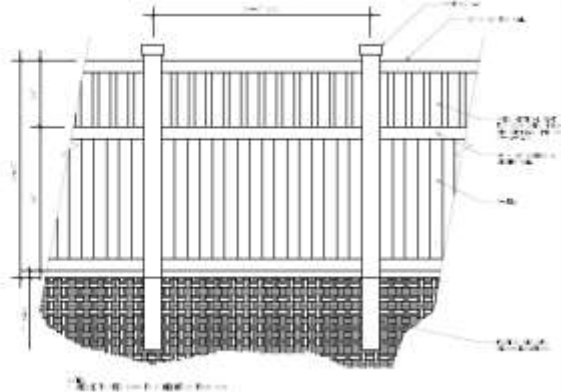

2 OPEN VISION VINYL SLAT TOP FENCE

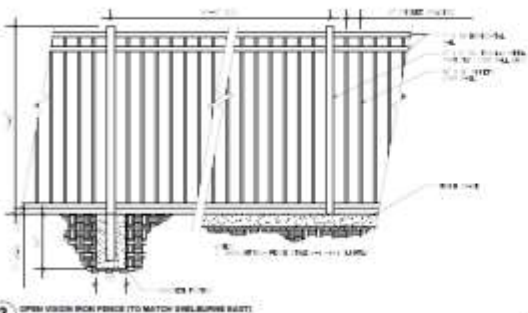


3 OPEN VISION IRON FENCE (TO MATCH SHRUBBERY EAST)

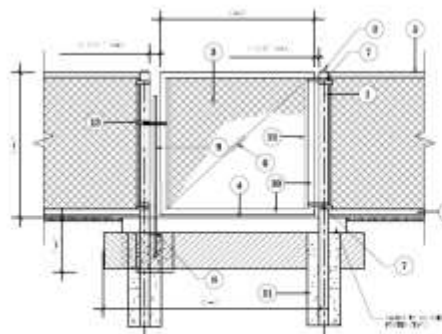

4 CHAIN LINK DOG PARK FENCE

1. 2" DIA. GALV. STEEL POSTS @ 8'-0" O.C.
2. 2" DIA. GALV. STEEL RAIL @ 6'-0" O.C.
3. 1/2" DIA. GALV. STEEL RAIL @ 6'-0" O.C.
4. 1/2" DIA. GALV. STEEL RAIL @ 6'-0" O.C.
5. 1/2" DIA. GALV. STEEL RAIL @ 6'-0" O.C.
6. 1/2" DIA. GALV. STEEL RAIL @ 6'-0" O.C.
7. 1/2" DIA. GALV. STEEL RAIL @ 6'-0" O.C.
8. 1/2" DIA. GALV. STEEL RAIL @ 6'-0" O.C.
9. 1/2" DIA. GALV. STEEL RAIL @ 6'-0" O.C.
10. 1/2" DIA. GALV. STEEL RAIL @ 6'-0" O.C.
11. 1/2" DIA. GALV. STEEL RAIL @ 6'-0" O.C.
12. 1/2" DIA. GALV. STEEL RAIL @ 6'-0" O.C.
13. 1/2" DIA. GALV. STEEL RAIL @ 6'-0" O.C.
14. 1/2" DIA. GALV. STEEL RAIL @ 6'-0" O.C.
15. 1/2" DIA. GALV. STEEL RAIL @ 6'-0" O.C.
16. 1/2" DIA. GALV. STEEL RAIL @ 6'-0" O.C.
17. 1/2" DIA. GALV. STEEL RAIL @ 6'-0" O.C.
18. 1/2" DIA. GALV. STEEL RAIL @ 6'-0" O.C.
19. 1/2" DIA. GALV. STEEL RAIL @ 6'-0" O.C.
20. 1/2" DIA. GALV. STEEL RAIL @ 6'-0" O.C.



Plaza Series, Model PL-3 Bench

SPECIFICATIONS

GENERAL

1. Bench shall be constructed of heavy-duty, weather-resistant material.

2. Bench shall be designed to withstand a minimum load of 250 lbs.

3. Bench shall be finished with a durable, weather-resistant coating.

4. Bench shall be installed on a concrete footing.

CONSTRUCTION

1. Bench shall be constructed of heavy-duty, weather-resistant material.

2. Bench shall be designed to withstand a minimum load of 250 lbs.

3. Bench shall be finished with a durable, weather-resistant coating.

4. Bench shall be installed on a concrete footing.

FINISHES

1. Bench shall be finished with a durable, weather-resistant coating.

2. Bench shall be installed on a concrete footing.

INSTALLATION

1. Bench shall be installed on a concrete footing.

2. Bench shall be finished with a durable, weather-resistant coating.


MAINTENANCE

1. Bench shall be maintained in accordance with the manufacturer's instructions.

2. Bench shall be installed on a concrete footing.



6 MAIL BOX KIOSK



TR-11 Trash Receptacle, Spun Dome Top with 30 Gallon Liner

SPECIFICATIONS

GENERAL

1. Receptacle shall be constructed of heavy-duty, weather-resistant material.

2. Receptacle shall be designed to withstand a minimum load of 250 lbs.

3. Receptacle shall be finished with a durable, weather-resistant coating.

4. Receptacle shall be installed on a concrete footing.

CONSTRUCTION

1. Receptacle shall be constructed of heavy-duty, weather-resistant material.

2. Receptacle shall be designed to withstand a minimum load of 250 lbs.

3. Receptacle shall be finished with a durable, weather-resistant coating.

4. Receptacle shall be installed on a concrete footing.

FINISHES

1. Receptacle shall be finished with a durable, weather-resistant coating.

2. Receptacle shall be installed on a concrete footing.

INSTALLATION

1. Receptacle shall be installed on a concrete footing.

2. Receptacle shall be finished with a durable, weather-resistant coating.

MAINTENANCE

1. Receptacle shall be maintained in accordance with the manufacturer's instructions.

2. Receptacle shall be installed on a concrete footing.



VI. CITY/AGENCY COMMENTS & CONDITIONS

A. Planning Division

Site Specific Conditions:

1. Applicant shall meet all terms of the approved annexation (Development Agreement - Inst. #2020-138124) and preliminary plat (H-2019-0106) applications approved for this site.
2. The applicant shall obtain the City Engineer's signature on the subject final plat within two years of the City Council's approval of the preliminary plat (by March 3, 2022); or apply for a time extension, in accord with UDC 11-6B-7.
3. Prior to submittal for the City Engineer's signature, have the Certificate of Owners and the accompanying acknowledgement signed and notarized.
4. The final plat prepared by Land Solutions, stamped by Clinton W. Hansen, dated: 8/18/2020, included in Section V.B shall be revised as follows:
 - a. Note #10: Include the recorded instrument number of the Development Agreement (#2020-138124).
 - b. Note #12: Include the recorded instrument number of the
 - c. Note #13: Include the recorded instrument number of the CC&R's.
 - d. Include the recorded Book and Page numbers for Shelburne East Subdivision No. 1 and No. 2 graphically depicted on Sheet 1.
 - e. Include the recorded instrument number for the existing slope easement graphically depicted on Sheet 1.
 - f. Include the recorded instrument number of the existing ACHD permanent sidewalk easement line in the Legend on Sheet 1.

A copy of the revised plat shall be submitted for City Engineer signature.

5. The landscape plan prepared by Kimley-Horn, dated 08/26/2020, included in Section V.C, shall be revised as follows:
 - a. Depict mitigation trees and calculations on the plan in accord with the standards listed in UDC 11-3B-10C.5. *Coordinate with Matt Perkins, the City Arborist, to determine mitigation requirements.*
 - b. Revise the configuration of the pathway on Lot 3, Block 2 so that it runs parallel with the creek in closer alignment with the pathway on Lot 23, Block 4.
 - c. If the unimproved right-of-way of E. Amity Rd. is 10 feet or greater from the edge of pavement to edge of sidewalk or property line, the Developer is required to maintain a 10 foot compacted shoulder meeting the construction standards of ACHD and landscape the remainder with lawn or other vegetative ground cover as set forth in UDC 11-3B-7C.5. A license agreement for improvements within the right-of-way is required between the property owner and ACHD.
 - d. Depict 5-foot wide landscape strips on each side of the multi-use pathway that comply with the standards listed in UDC 11-3B-12C. *A mix of trees, shrubs, lawn and/or other vegetative groundcover is required.*
6. The existing home proposed to remain on Lot 1, Block 4 shall hook up to City water and sewer services at the developers expense within 60 calendar days of such services becoming available in

accord with MCC 9-1-4 and 9-4-8. At such time, the septic tank shall be abandoned and the well solely used for irrigation purposes.

7. The address of the existing home on Lot 1, Block 4 shall change to be addressed off of S. Selatir Way when that road is constructed.
8. The Nine Mile Creek and the Ten Mile Creek/Feeder shall be protected during construction.
9. Prior to signature of the final plat by the City Engineer, the applicant shall provide a letter from the United States Postal Service stating that the applicant has received approval for the location of mailboxes. Contact the Meridian Postmaster, Sue Prescott, at 887-1620 for more information.
10. All fencing shall comply with the standards of UDC 11-3A-7C.
11. Development shall be limited to 30 building lots until such time as a secondary access that meets International Fire Code (IFC) is built and approved by the Fire Dept. *Note: Shelburne East No. 1 and 2 are currently being constructed to the north of the site and will provide secondary access for Shelburne South Phases 1 and 2 through Selatir Way.*
12. To ensure access is still provided to the Freeman property (Parcel #S1128438580) once Shelburne East develops to the north and S. Selatir Ln. is removed, a cross-access easement for a minimum 20-foot wide driveway shall be required to that property. **A copy of the recorded easement shall be submitted prior to signature on the final plat by the City Engineer.**
13. All existing structures on the site that are not proposed to remain on a lot in the proposed subdivision shall be removed prior to City Engineer signature on the final plat phase in which they are located.
14. An 8-foot wide public pedestrian easement shall be submitted to the Planning Division as required by the Park's Department prior to signature on the final plat(s) by the City Engineer for the multi-use pathway along the southwest side of the Nine Mile Creek from the east to the northwest (along the creek to the north boundary and along the access road to the west boundary) perimeter boundaries of the subdivision and along the northeast side of the Ten Mile Feeder Canal on the subject property.
15. All existing structures that don't comply with the setback standards listed in UDC 11-2A-6 shall be removed from the site prior to signature on the final plat by the City Engineer.
16. Staff's failure to cite specific ordinance provisions or conditions from the preliminary plat and/or development agreement does not relieve the Applicant of responsibility for compliance.

B. Public Works

Site Specific Conditions:

1. The streetlight at Amity and Amorita shall be Type 1 and be positioned over E. Amity Road.
2. Remove water mainline stub out of E Arabian Dr because the east boundary of the development is the edge of Meridian's service area.
3. Remove the water mainline stub out of E Grayson Dr east of S Selatir Way because the east boundary of the development is the edge of Meridian's service area.
4. Avoid sanitary sewer service lines going through seepage beds whenever possible. Adjust seepage beds, or service lines so they are not going through a seepage bed. There are multiple areas where the infiltration trenches can be relocated to eliminate these crossing. Applicant to reconfigure infiltration trenches to eliminate or minimize crossing.
5. All sewer mainlines outside of an improved public right-of-way must have at a minimum, a 14-foot wide compacted gravel maintenance road that meets the City standards. Installation of multi-

use pathways over main-lines is acceptable as long as the 14-foot width and adequate turn radiuses are provided.

General Conditions:

6. Sanitary sewer service to this development is available via extension of existing mains adjacent to the development. The applicant shall install mains to and through this subdivision; applicant shall coordinate main size and routing with the Public Works Department, and execute standard forms of easements for any mains that are required to provide service. Minimum cover over sewer mains is three feet, if cover from top of pipe to sub-grade is less than three feet then alternate materials shall be used in conformance of City of Meridian Public Works Departments Standard Specifications.
7. Water service to this site is available via extension of existing mains adjacent to the development. The applicant shall be responsible to install water mains to and through this development, coordinate main size and routing with Public Works.
8. All improvements related to public life, safety and health shall be completed prior to occupancy of the structures. Where approved by the City Engineer, an owner may post a performance surety for such improvements in order to obtain City Engineer signature on the final plat as set forth in UDC 11-5C-3B.
9. Upon installation of the landscaping and prior to inspection by Planning Department staff, the applicant shall provide a written certificate of completion as set forth in UDC 11-3B-14A.
10. A letter of credit or cash surety in the amount of 110% will be required for all incomplete fencing, landscaping, amenities, pressurized irrigation, prior to signature on the final plat.
11. The City of Meridian requires that the owner post with the City a performance surety in the amount of 125% of the total construction cost for all incomplete sewer, water infrastructure prior to final plat signature. This surety will be verified by a line item cost estimate provided by the owner to the City. The applicant shall be required to enter into a Development Surety Agreement with the City of Meridian. The surety can be posted in the form of an irrevocable letter of credit, cash deposit or bond. Applicant must file an application for surety, which can be found on the Community Development Department website. Please contact Land Development Service for more information at 887-2211.
12. The City of Meridian requires that the owner post to the City a warranty surety in the amount of 20% of the total construction cost for all completed sewer, and water infrastructure for a duration of two years. This surety amount will be verified by a line item final cost invoicing provided by the owner to the City. The surety can be posted in the form of an irrevocable letter of credit, cash deposit or bond. Applicant must file an application for surety, which can be found on the Community Development Department website. Please contact Land Development Service for more information at 887-2211.
13. In the event that an applicant and/or owner cannot complete non-life, non-safety and non-health improvements, prior to City Engineer signature on the final plat and/or prior to occupancy, a surety agreement may be approved as set forth in UDC 11-5C-3C.
14. Applicant shall be required to pay Public Works development plan review, and construction inspection fees, as determined during the plan review process, prior to the issuance of a plan approval letter.
15. It shall be the responsibility of the applicant to ensure that all development features comply with the Americans with Disabilities Act and the Fair Housing Act.

16. Applicant shall be responsible for application and compliance with any Section 404 Permitting that may be required by the Army Corps of Engineers.
17. Developer shall coordinate mailbox locations with the Meridian Post Office.
18. All grading of the site shall be performed in conformance with MCC 11-1-4B.
19. Compaction test results shall be submitted to the Meridian Building Department for all building pads receiving engineered backfill, where footing would sit atop fill material.
20. The engineer shall be required to certify that the street centerline elevations are set a minimum of 3-feet above the highest established peak groundwater elevation. This is to ensure that the bottom elevation of the crawl spaces of homes is at least 1-foot above.
21. The applicants design engineer shall be responsible for inspection of all irrigation and/or drainage facility within this project that do not fall under the jurisdiction of an irrigation district or ACHD. The design engineer shall provide certification that the facilities have been installed in accordance with the approved design plans. This certification will be required before a certificate of occupancy is issued for any structures within the project.
22. At the completion of the project, the applicant shall be responsible to submit record drawings per the City of Meridian AutoCAD standards. These record drawings must be received and approved prior to the issuance of a certification of occupancy for any structures within the project.
23. Street light plan requirements are listed in section 6-7 of the Improvement Standards for Street Lighting (http://www.meridiancity.org/public_works.aspx?id=272). All street lights shall be installed at developer's expense. Final design shall be submitted as part of the development plan set for approval, which must include the location of any existing street lights. The contractor's work and materials shall conform to the ISPWC and the City of Meridian Supplemental Specifications to the ISPWC. Contact the City of Meridian Transportation and Utility Coordinator at 898-5500 for information on the locations of existing street lighting.
24. The applicant shall provide easement(s) for all public water/sewer mains outside of public right of way (include all water services and hydrants). The easement widths shall be 20-feet wide for a single utility, or 30-feet wide for two. The easements shall not be dedicated via the plat, but rather dedicated outside the plat process using the City of Meridian's standard forms. The easement shall be graphically depicted on the plat for reference purposes. Submit an executed easement (on the form available from Public Works), a legal description prepared by an Idaho Licensed Professional Land Surveyor, which must include the area of the easement (marked EXHIBIT A) and an 8 1/2" x 11" map with bearings and distances (marked EXHIBIT B) for review. Both exhibits must be sealed, signed and dated by a Professional Land Surveyor. DO NOT RECORD. Add a note to the plat referencing this document. All easements must be submitted, reviewed, and approved prior to signature of the final plat by the City Engineer.
25. Applicant shall be responsible for application and compliance with and NPDES permitting that may be required by the Environmental Protection Agency.
26. Any existing domestic well system within this project shall be removed from domestic service per City Ordinance Section 9-1-4 and 9 4 8 contact the City of Meridian Water Department at (208)888-5242 for inspections of disconnection of services. Wells may be used for non-domestic purposes such as landscape irrigation if approved by Idaho Department of Water Resources.
27. Any existing septic systems within this project shall be removed from service per City Ordinance Section 9-1-4 and 9 4 8. Contact the Central District Health Department for abandonment procedures and inspections.
28. The City of Meridian requires that pressurized irrigation systems be supplied by a year-round source of water (MCC 9-1-28.C.1). The applicant should be required to use any existing surface or

well water for the primary source. If a surface or well source is not available, a single-point connection to the culinary water system shall be required. If a single-point connection is utilized, the developer will be responsible for the payment of assessments for the common areas prior to development plan approval.

29. All irrigation ditches, canals, laterals, or drains, exclusive of natural waterways, intersecting, crossing or laying adjacent and contiguous to the area being subdivided shall be addressed per UDC 11-3A-6. In performing such work, the applicant shall comply with Idaho Code 42-1207 and any other applicable law or regulation.