CITY OF MOBERLY

Mowers

Date: 9/6/2024, 10:AM

"BID OPENING" Sign-In Sheet

Name	Company
Shannon Hance	City of Moberry
Carla Berl Vin Spel)/
*	

CITY OF MOBERLY

"BID OPENING"

MOWERS

Date: 9/10/24, 10 AM

Jeff Dayis	\$ Airport: 13,564.00
(1	\$ Cemetary option 1: 11,0104.00
	\$ Cametary option 2: 13,398.00
Mckeown Farm & Lawn	\$ Airport: 12,1028.00
\t	\$ Cametery: 11,213.69
	\$ Street: 14,757.02
Crown Power	\$ Airport' 14.014.50
ч	\$ Cemetery: 12, 395.
\t	\$ Street: 16,015,30
Precision	\$ Airport 10,784.00
11	\$ Cemetery: 11,954.00
	\$
	\$
	\$

Airport

August 14, 2024

CITY OF MOBERLY, MISSOURI AIRPORT DEPARTMENT

BID FORM

Bid due date: September 6, 2024; 10:00 a.m.

We are requesting a bid quotation for:

One new 2024/2025 Zero Turn Commercial Mower Rear Discharge 72" Mid Mount Mower Deck, Side Discharge, Roll Over Protection, Min. of 35 H.P. Twin Cylinder Gas Engine (NON EFI)

Total Bid	\$_	13,56	400	
Dealer Name: JER DAVIS	Soler	1 Servi	CE	
Brand Name & Model: Huston Fx 1000 - KAN	Supar	- 2 72	" Rear Discu	JANGE
Authorized Signature:	JAll 3	SHP MODE	1 # 942912	_
Delivery Date:		30 V) Ay (

DATE 08-21-24

JEFF DAVIS SALES & SERVICE JEFF DAVIS TRUCKING & EXCAVATING

33305 US HWY 63 – MACON, MO. 63552 SHOP/FAX 660-395-9393 CELL 660-651-3658

FA	X	×	∻	∻	≍	*	*	*	×	×	*:	*
3 / 6	10											

TO: Coty of Mossely - GENETURY Dept.
NUMBER ZOPTIONS FOR this Mower
Option #1 - Great Monac - W. Il WORK FINE
For Your Specs
V
OPTION +2 - BEST OF the BEST -I PACOMMENT
THIS MOWER!

Cemetery

aption + 1

August 14, 2024

CITY OF MOBERLY, MISSOURI CEMETERY DEPARTMENT

BID FORM

Bid due date: September 6, 2024; 10:00 a.m.

We are requesting a bid quotation for:

One new 2024/2025 Zero Turn Commercial Mower Rear Discharge 60" or 61" Mid Mount Mower Deck, Rear Discharge, Roll Over Protection, Min. of 25 H.P. Twin Cylinder Hour Meter, Fuel Gage

Total Bid	s_11,064
Dealer Name:	OF DAYS SALET + SERVICE
Brand Name & Model:	HOTTER X-ONE 60" REAR DISCHARE KAWASAKI PROSE 27 HP MODEL # 941930
Authorized Signature:	KAWASAKI PK BSD 27 HP MODEL #941937
Delivery Date:	30 days

OPTION # Z Cemetery

August 14, 2024

CITY OF MOBERLY, MISSOURI CEMETERY DEPARTMENT

BID FORM

Bid due date: September 6, 2024; 10:00 a.m.

We are requesting a bid quotation for:

One new 2024/2025 Zero Turn Commercial Mower
Rear Discharge 60" or 61" Mid Mount Mower Deck, Rear Discharge,
Roll Over Protection, Min. of 25 H.P. Twin Cylinder
Hour Meter, Fuel Gage

Total Bid	\$ 13,398
Dealer Name: JAR-DAVIC SALET	4 Service
Brand Name & Model: Huster Spe Ex 1000 35HP	or 2 60" ROOR DISCHARLE
Authorized Signature:	1 MODEL # 942862
Delivery Date:	30 Day (

Cemetery

\$_11213.69____

August 14, 2024

CITY OF MOBERLY, MISSOURI CEMETERY DEPARTMENT

BID FORM

Bid due date: September 6, 2024; 10:00 a.m.

We are requesting a bid quotation for:

Total Bid

One new 2024/2025 Zero Turn Commercial Mower Rear Discharge 60" or 61" Mid Mount Mower Deck, Rear Discharge, Roll Over Protection, Min. of 25 H.P. Twin Cylinder Hour Meter, Fuel Gage

Dealer Name: MCKLOWN FAYM & LAWN

Brand Name & Model: Grassnopper

Authorized Signature: MANIA MCKLOW

Delivery Date: 24 days From quote acceptance

BID SPECS FOR NEW 2024/2025 ZERO TURN COMMERCIAL MOWER

ENGINE--MINIMUM 25 HP TWIN CYLINDER GASOLINE (NON EFI)

DRIVE SYSTEM- HYDRO GEAR DUAL HYDROSTATIC TYPE FOR COMMERCIAL USE

DECK- 60 /61" MIDMOUNT TYPE, MINIMUM 10 GAUGE STEEL CONSTRUCTION WITH REAR DISCHARGE

DECK SPINDLES-MINIMUM 1" OD SHAFT WITH MACHINED ALUMINUM OR CAST IRON HOUSING CONSTRUCTION, SEALED OR GREASABLE FROM TOP SIDE

STARTER AND ELECTRICAL SYSTEM- 12 VOLT

TIRES-MANUFACTURERS STANDARD FRONT AND REAR

ROPS-MANUFACTURERS STANDARD ROLL OVER PROTECTION

HOUR METER-MANUFACTURERS STANDARD EQUIPMENT

FUEL TANK-MINIMUM 10 GALLONS WITH FUEL GAUGE

SEAT-SUSPENSION TYPE WITH ARMRESTS

GROUND SPEED-MINIMUM 10 MPH

WARRANTY-MANUFACTURERS STANDARD

NOTE THIS MOWER SHALL BE A COMMERCIAL (NOT RESIDENTIAL) GRADE MOWER AND ANY DEVIATION FROM SPEC MUST BE NOTED ON BID.

NOTE THE CITY OF MOBERLY RESERVES THE RIGHT TO ACCEPT ANY BID REGARDLESS OF PRICE.

Grasshopper QuikQuote #43944N00054



Quoted by

McKeown Farm & Lawn LLC

2061 N Morley St

Moberly, MO 65270

P: (660) 263-1137

ANDREA MCKEOWN

E: MCKEOWNFARMANDLAWN@GMAIL.COM

P: 660-263-1137

Quoted for CITY OF MOBERLY - TIM





Models may be shown with optional equipment that may or may not appear on your specific quote

Model 225 with 61" 4X Rear Discharge

Quoted: Aug 30, 2024

Power	Ilmit	0	Doole
POWER	111111	~	I ICK

List

Bid

\$10,943.80

Model 225 (534123)

747cc Kohler Command Pro Engine; "no-gears" hydraulic pumpand-wheel-motor transmission; heavy-duty extra-deep 61" cutting deck; luxury seat and shock-absorbing footrest

61" 4X Rear Discharge Deck – In lieu of standard 61" deck for 225-61. *(534340)*

\$355.00

\$14,395.00

\$269.89

List Total: \$14,750.00

- Discount: 23,98%

Bid Price: \$11,213.69

Grand Total: \$11,213.69


Stipulation(s):

√ Quote Expires in 30 days

√ Additional Stipulations:
Expected Delivery, 21 days from quote acceptance.

200 SERIES AIR-COOLED MIDMOUNT

Reliable economy in a compact package

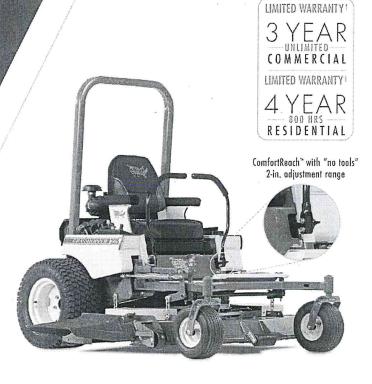

225







747 cc, 2-cylinder Kohler Command Pro OHV horizontal crankshaft gasoline engine

Standard deck
Dur

DuraMax[®] deck

Reliable economy that delivers a quality cut and powerful, air-cooled performance in a compact package ideal for tight-quarters mowing. Enjoy the maneuverability of a walk-behind without the fatigue, to mow longer and deliver quality results.

DURABILITY & LONGEVITY

The horizontal crankshaft configuration adds performance life to the engine. A higher horsepower combined with a compact wheelbase provides a great power-to-size ratio.

Design-matched G² hydrostatic transmissions with CoolFan[™] hydrostatic pump cooling system and 7 micron absolute filter partnered with wheel motors create a fully hydraulic system for smooth, responsive steering and less maintenance with 1,000-hour fluid change intervals.

Only five Access-Eze™ lubrication points cut maintenance time up to 80%.

MANICURED CUT

5.5-inch deep DuraMax® decks with anvil-edged design for exceptional durability easily convert from wide-pattern side discharge to optional mulching or vacuum collection. The QuikAjust™ DropPin™ Height Adjustment makes cutting height change fast and simple.

COMFORT & ERGONOMICS

Deep-cushioned Premium Comfort Seat featuring CoolTemp Cordura® and coil-spring suspension provides all-day comfort. Electronic fuel gauge/hour meter on the console is standard.

ComfortReach™ provides 2 inches of adjustment at the base of the lever for a custom steering fit. No tools required.

The 12.0 gal/45.4 L single-fill fuel tank lowers the center of gravity, providing more traction and stability for an enhanced ride. The standard bumper protects the rear of the mower while preserving easy access and removal of the service shield.

Optional four-spindle dedicated rear-discharge decks evenly distribute clippings out back for a smooth cut and no windrowing to provide the quality cut you expect.

Mowing speeds up to 9.5 MPH and 5.27 acres/hr. based on 61" cutting width* For more details visit: grasshoppermower.com/acres



OPTIONS

- >> Quik-D-Tatch[®] PowerVac[™] Collection Systems
- » Down Discharge™ mulching packages
- » Dedicated 4X Rear Discharge™ deck
- » Speed-Trimming™ heavy-duty roller (61")
- >> TrimAide™ Roller (52")
- » Electric height adjustment
- » DuraGuard™ rear bumper (2 bars)

- » DuraFlex™ suspension forks
- >> LED work lights
- >> Taller steering levers
- » QuikAjust Tilt™ steering levers with "no tools" 9-inch comfort range
- >> Big Boy wide-seat conversion kit
- » Premier suspension seat
- » Adjustable cup holder

- » Foldable ROPS with seat belt
- >> Bar tread, low-pressure tires
- » Michelin® X® Tweel® 24 x 12-12 Airless Turf Tires (61")
- » Michelin® X® Tweel® 13 x 6.5-6 Airless Front Casters
- » Edge-EZE™ edger
- » Shielded sprayer

- » Aluminum or Vinyl Sunshade Canopy
- » Yellow beacon light
- » Side discharge control kit
- $\hspace{-0.5cm}\hspace$

	Standard Option	225 48"	225 52"	225 61"
ENGINE	34 S	4 1		
Type/Displacement/Cylinders				
Kohler Command Pro / 45.6 cu. in. (747cc) / V-Twin			8	۰
Crankshaft/Cooling System				
Horizontal / Air		•	•	0
Fuel/Capacity				1 12 00
Gasoline - unleaded / 12 U.S. Gal. (45.4 l) Air Cleaner				
Heavy-duty, remote-mounted engine air cleaner with replaceable element		•	•	٠
DECKS – Side Discharge or Dedicated 4X R	lear Dis	charc	e (4X	RD)
Construction (Robotic-welded steel) - Side discharg				
Double-layered, 10-gauge plus 7-gauge formed-steel laminate spindle plane 0. (7.95 mm) thick – more than 25% thicker than 0.25 in. (6.35 mm) – with 7-gc for geometric strength. Spindle plane is 0.9 in. (22.86 mm) thick in stress zon Anvil-edge design with 0.5 in. (12.7 mm) reinforcement on front edge of deck.	.313 in. auge skirts es.	•	٠	
DuraMax [®] deck			٠	•
Blades (MARBAIN®, 1/4-in.)				
(2) 18 in. (45.7 cm), (1) 15 in. (38.1 cm) – high-lift blades standard		9		
(3) 18 in. (45.7 cm) – high-lift blades standard				
(3) 21 in. (53.3 cm) – high-lift blades standard				
Sentry™ Spindle Assemblies				
Sentry* Spindle System, 2.5 cm (approx. 1 in.) O.D. shaft. Double bearings, gr from top of deck. Spindle head designed to eliminate fiber wrap. Spindle cone housing and lower bearings from fiber wrap and dirt ingestion.		•		•
Spindle Housing – 8-in. (20.3 cm)-diameter wit	th 6-bolt	patte	rn	
Machined aluminum		•	Ð	0
QuikAjust™ DropPin™ Height Adjustment				
Foot-controlled height adjustment pedal with pin				
Cutting Height Range				
1.0 - 5.0 in. (2.5 - 12.7 cm)			٠	•
Blade Drive				
Belt drive with single Kevlar* V-belt and idler arm tensioning	6.50 51 53 62 6			
DEDICATED 4X REAR DISCHARGE DECK OPTION	- Additio	onal Ir	forme	tion
4th Spindle and Grass Thrower Blade	rn			•
Cast iron thrower spindle housing – 5-in. (12.7 cm) -diameter with 4-bolt pattel (1) Grass Thrower Blade	10			
1) 18 in. High-Low Mulching Grass Thrower Blade				0
STARTER & ELECTRICAL SYSTEM	775	H. 15		
Maintenance-Free Battery/Charging Capacity/S	Starter			
2 volt/15 amp/salenoid shift		٠	•	0
gnition				
reakerless			•	•
nterlock System				
trevents engine start when PTO clutch is engaged or steering levers are in drive posi Illows operator dismount without engine shutdown only when PTO is disengaged an teering levers are locked in neutral.		•		9
ULTIMATE OPERATOR STATION"			9.5	
Premium Comfort Seat				
co-mounted, high-back, deep-cushioned, foam-padded, Corduro®-covered, padde ackrest with lumbar support, coil-spring suspension and embroidered Grasshop n seat back.		•	9	8
remier Suspension Seat		0	0	O
Operator Protection				
OPS with seat belt		٠		0
Suspension				
nFrame" suspension with iso-mounted seat and footrest		•	۰	٠
Console-Mounted Instruments ow engine oil pressure light, combination electronic fuel gauge/hour meter, parki ndicator light, ignition switch and push/pull PTO switch. Choke integrated with thr		•	•	6
Nork Lights (Pre-wired)		0	0	0

TRANSMICCIONI & CTERNING				
TRANSMISSION & STEERING				
Type	talla			
Design-matched G ² hydrostatic system with auxiliary cooling fans, HydroGear displacement 12cc piston-type pumps and high-torque Parker wheel motors.	variable	9		0
Filtration/Hydro Fluid				
7 micron absolute, spin-on / Grasshopper CoolTemp Hydro-Max** fluid withsta	nde binb			
and low temperature extremes for 1,000-hour change intervals.	nus myn	•	٠	
Speed				
0 – 8.5 mph (0 – 13.7 kph) forward		٠		
0 – 9.0 mph (0 – 14.5 kph) forward			0	
0 – 9.5 mph (0 – 15.3 kph) forward		•		
0 - 6.0 mph (0 - 9.7 kph) reverse		۰	•	
Turning Radius				
True zero degree, turns within own length with counter-rotating, independent	y powered			
drive wheels.			•	٠
Steering				
One- or two-handed operation with ComfortReach™ adjustable Hydra-Smooth™	dual levers			9
that automatically return to neutral from either forward or reverse position.				
Brakes				
Dynamic braking through hydrostatic transmission. Disc parking brakes, one for drive wheel.	each	•	0	9
Disc brokes			•	
Clutch		1/18/05		ň
Heavy-duty electric MagStop blade clutch/brake		•	۰	٥
POWER UNIT TIRE SIZES	10	11 1		
Drive Wheels (4-ply rated): 23 x 9.5-12 turf		0		
Drive Wheels (4-ply rated): 23 x 10.5-12 turf			0	
Drive Wheels (4-ply rated): 24 x 12-12 turf				0
Drive Wheels (4-ply rated): 24 x 12-12 bor tread				0
Front Casters: 13 x 6.5-6; rib tread, pneumatic with greasable, double-sealed l	bearings			
to protect from grass wrap		•	9	9
POWER UNIT DIMENSIONS WITH DURAMA	AX® DEC	KS		
Mulch or 4XRD Width*/Length: 49.5 in. (125.7 cm) / 76.5 in. (194.3 cm)		0 .		
Mulch or 4XRD Width*/Length: 53.5 in. (135.9 cm) / 76.5 in. (194.3 cm)			٠	
Mulch or 4XRD Width*/Length: 62.5 in. (158.8 cm) / 78.0 in. (198.1 cm)				ø
*Add 1.5 in. (3.8 cm) to width for side discharge with deflector raised.				
Add 12.0 in. (30.5 cm) to width for side discharge with deflector down.				
Height (seat back/seat cushion): 46.5 in. (118.1 cm) / 31.0 in. (78.7 cm)		•	٠	
Height (seat back/seat cushion): 47.0 in. (119.4 cm) / 31.5 in. (80.0 cm)				•
leight (ROPS): 70.0 in. (177.8 cm)		•	0	9
WEIGHT	 1	15 173		
Jncrated**: 1050 lbs. (476.3 kg)		•		
Incrated**: 1070 lbs. (485.4 kg)			٠	
Incrated**: 1120 lbs. (508.0 kg)				9
Mulching package kit weights with high-low mulching blades:				













Street

August 14, 2024

CITY OF MOBERLY, MISSOURI STREET DEPARTMENT

BID FORM

Bid due date: September 6, 2024; 10:00 a.m.

We are requesting a bid quotation for:

Total Bid

One new 2024/2025 Zero Turn Commercial Mower Rear Discharge 60" or 61" Out Front Deck, Side Discharge, Roll Over Protection, Min. of 29 H.P. Gas Engine (NON EFI), Hour Meter, Fuel Gage

Dealer Name: MCICLOWN FAYM'S LAWN

Brand Name & Model: GVASShopper 729BT w/3661PF

Authorized Signature: MCKLOULD

Delivery Date: The Stock - Delivery Upon Approval

THE CITY OF MOBERLY WILL BE ACCEPTING BIDS FOR ONE NEW 2024/2025 ZERO TURN OUT FRONT DECK COMMERCIAL MOWER

ENGINE--MINIMUM 29 GROSS HORSEPOWER, GAS ENGINE (NON EFI)

DECK--61" OUT FRONT TYPE(MUST BE MADE OF MATERIAL NO THINNER THEN 10 GAUGE STEEL) SIDE DISCHARGE

SPINDLES--MINIMUM 1" SHAFT, GREASEABLE FROM TOP SIDE

TRANSMISSION--HYDROSTATIC TYPE

DECK LIFT--POWER DECK TILT(FOR CLEANING &CHANGING BLADES)

SPEED--MINIMUM 10 MPH FORWARD SPEED

TIRES -MANUFACTURES STANDARD BAR TREAD TYPE

HOUR METER

ROLL OVER PROTECTION DEVICE

FUEL GAUGE

SEAT--SUSPENSION TYPE WITH ARMRESTS

PARKING BRAKE--DISC TYPE

PAINT--MANUFACTURES STANDARD COLOR

FUEL TANK-- MINIMUM 7 GALLON CAPACITY

AIR CLEANER--DRY TYPE WITH REPLACEABLE ELEMENT

Grasshopper QuikQuote #43944N00051



Quoted by

McKeown Farm & Lawn LLC 2061 N Morley St

Moberly, MO 65270 P: (660) 263-1137

ANDREA MCKEOWN

E: MCKEOWNFARMANDLAWN@GMAIL.COM

P: 660-263-1137

Quoted for CITY OF MOBERLY - TIM

Street Dept. Mower



Models may be shown with optional equipment that may or may not appear on your specific quote Model 729BT with 3661PF Quoted: Aug 30, 2024

Power Unit & Deck	List	Bid
Model 729BT (531900) 895cc Big Block engine; "no-gears" T6 pump-and-wheel-motor transmission; AntiVibe Power Platform; luxury seat and shock- absorbing footrest	\$13,230.00	\$10,187.10
3661PF – 61" w/ PowerFold <i>(532810)</i>	\$4,705.00	\$3,622.85
Wholegoods	List	Bid
503218+503220 - Counterweight Kit - 50 lb. with mount kit (One lb. weight included)	50- \$265.00	\$204.05
533577 – Premier Suspension Seat	\$785.00	\$604.45
533550 - Foldable ROPS w/ Seatbelt	\$180.00	\$138.60

List Total: \$19,165.00

- Discount: 23.00%

Bid Price: \$14,757.05

Grand Total: \$14,757.05

Stipulation(s):

√ Quote Expires in 30 days

√ Additional Stipulations:
This model is in stock.

700 SERIES AIR-COOLED FRONTMOUNT™

Unexpected power when you need it most



Standard PowerFold® Electric Deck Lift. See Page 13 for more info.

725 KT



747 cc, Kohler Command Pro V-Twin OHV horizontal crankshaft gasoline engine

> 735 BT BIG BLOCK



993 cc, V-Twin OHV Vanguard BIG BLOCK horizontal crankshaft gasoline engine 729BT BIG BLOCK*







896 cc, V-Twin OHV Vanguard BIG BLOCK' horizontal crankshaft gasoline engine

727T EF







747 cc, V-Twin Kohler Command Pro, Delphi®-based closed-loop, Electronic Fuel Injection horizontal crankshaft gasoline engine Powerful and efficient with choices of Vanguard Big Block or Kohler EFI engines with horizontal crankshaft for longer performance life.

DURABILITY & LONGEVITY

For enhanced efficiency, consider the 727T EFI with closed-loop electronic fuel injection. A wide range of benefits include decreased fuel use, reliable hot and cold weather starts, reduced engine exhaust emissions and fewer fuel-related service issues.

Versatile and productive, with power to tackle tough jobs and plenty to spare thanks to the use of exclusive design-matched T-Drive™ and To® hydrostatic drive systems. The tandem-pump drive train is direct-coupled to the engine to transmit more power to the cutting deck or implement. The innovative AntiVibe Power Platform® isolates the engine and drive system from the operator station providing an unprecedented, vibration-free environment eliminating fatigue for the operator.

The CoolFan™ hydrostatic pump and filter cooling system partner with wheel motors for smooth, responsive steering and less maintenance with 1,000-hour fluid change intervals.

MANICURED CUT

5.5-inch deep DuraMax® contour-cut decks with anvilledged design for exceptional durability easily convert from wide-pattern side discharge to optional mulching or vacuum collection systems. A dedicated rear-discharge deck is also available.

Change cutting height easily with the flip of the PowerFold® deck switch. Use the same switch to electrically fold up the deck for storage and easy maintenance.

COMFORT & ERGONOMICS

Deep-cushioned Premium Comfort Seat featuring CoolTemp Cordura® with lumbar support and coil-spring suspension keeps the operator comfortably in control for all-day comfort.

QuikAjust Tilt** steering levers with "no tools" adjustment provide a 9-inch range for maximum comfort and fit.

Quickly attach a wide range of seasonal implements with the exclusive QuikConverter™ Implement System to save time and labor on all your jobs. Power units include standard wiring harness for the addition of electric-powered implements.

Mowing speeds up to 10 MPH and 6.55 acres/hr. based on 72" cutting width* For more details visit: grasshoppermower.com/acres



DuraMax® deck

OPTIONS

- » Quik-D-Tatch® PowerVac™ Collection Systems
- » Down Discharge™ mulching packages
- >> Dedicated rear-discharge deck
- >> Speed-Trimming™ heavy-duty roller
- » Hydraulic deck lift
- >> LED work lights (725KT)
- » Full-flotation deck inserts

- >> Taller steering levers
- » Big Boy wide-seat conversion kit
- » Premier suspension seat
- » Adjustable cup holder
- » Foldable ROPS with seat belt
- » Turf tires
- » Multiple tail wheel options
- >> Flat-proof 13 x 6.5-6 tires

- » Michelin® X® Tweel® 22 x 11-12 Airless Turf Tires
- » Michelin® X® Tweel® 13 x 6.5-6 Airless Tail Wheels
- >> Michelin® X® Tweel® 13 x 6.5-6 Airless Deck Tires (72")
- » QuikConverter™ implements
- >> Aluminum or Vinyl Sunshade Canopy
- yellow beacon light

- » Filter minder (729BT/735BT)
- » Air Dam kit for dry, dusty conditions
- >> QuikConverter™ implement capability with wiring harness
- >> PowerFold® height adjustment switch
- » Side discharge control kit
- » Footrest riser

AIR-GOOLEO 700 SERIES-SPECIFICATIONS

MODEL • Standard • Option	7 23(1	, , , 1	729BT	7 9 3 0
Type/Displacement/Cylinders Kohler Command Pro / 45.6 cu. in. (747.cc) / V-Twin	٠			
Kohler Command Pro, 7 45.6 td. in. (747c) / V-Iwin Kohler Command Pro, Delphi®-based, closed-loop, Electronic Fuel Injection (EFI) / 45.6 td. in. (747ct) / V-Iwin		•		
B&S Vanguard Big Block / 54.7 cu. in. (896cc) / V-Twin				
B&S Yanguard Big Block / 60.6 cu. in. (993 cc) / V-Twin				
Crankshaft/Cooling System		(41 4 5 5) 4		
Horizontal / Air	٠	۰	۰	
Fuel/Capacity				
Gasoline - unleaded / 7.2 U.S. Gal. (27.3 I)	٠	8		
Air Cleaner				
Heavy-duty, remote-mounted engine air cleaner with replaceable element	0		•	•
Heavy-duty cyclonic, remote-mounted engine dual air cleaner with replaceable element STARTER & ELECTRICAL SYSTEM		0		
Maintenance-Free Battery/Charging Capacity/Star	tor			
12 volt/15 amp/solenoid shift	er •			
12 volt/20 amp/salenoid shift		۰	•	
Ignition		3783		
Breakerless	٠	٠		
Interlock System				•
Prevents engine start when PTO clutch is engaged or steering levers are in drive position. Allows operator dismount without engine shutdown only when PTO is disengaged and steering levers are locked in neutral.	•		•	•
ULTIMATE OPERATOR STATION**				
Premium Comfort Seat		1102711		
Iso-mounted, high-back, multi-density, foam-padded Cordura®-covered, padded arms/backrest with lumbar support, coil-spring suspension and embroidered Grasshopper logo on seat back.	•	٥		9
Premier Suspension Seat	0	0	0	0
Suspension				
AntiVibe Power Platform® provides vibration-free experience.	9	0	•	
Console-Mounted Instruments				
Low engine oil pressure and parking brake warning lights, digital hour meter, work light, ignition and push/pull PTO switches. Choke integrated with throttle lever.	٠		•	
Low engine oil pressure, engine code light and parking brake warning lights, digital hour meter, ignition and push/pull PTO switches.				
Operator Protection/Convenience				
ROPS with seat belt	0	0	•	•
Adjustable cup holder	0	0	0	0
Work Lights				
LED	0	•	•	۰
TRANSMISSION & STEERING				
Туре				
F-Drive™ hydrostatic transmission with tandem 12cc Parker pumps-in-reservoir, in-line CoolFan™ for cooling efficiency, design-matched Parker high-tarque wheel mators.	•			
16 [©] hydrostatic transmission with tandem 16 cc Parker pumps-in-reservoir, in-line CoolFan [™] for cooling efficiency, design-matched Parker high-torque wheel motors.		•	•	•
AntiVibe Power Platform® reduces vibration for the operator. Transmission Fluid/Filtration	•	0	•	٥
Grasshopper CoolTemp Hydro-Max™ fluid withstands high and low temperature extremes for 1,000-hour change intervals. / Integrated, replaceable, high-efficiency, line-particle filter.	•	0	•	
Speed				
7 – 9.0 mph (0 – 14.5 kph) forward	9			
) – 10.0 mph (0 – 16.1 kph) forward		8	•	0
) – 6.0 mph (0 – 9.7 kph) reverse	۰	•	9	0
Furning Radius				
True zero degree, turns within own length with counter-rotating, ndependently powered drive wheels. Seat is pivot point.	٠	•	•	•
Steering				
One- or two-handed operation with QuikAjust Tihr" dual levers with 9-inch adjustment ange that automatically return to neutral from either forward or reverse position.	•	٠	a	9

MODEL	 Standard 	O Option	725KT	727T	729BT	735BT
Brakes						
Dynamic braking through hydrostatic transmone for each drive wheel.	ission. Disc parking brak	95,	•	•		0
Attachment Drive						
Telescoping PTO shaft with two high-speed U heavy-duty electric MagStop blade clutch/bro		pler and	•	۰	۰	٠
Wiring harness for electric-powered impleme	nis		0			0
POWER UNIT TIRE SIZES		100	137	Marie 1		1
Drive Wheels (4-ply rated): 22 x 11-10 bar	tread, high flotation		0	0	9	
Drive Wheels (4-ply rated): 22 x 11-10, turf	tread		0	0	0	0
Tail Wheel: Wide-Stance, Single-Fork, 13 x 6	.5-6 rib tread, pneumatic	(2)	•	٠	٥	0
Tail Wheel: Single-Fork, 13 x 6.5-6 rib tread	, pneumatic		0	0	0	0
POWER UNIT DIMENSIO	NS	1990			(3.3)	8 8
Width: 50.0 in. (127.0 cm)				0	0	0
Length: 67.0 in. (170.2 cm)			٠	•	0	9
Height (ROPS): 69.0 in. (175.3 cm)			•	٥	٥	8
Height (seat back/seat cushion): 46.0 in. (1	16.8 cm) / 30.5 in. (77.5	i cm)		•		
Height (seat back/seat cushion): 47.0 in. (1	19.4 cm) / 30.5 in. (77.5	cm)	0		9	•
Wheelbase: 51.5 in. (130.8 cm)			٠	0	9	0
WEIGHT					Sec.	
Uncrated: 890 lbs. (403.7 kg)			0			
Uncrated: 915 lbs. (415 kg)				0		
Uncrated: 930 lbs. (421.8 kg)					0	•
DURAMAX* CONTOUR-CUT DE	CKS – Side Discho	rge or Do	edicated	Real	Disch	arge
Model Side Discharge/Rear Discharge	3452/3552R	3661/3			72/357	
Width of cut	52 in. (132.1 cm)	61 in. (15			л. (182.9	
wilde with Jeffersen Jewe	155: 11115-1					

Width with deflector down 65.5 in. (166.5 cm) 74.5 in. (189.2 cm) 85.5 in. (227.3 cm) Width with deflector folded up 55.0 in. (139.7 cm) 64.0 in. (162.6 cm) 75.0 in. (190.5 cm) Width - mulching or rear discharge 53.5 in. (135.9 cm) 62.5 in. (158.8 cm) 73.5 in. (186.7 cm) Cutting Height* 1.25 to 5.0 in. (3.2 cm to 12.7 cm) PowerFold® Compatibility 725KT 727T 729BT 735BT Construction (Robotic-welded steel) - Side discharge or optional Dedicated Rear Discharge

Tubular 2.25 in. x 4 in. boxed members with 0.25 in. gussels. Formed double thickness hardened steel (0.269 in. – 7.6% thicker than 0.25 in. (6.35 mm) truss spindle plane and (3) Sentry" spindles and a triple-strength upper deck, over 1/2 in. thick in stress zones. Geometrically engineered design with 7 gauge skirts withstands the brunt of commercial mowing. Anvil-edge design with 0.5 in. (12.7 mm) reinforcement on front edge of deck.

Blades (MARBAIN®, 1/4-in. — High-lift blades standard)

Tempered, alloy steel (3) 18 in. (45.7 cm) (3) 21 in. (53.3 cm) (3) 25 in. (63.5 cm)

Spindle Assemblies

2.5 cm (approx. 1 in.) 0.D. shaft. Double bearings. Greasable from top of deck. Deck spindle cones shield housing and lower bearings from fiber wrap and dirt ingestion.

Spindle Housing - 8 in. (20.3 cm)-diameter with 6 bolt pattern

Machined aluminum
Blade Drive

Maintenance-free gearbox with single Keylar® V-belt and idler arm tensioning.

mannenunce-nee geurbo.	A WILL SHIGHE KEVIUL 190	en una laiet attit tension	my.
Trimability			
(outside of tire to left trim side)	1.0 in. (2.5 cm)	8.5 in. (21.6 cm)	13.75 in. (34.9 cm)
Power Unit/Deck Length			
Deck (mowing position)	105.5 in. (268.0 cm)	109.5 in. (278.1 cm)	117.5 in. (298.5 cm)
Deck (folded up)	88.5 in. (224.8 cm)	91.0 in. (231.1 cm)	104.0 in. (264.2 cm
Tire Size (4-ply rated): 9 x 3.5-4 (flat-proof)	•		
Tire Size (4-ply rated): 11 x 4-5 (flat-proof)		•	40.4
Tire Size (4-ply rated): 13 x 6.5-6 (rib tread pneumatic)			•
Weight Uncrated			
Side Discharge:	370 lbs. (167.8 kg)	420 lbs. (190.5 kg)	545 lbs. (247.2 kg)
Mulching Package (Mukhing package includes high-low mulching blades.)	29 lbs. (13.2 kg)	36 lbs. (16.3 kg)	44 lbs. (20.0 kg)

^{* 1.25&}quot; is reached with the combination of raising deck forks to top position AND moving tractor mounts lower by one set of holes. 5.0" height is reached using High Mow Kit #503289 for 52" & 61" decks, or #503287 for 72" deck.









Airport

August 14, 2024

CITY OF MOBERLY, MISSOURI AIRPORT DEPARTMENT

BID FORM

Bid due date: September 6, 2024; 10:00 a.m.

We are requesting a bid quotation for:

Total Bid

One new 2024/2025 Zero Turn Commercial Mower Rear Discharge 72" Mid Mount Mower Deck, Side Discharge, Roll Over Protection, Min. of 35 H.P. Twin Cylinder Gas Engine (NON EFI)

Dealer Name: MCKLOWN Farm's Lawn

Brand Name & Model: GVASSNOPPER 335 w) 72" Rear Discharge

Authorized Signature: MCKLOWN

Delivery Date: 21 days From yeoto acceptance,

s 12628.20

BID SPECS FOR NEW 2024/2025 ZERO TURN COMMERCIAL MOWER

ENGINE-MINIMUM 35HP TWIN CYLINDER GASOLINE (NON EFI)

DRIVE SYSTEM- HYDRO GEAR DUAL HYDROSTATIC TYPE FOR COMMERCIAL USE

DECK-72" MIDMOUNT TYPE, MINIMUM 10 GAUGE STEEL CONSTRUCTION WITH SIDE DISCHARGE

DECK SPINDLES-MINIMUM 1" OD SHAFT WITH MACHINED ALUMINUM OR CAST IRON HOUSING CONSTRUCTION, SEALED OR GREASABLE FROM TOP SIDE

STARTER AND ELECTRICAL SYSTEM- 12 VOLT

TIRES-MANUFACTURERS STANDARD FRONT AND REAR

ROPS-MANUFACTURERS STANDARD ROLL OVER PROTECTION

HOUR METER-MANUFACTURERS STANDARD EQUIPMENT

FUEL TANK-MINIMUM 10 GALLONS WITH FUEL GAUGE

SEAT-SUSPENSION TYPE WITH ARMRESTS

GROUND SPEED-MINIMUM 10 MPH

WARRANTY-MANUFACTURERS STANDARD

NOTE THIS MOWER SHALL BE A COMMERCIAL (NOT RESIDENTIAL) GRADE MOWER AND ANY DEVIATION FROM SPEC MUST BE NOTED ON BID.

NOTE THE CITY OF MOBERLY RESERVES THE RIGHT TO ACCEPT ANY BID REGARDLESS OF PRICE.

Grasshopper QuikQuote #43944N00052



Quoted by McKeown Farm & Lawn LLC 2061 N Morley St Moberly, MO 65270 P: (660) 263-1137

ANDREA MCKEOWN

E: MCKEOWNFARMANDLAWN@GMAIL.COM

P: 660-263-1137

Quoted for CITY OF MOBERLY - TIM

Airport Mower



Models may be shown with optional equipment that may or may not appear on your specific quote Model 335 with 72" deck Quoted: Aug 30, 2024

Power Unit & Deck

List

Bid

Model 335 with 72" deck (534184)

993cc Big Block Engine; "no-gears" hydraulic pump-and-wheelmotor transmission; heavy-duty extra-deep 72" cutting deck; luxury seat and shock-absorbing footrest \$16,190.00 \$12,628.20

List Total: \$16,190.00

- Discount: 22.00%

Bid Price: \$12,628.20

Grand Total: \$12,628.20

Stipulation(s):


√ Quote Expires in 30 days

√ Additional Stipulations:
Expected delivery date, 21 days from quote acceptance.

300 SERIES AIR-COOLED MIDMOUNT

Unexpected power in the straightaways

LIMITED WARRANTY:

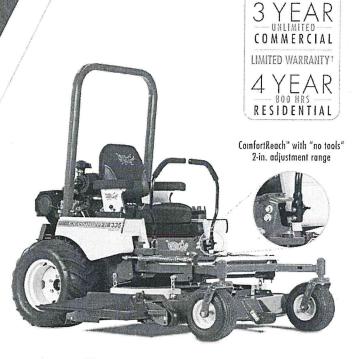

335 B BIG BLOCK



993 cc, V-twin OHV Vanguard BIG BLOCK" air-cooled horizontal crankshaft gasoline engine 329B BIG BLOCK





896 cc, V-twin OHV Vanguard BIG BLOCK™ air-cooled horizontal crankshaft gasoline engine A higher horsepower combined with a compact wheelbase provides a great power-to-size ratio.

DURABILITY & LONGEVITY

Power, efficiency and economy-equipped with a heavy-duty, Vanguard Big Block engine, with horizontal crankshaft for longer performance life, giving you intense mowing power in a surprisingly compact design.

Robust, design-matched G² hydrostatic transmissions with CoolFan^{ton} hydrostatic pump cooling system and 7 micron absolute filter partnered with wheel motors create a fully hydraulic system for smooth, responsive steering and less maintenance with 1,000-hour fluid change intervals.

Only five Access-Eze[™] lubrication points cut maintenance time up to 80%.

MANICURED CUT

5.5-inch deep DuraMax® decks with anvil-edged design for exceptional durability easily convert from wide-pattern side discharge to optional mulching or vacuum collection. The QuikAjust™ DropPin™ Height Adjustment makes cutting height change fast and simple.

COMFORT & ERGONOMICS

Deep-cushioned Premium Comfort Seat featuring CoolTemp Cordura® with lumbar and coil-spring suspension provides all-day comfort. The adjustable cup holder makes it convenient to tote along your favorite beverage. Electronic fuel gauge/hour meter on the console is standard.

ComfortReach $^{\text{\tiny M}}$ provides 2 inches of adjustment at the base of the lever for a custom steering fit. No tools required.

The 12.0 gal/45.4 L single-fill fuel tank lowers the center of gravity, providing more traction and stability for an enhanced ride. The standard bumper protects the rear of the mower while preserving easy access and removal of the service shield.

Optional four-spindle dedicated rear-discharge decks evenly distribute clippings out back for a smooth cut and no windrowing to provide the quality cut you expect.

Mowing speeds up to 10.5 MPH and 6.88 acres/hr. based on 72" cutting width* For more details visit: grasshoppermower.com/acres



DuraMax® deck

OPTIONS

- » Quik-D-Tatch[®] PowerVac[™] Collection Systems
- » Down Discharge™ mulching packages
- >> Dedicated 4X Rear Discharge™ deck
- » Speed-Trimming™ heavy-duty roller (61" and 72")
- >> TrimAide™ Roller (52")
- » Electric height adjustment

- » DuraGuard™ rear bumper (2 bars)
- >> DuraFlex™ suspension forks
- » LED work lights
- >> QuikAjust Tilt™ steering levers with "no tools" 9-inch comfort range
- » Taller steering levers
- » Big Boy wide-seat conversion kit
- » Premier suspension seat

- » Foldable ROPS with seat belt
- » Bar tread, low-pressure tires
- » Michelin® X® Tweel® 24 x 12-12 Airless Turf Tires
- » Michelin® X® Tweel® 13 x 6.5-6 Airless Front Casters
- » Edge-EZE™ edger
- » Shielded sprayer

- >> Aluminum or Vinyl Sunshade Canopy
- yellow beacon light
- » Filter minder
- » Side discharge control kit
- >> Air Dam kit for dry, dusty conditions

AIR-COOLED 300 SERIES-SPECIFICATIONS

MODEL - CUTTING WIDTH Standard Option	329B 52"	329B 61"	335B 61"	335B 72"
ENGINE	1998		and the second	
Type/Displacement/Cylinders				
B&S Vanguard Big Block / 54.7 cu. in. (896 cc) / V-twin		•		
B&S Vanguard Big Block / 60.6 cu. in. (993 cc) / V-twin			•	٠
Crankshaft / Cooling System Horizontal / Air	•			_
Fuel / Capacity	•	*	•	•
Gasoline - unleaded / 12 U.S. Gal. (45.4 I)	8		•	٠
Air Cleaner				
Heavy-duty, remote-mounted engine air cleaner with		_		_
replaceable element		•	•	9
DECKS – Side Discharge or Dedicated	4X Rea	r Disch	arge (4	XRD)
Construction (Robotic-welded steel) - Side di	scharge o	r optional	4X Rear D	ischarg
Double-layered, 10-gauge plus 7-gauge formed-steel laminate spindle plane 0.313 in. (7.95 mm) thick – more than 25% thicker than 0.25 in. (6.35 mm) – with 7-gauge skirts for geometric strength. Spindle plane is 0.9 in. (22.86 mm) thick in stress zones. Anvil-edge design with 0.5 in. (12.7 mm) reinforcement on front edge of deck.	٥	•	•	9
Blades (MARBAIN®, 1/4-in.)				
(3) 18 in. (45.7 cm) – high-lift blades standard	•			
(3) 21 in. (53.3 cm) – high-lift blades standard		•	٠	
(3) 25 in. (63.5 cm) – high-lift blades standard				•
Sentry™ Spindle Assemblies				
Sentry* Spindle System, 2.5 cm (approx. 1 in.) O.D. shaft. Double				
bearings, greasable from top of deck. Spindle head designed to eliminate fiber wrap. Spindle cones shield housing and lower bearings from fiber wrap and dirt ingestion.	•	•	•	•
Spindle Housing – 8-in. (20.3 cm)-diamet	er with	6-bolt	pattern	
Machined aluminum	•	۰	0	
QuikAjust™ DropPin™ Height Adjustment				
Foot-controlled height adjustment pedal with pin	•		9	0
Cutting Height Range				
1.0 - 5.0 in. (2.5 - 12.7 cm)	0		٠	٥
Blade Drive				
Belt drive with single Kevlar® Y-belt and idler arm tensioning		۰	٠	٠
DEDICATED 4X REAR DISCHARGE DECK OPT	ON - A	dditiona	l Inform	ation
4th Spindle and Grass Thrower Blade				
ast iron thrower spindle housing — 5-in. (12.7 cm) -diameter with				
-bolt pattern	•	9	9	8
1) Grass Thrower Blade	•	***************************************		
1) 18 in. High-Low Mulching Grass Thrower Blade		٠	٠	٠
STARTER & ELECTRICAL SYSTEM			E Park	
Maintenance-Free Battery/Charging Capac	ity/Sta	rter		
2 volt/20 amp/solenoid shift	•	•	0	٥
gnition				
reakerless nterlock System	0	•	•	•
revents engine start when PTO clutch is engaged or steering levers				
re in drive position. Allows operator dismount without engine hutdown only when PTO is disengaged and steering levers are saked in neutral.	•	•	•	٠
JLTIMATE OPERATOR STATION™	1965			
Premium Comfort Seat				
o-mounted, high-back, deep-cushioned, foom-padded, Cordura°- overed, padded arms/backrest with lumbar support, coil-spring uspension and embroidered Grasshopper loga on seat back.	•	•	•	•

MODEL - CUTTING WIDTH Standard Option	329B 52"	329B 61"	335B 61"	335B 72"
Operator Protection				
ROPS with seat belt			•	۰
Suspension				
InFrame® suspension with iso-mounted seat and footrest	•			
Console-Mounted Instruments				
Low engine oil pressure and parking brake warning lights, combination electronic fuel gauge/hour meter, ignition and push/pull PTO switches. Choke integrated with thrattle lever.	•	•	•	•
Work Lights (Pre-wired)				
LED	0	0	0	0
TRANSMISSION & STEERING		100		
Туре				
Design-matched 63 hydrostatic system with auxiliary cooling fans, HydroGear variable displacement 16cc piston-type pumps and high-torque Parker wheel motors.	•	•	•	٠
Filtration/Hydro Fluid				
7 micron absolute, spin-on / Grasshopper CoolTemp Hydro-Max* fluid withstands high and low temperature extremes for 1,000-hour change intervals.	٠	Ð	8	0
Speed				
0 – 10.0 mph (0 – 16.1 kph) forward	0			
0 – 10.5 mph (0 – 16.9 kph) forward		•	•	
0 - 6.0 mph (0 - 9.7 kph) reverse		0	•	
Turning Radius				
True zero degree, turns within own length with counter-rotating, independently powered drive wheels. Steering	a	•	•	0
A TARREST CONTRACTOR OF THE CO				
One- or two-handed operation with ComfortReach** adjustable Hydro-Smooth** dual levers that automatically return to neutral from either forward or reverse position.	٠	•	• Protestante e	9.
Brakes				
Dynamic braking through hydrostatic transmission. Disc parking brakes, one for each drive wheel.	•	•	•	•
Disc brakes	۰	•	•	•
Clutch				
Heavy-duty electric MagStop blade clutch/brake	۰	0	0	0
POWER UNIT TIRE SIZES				
Drive Wheels (4-ply rated): 23 x 10.5-12 turf	•			
Drive Wheels (4-ply roted): 24 x 12-12 turf		0	•	8
Drive Wheels (4-ply rated): 24 x 12-12 bar tread		0	0	0
Front Casters: 13 x 6.5-6; rib tread, pneumatic with greasable, double-sealed bearings to protect from grass wrap	•	•	•	•
POWER UNIT DIMENSIONS WITH DUE		DECKS		
Mulch or 4XRD Width*/Length: 53.5 in. (135.9 cm) / 79.5 in. (201.9 cm)	•			
Mulch or 4XRD Width*/Length: 62.5 in. (158.8 cm) / 81.0 in. (205.7 cm)		•	•	
Mulch or 4XRD Width "/Length: 73.5 in. (186.7 cm) / 84.5 in. (214.6 cm) *Add 1.5 in. (3.8 cm) to width for side discharge with deflector raised. Add 12.0 in. (30.5 cm) to width for side discharge with deflector down.				•
Height (seat back/seat cushion): 47.0 in. (119.4 cm) / 31.5 in. (80.0 cm)	•			•
Height (ROPS): 70.0 in. (177.8 cm)				•
WEIGHT	3-10-			
Uncrated**: 1140 lbs. (517.1 kg)				
Uncrated **: 1190 lbs. (539.8 kg)		_		
Uncroled**: 1280 lbs. (580.6 kg)		•	•	•
**Mulching package kit weights with high-low mulching blades: 52-in. – 29 lbs. (13.2 kg); 61-in. – 36 lbs. (16.3 kg); 72-in. – 44 lbs	. (20.0 kg)			





Premier Suspension Seat

CITY OF MOBERLY, MISSOURI AIRPORT DEPARTMENT

BID FORM

Bid due date: September 6, 2024; 10:00 a.m.

We are requesting a bid quotation for:

Total Bid

One new 2024/2025 Zero Turn Commercial Mower Rear Discharge 72" Mid Mount Mower Deck, Side Discharge, Roll Over Protection, Min. of 35 H.P. Twin Cylinder Gas Engine (NON EFI)

Dealer Name: Crown Power + Equipment

Brand Name & Model: Grasshopper 335 W/72" Rear Discharge

Authorized Signature: Wells Way

Delivery Date:

\$ 14,014.50

BID SPECS FOR NEW 2024/2025 ZERO TURN COMMERCIAL MOWER

ENGINE-MINIMUM 35HP TWIN CYLINDER GASOLINE (NON EFI)

DRIVE SYSTEM- HYDRO GEAR DUAL HYDROSTATIC TYPE FOR COMMERCIAL USE

DECK-72" MIDMOUNT TYPE, MINIMUM 10 GAUGE STEEL CONSTRUCTION WITH SIDE DISCHARGE

DECK SPINDLES-MINIMUM 1" OD SHAFT WITH MACHINED ALUMINUM OR CAST IRON HOUSING CONSTRUCTION, SEALED OR GREASABLE FROM TOP SIDE

STARTER AND ELECTRICAL SYSTEM- 12 VOLT

TIRES-MANUFACTURERS STANDARD FRONT AND REAR

ROPS-MANUFACTURERS STANDARD ROLL OVER PROTECTION

HOUR METER-MANUFACTURERS STANDARD EQUIPMENT

FUEL TANK-MINIMUM 10 GALLONS WITH FUEL GAUGE

SEAT-SUSPENSION TYPE WITH ARMRESTS

GROUND SPEED-MINIMUM 10 MPH

WARRANTY-MANUFACTURERS STANDARD

NOTE THIS MOWER SHALL BE A COMMERCIAL (NOT RESIDENTIAL) GRADE MOWER AND ANY DEVIATION FROM SPEC MUST BE NOTED ON BID.

NOTE THE CITY OF MOBERLY RESERVES THE RIGHT TO ACCEPT ANY BID REGARDLESS OF PRICE.

Grasshopper QuikQuote #19029N00057



Quoted by

Crown Power & Equipment Salisbury

103 E US Highway 24 Salisbury, MO 65281 P: (660) 388-6425 Quoted for City of Moberly 101 West Reed Street Moberly, Mo 65270 P: 660-269-8705

Trevor Wagy

Sales

E: twagy@crown-power.com

P: 660-388-6425



Models may be shown with optional equipment that may or may not appear on your specific quote

Model 335 with 72" 4X Rear Discharge Deck Quoted: Aug 30, 2024

Power	Unit	&	Deck
-------	------	---	------

List

Bid

Model 335 (534184)

\$16,190.00 \$13,275.80

993cc Big Block Engine; "no-gears" hydraulic pumpand-wheel-motor transmission; heavy-duty extra-deep 72" cutting deck; luxury seat and shock-absorbing footrest

\$395.00 \$323.90

72" 4X Rear Discharge Deck – In lieu of standard 72" deck for 329B-72 / 335-72 / 327 EFI-72. *(534370)*

Wholegoods

List

533588 - Sliding Seat - 300B Series - in lieu

\$140.00 \$114.80

Bid

List Total: \$16,725.00

Bid Price: \$13,714.50

Additional Pricing Adjustments

+ Freight

\$300.00

Grand Total: \$14,014.50

Air Port Dpt.

CITY OF MOBERLY, MISSOURI CEMETERY DEPARTMENT

BID FORM

Bid due date: September 6, 2024; 10:00 a.m.

We are requesting a bid quotation for:

Total Bid

One new 2024/2025 Zero Turn Commercial Mower Rear Discharge 60" or 61" Mid Mount Mower Deck, Rear Discharge, Roll Over Protection, Min. of 25 H.P. Twin Cylinder Hour Meter, Fuel Gage

\$ 12.395.00

Dealer Name: Crown Power + Equipment
Brand Name & Model: Grosshopper 225 61" Rear Discharge Authorized Signature: Nogy
Authorized Signature: Just Nogy
Delivery Date:

BID SPECS FOR NEW 2024/2025 ZERO TURN COMMERCIAL MOWER

ENGINE--MINIMUM 25 HP TWIN CYLINDER GASOLINE (NON EFI)

DRIVE SYSTEM- HYDRO GEAR DUAL HYDROSTATIC TYPE FOR COMMERCIAL USE

DECK- 60 /61" MIDMOUNT TYPE, MINIMUM 10 GAUGE STEEL CONSTRUCTION WITH REAR DISCHARGE

DECK SPINDLES-MINIMUM 1" OD SHAFT WITH MACHINED ALUMINUM OR CAST IRON HOUSING CONSTRUCTION, SEALED OR GREASABLE FROM TOP SIDE

STARTER AND ELECTRICAL SYSTEM- 12 VOLT

TIRES-MANUFACTURERS STANDARD FRONT AND REAR

ROPS-MANUFACTURERS STANDARD ROLL OVER PROTECTION

HOUR METER-MANUFACTURERS STANDARD EQUIPMENT

FUEL TANK-MINIMUM 10 GALLONS WITH FUEL GAUGE

SEAT-SUSPENSION TYPE WITH ARMRESTS

GROUND SPEED-MINIMUM 10 MPH

WARRANTY-MANUFACTURERS STANDARD

NOTE THIS MOWER SHALL BE A COMMERCIAL (NOT RESIDENTIAL) GRADE MOWER AND ANY DEVIATION FROM SPEC MUST BE NOTED ON BID.

NOTE THE CITY OF MOBERLY RESERVES THE RIGHT TO ACCEPT ANY BID REGARDLESS OF PRICE.

Grasshopper QuikQuote #19029N00058



Quoted by

Crown Power & Equipment Salisbury

103 E US Highway 24 Salisbury, MO 65281 P: (660) 388-6425 Quoted for City of Moberly 101 West Reed Street Moberly, Mo 65270 P: 660-269-8705

Trevor Wagy

Sales

E: twagy@crown-power.com

P: 660-388-6425



Models may be shown with optional equipment that may or may not appear on your specific quote

Model 225 with 61" 4X Rear Discharge Deck

Quoted: Aug 30, 2024

Power Unit & Deck

List

Bid

Model 225 (534123)

\$14,395.00 \$11,803.90

747cc Kohler Command Pro Engine; "no-gears" hydraulic pump-and-wheel-motor transmission; heavy-duty extra-deep 61" cutting deck; luxury seat and shock-absorbing footrest

61" 4X Rear Discharge Deck – In lieu of standard 61" \$355.00 \$291.10 deck for 225-61. *(534340)*

List Total: \$14,750.00

Bid Price: \$12,095.00

Additional Pricing Adjustments

+ Freight

\$300.00

Grand Total: \$12,395.00

Cemetery

CITY OF MOBERLY, MISSOURI STREET DEPARTMENT

BID FORM

Bid due date: September 6, 2024; 10:00 a.m.

We are requesting a bid quotation for:

Total Bid

One new 2024/2025 Zero Turn Commercial Mower Rear Discharge 60" or 61" Out Front Deck, Side Discharge, Roll Over Protection, Min. of 29 H.P. Gas Engine (NON EFI), Hour Meter, Fuel Gage

Dealer Name: Crown Power + Equipment	
Brand Name & Model: Grasshopper 729 BT 61" Powerfold Authorized Signature: Wagy	Deck
Authorized Signature: Wagy	
Delivery Date:	

\$ 16,015.30

THE CITY OF MOBERLY WILL BE ACCEPTING BIDS FOR ONE NEW 2024/2025 ZERO TURN OUT FRONT DECK COMMERCIAL MOWER

ENGINE--MINIMUM 29 GROSS HORSEPOWER, GAS ENGINE (NON EFI)

DECK--61" OUT FRONT TYPE(MUST BE MADE OF MATERIAL NO THINNER THEN 10 GAUGE STEEL) SIDE DISCHARGE

SPINDLES--MINIMUM 1" SHAFT, GREASEABLE FROM TOP SIDE

TRANSMISSION--HYDROSTATIC TYPE

DECK LIFT--POWER DECK TILT(FOR CLEANING &CHANGING BLADES)

SPEED--MINIMUM 10 MPH FORWARD SPEED

TIRES -MANUFACTURES STANDARD BAR TREAD TYPE

HOUR METER

ROLL OVER PROTECTION DEVICE

FUEL GAUGE

SEAT--SUSPENSION TYPE WITH ARMRESTS

PARKING BRAKE--DISC TYPE

PAINT--MANUFACTURES STANDARD COLOR

FUEL TANK-- MINIMUM 7 GALLON CAPACITY

AIR CLEANER--DRY TYPE WITH REPLACEABLE ELEMENT

Grasshopper QuikQuote #19029N00056



Quoted by

Crown Power & Equipment Salisbury

103 E US Highway 24 Salisbury, MO 65281 P: (660) 388-6425 Quoted for City of Moberly 101 West Reed Street Moberly, Mo 65270 P: 660-269-8705

Trevor Wagy

Sales

E: twagy@crown-power.com

P: 660-388-6425



Models may be shown with optional equipment that may or may not appear on your specific quote

Model 729BT with 3661PF Quoted: Aug 30, 2024

Power Unit & Deck	List	Bid
Model 729BT (531900) 895cc Big Block engine; "no-gears" T6 pump-and- wheel-motor transmission; AntiVibe Power Platform; luxury seat and shock-absorbing footrest	\$13,230.00	\$10,848.60
3661PF – 61" w/ PowerFold <i>(532810)</i>	\$4,705.00	\$3,858.10

List Total: \$19	,165.00
Bid Price: \$15	5,715.30
Additional Pri Adjustments	cing
+ Freight	\$300.00

Wholegoods	List	Bid
503218+503220 - Counterweight Kit - 50 lb. with mount kit (One 50-lb. weight included)	\$265.00	\$217.30
533577 – Premier Suspension Seat	\$785.00	\$643.70
533550 - Foldable ROPS w/ Seatbelt	\$180.00	\$147.60

Grand Total: \$16,015.30

Street Dpt.

CITY OF MOBERLY, MISSOURI AIRPORT DEPARTMENT

BID FORM

Bid due date: September 6, 2024; 10:00 a.m.

We are requesting a bid quotation for:

One new 2024/2025 Zero Turn Commercial Mower Rear Discharge 72" Mid Mount Mower Deck, Side Discharge, Roll Over Protection, Min. of 35 H.P. Twin Cylinder Gas Engine (NON EFI)

CITY OF MOBERLY, MISSOURI CEMETERY DEPARTMENT

BID FORM

Bid due date: September 6, 2024; 10:00 a.m.

We are requesting a bid quotation for:

Total Bid

One new 2024/2025 Zero Turn Commercial Mower Rear Discharge 60" or 61" Mid Mount Mower Deck, Rear Discharge, Roll Over Protection, Min. of 25 H.P. Twin Cylinder Hour Meter, Fuel Gage

s 11, 954, 00 Dealer Name: Precision Water & Power Sports

Brand Name & Model: Bad Boy. 2024 Rogue 61" Kawasaki FX 1000

Authorized Signature: Vana M. Hablage rear discharge Delivery Date:

CITY OF MOBERLY, MISSOURI STREET DEPARTMENT

BID FORM

Bid due date: September 6, 2024; 10:00 a.m.

We are requesting a bid quotation for:

One new 2024/2025 Zero Turn Commercial Mower
Rear Discharge 60" or 61" Out Front Deck Side Discharge,
Roll Over Protection, Min. of 29 H.P. Gas Engine (NON EFI),
Hour Meter, Fuel Gage

Total Bid

S

Total Bid

S

Total Bid

S

Total Bid

S

Dealer Name: Precision Water + Power Sports

Brand Name & Model:

Authorized Signature: Ama Harlay

Delivery Date: