

COMMERCIAL ZTRAK™ ZERO-TURN MOWERS

Z900 E Series, M Series, R Series, R Diesel Series



JOHN DEERE



The Zevolution Way

What started as an idea over 25 years ago is now a way of life for landscape professionals like you. Zevolution is the continuous demand for quality in zero-turn mowers. Yours. And ours. You inspire us to keep improving on power and precision at every turn, on comfort and convenience. With every new Zevolution, comes the ultimate John Deere ZTrak™ mower.

From our hard-charging Z900 Series to the newest addition to our commercial lineup, the Z700 Series, you'll find the right equipment for any job, especially the toughest jobs. Power up your crew with the

engines, mower decks, features, tools, and attachments to run all day and finish with pride.

And remember, with every mower you add to the fleet, your local John Deere dealer stands ready with a full suite of NEVERSTOP™ Services and Support – from equipment and financing to parts and service to exclusive product partnerships and special customer rewards.

You have a job to do. Ours is to help keep you evolving, keep growing, and most importantly, keep mowing.

ZEVOLUTION

Evolution of the ZTrak™



Expanded height-of-cut
range is easy to adjust and lock in place.

Heavy-duty C-channel frame
Built like a truck, for greater durability.

Stamped under pressure
The 7Iron™ PRO deck's forged 7-gauge steel creates improved airflow to provide a better cut.

QR Code Owner Information Just scan for parts ordering details, maintenance schedules, owners' manuals, and more.





2013 – Z900B, M, R models introduced with multiple seat options; Electronic fuel injection options and the Flex Fuel Z925M

2014 – Z950M 27 HP in M spec machine; Propane conversion kits introduced

2015 – MICHELIN® X® TWEEL® Turf Airless Radial Tire introduced on Z900s; Z930M with Mulch On Demand deck; Seat springs now rubber; Improved MOD deck discharge chute design; Greaseless pivots and ball joints

2016 – New Power Take Off toggle switch; Rear bumper now standard on M and R series; Integrated front tie-down locations; 60 and 60 Mulch On Demand™ decks added to Z970R

2017 – Introduced the Z915E with a new seat slide suspension seat conversion kits; TWEEL® Airless Radial Tire offered as direct orders

2018 – Z945M EFI and Z955M EFI models introduced

2019 – ComfortGlide™ Suspension system included in base equipment on all Z900s

2020 – 24" high back seats, foot platform isolators, foot pegs standard on R series; New 3-bag Material Collection System; Z955R EFI model introduced

2021 – FastBack™ PRO 60 and 72" RD deck: new baffles, new wear guard, new debris enclosure, single belt design; Cast iron spindles; String trimmer mount, cargo tray, yard tool carrier; Dump from seat Material Collection System

2022 – New seat styling and materials; QR code label for machine information; LED work light kit, LED beacon light kit

Cast-iron front forks
Molded to perfection, for superior strength.

Foldable Roll-Over Protective Structure (ROPS) and retractable seat belt are standard equipment on Z900 ZTrak mowers.

Unique Cross-Porting System
Routes the coolest hydraulic fluid to the hydraulic pump that's doing the most work – increasing the life of the transmission. Standard on all R Series mowers.

Trim Edge Bumper
Standard on all side discharge mower decks. Reduces damage to the mower deck and property.

Larger Fuel Tank
The mow-all-day 11.5 U.S. gallon (43.5 L) fuel tank helps operators stay on the job longer before needing to refuel.



ZTrak™ E Series

Get the basics. So you can do basically anything.

The Z915E comes with more features and quality John Deere components as standard equipment than any zero turn mower we've ever offered in this class.

That includes things like a larger fuel tank, so you can power through large jobs. Professional-grade seats, so operators can stay more comfortable from start to finish. Superb weight distribution for enhanced maneuverability. And large rear tires for a balanced ride.

E SERIES

Z915E



M SERIES

Z920M

Z920M Propane*

Z930M

Z930M Propane*

Z950M

Z950M Propane*

Z960M



R SERIES

Z930R

Z930R Propane*

Z950R

Z950R Propane*

Z970R



R DIESEL SERIES

Z994R

Z997R



When you choose a mower, remember that each machine has different features and slope operating limits. Not all areas are appropriate for riding mowers.

*Propane conversion kit available in the US only.



Foldable Rollover Protective Structure (ROPS) and retractable seat belt are standard equipment on Z900 ZTrak mowers.

ZTrak™ M Series

Efficiency? Value? This is where the rubber meets the road.

The Z920M, Z930M, Z950M, and Z960M hit the sweet spot where value-driven performance and day-in, day-out driving durability come together. They deliver all the power you need, the effortless Mulch On Demand™ you want – and build quality that ensures years of reliable operation at every turn.



Z950M with a 72-inch FastBack™ Pro rear discharge mower deck.

** X[®] TWHEEL[®] TURF™ not available on units equipped with 48" (121.9 cm) deck. Approved for John Deere ZTrak™ Z900 B, E, M, or R Series gas or diesel powered zero-turn mowers equipped with 54", 60" or 72" (137.2, 152.4, 182.9 cm) decks. Not recommended for use with Material Collection Systems.

ZTrak™ R Series

For those who want everything in a zero-turn mower.

Our Z900 R Series comes with everything you need to keep working your best from start to finish, including available Mulch On Demand™, Flat Free front tires and a power deck lift. The only hard part? Picking the perfect package among the Z930R, Z950R, and Z970R.

Keep clippings flowing behind you, and not on you, with the FastBack™ PRO rear discharge deck. Unique baffling system is designed to reduce clumping and windrowing often associated with rear discharge mowers. 7-gauge deck is suspended from and supported by the machine to provide a level cut.



The Comfort & Convenience Package features padded, ergonomically angled control levers – complete with electronic controls that let you raise and lower the deck, or disengage the mower blades, at the push of a button.

The X² TWEEL® Turf Airless Radial Tire by Michelin® has all the qualities you want in a pneumatic tire, but none of the air – so flats, downtime and patch kits will be a thing of the past.

Heavy-Duty Spindles designed specifically for the demands of commercial mowing – are perfect for surviving high temperatures and frequent blade impacts.

LED Beacon Lights
See and be seen better in low light. Stay safe out there.

LED Work Light Kit
Mow later with bright and clear sealed LED lights.



ZTrak™ R Diesel Series

Muscle your way through the tough stuff.

Bring it on with the ZTrak™ team's largest player. The heavy-duty, large-capacity ZTrak™ Z997R gives you front-mower-like power in a zero-turn mower – along with the ZTrak™ productivity and dependability you count on. Biodiesel (B20) compatible and Tier 4 compliant so you can take this beast anywhere.

And meet our latest addition, the Z994R Diesel: sized right, the Z994R features a 24.7 hp (18.4 kW)¹ diesel engine, speeds up to 11.4 mph (18.3 km/h), and ComfortGlide™ Suspension. With ComfortGlide, the seat works with you, not against you.



Deck Height Adjustment lets you adjust height of cut without leaving your seat. From a single dial, select among 15 positions, from 1.5 inches to 5 inches (3.8 cm to 12.7 cm) in 1/4-inch (6.35 mm) increments. Easy.

Powerful Engine. Strong design. Sums up this Tier 4 diesel engine which is liquid cooled and features direct fuel injection for efficient combustion and improved starting. The steel oil cooler eliminates potential fin damage from pressure washing and cleaning and easily flips out for cleaning and radiator access.



The Brake-N-Go System makes it a snap to get started: just set the parking brake and turn the key.

ComfortGlide™ Suspension All three of the seat options for the Z994R come with our ComfortGlide™ Suspension. With the ComfortGlide setting on, the seat works in the motion you are going.



¹Engine HP at Gross SAE J1995, PS, rated at 3200 RPM - displacement 77.3 cu.in. (1.27L)

The decks you need, for the way you mow.

Not everyone mows the same. We understand that. That’s why we have you covered with three great decks. First, there’s the legendary 7Iron™ PRO side-discharge deck. Forged from a single sheet of seven-gauge steel using four million pounds of pressure, the 7Iron deck is 5.5 inches (13.9 cm) deep. Which explains why they’ve re-
 remained an industry standard for over twenty years.

7Iron™ PRO Side Discharge



And when it comes to a mulching deck, nothing can touch our Mulch On Demand™ deck. Because we put the power to choose mulching or side-discharge at your fingertips. By shifting the lever to mulch position, the movable gate closes off the discharge chute.

Mulch On Demand™



Lastly, if you need to mow right to the edge, there’s the FastBack™ PRO Rear Discharge deck. A unique baffling system reduces clumping and windrowing often associated with rear-discharge decks. So less clippings get on the operator and stay where they should: in the turf.

FastBack™ PRO Rear Discharge

Deck pictured with optional Mulch Kit installed.




ZTrak™ 900 Series Seat Options

John Deere has your back with seat options designed for long mowing days. It starts with sharp new seat designs made with hardy marine-grade vinyl. Higher seat back options and adjustable arm rests are made to make just

about any size operator feel comfortably supported. And all seat options feature the exclusive ComfortGlide™ suspension system that can travel up to 2 in. fore and aft, absorbing bumps for superior ride comfort over uneven areas.

Sit down, buckle in, and get to work on professional mowing’s favorite seat.

Riding in comfort with our new and improved high back seats with armrests, and ComfortGlide™ Suspension.**	ComfortGlide™ Seats with Armrest:	E Series	M Series	R Series: (gas)	R Series: Z994R Diesel	R Series: Z997R Diesel
 **Available on all 3 seat options for the E/M/R Series.	Deluxe Comfort Seat	Base	Base	–	–	–
	Deluxe Comfort Seat with Isolation	Optional	Optional	Optional	Optional	–
	Suspension Seat	–	Optional	Base	Base	Base



Deluxe Comfort Seat



Deluxe Comfort Seat with Isolation



Suspension Seat



Suspension Seat with optional padded arm rests


Attachments

Some jobs are more demanding than others. No worries: our Z900 mowers can handle the extra work. Whether it's collecting clippings, carrying extra tools, or just picking up trash, a ZTrak comes through like a pro.

Attachments may reduce Slope Operating Limit. See Operator's Manual.

Three-Bag Material Collection System (MCS)

Fill three large bags to capacity with from this powerful, heavy-duty steel-fan blower. One-pass cleanup with minimal chance of clogging is accomplished with the powerful, power take-off (PTO) driven blower and large-diameter hoses.

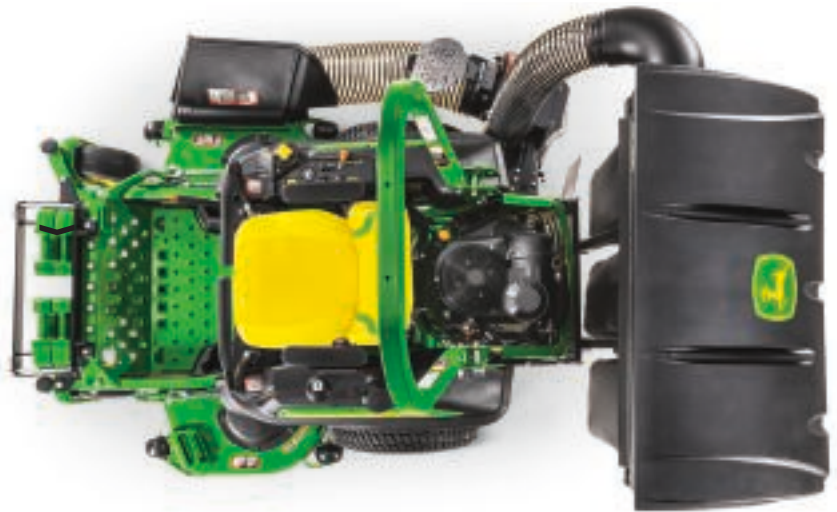

Dump From Seat (DFS) Material Collection System (MCS)

You can fill this large hopper to capacity with finely chopped and compacted material from the powerful, heavy-duty steel-fan blower. Efficient cleanup with minimal chance of clogging.



Tool and tray mounts

The string trimmer mount includes two brackets that will hold a string trimmer securely in place on your mower.

A cargo tray provides a convenient place to carry small hand tools, gloves, etc. The yard tool kit includes a bracket that will hold up to two long-handled yard tools, such as a shovel or rake.



ShadePro™ Canopy

Experience over-the-top comfort! The ShadePro™ Canopy's overhead sun protection and cooling fan make mowing a breeze.

Sun Canopy

Keep the sun at bay all day with this heavy-duty canopy. Secures easily to the top of the rollover protective structure.

Trash Receptacle Kit

This kit provides a mounting bracket, a 5-gal. bucket, and a trash-grabbing apparatus. It enables trash pickup and storage without having to leave the mower seat.

SPECIFICATIONS: 2022 Commercial ZTrak™ Mowers

	E Series	M Series			
MODEL	Z915E	Z920M	Z930M	Z950M	Z960M
ENGINE					
Certified Horsepower ¹	25.0 HP (18.6 kW) ^{3,5} @ 3600 RPM	23.5 HP (17.5 kW) ^{2,3} @ 3600 RPM	25.5 HP (19.0 kW) ^{2,3} @ 3600 RPM	27.0 HP (20.1 kW) ^{2,3} @ 3600 RPM	31.0 HP (23.1 kW) ^{2,3} @ 3600 RPM
Engine Model	CV742	FX730V	F801V	FX850V	FX921V
Displacement	747 cc	726 cc	852 cc	852 cc	999 cc
Cylinders	Two	Two	Two	Two	Two
Oil Filter	Full flow, replaceable	Full flow, replaceable	Full flow, replaceable	Full flow, replaceable	Full flow, replaceable
Lubrication	Full pressure	Full pressure	Full pressure	Full pressure	Full pressure
Cooling	Air	Air	Air	Air	Air
Air Cleaner	Heavy-duty canister type with safety element	Heavy-duty canister type with safety element	Heavy-duty canister type with safety element	Heavy-duty canister type with safety element	Heavy-duty canister type with safety element
FUEL SYSTEM					
Fuel Type	Gas	Gas	Gas	Gas	Gas
Fuel Tank Capacity	11.5 U.S. gallons (43.5 L)	11.5 U.S. gallons (43.5 L)	11.5 U.S. gallons (43.5 L)	11.5 U.S. gallons (43.5 L)	11.5 U.S. gallons (43.5 L)
ELECTRICAL SYSTEM					
Charge System	15 amp	20 amp	20 amp	20 amp	20 amp
Battery Voltage	12 Volt	12 Volt	12 Volt	12 Volt	12 Volt
Hour Meter	Standard, digital	Standard, digital	Standard, digital	Standard, digital	Standard, digital
DRIVE TRAIN					
Hydraulic Pumps	Tuff Torq heavy-duty integrated piston pump	Tuff Torq heavy-duty integrated piston pump	Tuff Torq heavy-duty integrated piston pump	Tuff Torq heavy-duty integrated piston pump	Tuff Torq heavy-duty integrated piston pump
Wheel Motors	Tuff Torq heavy-duty integrated piston wheel motor	Tuff Torq heavy-duty integrated piston wheel motor	Tuff Torq heavy-duty integrated piston wheel motor	Tuff Torq heavy-duty integrated piston wheel motor	Tuff Torq heavy-duty integrated piston wheel motor
Hydraulic Capacity	5.9 U.S. qt (5.58 L)	5.9 U.S. qt (5.58 L)	5.9 U.S. qt (5.58 L)	5.9 U.S. qt (5.58 L)	5.9 U.S. qt (5.58 L)
Travel Speed Forward	0 - 10 mph (0-16.1 km/h)	0 - 10 mph (0-16.1 km/h)	0 - 10 mph (0-16.1 km/h)	0 - 10 mph (0-16.1 km/h)	0 - 10 mph (0-16.1 km/h)
Travel Speed Reverse	0 - 4.5 mph (0-7.2 km/h)	0 - 4.5 mph (0-7.2 km/h)	0 - 4.5 mph (0-7.2 km/h)	0 - 4.5 mph (0-7.2 km/h)	0 - 4.5 mph (0-7.2 km/h)
PTO					
Type	Electro-magnetic (200 lb. ft.)	Electro-magnetic (200 lb. ft.)	Electro-magnetic (225 lb. ft.)	Electro-magnetic (225 lb. ft.)	Electro-magnetic (225 lb. ft.)
Drive	V-belt	V-belt	V-belt	V-belt	V-belt
BRAKES					
Park Brake	Internal wet disk integrated in the transmission	Internal wet disk integrated in the transmission	Internal wet disk integrated in the transmission	Internal wet disk integrated in the transmission	Internal wet disk integrated in the transmission
Park Brake Actuation	Hand brake	Hand brake	Hand brake	Hand brake	Hand brake
MOWER DECKS					
7Iron® II deck (7-Gauge Stamped Steel Mower Deck)	48, 54, 60 in. (121.9, 137.2, 152.4 cm)				
7Iron® PRO deck (7-Gauge Stamped Steel Mower Deck)		54, 60 in. (121.9, 137.2, 152.4 cm)	54, 60 in. (137.2, 152.4 cm)	60, 72 in. (152.4, 182.9 cm)	60, 72 in. (152.4, 182.9 cm)
7Iron® PRO Mulch On Demand™ deck (7-Gauge Stamped Steel Mower Deck)			60 in. (152.4 cm)	54, 60 in. (137.2, 152.4 cm)	60 in. (152.4 cm)
FastBack™ PRO Rear Discharge Deck (7-Gauge Fabricated Steel Mower Deck)			60 in. (152.4 cm)	72 in. (182.9 cm)	60, 72 in. (152.4, 182.9 cm)
Spindle Housing	8-in (20.32cm) Aluminum	8-in (20.32cm) Cast Iron	8-in (20.32cm) Cast Iron	8-in (20.32cm) Cast Iron	8-in (20.32cm) Cast Iron
Height-of-Cut Range / Increment	1.0 in. to 5.5 in. (2.5 cm - 13.9 cm) / 0.25 in. (.6 cm)	1.0 in. to 5.5 in. (2.5 cm - 13.9 cm) / 0.25 in. (.6 cm)	1.0 in. to 5.5 in. (2.5 cm - 13.9 cm) / 0.25 in. (.6 cm)	1.0 in. to 5.5 in. (2.5 cm - 13.9 cm) / 0.25 in. (.6 cm)	1.0 in. to 5.5 in. (2.5 cm - 13.9 cm) / 0.25 in. (.6 cm)
BLADES					
Tip Speed	Approximately 18,000 fpm	Approximately 18,000 fpm	Approximately 18,000 fpm; 60 in. rear discharge is approx. 15,000 fpm	Approximately 18,000 fpm	Approximately 18,000 fpm
Number	Three	Three	Three	Three	Three
WHEELS AND TIRES					
Drive (Rear) Tires	24x9.5-12 Turf (48"), 24x12-12 Turf (54", 60"); 24x12-12 X TWEEL Turf (54", 60")	24x9.5-12 Turf (48"), 24x12-12 Turf (54", 60"); 24x12-12 X TWEEL Turf (54", 60")	24x12-12 Turf; 24x12-12 X TWEEL Turf	24x12-12 Turf; 24x12-12 X TWEEL Turf	24x12-12 Turf; 24x12-12 X TWEEL Turf
Caster Wheel Type / Size	Pneumatic / 13x5-6	Flat Free / 13x6.5-6	Flat Free / 13x6.5-6	Flat Free / 13x6.5-6	Flat Free / 13x6.5-6
DIMENSIONS					
Overall Length	84 in. (213.4 cm)	84 in. (213.4 cm)	84 in. (213.4 cm)	84 in. (213.4 cm)	84 in. (213.4 cm)
Overall Width (chute down)	62, 68, 74 in. (157.5, 172.7, 188 cm) with chute down	62, 68, 74 in. (157.5, 172.7, 188 cm) with chute down	With chute down, 68, 74 in. (173, 188 cm); rear discharge 63.5 in (161.3 cm)	With chute down, 74, 86 in. (188, 218 cm); rear discharge 75.8 in. (192.5 cm)	74, 86 in. (188, 218.4 cm) with chute down
Height	73 in. (185.4 cm) with ROPS up; 47 in. (119.4 cm) with ROPS down	73 in. (185.4 cm) with ROPS up; 47 in. (119.4 cm) with ROPS down	73 in. (185.4 cm) with ROPS up; 47 in. (119.4 cm) with ROPS down	73 in. (185.4 cm) with ROPS up; 47 in. (119.4 cm) with ROPS down	73 in. (185.4 cm) with ROPS up; 47 in. (119.4 cm) with ROPS down
Weight (with Fluids)	1178 lb (534.3 kg) - Z915B 60" ISO seat	1283 lb (582 kg) - Z920M 60"	1365 lb (619.2 kg) - Z930M 60"	1340 lb (607.8 kg) - Z960R 72"	1340 lb (607.8 kg) - Z960R 72"
ROLL-OVER PROTECTIVE STRUCTURE					
Folding ROPS (ISO 21299-2009)	Yes	Yes	Yes	Yes	Yes
SLOPE OPERATING LIMIT					
Z900 Slope Operating Limit ⁷	20 degrees	20 degrees	20 degrees	20 degrees	20 degrees
WARRANTY¹					
Duration	36 months or 1200 hours, whichever comes first, no hour limitation for the first 24 months	36 months or 1200 hours, whichever comes first, no hour limitation for the first 24 months	36 months or 1200 hours, whichever comes first, no hour limitation for the first 24 months	36 months or 1200 hours, whichever comes first, no hour limitation for the first 24 months	36 months or 1200 hours, whichever comes first, no hour limitation for the first 24 months
Type	Single Source Commercial	Single Source Commercial	Single Source Commercial	Single Source Commercial	Single Source Commercial

¹ Hour and/or usage limitations apply and vary by model. See the WARRANTY FOR NEW JOHNDEERE TURF AND UTILITY EQUIPMENT at dealer for details. ²@ 3600 RPM engine manufacturer certified gross power tested in accordance with SAE J1995. ³The engine horsepower and torque information are provided by the engine manufacturer to be used for comparison purposes only. Actual operating horsepower and torque will be less. Refer to the engine manufacturer's web site for additional information. ⁴ Engine HP at Gross SAE J1995, PS, rated at 3000 RPM [Z997R - displacement 100.2 cu.in. (1.64L)]. ⁵ @ 3600 RPM engine manufacturer certified gross power per SAE J1940, tested in accordance with SAE J1995. ⁶ Engine HP at Gross SAE J1995, PS, rated at 3200 RPM [Z994R - displacement 77.3 cu.in. (1.27 L)]. ⁷ Attachments may reduce the slope operating limit. See Operator's Manual.

¹ GAS engines - The engine horsepower and torque information are provided by the engine manufacturer to be used for comparison purposes only. Actual operating horsepower and torque will be less. Refer to the engine manufacturer's web site for additional information.

R Series			R Diesel Series	
Z930R	Z950R	Z970R	Z994R	Z997R
25.5 HP (19.0 kW) ^{2,3} @ 3600 RPM	27.0 HP (20.1 kW) ^{2,3} @ 3600 RPM	35.0 HP (26.1 kW) ^{2,3} @ 3600 RPM	24.7 HP (18.4 kW) ⁶ @3200 RPM, PS	37.4 HP (27.5 kW) ⁶ @ 3000 rpm, PS
FX80IV	FX850V	FX92IV	3TNV80F	3TNV88C
852 cc	852 cc	999 cc	77.3 cu. in. (1.27 L)	100.2 cu.in. (1.64 L)
Two	Two	Two	Three	Three
Full flow, replaceable	Full flow, replaceable	Full flow, replaceable	Full flow, replaceable, Spin-on type	Full flow, replaceable, Spin-on type
Full pressure	Full pressure	Full pressure	Full pressure	Full pressure
Air	Air	Air	Liquid	Liquid
Heavy-duty canister type with safety element	Heavy-duty canister type with safety element	Heavy-duty canister type with safety element	Heavy-duty canister, dry type with safety element	Dry-type, replaceable
Gas	Gas	Gas	Diesel or Biodiesel (up to B20)	Diesel or Biodiesel (up to B20)
11.5 U.S. gallons (43.5 L)	11.5 U.S. gallons (43.5 L)	11.5 U.S. gallons (43.5 L)	11.5 U.S. gallons (43.5 L)	11.5 U.S. gallons (43.5 L)
20 amp	20 amp	20 amp	75 amp	75 amp
12 Volt	12 Volt	12 Volt	12 Volt	12 Volt
Standard, digital	Standard, digital	Standard, digital	Digital multi-function display	Standard multi-function display
Tuff Torq heavy-duty integrated piston pump	Tuff Torq heavy-duty integrated piston pump	Tuff Torq heavy-duty integrated piston pump	Kanzaki dual-unitized pumps	Kanzaki dual-unitized pumps
Tuff Torq heavy-duty integrated piston wheel motor	Tuff Torq heavy-duty integrated piston wheel motor	Tuff Torq heavy-duty integrated piston wheel motor	Parker Ross	Parker Ross
5.9 U.S. qt (5.58 L)	5.9 U.S. qt (5.58 L)	5.9 U.S. qt (5.58 L)	3.2 U.S. gal (12.1 L)	3.2 U.S. gal (12.1 L)
0 - 12 mph (0-19.3 km/h)	0 - 12 mph (0-19.3 km/h)	0 - 12 mph (0-19.3 km/h)	0-11.4 mph (18.3 km/h)	0-11.5 mph (0-18.5 km/h)
0 -4.5 mph (0-7.2 km/h)	0 -4.5 mph (0-7.2 km/h)	0 -4.5 mph (0-7.2 km/h)	0-5 mph (0-8.1 km/h)	0-5 mph (0-8.1 km/h)
Electro-magnetic (225 lb. ft.)	Electro-magnetic (225 lb. ft.)	Electro-magnetic (225 lb. ft.)	Electric	Hydraulic clutch
V-belt	V-belt	V-belt	V-belt	Internal wet disk clutch
Internal wet disk integrated in the transmission	Internal wet disk integrated in the transmission	Internal wet disk integrated in the transmission	Caliper disc brake	Caliper disc brake
Foot Brake	Foot Brake	Foot Brake	Hand lever	Hand lever
54, 60 in. (137.2, 152.4 cm)	60, 72 in. (152.4, 182.9 cm)	60, 72 in. (152.4, 182.9 cm)	54, 60, 72 in. (137, 152.4, 182.9 cm)	60, 72 in. (152.4, 182.9 cm)
54 in. (137.2 cm)	60 in. (152.4 cm)	72 in. (182.9 cm)	60 in. (152.4 cm)	60, 72 in. (152.4, 182.9 cm)
8-in (20.32cm) Cast Iron	8-in (20.32cm) Cast Iron	8-in (20.32cm) Cast Iron	8-in (20.32 cm) Cast Iron	8-in (20.32 cm) Cast Iron
1.0 in. to 5.5 in. (2.5 cm - 13.9 cm) / 0.25 in. (.6 cm)	1.0 in. to 5.5 in. (2.5 cm - 13.9 cm) / 0.25 in. (.6 cm)	1.0 in. to 5.5 in. (2.5 cm - 13.9 cm) / 0.25 in. (.6 cm)	1.0 in. to 5.5 in. (2.5 cm - 13.9 cm) / 0.25 in. (.6 cm)	1.5-5.0 in. (3.8-12.7 cm) / 0.25 in. (.6 ccm)
Approximately 18,000 fpm	Approximately 18,000 fpm; 60 in. rear discharge is approx. 15,000 fpm	Approximately 18,000 fpm	Approximately 18,000 fpm	60 in. deck 17,480 fpm (88.8 m/s); 72 in. deck 17,500 fpm (88.9 m/s)
Three	Three	Three	Three	Three
24x12-12 Turf; 24x12-12 X TWEEL Turf	24x12-12 Turf; 24x12-12 X TWEEL Turf	24x12-12 Turf; 24x12-12 X TWEEL Turf	24x12-12 Turf; 24x12-12 X TWEEL Turf	26x12-12; 26x12-12 X TWEEL Turf
Flat Free / 13x6.5-6	Flat Free / 13x6.5-6	Flat Free / 13x6.5-6	Flat Free / 13x6.5-6	Flat Free / 15-6-6
84 in. (213.4 cm)	84 in. (213.4 cm)	84 in. (213.4 cm)	89 in. (225 cm)	60 in. side discharge 96 in. (244 cm)
68, 74 in. (172.7, 188 cm) with chute down	With chute down, 74, 86 in. (188, 218 cm); rear discharge 63.5 in. (161.3 cm)	With chute down, 74, 86 in. (188, 218 cm); rear discharge 75.8 in. (192.5 cm)	68, 74 in. (172.7, 188 cm) with chute down	60 in. side discharge and MOD 74 in. (188 cm); 72 in. deck 86 in. (218.4 cm)
73 in. (185.4 cm) with ROPS up; 47 in. (119.4 cm) with ROPS down	73 in. (185.4 cm) with ROPS up; 47 in. (119.4 cm) with ROPS down	73 in. (185.4 cm) with ROPS up; 47 in. (119.4 cm) with ROPS down	73 in. (185.4 cm) with ROPS up; 47 in. (119.4 cm) with ROPS down	85 in. (216 cm) with ROPS up 48 in. (122 cm) with ROPS down
Not available at time of printing	1340 lb (607.8 kg)- Z930R 54" MOD	1340 lb (607.8 kg) - Z960R 72"	1720 lbs (781 kg) - Z994R 60"	60 in. side discharge 1,774 (805 kg); 60 in. Fastback™ PRO rear discharge 1,827 lb (829 kg); 72 in. side discharge 1,841 lb (835 kg)
Yes	Yes	Yes	Yes	Yes
20 degrees	20 degrees	20 degrees	20 degrees	20 degrees
36 months or 1500 hours, whichever comes first, no hour limitation for the first 24 months	36 months or 1500 hours, whichever comes first, no hour limitation for the first 24 months	36 months or 1500 hours, whichever comes first, no hour limitation for the first 24 months	36 months or 1500 hours, whichever comes first, no hour limitation for the first 24 months	36 months or 1500 hours, whichever comes first, no hour limitation for the first 24 months
Single Source Commercial	Single Source Commercial	Single Source Commercial	Single Source Commercial	Single Source Commercial

This literature has been compiled for worldwide circulation. While general information, pictures and descriptions are provided, some illustrations and text may include finance, credit, insurance, product options and accessories NOT AVAILABLE in all countries or regions, and in some countries products and accessories may require modifications or additions to ensure compliance with the local regulations of those countries. PLEASE CONTACT YOUR LOCAL DEALER FOR DETAILS. John Deere reserves the right to change specifications, design and price of products described in the literature without notice. John Deere, the leaping deer symbol, and John Deere's green and yellow trade dress are the trademarks of Deere & Company.


Tuff Torq is a trademark of the Tuff Torq Corporation. Kanzaki is a trademark of the Kanzaki Kokyukoki Mfg. Company. Michelin and Michelin X Tweel are all registered trademarks of Michelin Corporation.



60" Self-Sharpening Mower Blade



Air Filters



Oil Filters

Quality Commercial Parts.
Where you need them, when you need them.

Parts NOW.

For more information - in the US, visit JohnDeere.com/CommercialParts
and in Canada, visit JohnDeere.ca/CommercialParts

3127345 (22-XX)



JOHN DEERE