



Pella® Reserve™ Traditional Hung Window

Special Sizes and Dimensions

Special Size Frame Dimensions*

Sash configuration	Vent-Equal	Cottage	Fixed
Sash Glass Ratio Top % : Bottom %	50 : 50	40 : 60	NA
Shortest Unit Frame Size	24-3/8" (619)	40-1/4" (1 022)	17" (432)
Tallest Unit Frame Size	96" (2 438)	81" (2 057)	71" (1 803)
Unit Frame Width Range	14" to 48" (356 to 1 219)	14" to 48" (356 to 1 219)	17" to 59" (432 to 1 499)


Opening Dimensions

Clad Exterior Units:
Dimensions shown in standard size tables are rough opening dimensions.

Wood Exterior Units:
Use frame dimension plus dimensions below. This dimension includes the use of standard 1-1/8" wood subsill.



Frame	Rough		Masonry	
Brickmould	Width	Height	Width	Height
STD	+ 3/4"	+1-7/8"	+ 3-1/8"	+ 3-1/8"
3-1/2"	+ 3/4"	+1-7/8"	+ 6-3/8"	+ 4-3/4"

For clad and wood units with impact-resistant glass, see the product installation instructions or refer to local building code requirements.

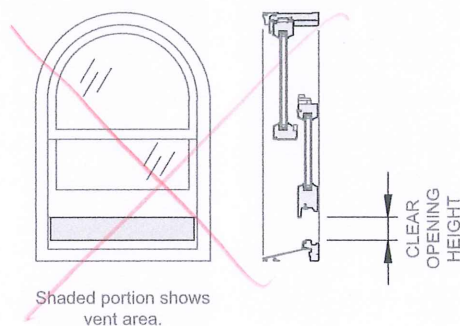

Equal Sash Rectangular Only

	Vent Units	Fixed and Transom Units
Visible Glass	Width = Frame - 5.647" Height = (Frame - 8.681") ÷ 2	Width = Frame - 5.75" Height = Frame - 5.75"
Actual Glass	Width = Frame - 4.375" Height = (Frame - 5.983") ÷ 2	Width = Frame - 4.375" Height = Frame - 4.375"
Clear Opening*	COW = Frame Width - 3.4375" COH = (Frame Height ÷ 2) - 4.4375"	— —
Vent Area Ft²	(COW x COH) ÷ 144	—



Traditional grille patterns shown. Refer to Grille Types section for additional patterns and profiles.

* Some units with custom glazing may have limited travel. Integrated Rolscreen® is only available on sizes greater than or equal to 34" tall and 21" wide and less than or equal to 84" tall and 48" wide.

See your local Pella sales representative for specific size information.