

2023 Permit for Fireworks Other than Consumer or Low Impact

Authority: 2011 PA 256	The LEGISLATIVE BODY OF CITY, VILLAGE OR TOWNSHIP BOARD will not discriminate against any individual or group because of race, sex, religion, age, national origin, color, marital status, disability, or political beliefs. If you need assistance with reading, writing, hearing, etc., under the Americans with Disabilities Act, you may make your needs known to this Legislative Body of City, Village or Township Board.
------------------------	---

This permit is not transferable. Possession of this permit authorizes the herein named person to possess, transport and display fireworks in the amounts, for the purpose of and at the place listed below only through permit expiration date.

TYPE OF PERMIT(S) (Select all applicable boxes) ☐ Agricultural or Wildlife Fireworks ☒ Articles Pyrotechnic ☐ Display Fireworks ☒ Public Display ☐ Private Display ☐ Special Effects Manufactured for Outdoor Pest Control or Agricultural Purposes	FOR USE BY LEGISLATIVE BODY OF CITY, VILLAGE OR TOWNSHIP BOARD ONLY. PERMIT(S) EXPIRATION DATE (ENTER DATE OF EXPIRATION)
--	--

NAME OF PERSON PERMIT ISSUED TO <u>James Herr</u>	AGE (18 YEARS OR OLDER) ☒ YES ☐ NO
ADDRESS OF PERSON PERMIT ISSUED TO	

NAME OF ORGANIZATION, GROUP, FIRM OR CORPORATION <u>Brightmoor Christian Church</u>
ADDRESS <u>40800 W. 13 Mile Road Novi MI 48377</u>

NUMBER AND TYPES OF FIREWORKS (Please attach additional pages if necessary) <u>4- Fire Fly Propane Flame Units</u> <u>4- Theatrical Flash</u> <u>4- Mortar Hits</u> <u>4- Handheld Torches</u>
--

EXACT LOCATION OF DISPLAY OR USE <u>Brightmoor Christian Church, Worship Center Stage</u>		
CITY, VILLAGE, TOWNSHIP <u>Novi</u>	DATE <u>3/29/23 - 4/2-/23</u>	TIME <u>7pm</u>
BOND OR INSURANCE FILED ☒ YES ☐ NO	AMOUNT <u>\$8,000,000</u>	

Issued by action of the Legislative Body of a	
☐ City ☐ Village ☐ Township of _____	on the _____ day of _____
(Signature and Title of Legislative Body Representative)	

THIS FORM IS VALID UNTIL THE DATE OF EXPIRATION OF PERMIT

2023 Application for Fireworks Other Than Consumer or Low Impact

FOR USE BY LEGISLATIVE BODY
OF CITY, VILLAGE OR TOWNSHIP
BOARD ONLY

DATE PERMIT(S) EXPIRE:

Authority: 2011 PA 256

The LEGISLATIVE BODY OF CITY, VILLAGE OR TOWNSHIP BOARD will not discriminate against any individual or group because of race, sex, religion, age, national origin, color, marital status, disability, or political beliefs. If you need assistance with reading, writing, hearing, etc., under the Americans with Disabilities Act, you may make your needs known to this Legislative Body of City, Village or Township Board.

TYPE OF PERMIT(S) (Select all applicable boxes)

- ☐ Agricultural or Wildlife Fireworks ☒ Articles Pyrotechnic ☐ Display Fireworks
- ☒ Public Display ☐ Private Display
- ☐ Special Effects Manufactured for Outdoor Pest Control or Agricultural Purposes

NAME OF APPLICANT James Herr	ADDRESS OF APPLICANT	AGE OF APPLICANT 18 YEARS OR OLDER ☐ YES ☐ NO
---------------------------------	----------------------	--

NAME OF PERSON OR RESIDENT AGENT REPRESENTING CORPORATION, LLC, DBA OR OTHER James Herr	ADDRESS PERSON OR RESIDENT AGENT REPRESENTING CORPORATION, LLC, DBA OR OTHER
--	--

IF A NON-RESIDENT APPLICANT (LIST NAME OF MICHIGAN ATTORNEY OR MICHIGAN RESIDENT AGENT)	ADDRESS (MICHIGAN ATTORNEY OR MICHIGAN RESIDENT AGENT)	TELEPHONE NUMBER
---	--	------------------

NAME OF PYROTECHNIC OPERATOR James Herr	ADDRESS OF PYROTECHNIC OPERATOR	AGE OF PYROTECHNIC OPERATOR 18 YEARS OR OLDER ☐ YES ☐ NO
--	---------------------------------	---

NO. YEARS EXPERIENCE 11	NO. DISPLAYS 6	WHERE Various
----------------------------	-------------------	------------------

NAME OF ASSISTANT	ADDRESS OF ASSISTANT	AGE OF ASSISTANT 18 YEARS OR OLDER ☐ YES ☐ NO
-------------------	----------------------	--

NAME OF OTHER ASSISTANT	ADDRESS OF OTHER ASSISTANT	AGE OF OTHER ASSISTANT 18 YEARS OR OLDER ☐ YES ☐ NO
-------------------------	----------------------------	--

EXACT LOCATION OF PROPOSED DISPLAY
Brightmoor Christian Church, Worship Center Stage

DATE OF PROPOSED DISPLAY 3/29/23 - 4/2/23	TIME OF PROPOSED DISPLAY 3pm & 7pm
--	---------------------------------------

MANNER AND PLACE OF STORAGE, SUBJECT TO APPROVAL OF LOCAL FIRE AUTHORITIES, IN ACCORDANCE WITH NFPA 1123, 1124 & 1126 AND OTHER STATE OR FEDERAL REGULATIONS.
PROVIDE PROOF OF PROPER LICENSING OR PERMITTING BY STATE OR FEDERAL GOVERNMENT
All products are stored in a metal flammables cabinet prior to being installed into the show.

AMOUNT OF BOND OR INSURANCE (TO BE SET BY LOCAL GOVERNMENT) \$58,000,000	NAME OF BONDING CORPORATION OR INSURANCE COMPANY Brotherhood Mutual
---	--

ADDRESS OF BONDING CORPORATION OR INSURANCE COMPANY
P.O. Box 2227
Fort Wayne, IN 46801

NUMBER OF FIREWORKS	KIND OF FIREWORKS TO BE DISPLAYED (Please provide additional pages as needed)
4	Firefly Propane Flame Units
4	Theatrical Flashes
4	Mortar Hits
4	Handheld Theatrical Torches

SIGNATURE OF APPLICANT

DATE

3/8/23



OP ID: MB

EVIDENCE OF COMMERCIAL PROPERTY INSURANCEDATE (MM/DD/YYYY)
03/08/2023

THIS EVIDENCE OF COMMERCIAL PROPERTY INSURANCE IS ISSUED AS A MATTER OF INFORMATION ONLY AND CONFERS NO RIGHTS UPON THE ADDITIONAL INTEREST NAMED BELOW. THIS EVIDENCE DOES NOT AFFIRMATIVELY OR NEGATIVELY AMEND, EXTEND OR ALTER THE COVERAGE AFFORDED BY THE POLICIES BELOW. THIS EVIDENCE OF INSURANCE DOES NOT CONSTITUTE A CONTRACT BETWEEN THE ISSUING INSURER(S), AUTHORIZED REPRESENTATIVE OR PRODUCER, AND THE ADDITIONAL INTEREST.

PRODUCER NAME, CONTACT PERSON AND ADDRESS Shilton & Associates, Inc. Dave Shilton 660 Cascade West Parkway, SE Grand Rapids, MI 49546 Jared Nathan Shilton		PHONE (A/C, No, Ext): 616-956-5300	COMPANY NAME AND ADDRESS Brotherhood Mutual P O Box 2227 Fort Wayne, IN 46801		NAIC NO:
FAX (A/C, No): 616-956-9993		E-MAIL ADDRESS:		IF MULTIPLE COMPANIES, COMPLETE SEPARATE FORM FOR EACH	
CODE:		SUB CODE:		POLICY TYPE Commercial Package	
AGENCY CUSTOMER ID #: BRIGH-3		LOAN NUMBER		POLICY NUMBER 21MRA0437802	
NAMED INSURED AND ADDRESS Brightmoor Christian Church 40800 W 13 Mile Rd Novi, MI 48377-2327		EFFECTIVE DATE 09/01/2022		EXPIRATION DATE 09/01/2023	☐ CONTINUED UNTIL TERMINATED IF CHECKED
ADDITIONAL NAMED INSURED(S)		THIS REPLACES PRIOR EVIDENCE DATED:			

PROPERTY INFORMATION (ACORD 101 may be attached if more space is required) ☒ BUILDING OR ☐ BUSINESS PERSONAL PROPERTY

LOCATION / DESCRIPTION 40800 W 13 Mile Rd Novi, MI 48377	Location 101 Church-\$50,406,000 Contents-\$8,000,000
THE POLICIES OF INSURANCE LISTED BELOW HAVE BEEN ISSUED TO THE INSURED NAMED ABOVE FOR THE POLICY PERIOD INDICATED. NOTWITHSTANDING ANY REQUIREMENT, TERM OR CONDITION OF ANY CONTRACT OR OTHER DOCUMENT WITH RESPECT TO WHICH THIS EVIDENCE OF PROPERTY INSURANCE MAY BE ISSUED OR MAY PERTAIN, THE INSURANCE AFFORDED BY THE POLICIES DESCRIBED HEREIN IS SUBJECT TO ALL THE TERMS, EXCLUSIONS AND CONDITIONS OF SUCH POLICIES. LIMITS SHOWN MAY HAVE BEEN REDUCED BY PAID CLAIMS.	

COVERAGE INFORMATION

PERILS INSURED

BASIC

BROAD

☒ SPECIAL

COMMERCIAL PROPERTY COVERAGE AMOUNT OF INSURANCE: \$		58,611,000		DED: 2,500	
		YES	NO	N/A	
☐ BUSINESS INCOME	☐ RENTAL VALUE				Actual Loss Sustained; # of months:
BLANKET COVERAGE					If YES, indicate value(s) reported on property identified above: \$
TERRORISM COVERAGE		☒			Attach Disclosure Notice / DEC
IS THERE A TERRORISM-SPECIFIC EXCLUSION?					
IS DOMESTIC TERRORISM EXCLUDED?					
LIMITED FUNGUS COVERAGE					If YES, LIMIT: DED:
FUNGUS EXCLUSION (If "YES", specify organization's form used)					
REPLACEMENT COST		☒			
AGREED VALUE					
COINSURANCE					If YES, %
EQUIPMENT BREAKDOWN (If Applicable)		☒			If YES, LIMIT: 58,611,000 DED: 2,500
ORDINANCE OR LAW - Coverage for loss to undamaged portion of bldg		☒			If YES, LIMIT: 100,000 DED: 2,500
- Demolition Costs		☒			If YES, LIMIT: 350,000 DED: 2,500
- Incr. Cost of Construction		☒			If YES, LIMIT: DED: 2,500
EARTH MOVEMENT (If Applicable)					If YES, LIMIT: DED:
FLOOD (If Applicable)					If YES, LIMIT: DED:
WIND / HAIL INCL ☐ YES ☐ NO Subject to Different Provisions:					If YES, LIMIT: DED:
NAMED STORM INCL ☐ YES ☐ NO Subject to Different Provisions:					If YES, LIMIT: DED:
PERMISSION TO WAIVE SUBROGATION IN FAVOR OF MORTGAGE HOLDER PRIOR TO LOSS					

CANCELLATION

SHOULD ANY OF THE ABOVE DESCRIBED POLICIES BE CANCELLED BEFORE THE EXPIRATION DATE THEREOF, NOTICE WILL BE DELIVERED IN ACCORDANCE WITH THE POLICY PROVISIONS.

ADDITIONAL INTEREST

☐ CONTRACT OF SALE	☐ LENDER'S LOSS PAYABLE	☐ LOSS PAYEE	LENDER SERVICING AGENT NAME AND ADDRESS
☐ MORTGAGEE			
NAME AND ADDRESS			AUTHORIZED REPRESENTATIVE <i>Jared Shilton</i>

EVIDENCE OF PROPERTY INSURANCE
PROPERTY SCHEDULE

DATE (MM/DD/YY)

03/08/2023

PAGE 2

PROPERTY INFORMATION

LOCATION/DESCRIPTION

23745 Research Dr

Farmington Hills, MI 48335

Location 0201

Storage Building Contents-\$45,000

PROPERTY INFORMATION

LOCATION/DESCRIPTION

28265 Beck Rd Ste C13 C14

Wixom, MI 48393

Location 0301

Storage Unit Contents-\$60,000

PROPERTY INFORMATION

LOCATION/DESCRIPTION

PROPERTY INFORMATION

LOCATION/DESCRIPTION

PROPERTY INFORMATION

LOCATION/DESCRIPTION

PROPERTY INFORMATION

LOCATION/DESCRIPTION

PROPERTY INFORMATION


LOCATION/DESCRIPTION

PROPERTY INFORMATION

LOCATION/DESCRIPTION

Controller Interface

 **Zach Gilbert**
Updated 7 months ago

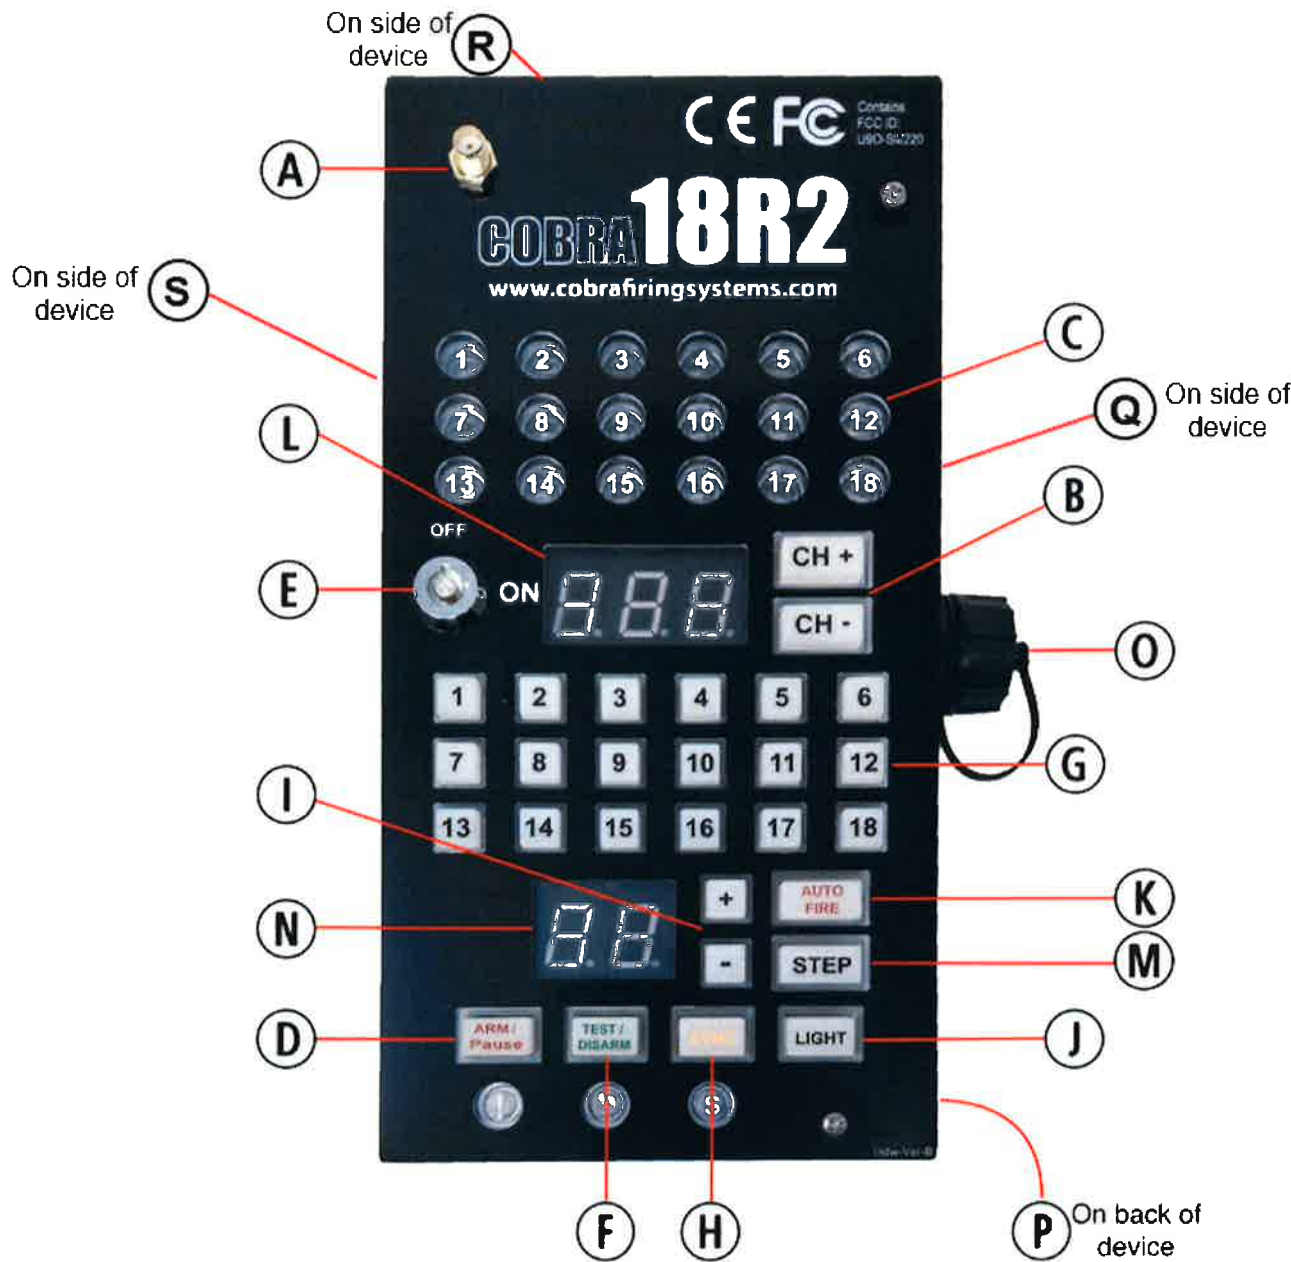

A) Antenna Connector

Connect the standard omnidirectional antenna, COBRA Booster, COBRA DISH, or a combination of the three.

C) Cue LED Indicators (1-18)

B) CH+, CH- Buttons

Press up or down to navigate between channels. Holding the CH+ or CH- button will allow for fast scrolling.

D) ARM/Pause Button

Press to ARM the 18R2 or pause/resume an


Connect to COBRA Control Panel, load automated scripts and firmware updates.	power the 18R2.
(Q) Deadman Port (Optional Upgrade) Connect to the COBRA Deadman Trigger.	(R) Timecode RCA Port (Optional Upgrade) Connect an RCA cable to support SMPTE Timecode control.
(S) Charge Port (Optional Upgrade) Connect a COBRA charger to charge the internal LiPo battery.	

Interface



Brandon Brown

Updated 7 months ago

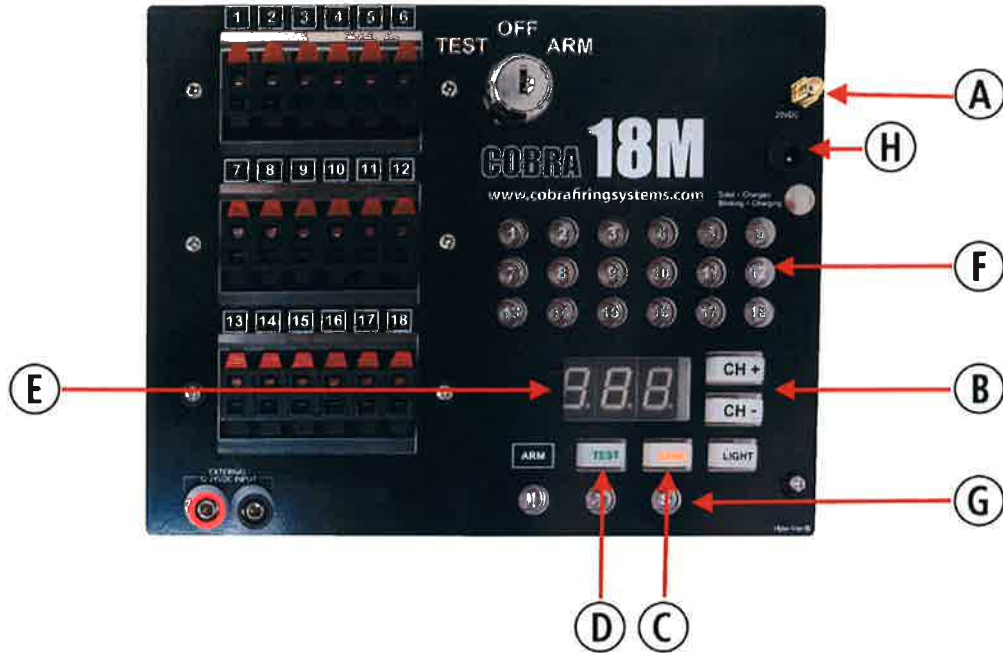

A) Antenna Connector

Connect the standard **omnidirectional antenna**, **COBRA Booster**, **COBRA DISH**, or a combination of the three.

B) CH+, CH- Buttons

Press and release to increment (CH+) or decrement (CH-) the channel for the selected bank.

C) SYNC Button

D) TEST Button

16th September 2019

SAFETY DATA SHEET

SECTION 1 – PRODUCT IDENTIFICATION

1.1 Product identifier

Product Name: SIMULATION EFFECTS (Napalm, Shellburst, Giant Fireball, Goldstar, Mortar Hit, Thunderflash)

1.2 Relevant identified uses of the substance or mixture and uses advised against

Relevant identified uses: Articles pyrotechnic for technical purposes

1.3 Details of the Supplier of the Safety Data Sheet

Supplier: Le Maitre Ltd
Street/P.O. Box: 6 Forval Close
Postcode/City: CR4 4NE, Mitcham
Country: England
Telephone number: +44 (0)20 8646 2222
Email: info@lemaitreltd.com

1.4 Emergency telephone number

Please contact: +44 (0)151 951 3317 Health and Safety Executive (HSE) Chemicals Regulation Directorate
Other comments: Only available during office hours

SECTION 2 – HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

H204: Fire or projection hazard

2.2 Label elements

Labelling according to Regulation (EC) No. 1272/2008 (CLP)

Hazard category: Division 1.4

Signal word: Warning

Hazard statement: H204 Fire or projection hazard

Precautionary Statements Prevention: P210, P234

Precautionary Statements Response: P370 + P372 + P380 + P373

Precautionary Statements Storage: P401

Precautionary Statements Disposal: P501

Hazard pictograms:



2.3 Other hazards

There are no chronic effects from handling the product appropriately
 When used in the correct manner, any fallout does not pose a risk to personal health.

SECTION 3 – COMPOSITION / INFORMATION ON INGREDIENTS

3.1 Substances

Name	CAS No.	EC No.
Aluminium powder	7429-90-5	231-072-3
Charcoal	16291-96-6	240-383-3
Lycopodium powder	8023-70-9	282-002-3
Magnesium powder	7439-54-4	231-104-6
Naphthalene	91-20-3	202-049-5
Potassium Nitrate	7757-79-1	231-818-8
Potassium Perchlorate	7778-47-7	231-912-9
Starch	9005-25-8	232-679
Strontium Oxalate	814-95-9	212-415-6
Sulphur	7704-34-9	231-722-6

List above covers all products within the Simulation effect families

SECTION 4 – FIRST AID MEASURES

4.1 Description of first aid measures

General notes: In the case of accident or sickness, seek medical advice immediately.

Following inhalation: Remove casualty to fresh air and keep warm and at rest.

Following skin contact: Wash immediately with soap and water

Following eye contact: Immediately flush with water

Following ingestion: If accidentally swallowed, rinse the mouth with plenty of water (only if the person is conscious) and obtain medical attention

Self protection of the first aider: Pay attention to self protection!

4.2 Most important symptoms and effects, both acute and delayed

Irritation to the eyes and irritation to the skin

4.3 Indication of any immediate medical attention and special treatment needed

First aid, decontamination, treatment of symptoms

SECTION 5 – FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media: If there is a small flame persisting from the effect itself (or from the surrounding area) this can be extinguished with a dry powder or Carbon Dioxide Fire Extinguisher if trained to do so.

For larger fires do not attempt to extinguish any fire unless specifically trained to do so. Evacuate area and contact emergency services

Unsuitable extinguishing media: N/A

5.2 Special hazards arising from the substance or mixture

Hazardous combustion products may be produced.

Pyrotechnic devices can burn violently and the state of the fire will be dependent on composition, packaging and containment.

5.3 Advice for firefighters

Exercise extreme caution. Special protective equipment for firefighters: wear self-contained breathing apparatus and chemical protective clothing

SIMULATION EFFECTS

SECTION 6 – ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

6.1.1 For non-emergency personnel: Suitable personal protective equipment. Remove ignition sources.

6.1.2 For emergency responders: Remove persons to safety. Isolate hazard area and deny entry. Ventilate closed spaces before entering.

6.2 Environmental precautions

Prevent large spillages from entering surface water or drains.

6.3 Methods and material for containment and cleaning up

Dispose of as special waste in compliance with local and national regulations.

6.4 Reference to other sections

See sections 8 and 13

SECTION 7 – HANDLING AND STORAGE

7.1 Precautions for safe handling

Protective measures: Handle with caution.

Measures to prevent fire: No smoking and no naked flames.

Measures to prevent aerosol and dust generation: Do not tamper with the item.

Advice on general occupational hygiene: Do not eat, drink or smoke in work areas. Wash hands after use.

7.2 Conditions for safe storage, including any incompatibilities

Technical measures and storage conditions: Store in cool, dry place.

Requirements for storage rooms and vessels: Always store in original packaging with appropriate marking and labelling. Stores should be adequately secured and identified.

7.3 Specific end use(s)

The identified use for this product is detailed in section 1.2.

8.1

SECTION 8 – EXPOSURE CONTROLS / PERSONAL PROTECTION

Control

parameters

Workplace exposure limits.

8.2 Exposure controls

8.2.1 Appropriate engineering controls: Provide adequate ventilation.

8.2.2 Personal protection equipment: Appropriate Safety goggles.

8.2.3 Environmental exposure controls: No specific measures.

SIMULATION EFFECTS

SECTION 9 – PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

Appearance: Solid sealed tube

As this is a sealed unit chemical properties are not applicable

9.2 Other information

No additional information relevant to safe use.

SECTION 10 – STABILITY AND REACTIVITY

10.1 Reactivity

No specific data related to reactivity available.

10.2 Chemical stability

Stable under recommended conditions of storage and use.

10.3 Possibility of hazardous reactions

No hazardous reaction when handled and stored according to provisions.

10.4 Conditions to avoid

Avoid high temperatures, shock, static discharge, vibrations or other physical stresses that might result in a hazardous situation.

10.5 Incompatible materials

As this is a sealed unit incompatible materials are not applicable.

10.6 Hazardous decomposition products

Decomposition does not occur during normal circumstances of storage, transport and handling. Upon functioning various gases may be emitted including oxides.

SECTION 11 – TOXICOLOGICAL INFORMATION

11.1 Information on toxilogical effects

As this is a sealed unit this only applies to spillages.
May cause eye and skin irritation. Inhalation or ingestion may cause discomfort.

SECTION 12 – ECOLOGICAL INFORMATION

12.1 Toxicity

Not classified as dangerous for the environment/aquatic toxicant

12.2 Persistence and degradability N/A

12.3 Bioaccumulative potential N/A

12.4 Mobility in soil N/A

12.5 Results of PBT and vPvB assessment N/A

12.6 Other adverse effects N/A**SECTION 13 – DISPOSAL CONSIDERATIONS****13.1 Waste treatment methods**

No specific regulations apply to packagings or spent devices.

Unused devices should be returned to the manufacturer, functioned in a safe manner or soaked in a vessel of water for 48 hours. If soaked in water review local and national requirements prior to disposal.

SECTION 14 – TRANSPORT INFORMATION**14.1 UN number**

UN0431 or UN0432

14.2 UN proper shipping name

Articles pyrotechnic for technical purposes

14.3 Transport hazard class(es)

1.4G (UN0431) or 1.4S (UN0432)

14.4 Packing group

N/A

14.5 Environmental hazards

None

14.6 Special precautions for user

No smoking or naked flames

14.7 Transport in bulk according to Annex II of MARPOL and the IBC Code

N/A

SECTION 15 – REGULATORY INFORMATION**15.1 Safety, health and environmental regulations/legislation specific for the substance or mixture**

Explosives Regulations 2014 and all orders of council, HSG 36, Local Authorities and the Health and Safety Executive.

Pyrotechnic Articles European Directive 2013/29/EU

15.2 Chemical Safety Assessment

N/A

SECTION 16 – OTHER INFORMATION

Information for this safety data sheet was obtained from sources considered technically accurate and reliable. Whilst every effort has been made to ensure full disclosure of product hazards, in some cases data is not available and is so stated. No warranty, expressed or implied, is made and supplier will not be liable for any losses, injuries or consequential damages which may result from the use of, or reliance on, any information contained in this form.

Safety Data Sheet
29 CFR 1910.1200

Section 1: Company and Product Identification

Product Name: Pyrowizard Flash Cotton

Product Code(s): FP11

Company: Theatre Effects
1810 Airport Exchange Blvd.
Suite 400
Erlanger, KY 41018
800-791-7646
24 Hr Emergency: INFOTRAC, 1-800-535-5053
(outside USA +1-352-323-3500)

Section 2: Hazards Identification

Hazard Pictograms:



Signal Word: Danger

Hazard Category: Flammable Solid

Hazard Statements: H228: Flammable solid

Precautionary
P210: Keep away from heat/sparks/open flames/hot surfaces – No smoking
P241: Use explosion-proof lighting or other equipment in proximity of product
P230: Keep wetted with water until usage
P280: Wear protective gloves/protective clothing/eye protection/face protection
P370+378: In case of fire: use water for extinction

Hazards not otherwise classified: Not applicable, none known.

Section 3: Composition / Information on Ingredients

Hazardous substance (name)	Hazard Category	CAS#	Weight %
nitrocellulose	Flam Sld 1	9004-70-0	<75
water	not classified	1330-20-7	>25

Section 4: First Aid Measures

General Info: No specific measures necessary for first aid response. Material does not represent a health hazard.

Notable Exposure symptoms: Exposure to product is not likely to result in symptoms.

If ingested: Rinse mouth. Drink plenty of water.

If inhaled: Remove to fresh air.

Eye contact: Eye contact not likely to result in any health hazards. Rinse eye to remove any particulates.

Skin contact: Rinse with water. Consult medical advise if irritation develops.

Additional Info: No further information.

Section 5: Fire Fighting Measures

General Info: Product is highly flammable when dried. It can be handled safely when wetted with water. After drying, this product will burn very rapidly releasing extreme heat.

Extinguishing Method / Water is the preferred extinguishing agent. Isolate area, and if possible fight fire from upwind. Wetted **Equipment:** product that is in contact with fire will dry and combust, increasing fire hazard.

Hazardous Constituents associated with burning / combustion are to be considered hazardous. Utilize product where **Decomposition Info:** ventilation is adequate. Large quantities should not be burned in small spaces.

Section 6: Accidental Release Measures

Personal precautions, Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Released material **protective equipment** will be a solid article that can be made less hazardous by wetting further with water. Ensure area is properly **and procedures:** ventilated.

Containment Equipment Not applicable. Material can be stored in the original receptacle. **and Procedures:**

Cleanup Procedures: Care should be taken to avoid ignition. Wetting product with water will render released material non-hazardous.

Section 7: Handling and Storage

Safe Handling Do not handle until all safety precautions have been read and understood. Do not handle near an open flame **Precautions:** or sources of ignition until product effect is desired. Ensure adequate ventilation. Take precautionary measures against static discharges. Avoid breathing vapors.

Recommendations for Store in product package until usage is warranted. **Storage:**

Incompatibilities: Store away from strong acids or oxidizing agents. Refer to Section 10.

Section 8: Exposure Control / Personal Protection

General / Engineering Local exhaust ventilation should be utilized to control fumes. Nearby water supply may be necessary to wet **Controls:** product (if needed) or to combat any uncontrolled fire.

Work Clothing: No specific protective clothing needed.

Eye/face protection: None needed for product as received. When using product, utilize eyewear if situation necessitates additional safe measures.

Skin Protection: None needed for product as received. When using product, utilize fire resistant gloves if situation necessitates additional safe measures.

Respiratory Protection: Not required under normal usage.

Additional Information: Observe good chemical hygiene practices. Do not smoke while using this product. Care should be taken to observe surroundings prior to utilizing.

Section 9: Physical and Chemical Properties

State: Solid article	Melting Point: Not avail	Freezing Point: Not avail
Color: White or tan	Boiling Point/Range: Not avail	pH: Not avail
Sp Grav: Not avail	Odor: Odorless	Water Solubility: Insoluble
Evaporation rate: Not avail	Flash Point: (see autoign)	Part. Coeff (n-octanol/water): Not avail
Upper Flam Limits: Not avail	Lower Flam Limits: Not avail	Vapor Pressure:
VOC Content (lbs/gal): Not avail	Viscosity: Not avail	Autoignition: 160C (320F)
		Temp:

Section 10: Stability and Reactivity

General: Product becomes less stable as it dries. Flammability characteristics increase as water is lost from product.

Incompatible materials: Strong oxidizing agents, strong acids.

Decomposition products: No decomposition products known. Constituents associated with burning may be harmful.

Section 11: Toxicological Information

General Information: Product does not pose a health hazard.

Toxicological Information (product): Product has not been tested, yet is not considered to be an acute or chronic health hazard.

Likely Routes of Exposure: Inhalation of vapors during burning.

Carcinogenicity or mutagenicity: Product is not a carcinogen or mutagen.

Sensitization: Product is not expected to be a sensitizer.

Other Notes: Not applicable.

Section 12: Ecological Information

General information: Product not tested. Not expected to pose an environmental hazard.

Aquatic toxicity: Not expected to have any aquatic toxicity characteristics.

Degradation / Mobility info: No specific data available.

Bioaccumulative potential: Product is not bioaccumulative.

Section 13: Disposal Information

Product disposal: Dispose of product in accordance with local, regional, and national regulations. Product is to be considered a flammable solid / ignitable waste.

Container disposal: No further information.

Section 14: Transport Information

DOT: Classified as Dangerous Goods per 49 CFR (UN2555). Product is sold in excepted quantities.

Comments: Inquire for further information.

Section 15: Regulatory Information

TSCA: All components listed on the TSCA 8(b) inventory.

CERCLA RQ: Not applicable.

SARA 311/312: Product is a flammable hazard.

SARA 313 Not applicable.

California Prop 65 Not applicable.

Substances:

Section 16: Other Information

HMIS Rating: H:1, F:3, R:3

SDS Author: CCS, LLC

Version Date: 5/19/2015

The provider of this SDS urges the buyer or user to study it carefully and consult with appropriate expertise, as necessary to become aware of and understand the data contained herein. This information is provided in good faith and is believed to be accurate as of the effective date, or version date shown. However, no warranty, express or implied, is given. Regulatory requirements are subject to change and may differ between various locations. It is the buyer or user's responsibility to ensure that its activities comply with all federal, state, provincial or local laws. The information presented here pertains only to the product as shipped. It is the buyer's/user's duty to determine the conditions necessary for the safe use of this product. Information regarding the exact chemical identity or concentration of certain substances may be reserved as a trade secret as per 29 CFR 1910.1200(i).

Safety Data Sheet
29 CFR 1910.1200

Section 1: Company and Product Identification

Product Name: Pyrowizard Flash Paper

Product Code(s): FP01, FP02, FP03, FP06, FP07, FP08

Company: Theatre Effects
1810 Airport Exchange Blvd.
Suite 400
Erlanger, KY 41018
800-791-7646
24 Hr Emergency: INFOTRAC, 1-800-535-5053
(outside USA +1-352-323-3500)

Section 2: Hazards Identification

Hazard Pictograms:



Signal Word: Danger

Hazard Category: Flammable Solid

Hazard Statements: H228: Flammable solid

Precautionary
P210: Keep away from heat/sparks/open flames/hot surfaces – No smoking
P241: Use explosion-proof lighting or other equipment in proximity of product
P230: Keep wetted with water until usage
P280: Wear protective gloves/protective clothing/eye protection/face protection
P370+378: In case of fire: use water for extinction

Hazards not otherwise classified: Not applicable, none known.

Section 3: Composition / Information on Ingredients

Hazardous substance (name)	Hazard Category	CAS#	Weight %
nitrocellulose	Flam Sld 1	9004-70-0	<75
water	not classified	1330-20-7	>25

Section 4: First Aid Measures

General Info: No specific measures necessary for first aid response. Material does not represent a health hazard.

Notable Exposure symptoms: Exposure to product is not likely to result in symptoms.

If ingested: Rinse mouth. Drink plenty of water.

If inhaled: Remove to fresh air.

Eye contact: Eye contact not likely to result in any health hazards. Rinse eye to remove any particulates.

Skin contact: Rinse with water. Consult medical advise if irritation develops.

Additional Info: No further information.

Section 5: Fire Fighting Measures

General Info: Product is highly flammable when dried. It can be handled safely when wetted with water. After drying, this product will burn very rapidly releasing extreme heat.

Extinguishing Method / Water is the preferred extinguishing agent. Isolate area, and if possible fight fire from upwind. Wetted **Equipment:** product that is in contact with fire will dry and combust, increasing fire hazard.

Hazardous Constituents associated with burning / combustion are to be considered hazardous. Utilize product where **Decomposition Info:** ventilation is adequate. Large quantities should not be burned in small spaces.

Section 6: Accidental Release Measures

Personal precautions, Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Released material **protective equipment** will be a solid article that can be made less hazardous by wetting further with water. Ensure area is properly **and procedures:** ventilated.

Containment Equipment Not applicable. Material can be stored in the original receptacle. **and Procedures:**

Cleanup Procedures: Care should be taken to avoid ignition. Wetting product with water will render released material non-hazardous.

Section 7: Handling and Storage

Safe Handling Do not handle until all safety precautions have been read and understood. Do not handle near an open flame **Precautions:** or sources of ignition until product effect is desired. Ensure adequate ventilation. Take precautionary measures against static discharges. Avoid breathing vapors.

Recommendations for Store in product package until usage is warranted. **Storage:**

Incompatibilities: Store away from strong acids or oxidizing agents. Refer to Section 10.

Section 8: Exposure Control / Personal Protection

General / Engineering Local exhaust ventilation should be utilized to control fumes. Nearby water supply may be necessary to wet **Controls:** product (if needed) or to combat any uncontrolled fire.

Work Clothing: No specific protective clothing needed.

Eye/face protection: None needed for product as received. When using product, utilize eyewear if situation necessitates additional safe measures.

Skin Protection: None needed for product as received. When using product, utilize fire resistant gloves if situation necessitates additional safe measures.

Respiratory Protection: Not required under normal usage.

Additional Information: Observe good chemical hygiene practices. Do not smoke while using this product. Care should be taken to observe surroundings prior to utilizing.

Section 9: Physical and Chemical Properties

State: Solid article	Melting Point: Not avail	Freezing Point: Not avail
Color: White or tan	Boiling Point/Range: Not avail	pH: Not avail
Sp Grav: Not avail	Odor: Odorless	Water Solubility: Insoluble
Evaporation rate: Not avail	Flash Point: (see autoign)	Part. Coeff (n-octanol/water): Not avail
Upper Flam Limits: Not avail	Lower Flam Limits: Not avail	Vapor Pressure:
VOC Content (lbs/gal): Not avail	Viscosity: Not avail	Autoignition: 160C (320F)
		Temp:

Section 10: Stability and Reactivity

General: Product becomes less stable as it dries. Flammability characteristics increase as water is lost from product.

Incompatible materials: Strong oxidizing agents, strong acids.

Decomposition products: No decomposition products known. Constituents associated with burning may be harmful.

Section 11: Toxicological Information

General Information: Product does not pose a health hazard.

Toxicological Information (product): Product has not been tested, yet is not considered to be an acute or chronic health hazard.

Likely Routes of Exposure: Inhalation of vapors during burning.

Carcinogenicity or mutagenicity: Product is not a carcinogen or mutagen.

Sensitization: Product is not expected to be a sensitizer.

Other Notes: Not applicable.

Section 12: Ecological Information

General information: Product not tested. Not expected to pose an environmental hazard.

Aquatic toxicity: Not expected to have any aquatic toxicity characteristics.

Degradation / Mobility info: No specific data available.

Bioaccumulative potential: Product is not bioaccumulative.

Section 13: Disposal Information

Product disposal: Dispose of product in accordance with local, regional, and national regulations. Product is to be considered a flammable solid / ignitable waste.

Container disposal: No further information.

Section 14: Transport Information

DOT: Classified as Dangerous Goods per 49 CFR (UN2555). Product is sold in excepted quantities.

Comments: Inquire for further information.

Section 15: Regulatory Information

TSCA: All components listed on the TSCA 8(b) inventory.

CERCLA RQ: Not applicable.

SARA 311/312: Product is a flammable hazard.

SARA 313 Not applicable.

California Prop 65 Not applicable.

Substances:

Section 16: Other Information

HMIS Rating: H:1, F:3, R:3

SDS Author: CCS, LLC

Version Date: 5/19/2015

The provider of this SDS urges the buyer or user to study it carefully and consult with appropriate expertise, as necessary to become aware of and understand the data contained herein. This information is provided in good faith and is believed to be accurate as of the effective date, or version date shown. However, no warranty, express or implied, is given. Regulatory requirements are subject to change and may differ between various locations. It is the buyer or user's responsibility to ensure that its activities comply with all federal, state, provincial or local laws. The information presented here pertains only to the product as shipped. It is the buyer's/user's duty to determine the conditions necessary for the safe use of this product. Information regarding the exact chemical identity or concentration of certain substances may be reserved as a trade secret as per 29 CFR 1910.1200(i).



16th September 2019

SAFETY DATA SHEET

SECTION 1 – PRODUCT IDENTIFICATION

1.1 Product identifier

Product Name: FLASHES, ROBOTICS & SPDS

1.2 Relevant identified uses of the substance or mixture and uses advised against

Relevant identified uses: Articles pyrotechnic for technical purposes

1.3 Details of the Supplier of the Safety Data Sheet

Supplier: Le Maitre Ltd
Street/P.O. Box: 6 Forval Close
Postcode/City: CR4 4NE, Mitcham
Country: England
Telephone number: +44 (0)20 8646 2222
Email: info@lemaitreltd.com

1.4 Emergency telephone number

Please contact: +44 (0)151 951 3317 Health and Safety Executive (HSE) Chemicals Regulation Directorate

Other comments: Only available during office hours

SECTION 2 – HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

H204: Fire or projection hazard

2.2 Label elements

Labelling according to Regulation (EC) No. 1272/2008 (CLP)

Hazard category: Division 1.4

Signal word: Warning

Hazard statement: H204 Fire or projection hazard

Precautionary Statements Prevention: P210, P234

Precautionary Statements Response: P370 + P372 + P380 + P373

Precautionary Statements Storage: P401

Precautionary Statements Disposal: P501

Hazard pictograms:



2.3 Other hazards

There are no chronic effects from handling the product appropriately

When used in the correct manner, any fallout does not pose a risk to personal health.

SECTION 3 – COMPOSITION / INFORMATION ON INGREDIENTS

3.1 Substances

Name	CAS No.	EC No.
Aluminium powder	7429-90-5	231-072-3
Ammonium Perchlorate	7798-98-9	232-235-1
Barium Nitrate	10022-31-8	233-020-5
Chlorinated Rubber	9006-03-5	918-668-5
Copper Carbonate	1184-64-1	214-671-4
Diphenylamine	122-39-4	204-539-4
Graphite	7782-42-5	231-955-3
Magnesium powder	7439-54-4	231-104-6
Nitrocellulose	9004-70-0	603-037-0
Potassium Nitrate	7757-79-1	231-818-8
Potassium Perchlorate	7778-47-7	231-912-9
Sodium Nitrate	7631-99-4	231-554-3
Strontium Nitrate	10042-76-9	233-131-9
Talc	14087-96-6	238-877-9
Titanium powder	7440-32-6	231-142-3

List above covers all products within the Flash, Robotic & SPD families

SECTION 4 – FIRST AID MEASURES

4.1 Description of first aid measures

General notes: In the case of accident or sickness, seek medical advice immediately.

Following inhalation: Remove casualty to fresh air and keep warm and at rest.

Following skin contact: Wash immediately with soap and water

Following eye contact: Immediately flush with water

Following ingestion: If accidentally swallowed, rinse the mouth with plenty of water (only if the person is conscious) and obtain medical attention

Self protection of the first aider: Pay attention to self protection!

4.2 Most important symptoms and effects, both acute and delayed

Irritation to the eyes and irritation to the skin

4.3 Indication of any immediate medical attention and special treatment needed

First aid, decontamination, treatment of symptoms

SECTION 5 – FIREFIGHTING MEASURES

5.1 Extinguishing media

Suitable extinguishing media: If there is a small flame persisting from the effect itself (or from the surrounding area) this can be extinguished with a dry powder or Carbon Dioxide Fire Extinguisher if trained to do so.

For larger fires do not attempt to extinguish any fire unless specifically trained to do so. Evacuate area and contact emergency services

Unsuitable extinguishing media: N/A

5.2 Special hazards arising from the substance or mixture

Hazardous combustion products may be produced.

Pyrotechnic devices can burn violently and the state of the fire will be dependent on composition, packaging and containment.

5.3 Advice for firefighters

Exercise extreme caution. Special protective equipment for firefighters: wear self-contained breathing apparatus and chemical protective clothing

SECTION 6 – ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

6.1.1 For non-emergency personnel: Suitable personal protective equipment. Remove ignition sources.

6.1.2 For emergency responders: Remove persons to safety. Isolate hazard area and deny entry. Ventilate closed spaces before entering.

6.2 Environmental precautions

Prevent large spillages from entering surface water or drains.

6.3 Methods and material for containment and cleaning up

Dispose of as special waste in compliance with local and national regulations.

6.4 Reference to other sections

See sections 8 and 13

SECTION 7 – HANDLING AND STORAGE

7.1 Precautions for safe handling

Protective measures: Handle with caution.

Measures to prevent fire: No smoking and no naked flames.

Measures to prevent aerosol and dust generation: Do not tamper with the item.

Advice on general occupational hygiene: Do not eat, drink or smoke in work areas. Wash hands after use.

7.2 Conditions for safe storage, including any incompatibilities

Technical measures and storage conditions: Store in cool, dry place.

Requirements for storage rooms and vessels: Always store in original packaging with appropriate marking and labelling. Stores should be adequately secured and identified.

7.3 Specific end use(s)

The identified use for this product is detailed in section 1.2.

SECTION 8 – EXPOSURE CONTROLS / PERSONAL PROTECTION

8.1 Control parameters

Workplace exposure limits.

8.2 Exposure controls

8.2.1 Appropriate engineering controls: Provide adequate ventilation.

8.2.2 Personal protection equipment: Appropriate Safety goggles.

8.2.3 Environmental exposure controls: No specific measures.

SECTION 9 – PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

Appearance: Solid sealed tube

As this is a sealed unit chemical properties are not applicable

9.2 Other information

No additional information relevant to safe use.

SECTION 10 – STABILITY AND REACTIVITY

10.1 Reactivity

No specific data related to reactivity available.

10.2 Chemical stability

Stable under recommended conditions of storage and use.

10.3 Possibility of hazardous reactions

No hazardous reaction when handled and stored according to provisions.

10.4 Conditions to avoid

Avoid high temperatures, shock, static discharge, vibrations or other physical stresses that might result in a hazardous situation.

10.5 Incompatible materials

As this is a sealed unit incompatible materials are not applicable.

10.6 Hazardous decomposition products

Decomposition does not occur during normal circumstances of storage, transport and handling. Upon functioning various gases may be emitted including oxides.

SECTION 11 – TOXICOLOGICAL INFORMATION

11.1 Information on toxilogical effects

As this is a sealed unit this only applies to spillages.
May cause eye and skin irritation. Inhalation or ingestion may cause discomfort.

SECTION 12 – ECOLOGICAL INFORMATION

12.1 Toxicity

Not classified as dangerous for the environment/aquatic toxicant

12.2 Persistence and degradability N/A

12.3 Bioaccumulative potential N/A

12.4 Mobility in soil N/A

12.5 Results of PBT and vPvB assessment N/A

12.6 Other adverse effects N/A

SECTION 13 – DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

No specific regulations apply to packagings or spent devices.
Unused devices should be returned to the manufacturer, functioned in a safe manner or soaked in a vessel of water for 48 hours. If soaked in water review local and national requirements prior to disposal.

SECTION 14 – TRANSPORT INFORMATION

14.1 UN number

UN0431 or UN0432

14.2 UN proper shipping name

Articles pyrotechnic for technical purposes

14.3 Transport hazard class(es)

1.4G (UN0431) or 1.4S (UN0432)

14.4 Packing group

N/A

14.5 Environmental hazards

None

14.6 Special precautions for user

No smoking or naked flames

14.7 Transport in bulk according to Annex II of MARPOL and the IBC Code

N/A

SECTION 15 – REGULATORY INFORMATION

15.1 Safety, health and environmental regulations/legislation specific for the substance or mixture

Explosives Regulations 2014 and all orders of council, HSG 36, Local Authorities and the Health and Safety Executive.

Pyrotechnic Articles European Directive 2013/29/EU

15.2 Chemical Safety Assessment

N/A

SECTION 16 – OTHER INFORMATION

Information for this safety data sheet was obtained from sources considered technically accurate and reliable. Whilst every effort has been made to ensure full disclosure of product hazards, in some cases data is not available and is so stated. No warranty, expressed or implied, is made and supplier will not be liable for any losses, injuries or consequential damages which may result from the use of, or reliance on, any information contained in this form.

FIREFLY

Flame System

The FireFly mini propane flame unit is an economical solution for small applications that require a real flame effect. The units can be operated directly off the fuel tank, with no gas accumulator. The FireFly complies with applicable codes and bears the ARI testing labs certification. The FireFly uses a standing pilot system controlled by a Honeywell® Intermittent Pilot Module to assure reliable and safe light-off. A CE listed version is available



Burner Head

- 7" long x 9" tall x 5" deep.
- Weight is 7 lbs.
- 24 vac, 50/60 Hz, 2.5 amps.
- 167,000 BTU's Max.



Control Panel

- 8" wide x 8" tall x 6" deep
- Weight is 8 lbs
- 120/240 vac, 50/60 Hz, .5/.25amps
- Custom controls available



SIGMA SERVICES, INC.
SPECIAL EFFECTS

Phone **813.737.1904**
Fax 813.737.1063

8210 South County Road 39
Plant City, Florida 33567

www.sigmaservices.com

Le Torcia Provides an Easy to Use, Safe Flame Effect.



Ultratec's butane fluid is used to create realistic and safe flame effects. Using our butane fluid maintains your five-year warranty against manufacturer's defect.



Le Torcia is a lightweight, durable device that provides a realistic flame effect. It's simple and easy to use design includes an electric switch to create that instant flame. It can be used on it's own or implemented into props. The gas safety release ensures performers stay safe.

Using our single 2 oz. butane canister, Le Torcia can operate for up to 20 minutes. It features an adjustable flame height, with a maximum height of approximately 6". Heat Exchanger. The one-gallon integrated fluid reservoir and full function remote control with timer allow you to create a range water-based fog effects.

ultratecfx.com

**SETTING THE STANDARD IN
SPECIAL EFFECTS FOR OVER 25 YEARS**



Durable Construction



MODELS	
CLF-4400	Le Torcia - Electric Ignition

OUTPUT	
Run Time:	20 minutes per 2 oz. butane container
Flame Height:	adjustable (maximum 6 in / 15 cm)
Flame Width:	approximately 4 in / 10.16 cm

SPECIFICATIONS	
Length:	22 in / 56 cm
Diameter:	1 5/8 in / 4.13 cm
Net Weight:	2 lbs / 0.91 kgs

WARRANTY

The Le Torcia has a five-year warranty against manufacturer's defect provided Ultratec fluids are used.

Visit www.ultratecfx.com to see available accessories, parts and for a complete set of specifications on all models.

ultratecfx.com

Canada - USA - Germany

Phone: 519-659-7972 / Toll Free: 800-388-0617 — Email: sales@ultratecfx.com

ultratec
special effects



PYROWIZARD FLASH GUN

Catalog No. MG01

LEFT

Read these directions very carefully. This product uses flammable material and is for professional use only. The manufacturer is not responsible for any injury or liability that is the result of the user's failure to follow the specific instructions stated below.

Directions:

Take the Gun and insert an 'AA' alkaline battery (not included) in the battery holder. It doesn't matter in which direction the battery is turned. Without loading the gun, press the red firing button and look into the barrel. You'll see a glowing coil similar to the one in an automobile cigarette lighter. This glowing coil is the glo-plug. The fact that it glows tells you that the battery is operational and the glo-plug is in good working order.

To prevent accidental firing while loading, remove the glo-plug clip from the glo-plug now. (The glo-plug clip is a black clip at the end of a thin wire.) Be sure not to lose the tiny plastic insulating washer that fits between the glo-plug and the glo-plug clip. Take a pinch of Flash Cotton, fluff it up, and insert it into the brass barrel. Use a blunt instrument to press the cotton against the glo-plug coil. (The eraser end of a pencil works well for this.) Don't use a pointed instrument because the glo-plug coil can be easily damaged. Now take a piece of Flash Paper 3" or 4" square, loosely ball it up, and insert it into the brass barrel. Use a blunt instrument to gently push the Paper up against the Cotton.

Grip the gun by the finger clips with the brass ears between the middle two fingers of the right hand. Bend the ears to fit the shape of your hand. Replace the glo-plug clip on the end of the glo-plug. Be sure to use the insulating plastic washer. The Gun is now ready to fire. From this time forward, do not point the Gun at any person or flammable object. Use your thumb to press the button and fire the Gun. Depending on the strength of the battery and the condition of the glo-plug, you may have to hold the button down for up to a full second to ignite the Cotton. A ball of fire streaking out of the barrel will result.

Caution:

Always remove the glo-plug clip before loading.

NEVER USE FLASH POWDER IN THIS DEVICE !! An explosion will result.

Never fire at people, animals or flammable objects.

Never stick your finger in the barrel.

Conduct a preliminary test in a safe location. The fireball can travel up to 20 feet.

Tips:

Make sure the insulating washer is in place or the Gun may not fire.

If Cotton is unavailable, a small wad of Flash Paper can be substituted.

If the glo-plug burns out, it can be easily replaced by screwing it outward from the brass barrel (counter-clockwise) with a small wrench. Don't over-tighten the new plug.

The brass barrel can be slid forward or back to suit your hand. The finger clips can be trimmed for a more comfortable fit. If the Paper shoots out without lighting, you used too much Cotton.

Warning:

Read these directions carefully and follow them exactly. Misuse is dangerous. The manufacturer is not responsible for any injury or liability that is the result of the user's failure to follow the specific instructions stated above. This product is manufactured without any warranties, express or implied. It is for professional use only. It is not sold to minors. For more information, consult the technical manual "Special Effects with Fire and Smoke" available from us or your dealer. DANGER! USE AT YOUR OWN RISK!

NFPA 1126 Compliance Statements:

This product is intended for indoor use.

It creates a streaking flash of fire with no smoke.

An MSDS is not applicable.

It is manufactured by Theatre Effects, 1810 Airport Exchange Blvd, Suite 400, Erlanger, KY 41018, 859-647-8844

World's largest manufacturer of handheld pyrotechnics • Since 1976

IMPORTANT FACTS YOU SHOULD KNOW ABOUT GLO-PLUGS

Here is vital information on how to keep your glo-plug working at peak performance, and what to look for if a malfunction occurs.

1. There are two types of glo-plugs: 1.5 volt and 3 volt. The 1.5 volt is for use in all single battery devices and the 3 volt is for use in all double battery devices. (The number of barrels is imaterial.) If the wrong glo-plug is installed in a device, it will either burn out, or burn very dimly - inadequate for ignition.

2. We've found that alkaline batteries last the longest and give your glo-plug the most firing power - usually 30 to 40 firings before your glo-plug grows dim and battery replacement is necessary.

3. Our glo-plugs usually last 20 to 30 firings before replacement is needed (due to corrosion and/or crushing of the inner wire). To remove the glo-plug, first unplug the wire. Then turn out the glo-plug counter-clockwise with a small wrench or pliers. Theatre Effects glo-plugs have a special size threading and hobby store ones won't fit. Replacements are available from your magic dealer or directly from us.

4. If your device doesn't fire, first extract the paper and check the glow coil. A dim glow indicates weak batteries or that your glo-plug may have been crushed. To correct the problem, remove the glo-plug, and with a straight pin, carefully lift the center coil upward so that it's level with the top surface. If the platinum wire breaks, a new plug is needed.

5. Flash Cotton is an excellent primer for all glo-plug devices. Take a pinch of Flash Cotton, fluff it up, and insert it against the glo-plug coil before inserting Flash Paper. NOTE: If your Paper pops out without lighting, you're using too much Cotton. Since Cotton ignites more easily than Paper, your glo-plug and battery will last much longer when Cotton is used as a primer.

6. For the best reliability, use only Theatre Effects/Pyrowizard brand Flash Paper in your device. Don't use Flash Strips - use one piece of Flash Paper instead of many small pieces. If your first firing yields only a small puff of smoke, it's an indication that a larger amount of Paper is needed. Flash Powder will destroy your glo-plug. (That's why Flash Cotton is used as a "fuse" in battery-powered glo-plug Flash Pots.) Never use Flash Powder in a glo-plug device. (And never ever use Flash Powder in a handheld device.)

7. Barrel cleaning is a must if you want good results from your product. Burnt Flash Paper builds up a sticky residue inside your device's barrel. This buildup causes slow lighting and great restriction to your projecting fireball. To clean, remove the glo-plug and brush out the barrel with a stiff wire brush. Round wire brushes can be found at most gun, plumbing, and hardware stores; buy one that fits your barrel size. Twist the wire brush inside your barrel until the inside becomes clean and shiny. When your barrel is clean, it will use less paper and shoot much farther. Re-install the plug, and you're ready to go.

8. There's a plastic insulating washer that fits between the glo-plug and the glo-plug clip. It prevents the glo-plug clip from touching the "nut" of the glo-plug. The nut is the electrical "ground" for the glo-plug, while the center shaft is the "hot". If the hot and the ground are shorted together by the clip, your device won't fire. If you lose your plastic insulating washer, request another from us. Meanwhile, your device will still work if you don't push the clip on so far that it touches the base (nut) of the glo-plug (i.e., the clip should only make electrical contact with the glo-plug's center shaft).



Roscoflamex fire retardants have been formulated to meet the extreme needs of the entertainment industry, designed to treat the wide range of diverse materials used in scenery, props and costume construction. Roscoflamex products meet fire retardant standards as established by NFPA, ASTM, ANSI, and UL and have been approved by the CA Fire Marshall and New York City Fire Dept.

Roscoflamex for Raw Wood is intended for untreated wood, plywood, cellulose board, acoustical board, and corrugated paper.

PRODUCT NO:	150 079WD 0128 - 1 US Gallon (3.79 L)
DESCRIPTION:	Roscoflamex for Raw Wood is a proprietary, non-durable flame retardant.
APPEARANCE:	Pale Orange liquid that dries clear.
USE:	Unsealed raw wood, straw and other cellulose materials that can absorb liquids. Not for use on wood items that contain bark or pitch.
FINISH:	Typically leaves no residue. In some instances, a fine white powder may develop based on absorption of the wood treated
APPLICATION:	Spray, brush or dip. Perform tests to determine the appropriate soaking time to achieve an effective treatment. Properly treated material will have increased in weight by 10-20% when dry.
MIX RATIO:	Roscoflamex Raw Wood is designed to be used straight out of the bottle. Do not dilute.
HAZARD:	May cause skin and eye irritation on some people. Use in a well ventilated area.
COVERAGE:	Estimated 150-200 square feet per gallon.
DRYING:	Allow to dry naturally or using forced hot air.
COMPOSITION:	Water soluble inorganic salts. Safe for professional use.
CERTIFICATION:	ASTM E84 Class B; NYC FD Certificate of Approval; CA State Fire Marshall
OTHER:	pH - 7.1

Roscoflamex fire retardants have been formulated to meet the extreme needs of the entertainment industry, designed to treat the wide range of diverse materials used in scenery, props and costume construction. Roscoflamex products meet fire retardant standards as established by NFPA, ASTM, and UL and have been approved by the CA Fire Marshall and New York City Fire Dept.

Roscoflamex for Paper & Cardstock effectively treats papers, non-corrugated cardboard and uncoated cardstock materials. Premixed for easy use straight out of the bottle, Roscoflamex for Paper & Cardstock is perfect for props and set pieces made from flammable paper products.



SPECIFICATIONS

- Description:** Roscoflamex for Paint & Cardstock is a proprietary, non-durable flame retardant.
- Appearance:** Clear liquid that dries clear.
- Use:** Paper, non-corrugated cardboard, uncoated cardstock, newsprint and other cellulosic materials.
- Finish:** Leaves no residue and will not affect the hand of the fabric.
- Application:** Spray, brush or dip. Perform tests to determine the appropriate soaking time to achieve an effective treatment. Properly treated material will have increased in weight by 8-15% when dry.
- Mix Ratio:** Roscoflamex for Paint & Cardstock is designed to be used straight out of the bottle.
- Hazard:** May cause skin irritation. Use in a well ventilated area.
- Coverage:** Estimated 400 square feet per gallon.
- Drying:** Allow to dry naturally or using forced hot air.
- Composition:** Water soluble inorganic salts. Safe for professional use.
- Certification:** NFPA 701; FDNY #5809 Certificate of Approval; CA State Fire Marshall #C-25001.
- Other:** pH – 7.1

Roscoflamex PC	
Item Code	Description
150 079PC 0128	1 US Gallon (3.79 L)



Roscoflamex fire retardants have been formulated to meet the extreme needs of the entertainment industry, designed to treat the wide range of diverse materials used in scenery, props and costume construction. Roscoflamex products meet fire retardant standards as established by NFPA, ASTM, ANSI, and UL and have been approved by the CA Fire Marshall and New York City Fire Dept.

Roscoflamex for Natural Fibers should be used on fabrics like cotton, linen, wool, burlap and most other materials made of natural fibers. Premixed for easy use straight out of the bottle, Roscoflamex for Natural Fibers is perfect for treating backdrops, velours, muslin cycloramas, and decorative fabric panels.

PRODUCT NO:	150 079NF 0128 - 1 US Gallon (3.79 L)
DESCRIPTION:	Roscoflamex for Natural Fibers is a proprietary, non-durable flame retardant.
APPEARANCE:	Clear liquid that dries clear.
USE:	Cotton, linen, wool, burlap and most natural fiber fabrics.
FINISH:	Leaves no residue and will not affect the hand of the fabric.
APPLICATION:	Spray, brush or dip. Perform tests to determine the appropriate soaking time to achieve an effective treatment. Properly treated material will have increased in weight by 10-20% when dry.
MIX RATIO:	Roscoflamex Natural Fiber is designed to be used straight out of the bottle. In rare instances when a residue develops on the surface of the fabric, dilute 15% with water and re-test.
HAZARD:	May cause skin and eye irritation on some people. Use in a well ventilated area.
COVERAGE:	Estimated 500 square feet per gallon, based on weight.
DRYING:	Allow to dry naturally or using forced hot air.
COMPOSITION:	Water soluble inorganic salts. Safe for professional use.
CERTIFICATION:	NFPA 701; NYC FD Certificate of Approval #5022; CA State Fire Marshall C-139.01
OTHER:	pH - 7.1



Roscoflamex fire retardants have been formulated to meet the extreme needs of the entertainment industry, designed to treat the wide range of diverse materials used in scenery, props and costume construction. Roscoflamex products meet fire retardant standards as established by NFPA, ASTM, ANSI, and UL and have been approved by the CA Fire Marshall and New York City Fire Dept.

Roscoflamex for Synthetic Fibers effectively treats many synthetic fabrics, such as polyesters, nylons, acrylics and rayons, as well as most cotton/synthetic blends. Premixed for easy use straight out of the bottle, Roscoflamex for Synthetic Fibers is perfect for the varied range of fabrics used in modern scenic and costume construction.

PRODUCT NO:	150 079SF 0128 - 1 US Gallon (3.79 L)
DESCRIPTION:	Roscoflamex for Synthetic Fibers is a proprietary, non-durable flame retardant.
APPEARANCE:	Clear liquid, dries clear.
USE:	Polyester, acrylic, and most synthetic fabrics and blends.
FINISH:	Leaves no residue and will not affect the hand of the fabric.
APPLICATION:	Spray, brush or dip. Perform tests to determine the appropriate soaking time to achieve an effective treatment. Properly treated material will have increased in weight by 10-20% when dry.
MIX RATIO:	Roscoflamex Synthetic Fiber is designed to be used straight out of the bottle. In rare instances when a residue develops on the surface of the fabric, dilute 15% with water and re-test.
HAZARD:	May cause skin and eye irritation on some people. Use in a well ventilated area.
COVERAGE:	Estimated 500 square feet per gallon, based on weight.
DRYING:	Allow to dry naturally or using forced hot air.
COMPOSITION:	Water soluble inorganic salts. Safe for professional use.
CERTIFICATION:	NFPA 701; NYC FD Certificate of Approval #5022; CA State Fire Marshall C-139.02
OTHER:	pH - 7.1



Certificate of Flame Resistance

January 2023

Liba Fabrics is a business operating in New York, New York with Warehouses in New York and New Jersey.

This is to certify that the fabric below is manufactured with a yarn that is inherently flame resistant or a durable flame retardant process. The fabric or substrate described below meets the minimum requirements of flame resistance established by the following test:

- NFPA 701-2019, TM #1 (small scale)

Liba Fabrics recommends annual testing of the material using the NFPA 705 Field Test Method for Textiles, accumulations of dust and liquids may reduce the flame resistance of the material.

Fabric:

- Style 461 – 100% Cotton FR 57" Duvetyne 9oz (All Colors)



Jacob Visoky
Vice President
FDNY C-15 #91283952
Expires 5/21/2024

Jacob Visoky

Certificate of Flame Resistance

ISSUED BY



KM

FABRICS, INC.

GREENVILLE, SC

THIS IS TO CERTIFY THAT THE FABRIC DESCRIBED HEREON WAS MANUFACTURED BY KM FABRICS, INC. AT ITS MILL IN GREENVILLE, SOUTH CAROLINA UTILIZING 100% INHERENTLY FLAME RETARDANT POLYESTER FIBER.

FLAME RESISTANCE IS PERMANENT FOR THE LIFE OF THE FABRIC AND COMPLIES WITH THE LAWS OF THE STATE OF CALIFORNIA, NFPA 701-2010 EDITION, THE BOSTON FIRE DEPARTMENT, THE NEW YORK PORT AUTHORITY, AND THE COMMONWEALTH OF MASSACHUSETTS. CALIFORNIA STATE FIRE MARSHAL REGISTRATION NO. F-59901. IT CAN BE WASHED WITHOUT LOSING THE FLAME RESISTANT PROPERTIES INHERENT IN THE YARN.

CUSTOMER _____ Theatrical Supply and Drapery

PATTERN AND COLOR _____ Prestige 1064

CONTROL NUMBER/DATE PROCESSED _____ 01-31-2017

CUSTOMER ORDER NUMBER _____ 12


CUSTOMER INVOICE NUMBER AND DATE _____ 67384

YARDS PROCESSED _____ 419.875

KM FABRICS, INC.

20' Tall Black Velour Drapery

Worship Center

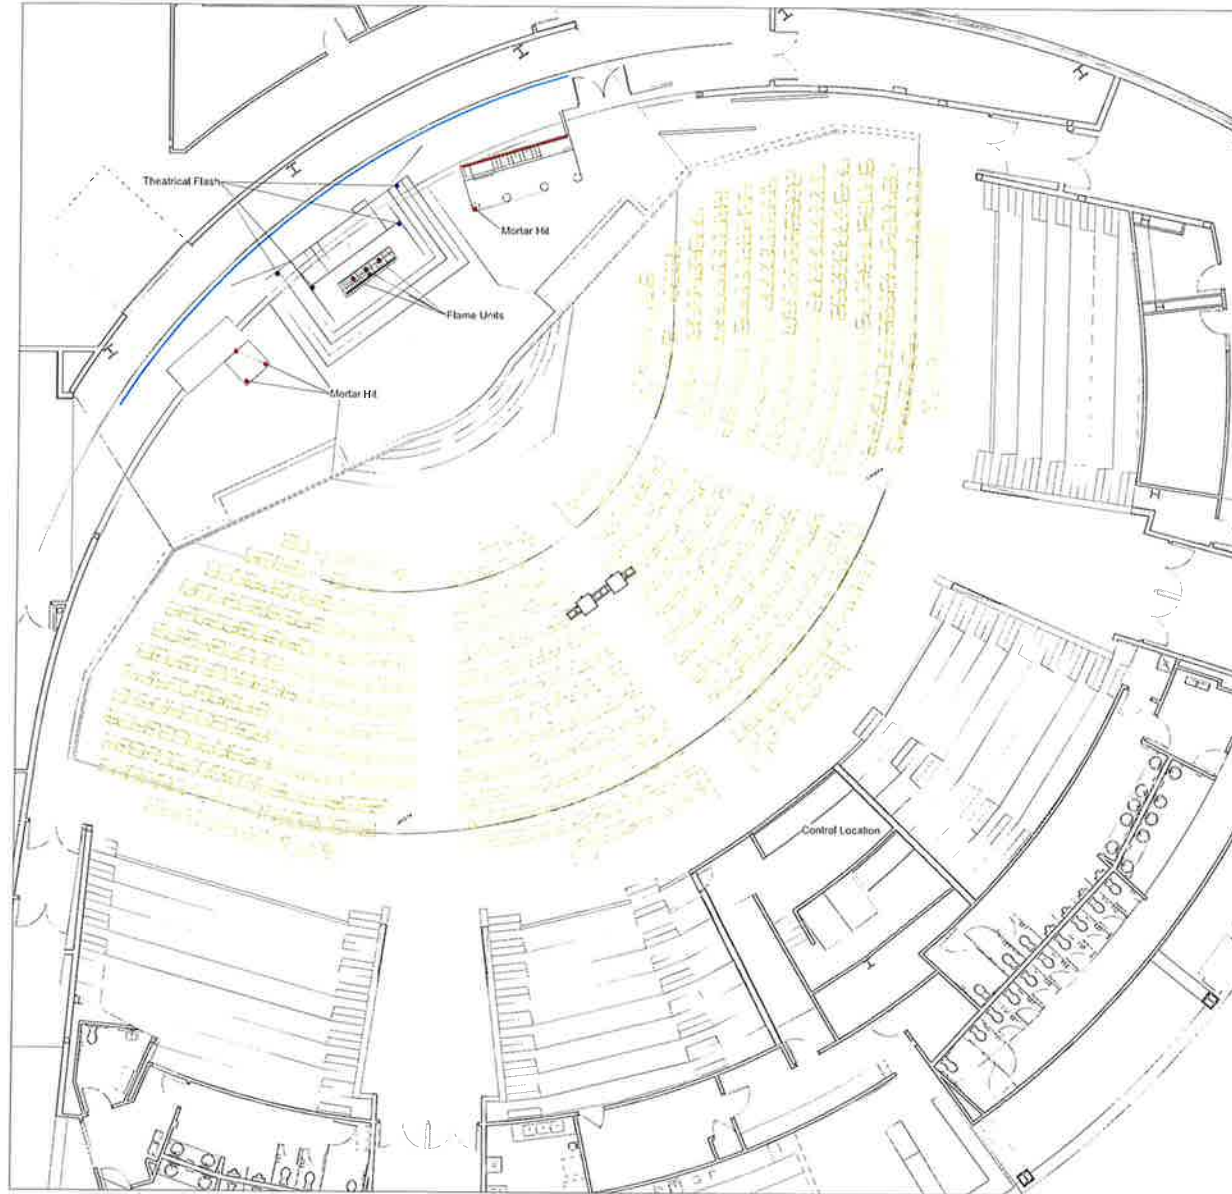

Stage Zoom In

