

CHANGE ORDER NO.: 01

Owner: Effingham County Board of Commissioners
 Engineer: Hussey Gay Bell
 Contractor: Southern Civil, LLC
 Project: Hodgeville Lift Station #4 Improvements
 Contract Name: Hodgeville Lift Station #4 Improvements
 Date Issued: 09/19/2023

Owner's Project No.: ITB 22-105-003
 Engineer's Project No.: 120224450

Effective Date of Change Order: / / 2023

The Contract is modified as follows upon execution of this Change Order.


Description: Adjustments to the scope of work include modifications to bypass pump discharge piping, installation of pump three valves and piping, rearrangement of station discharge piping, and adjustments to stub out connection for future force main connection.

Attachments:


- Revised Issued for Construction Plan Sheet 06 marked CO No. 1 – September 11, 2023
- Change Order No. 1 Summary Form

Change in Contract Price	Change in Contract Times (0 Days)
Original Contract Price: \$ <u>3,520,533.00</u>	Original Contract Times: Substantial Completion: <u>March 16, 2023</u> Ready for final payment: <u>April 15, 2023</u>
[Increase] [Decrease] from previously approved Change Orders No. 1 to No. [Number of previous Change Order] : \$ <u>N/A</u>	[Increase] [Decrease] from previously approved Change Orders No.1 to No. [Number of previous Change Order] : Substantial Completion: <u>N/A</u> Ready for final payment: <u>N/A</u>
Contract Price prior to this Change Order: \$ <u>3,520,533.00</u>	Contract Times prior to this Change Order: Substantial Completion: <u>March 16, 2023</u> Ready for final payment: <u>April 15, 2023</u>
Deduction this Change Order: \$ <u>38,400.00</u>	[Increase] this Change Order: Substantial Completion: <u>April 9, 2024</u> Ready for final payment: <u>May 9, 2024</u>
Contract Price incorporating this Change Order: \$ <u>3,482,133.00</u>	Contract Times with all approved Change Orders: Substantial Completion: <u>April 9, 2024</u> Ready for final payment: <u>May 9, 2024</u>

Recommended by Engineer

By: 
 Title: Project Engineer
 Date: September 19, 2023

Accepted by Contractor


Vice President
9/19/2023

Authorized by Owner

By: _____
 Title: _____
 Date: _____

Approved by Funding Agency (if applicable)

By: _____
 Title: _____
 Date: _____

Hodgeville Lift Station #4 Change Order No. 01 Summary

Item No.	Description	Qty	Unit	Unit Cost	Total Cost
1	12-inch RJ DIP Force Main installed by Open-Cut	(-)8	LF	\$100.00	(\$800.00)
2	18-inch RJ PVC Force Main installed by Open-Cut	(-)20	LF	\$150.00	(\$3,000.00)
3	18-inch C900 PVC Force Main installed in 24-inch Steel Casing installed by Jack and Bore	(-)40	LF	\$1,125.00	(\$45,000.00)
4	12-inch RJ 45° Bend	(-)5	EA	\$950.00	(\$4,750.00)
5	12-inch RJ 22.5° Bend	(-)1	EA	\$950.00	(\$950.00)
6	12-inch RJ 11.25° Bend	(-)1	EA	\$950.00	(\$950.00)
7	12-inch RJ Wye	4	EA	\$2,010.00	(\$8,040.00)
8	18-inch x 12-inch RJ Reducer	1	EA	\$2,200.00	(\$2,200.00)
9	18-inch RJ Plug	1	EA	\$1,500.00	(\$1,500.00)
10	Adjustments to Elevated Concrete Structure Connected to Wetwell	1	LS	\$250.00	(\$250.00)
11	Relocate Generator Closer to Electrical Control Building	1	LS	\$100.00	(\$100.00)
12	12-inch RJ 90° Bend	4	EA	\$1,050.00	\$4,200.00
13	12-inch RJ Tee	4	EA	\$2,010.00	\$8,040.00
14	12-inch RJ Plug	1	EA	\$750.00	\$750.00
15	Installation of Pump No. 3 Above Ground Valves and Piping	1	LS	\$16,150.00	\$16,150.00
Sum of Change					(\$38,400.00)

- Items in red are assumed to be credited items.
- Items in black are considered as an additional price to the original bid.



HUSSEY GAY BELL
Established 1958
329 COMMERCIAL DRIVE, SAVANNAH, GA 31406 / T: 912.354.4626

REVISIONS:


NO.	DATE	DESCRIPTION
1	SEPTEMBER 11, 2023	

DESIGNED	DRAWN	CHECKED
JLO/JCB	SKK	JCB
DATE: JULY 2022		
JOB NO. 120004450		
SCALE: XX		

HODGEVILLE LIFT STATION #4
FOR THE IMPROVEMENTS
EFFINGHAM COUNTY
BOARD OF COMMISSIONERS
PROPOSED SITE PLAN

DRAWING NUMBER
06
06 OF 16

- NOTES:
1. CONTRACTOR RESPONSIBLE FOR THE CONFIRMED OPERATION OF THE PUMP STATION DURING CONSTRUCTION.
 2. ANY BYPASSING OF THE PUMP STATION IS THE RESPONSIBILITY OF THE CONTRACTOR.
 3. ALL BYPASSING PLANS MUST BE APPROVED BY THE OWNER PRIOR TO INSTALLATION.
 4. ALL DIP PIPING MUST BE COATED WITH 401 LINING.
 5. EXISTING WETWELL AND PROPOSED WETWELL ARE TO BE COATED WITH RAVEN 400, OR EQUIVALENT.
 6. ALL DISTURBED AREAS WITHIN THE LIFT STATION FENCING ARE TO HAVE WEED BLOCK AND 4" OF GAB UNLESS PAVED.
 7. ALL DISTURBED AREA OUTSIDE OF THE LIFT STATION FENCING ARE TO BE SEEDED PER SHEET 14 UNLESS PAVED.

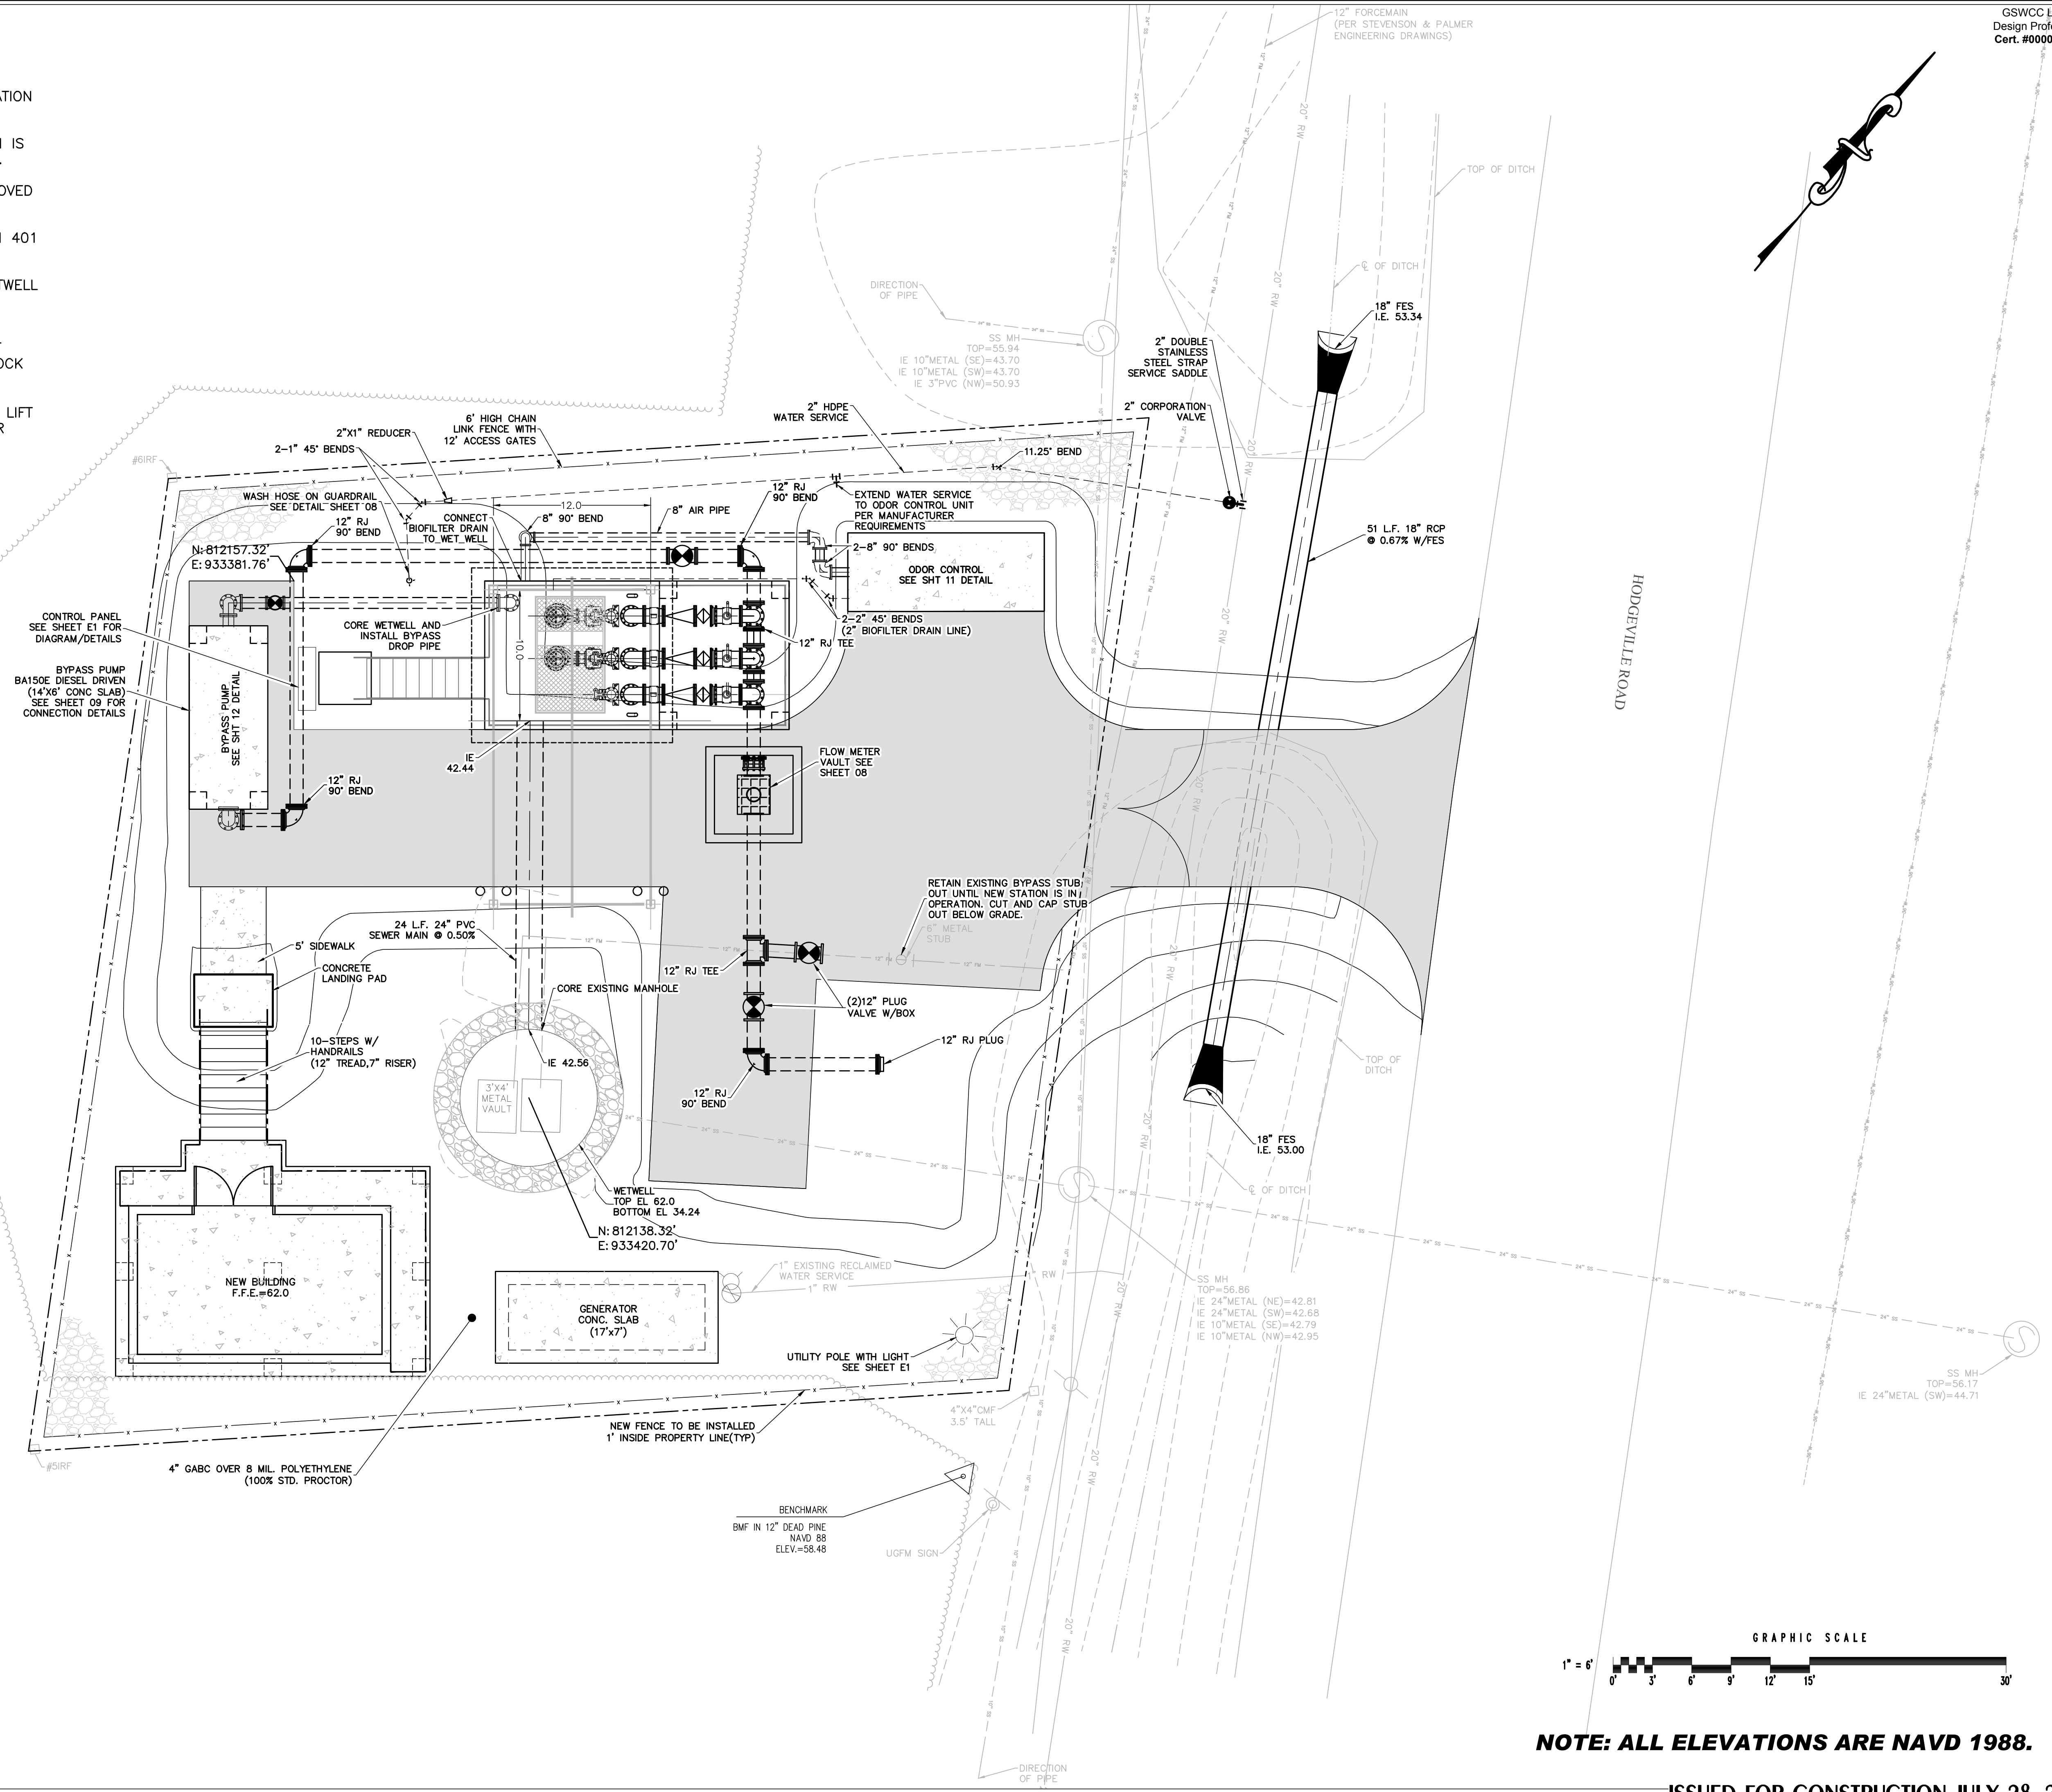

NOTE: ALL ELEVATIONS ARE NAVD 1988.

December 14, 2018 - 8:59 AM Printed By: gjmbrell
 E:\Effingham\120224450 Hodgeville Lift Station #4\Cadd Files\Changes Made During Construction\SHT 06 SITE PLAN.dwg