

Premium Coverage Update Cameras and Replace NVR with 16 Channel



AD Commercial


ADD: One 360-degree Camera for outside viewing. One Vandal proof dome to view Lobby Entrances. One Vandal proof dome to view Board room entrances.

One Vandal proof dome to view banquet room.

INDOOR CAMERAS Add on Camera to view entrance of Board Room, lobby area and Banquet Room

- Vellow representants "New" Camera
- Blue representants "Existing" indoor Camera view
- Light Blue representants "Existing" indoor Camera view



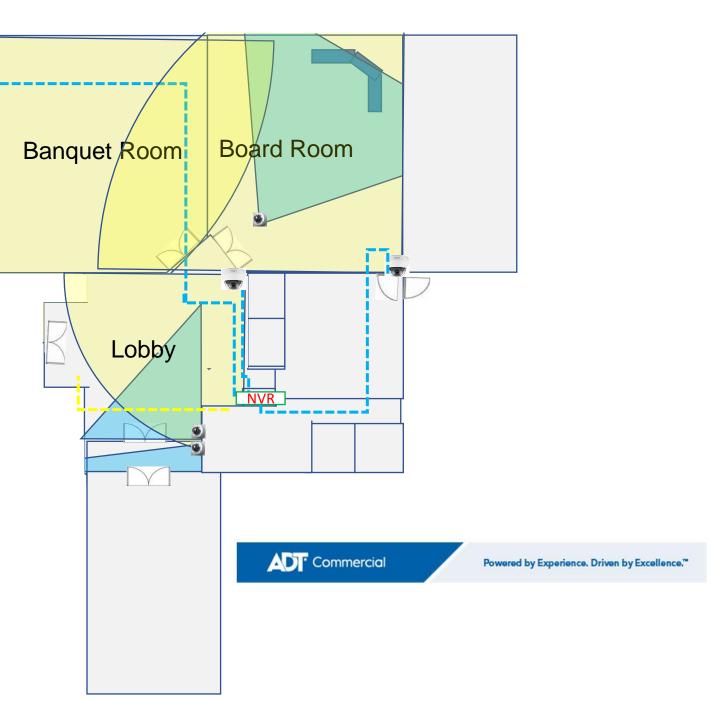



INDOOR CAMERAS

Motorized Lens with Microphones.

2mp Camera to save bandwidth and storage



QND-6082R

IR viewable length 20m
Hallway view support
Analog video out & simple focus for easy installation
LDC support (Lens Distortion Correction)


Built-in microphone
Genetec Stratocast cor

2 Megapixel (1920 x 1080) resolution
3.2 - 10mm (3.1x) motorized varifocal lens
30fps@all resolutions (H.265/H.264)
H.265, H.264, MJPEG code: supported, Multiple streaming

ction, Motion detection, Enter/Exit, Tampering, Virtual lin

Day & Night (ICR), WDR (120dB)
Defocus detection, Directional detection, Moti
micro SD (128GB) memory slot, POE / 12V DC


wiseNet

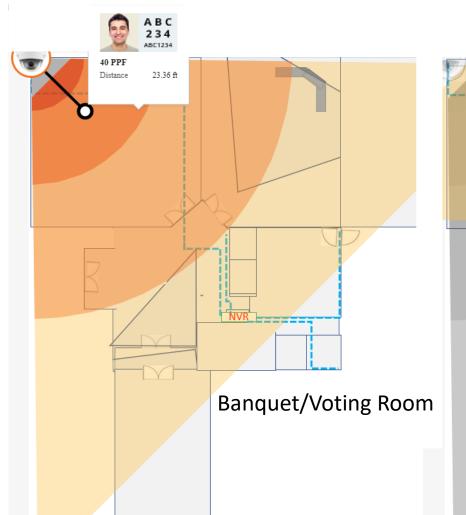




Add On 360 Camera to View Parking and Tennis Courts

4 Multi Sensor camera with focus and rotating features from PC.

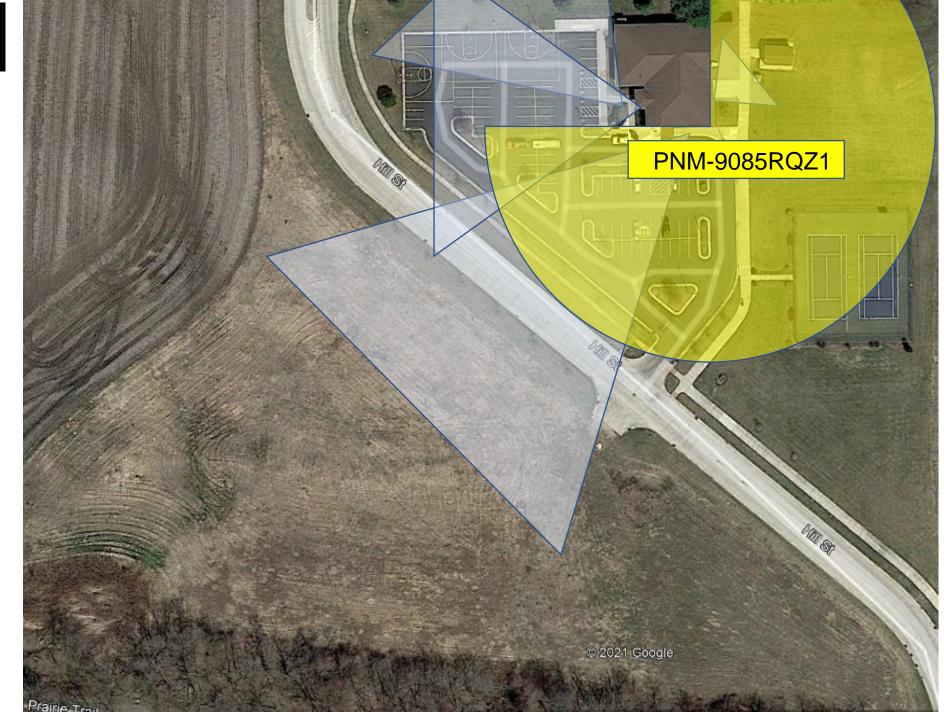

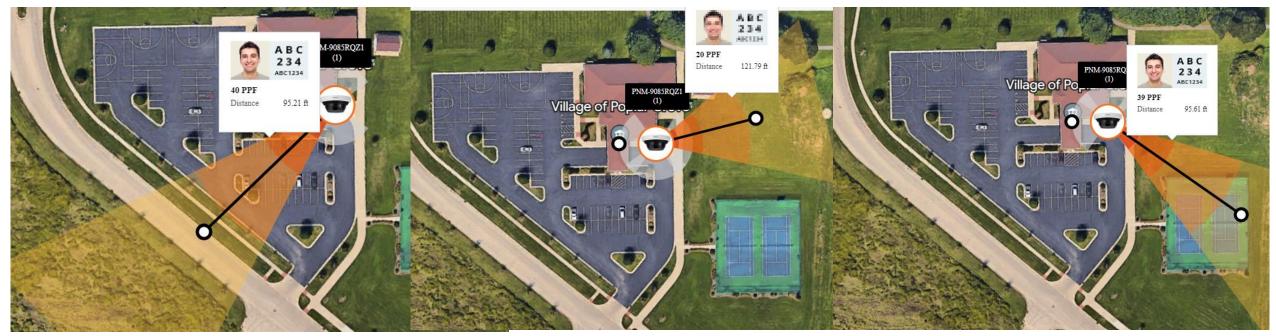


PNM-9085RQZ1

 SMP x 4ch multi-directional currents, using Motorized PTR2 for expl installation and in Statesid-SMPL26. X 12-01 10-3-Anmp2.2-30 motorized PTR2 variable intergraved tifts are recase value currents has in 2625, K1264, MPIG codec, Multi-streamin i Video analytics, WideStreaming, Wideo analytics, Widestreaming, SMPL intergraved by Analytics, WideStreaming, WideStreaming, SMPL intergraved by Analytics, WideStreaming, SMPL inte





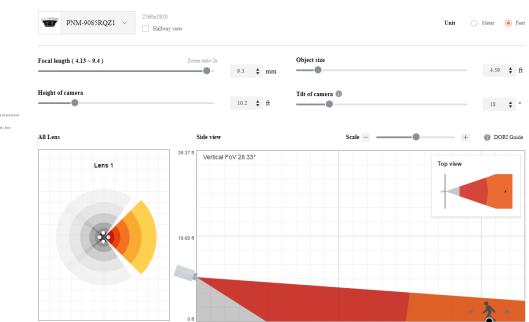

16.41 ft 32.81 ft

0.00 ft

65 62 A B C 2 3 4 ABC1234

55 PPF

49.22 ft











16CH 4K 140Mbps H.265 PoE+ NVR

- Up to 16 channels, Supports up to 32 megapixel camera resolution
- 140Mbps network camera recording
- Support 4K video out on HDMI monitor
- Support dual monitor HDMI/VGA video out
- H.265, H.264, MIPEG compression
- WiseStream support

https://www.youtube.com/watch?v=9n-1eVRG-y8

WISENET

- Maximum 4 internal HDDs (24TB)
- ARB & failover (N+1), dynamic event, Wisenet AI metadata search support

WISENET

PNM-9085RQZ1

20MP (5MP x 4) Multi-Sensor, Multi-Directional PTRZ Camera

- 5MP x 4ch multi-directional camera, using one IP address
- · Motorized PTRZ for easy installation and remote adjustment of entire FoV
- 30fps@5MP(H.265, H.264)
- 4.13~9.4mm(2.3x) motorized PTRZ varifocal lens
- · Integrated IR that rotates with camera head, viewable length : 30m
- H.265, H.264, MJPEG codec, Multi streaming
- Video analytics, WiseStreamII
- IP66, IK10, NEMA4X
- Easy Gangbox mounting installation

QND-6082R

2 MP Network IR Dome Camera with Motorized Varifocal Lens

- 2 Megapixel (1920 x 1080) resolution
- · 3.2 ~ 10mm (3.1x) motorized varifocal lens
- · 30fps@all resolutions (H.265/H.264) · H.265, H.264, MJPEG codec supported, Multiple streaming
- Day & Night (ICR), WDR (120dB)
- · Defocus detection, Directional detection, Motion detection, Enter/Exit, Tampering, Virtual line
- micro SD (128GB) memory slot, PoE / 12V DC
- IR viewable length 20m
- · Hallway view support · Analog video out & simple focus for easy installation
- LDC support (Lens Distortion Correction)
- Built-in microphone
- Genetec Stratocast compatible

https://www.youtube.com/watch?v=Ojl1AUem1a0

SBP-300KMW1

Corner Mount Base

 Material: Aluminum Dimensions : 280(W) x 183(D) x 159(H)mm (11" x 7.2" x 6.26") Weight : 770g (1.7 lb) · Color : White Supported products : SBP-300WMW1



SBP-390WMW2

- Wall Mount Arm (White)
- Weight: 1.79Kg (3.95 lb)
- Material : Aluminum Color : White
- Dimensions (WxHxD) : 115.0 x 183.0 x 417.3mm(4.5" x 7.2" x 16.4")

