

GARLICK ENVIRONMENTAL ASSOCIATES, INC.

SPECIALIZING IN: REGULATORY PERMITS • WETLANDS/UPLAND JURISDICTIONAL DELINEATIONS • SUBMERGED LAND LEASES • ECOLOGICAL INVENTORY ASSESSMENTS • CONSERVATION AND OTHER EASEMENTS • EXPERT WITNESS AND ENVIRONMENTAL LITIGATION SERVICES • MITIGATION • CULTURAL RESOURCE ANALYSIS • CREATIVE MARINA, DOCK, AND SUBDIVISION DESIGN

June 9, 2020

Ms Amy Kelly
Franklin County Planning & Zoning
33 Commerce Street
Apalachicola, FL 32320



BY:*ak*.....

Re: Dock Approval
GEA File No. 20-035 / Robert (Rip) Kirby
FDEP File No. 0369382-001-EG/19

Dear Ms. Kelly:

By this letter, we are requesting you place the referenced project on the next Franklin County Planning and Zoning meeting to be held on July 14, 2020, as well as, the Franklin County Board of County Commissioners meeting to be held on July 21, 2020 for the construction of a Single Family Residential Dock. Attached is a copy of the permit for the referenced project. Please note the FDEP permit also includes approval from the COE.

Also, attached is a request to FDEP/COE for a 40 ft. extension of the proposed permitted dock. We have not as of this date received approval for the extension, however, I have received an email from FDEP stating that she is working on the permit draft for Kirby. Hopefully it will be here by the meeting date.

If you have any questions, please let us know.

Sincerely,


Dan Garlick, President
Garlick Environmental Associates, Inc.

Attachments

P.O. BOX 385
APALACHICOLA, FL 32329-0385
(850) 653-8899 FAX (850) 653-9656
garlick@garlickenv.com



GARLICK ENVIRONMENTAL ASSOCIATES, INC.

SPECIALIZING IN: REGULATORY PERMITS • WETLANDS/UPLAND JURISDICTIONAL
DELINEATIONS • SUBMERGED LAND LEASES • ECOLOGICAL INVENTORY ASSESSMENTS •
CONSERVATION AND OTHER EASEMENTS • EXPERT WITNESS AND ENVIRONMENTAL
LITIGATION SERVICES • MITIGATION • CULTURAL RESOURCE ANALYSIS • CREATIVE
MARINA, DOCK, AND SUBDIVISION DESIGN

LETTER OF TRANSMITTAL

April 16, 2020

Mr. Wade Dandridge
FDEP / Pensacola Office
160 West Government Street
Suite 308
Pensacola, FL 32502

RE: Extension of an Existing Dock
Additional Boat Lift
Alligator Drive / Franklin County
GEA File No. 18-113 – Robert Kirby
FDEP 0369382-001-EG-19, Franklin County

The proposed project is located in Section 2, Township 7 South, Range 2 West, in Franklin County, FL. The waterbody at the project site is Alligator Harbor, Class II, an OFW, and an Aquatic Preserve.

The attached application is for an extension of 40 ft. to the already permitted access walkway of the dock, as well as, an additional boat lift, 11 ft. in width and 25 ft. in length. The extension also includes increasing the size of the already permitted boat lift to 12'x30', as well as, increasing the terminus to 8 ft. by 20 ft. The purpose of extending the access walkway is to allow our client additional room to access his boat lift without encroaching into the existing neighbor's dock. Please see Sheet 3A/4 for further clarification.

The materials to be used to construct the proposed dock and boat lifts will be transported to the site by truck. The piles will be jettied. However, provisions will include maintaining State Water Quality standards for turbidity by installing turbidity curtains. A barge will assist in the construction of the proposed boat lift and dock. The depth of water at the location of the proposed dock and boatlifts is -3.00 feet at Mean Low Water (MLW). The Mean High Water and Mean Low Water Lines are indicated on the attached drawings. No emergent nor submerged vegetation exists within the alignment of the proposed dock, nor the boat lifts.

Evidence of title to the subject riparian upland property is attached in the form of a Warranty Deed. The upland area is presently zoned as residential and no changes are proposed.

If you have any questions or need any additional assistance, please do not hesitate to call us at (805) 653-8899 or email us dan@garlickenv.com or maryann@garlickenv.com,

Sincerely,

A handwritten signature in blue ink, appearing to read "Mary Ann Wasmund". The signature is fluid and cursive, with large loops and a long horizontal stroke at the end.

Mary Ann Wasmund, Permit Specialist
Garlick Environmental Associates, Inc.

Attachments

cc: Robert Kirby

PREPARED BY: GARLICK ENVIRONMENTAL ASSOCIATES, INC.

P. O. BOX 385, APALACHICOLA FLORIDA 32329-0385

(850) 653-8899

FAX (850) 653-9656

garlick@garlickenv.com

LB No. 7415

APPLICANT/CLIENT: Robert Kirby

WATERBODY/CLASS: Alligator Harbor / ClassII / OFW / AP

PURPOSE: Environmental Permitting

PROJECT LOCATION / USGS: Alligator Point / Franklin County

LATITUDE:

LONGITUDE:

SECTION: 2 TOWNSHIP: 7 South

RANGE: 2 West

JOB: 18-113


DEP:

COE:

OTHER:

DATE: April 15, 2020

SHEET: 1/4

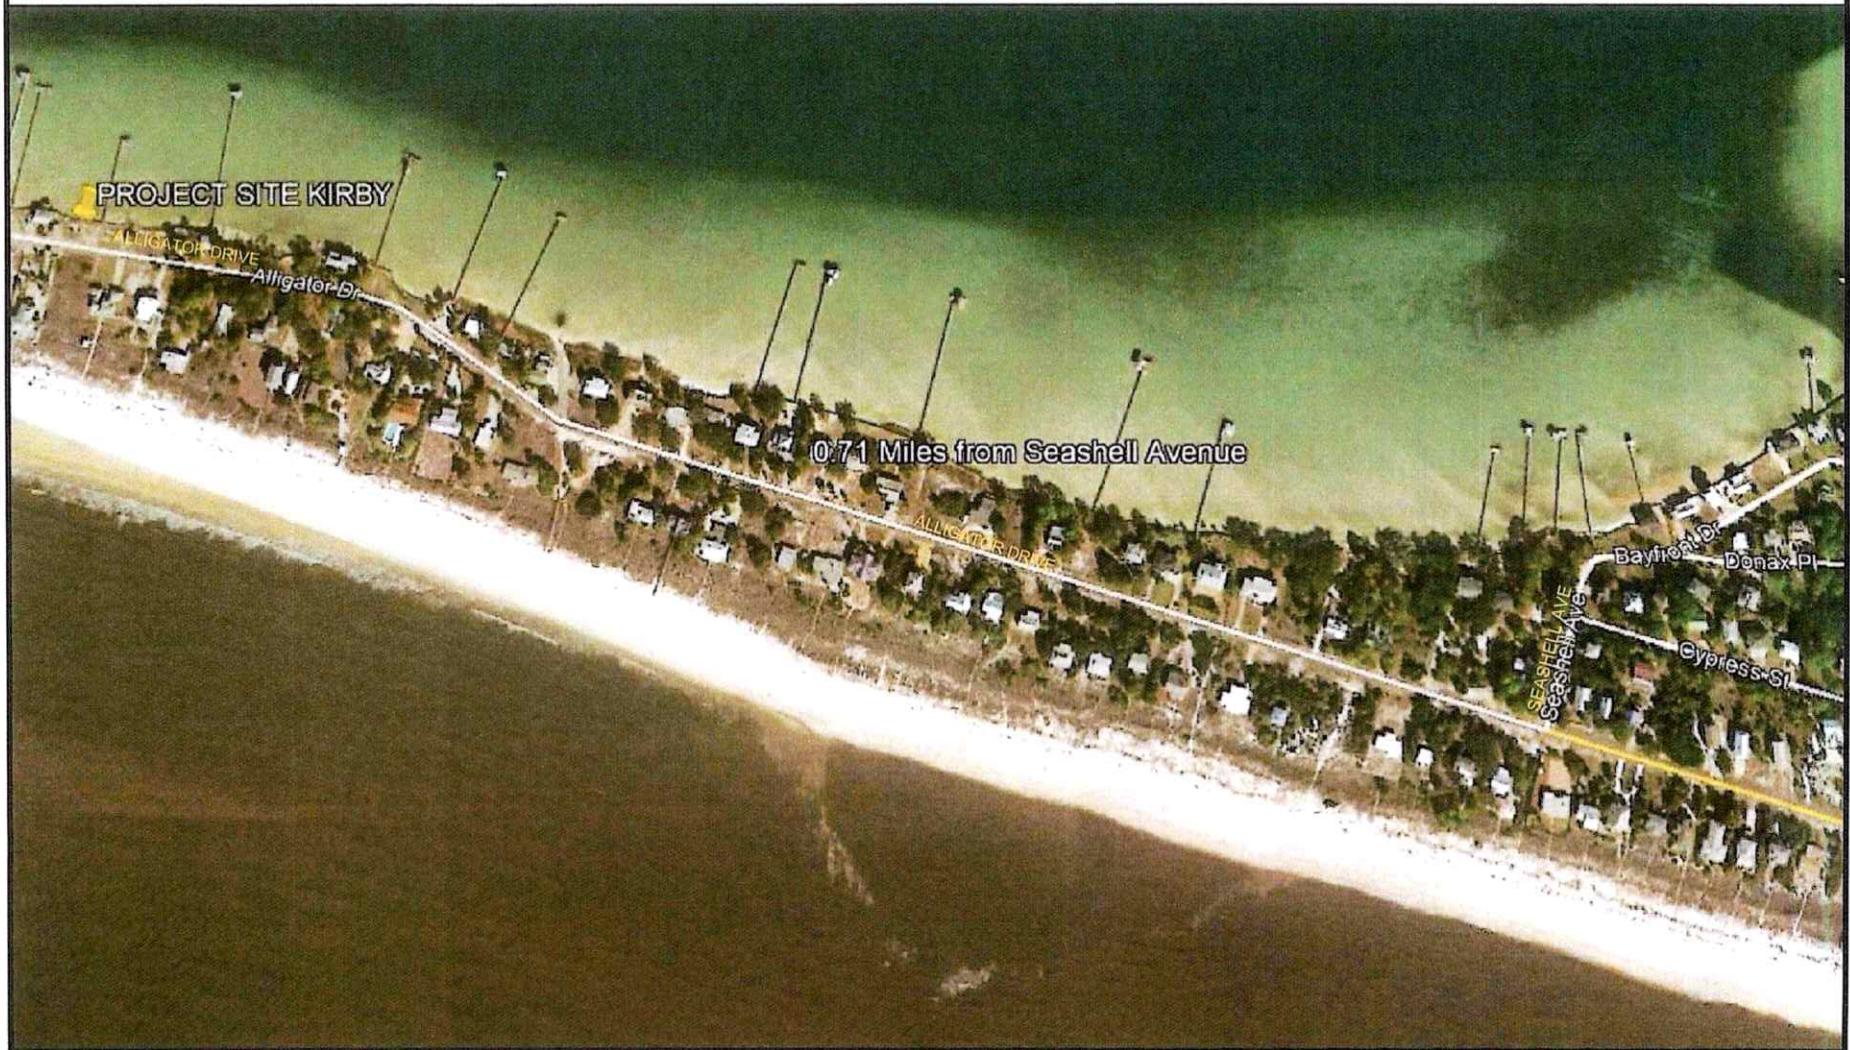


PREPARED BY: GARLICK ENVIRONMENTAL ASSOCIATES, INC.



APPLICANT/CLIENT: Robert Kirby
WATERBODY/CLASS: Alligator Harbor / ClassII / OFW / AP
PURPOSE: Environmental Permitting
PROJECT LOCATION / USGS: Alligator Point / Franklin County
LATITUDE:
LONGITUDE:
SECTION: 2 TOWNSHIP: 7 South RNG: 2 West

JOB: 18-113
DEP:
COE:
OTHER:
DATE: April 15, 2020
SHEET: 2/4

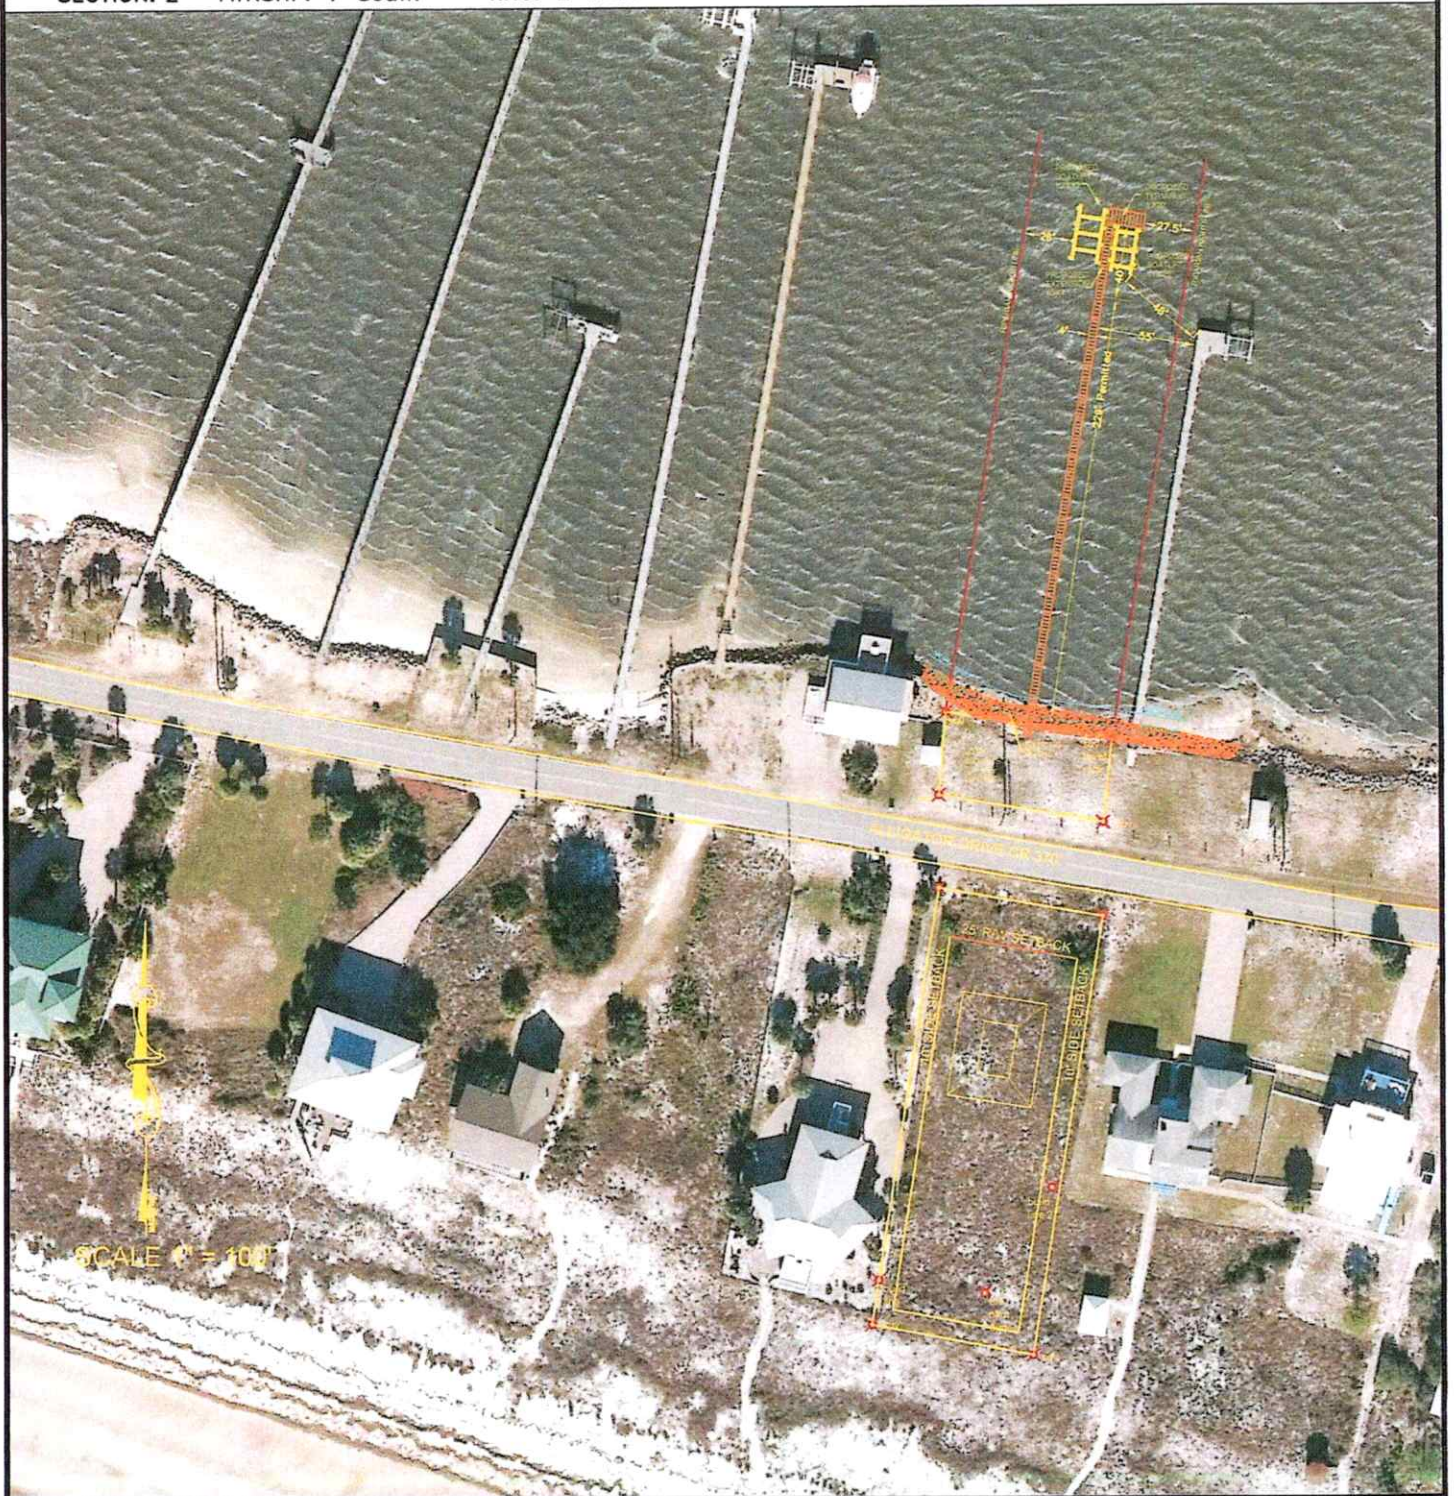


PREPARED BY: GARLICK ENVIRONMENTAL ASSOCIATES, INC.



APPLICANT/CLIENT: Robert Kirby
 WATERBODY/CLASS: Alligator Harbor / ClassII / OFW / AP
 PURPOSE: Environmental Permitting
 PROJECT LOCATION / USGS: Alligator Point / Franklin County
 LATITUDE:
 LONGITUDE:
 SECTION: 2 TOWNSHIP: 7 South RANGE: 2 West

JOB: 18-113
 DEP:
 COE:
 OTHER:
 DATE: April 15, 2020
 SHEET: 3/4

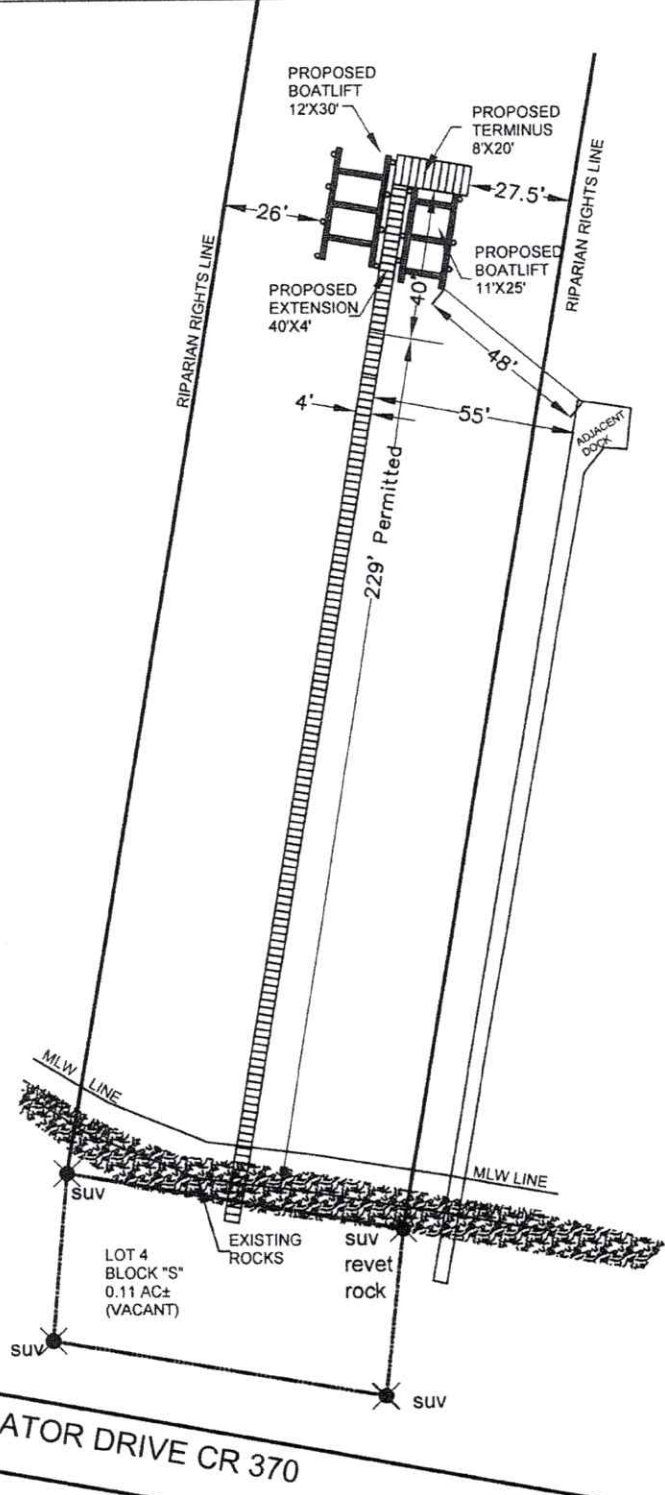

SCALE 1" = 50'

ALLIGATOR DRIVE CR 370


PREPARED BY: GARLICK ENVIRONMENTAL ASSOCIATES, INC.



APPLICANT/CLIENT: Robert Kirby
WATERBODY/CLASS: Alligator Harbor / ClassII / OFW / AP
PURPOSE: Environmental Permitting
PROJECT LOCATION / USGS: Alligator Point / Franklin County
LATITUDE:
LONGITUDE:

JOB: 18-113
DEP:
COE:
OTHER:
DATE: April 15, 2020
SHEET: 3A/4

SECTION: 2 TWSHP: 7 South RNG: 2 West

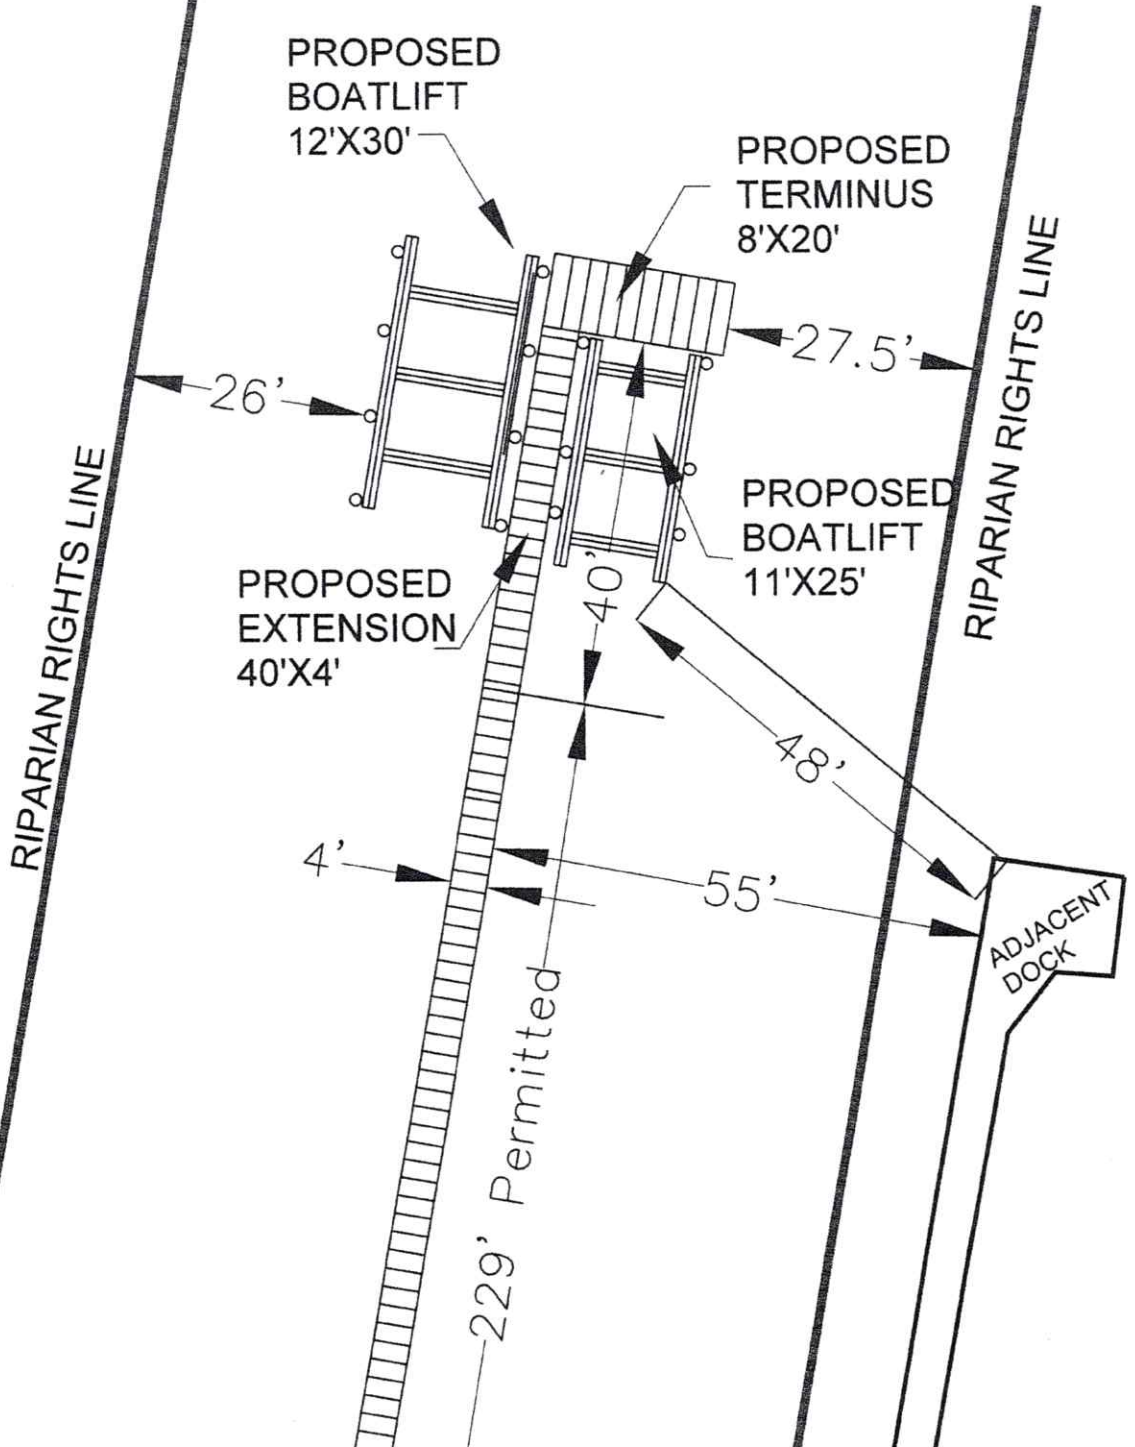

SCALE 1" = 20'

PREPARED BY: GARLICK ENVIRONMENTAL ASSOCIATES, INC.

P. O. BOX 385, APALACHICOLA FLORIDA 32329-0385

(850) 653-8899

FAX (850) 653-9656

garlick@garlickenv.com

LB No. 7415

APPLICANT/CLIENT: Robert Kirby

WATERBODY/CLASS: Alligator Harbor / ClassII / OFW / AP

PURPOSE: Environmental Permitting

PROJECT LOCATION / USGS: Alligator Point / Franklin County

LATITUDE:

LONGITUDE:

SECTION: 2 TWSHP: 7 South RNG: 2 West

JOB: 18-113

DEP:

COE:


OTHER:

DATE: April 15, 2020


SHEET: 4/4



CROSS SECTION OF PROPOSED DOCK Not To Scale

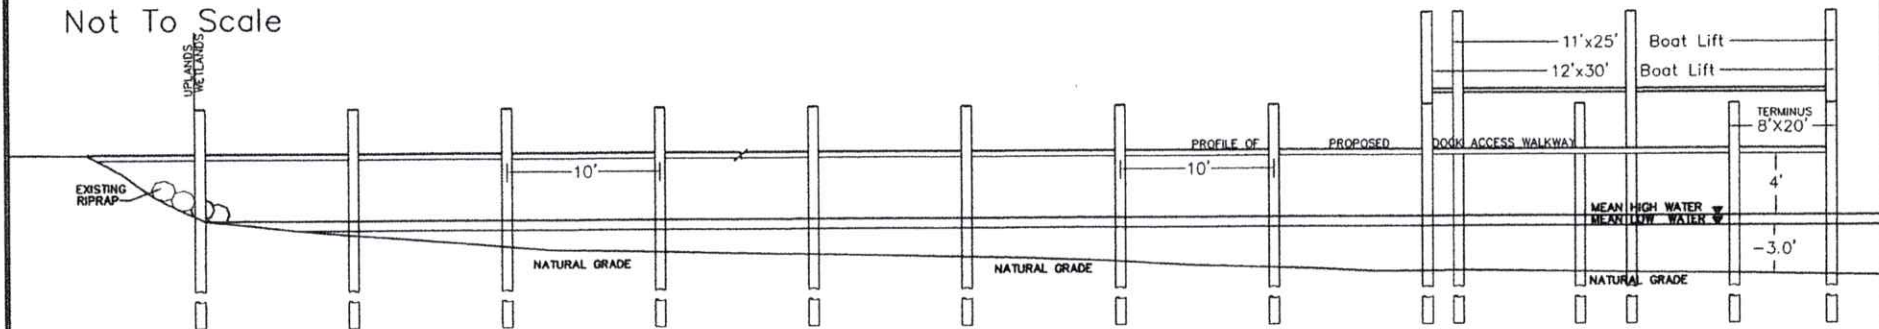

These drawings are for permitting purposes only. Not intended for construction purposes

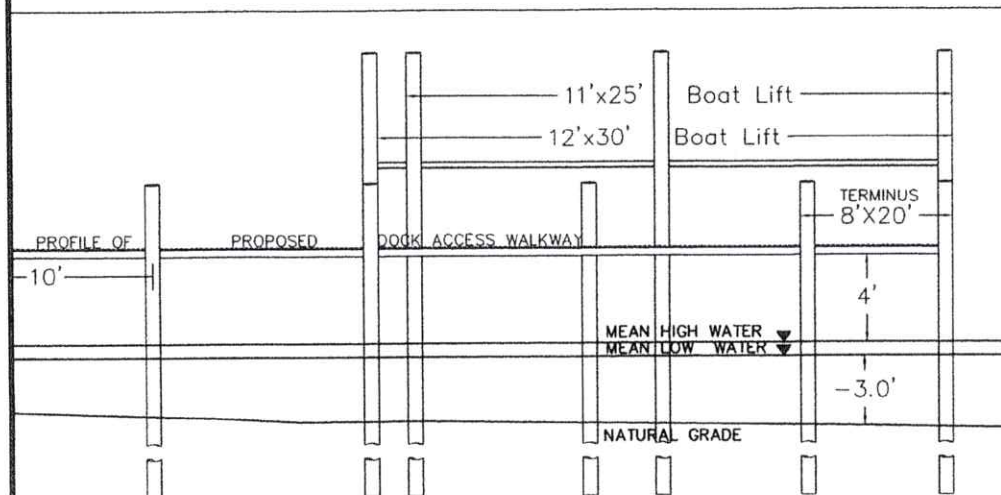

These drawings are for permitting purposes only. Not intended for construction purposes



Overview



Legend

-  Parcels
-  Roads
-  City Labels

Parcel ID	02-075-02W-1045-000R-0030	Alternate ID	02W075021045000R0030	Owner Address	KIRBY ROBERT H
Sec/Twp/Rng	2-7S-2W	Class	VACANT		2755 MILLSTONE PLANTATION RD
Property Address	1545 ALLIGATOR DR	Acreage	0.568		TALLAHASSEE, FL 32312
District	7				
Brief Tax Description	UNIT 5 BL R LOT 3				

(Note: Not to be used on legal documents)

Date created: 4/17/2020
Last Data Uploaded: 4/17/2020 7:38:29 AM

Developed by  **Schneider**
GEO SPATIAL

Parcel Summary

Parcel ID 02-075-02W-1045-000S-0040
Location Address 1544 ALLIGATOR DR
 32346
Brief Tax Description* UNIT 5 BL S LOT 4 OR 171/62 OR 171/69 PENN POINT 647/477 1179/192
*The Description above is not to be used on legal documents.
Property Use Code VACANT (000000)
Sec/Twp/Rng 2-7S-2W
Tax District Alligator Point (District 7)
Millage Rate 13.4617
Acreage 0.000
Homestead N

[View Map](#)

Owner Information

Primary Owner
[Kirby, Robert H](#)
 2755 Millstone Plantation Rd
 Tallahassee, FL 32312

Land Information

Code	Land Use	Number of Units	Unit Type	Frontage	Depth
999910	DOCK PERMISSIV	1.00	UT	0	0

Sales

Multi Parcel	Sale Date	Sale Price	Instrument	Book	Page	Qualification	Vacant/Improved	Grantor	Grantee
N	10/20/2016	\$390,000	WD	1179	192	Qualified (Q)	Vacant	THORNBERRY AKA DEEB LONG	KIRBY

Valuation

	2019 Preliminary Certified	2019 Certified	2018 Certified	2017 Certified	2016 Certified
Building Value	\$0	\$0	\$0	\$0	\$0
Extra Features Value	\$0	\$0	\$0	\$0	\$0
Land Value	\$35,000	\$35,000	\$25,000	\$15,000	\$15,000
Land Agricultural Value	\$0	\$0	\$0	\$0	\$0
Agricultural (Market) Value	\$0	\$0	\$0	\$0	\$0
Just (Market) Value	\$35,000	\$35,000	\$25,000	\$15,000	\$15,000
Assessed Value	\$18,150	\$19,965	\$16,500	\$15,000	\$5,500
Exempt Value	\$0	\$0	\$0	\$0	\$0
Taxable Value	\$18,150	\$19,965	\$16,500	\$15,000	\$5,500
Maximum Save Our Homes Portability	\$16,850	\$0	\$8,500	\$0	\$9,500

"Just (Market) Value" description - This is the value established by the Property Appraiser for ad valorem purposes. This value does not represent anticipated selling price.

TRIM Notices

[2019 TRIM Notice](#)

No data available for the following modules: Residential Buildings, Commercial Buildings, Extra Features, Sketches.

Franklin County makes every effort to produce the most accurate information possible. No warranties, expressed or implied, are provided for the data hereof, its use or interpretation. The assessment information is from the last certified tax roll. All data is subject to change before the next certified tax roll.

[User Privacy Policy](#)
[GDPR Privacy Notice](#)

Last Data Upload: 4/17/2020, 7:38:29 AM

Version 2.3.54



Overview



Legend

-  Parcels
-  Roads
-  City Labels

Parcel ID	02-075-02W-1045-0005-0040	Alternate ID	02W07502104500050040	Owner Address	KIRBY ROBERT H
Sec/Twp/Rng	2-7S-2W	Class	VACANT		2755 MILLSTONE PLANTATION RD
Property Address	1544 ALLIGATOR DR	Acreage	n/a		TALLAHASSEE, FL 32312
District	7				
Brief Tax Description	UNIT 5 BL S LOT 4				

(Note: Not to be used on legal documents)

Date created: 4/17/2020
 Last Data Uploaded: 4/17/2020 7:38:29 AM

Developed by  **Schneider**
 GEOSPATIAL

Parcel Summary

Parcel ID 02-075-02W-1045-000R-0030
Location Address 1545 ALLIGATOR DR
 32346
Brief Tax Description* UNIT 5 BL R LOT 3 OR 171/62 PENN POINT 774/579 1179/192
*The Description above is not to be used on legal documents.
Property Use Code VACANT (000000)
Sec/Twp/Rng 2-7S-2W
Tax District Alligator Point (District 7)
Millage Rate 13.4617
Acreage 0.568
Homestead N

[View Map](#)

Owner Information

Primary Owner
[Kirby Robert H](#)
 2755 Millstone Plantation Rd
 Tallahassee, FL 32312

Land Information

Code	Land Use	Number of Units	Unit Type	Frontage	Depth
000125	GULF FRONT ALLI PT	24,750.00	SF	90	275

Sales

Multi Parcel	Sale Date	Sale Price	Instrument	Book	Page	Qualification	Vacant/Improved	Grantor	Grantee
N	10/20/2016	\$390,000	WD	1179	192	Qualified (Q)	Vacant	THORNBERRY	KIRBY
N	02/02/2004	\$100	WD	774	579	Unqualified (U)	Vacant	LONG	THORNBERRY

Valuation

	2019 Preliminary Certified	2019 Certified	2018 Certified	2017 Certified	2016 Certified
Building Value	\$0	\$0	\$0	\$0	\$0
Extra Features Value	\$0	\$0	\$0	\$0	\$0
Land Value	\$371,250	\$371,250	\$297,000	\$228,937	\$228,937
Land Agricultural Value	\$0	\$0	\$0	\$0	\$0
Agricultural (Market) Value	\$0	\$0	\$0	\$0	\$0
Just (Market) Value	\$371,250	\$371,250	\$297,000	\$228,937	\$228,937
Assessed Value	\$277,014	\$304,715	\$251,831	\$228,937	\$228,937
Exempt Value	\$0	\$0	\$0	\$0	\$0
Taxable Value	\$277,014	\$304,715	\$251,831	\$228,937	\$228,937
Maximum Save Our Homes Portability	\$94,236	\$0	\$45,169	\$0	\$0

"Just (Market) Value" description - This is the value established by the Property Appraiser for ad valorem purposes. This value does not represent anticipated selling price.

TRIM Notices

[2019 TRIM Notice](#)

No data available for the following modules: Residential Buildings, Commercial Buildings, Extra Features, Sketches.

Franklin County makes every effort to produce the most accurate information possible. No warranties, expressed or implied, are provided for the data here, its use or interpretation. The assessment information is from the last certified tax roll. All data is subject to change before the next certified tax roll.

[User Privacy Policy](#)
[GDPR Privacy Notice](#)

Last Data Upload: 4/17/2020, 7:38:29 AM

Version 2.3.54

This Instrument Prepared by & return to:

Name: W. Crit Smith, Esq.
Susan S. Thompson, Esq.
Frank S. Shaw, III, Esq.

Address: Smith, Thompson & Shaw
Fourth Floor, 3520 Thomasville Rd.

20163245ANH
Parcel I.D. #: 02-07S-02W-1045-000R-0030
02-07S-02W-1045-000S-0040

Inst: 201619005057 Date: 10/24/2016 Time: 4:00PM
Page 1 of 2 B: 1179 P: 192. Marcia Johnson, Clerk of Court
Franklin, County, By: SM Deputy Clerk
Doc Stamp-Deed: 2730.00

SPACE ABOVE THIS LINE FOR PROCESSING DATA

SPACE ABOVE THIS LINE FOR RECORDING DATA

THIS WARRANTY DEED Made the 20th day of October, A.D. 2016, by **MARCLIA DEEB THORNBERRY, a/k/a MARCLIA DEEB LONG, A MARRIED WOMAN**, hereinafter called the grantor, to **ROBERT H. KIRBY, A MARRIED MAN**, whose post office address is 2755 MILLSTONE PLANTATION ROAD, TALLAHASSEE, FL 32312, hereinafter called the grantee:

(Wherever used herein the terms "grantor" and "grantee" include all the parties to this instrument, singular and plural, and the heirs, legal representatives and assigns of individuals, and the successors and assigns of corporations.)

Witnesseth: That the grantor, for and in consideration of the sum of \$10.00 and other valuable consideration, receipt whereof is hereby acknowledged, does hereby grant, bargain, sell, alien, remise, release, convey and confirm unto the grantee all that certain land situate in Franklin County, State of Florida, viz:

SEE EXHIBIT "A" ATTACHED HERETO AND BY REFERENCE MADE A PART HEREOF.

The grantor does herein affirm that the above described property is not homestead property.


Subject to taxes for the year 2016 and subsequent years, restrictions, reservations, covenants and easements of record, if any.

Together with all the tenements, hereditaments and appurtenances thereto belonging or in anywise appertaining. **To Have and to Hold** the same in fee simple forever.


And the grantor hereby covenants with said grantee that she is lawfully seized of said land in fee simple; that she has good right and lawful authority to sell and convey said land, and hereby fully warrants the title to said land and will defend the same against the lawful claims of all persons whomsoever, and that said land is free of all encumbrances, except taxes accruing subsequent to December 31, 2015.

In Witness Whereof, the said grantor has signed and sealed these presents, the day and year first above written.

Signed, sealed and delivered in the presence of:



Witness Signature

Susan S. Thompson
Printed Name


Witness Signature

Cindy Jordan
Printed Name

State of Florida
County of Leon


MARCIA DEEB THORNBERRY
Address:
2810 CLINE STREET, TALLAHASSEE, FL 32308


I hereby Certify that on this day, before me, an officer duly authorized to administer oaths and take acknowledgements, personally appeared MARCLIA DEEB THORNBERRY, A MARRIED WOMAN, known to me to be the person described in and who executed the foregoing instrument, who acknowledged before me that he/she executed the same, and that I relied upon the following form of identification of the above-named person:

and that an oath was not taken.

personally known

Witness my hand and official seal in the County and State last aforesaid this 20th day of October, A.D. 2016.

Notary Public Rubber Stamp Seal


Notary Signature

Printed Notary Signature




EXHIBIT "A"

The land referred to herein below is situated in the County of Franklin, State of Florida,
and is described as follows:

Parcel 1

Lot 3, Block "R" of PENINSULAR POINT UNIT NO. 5, according to the Plat thereof as
recorded in Plat Book 1, Page(s) 29, of the Public Records of Franklin County, Florida.

Parcel 2

Lot 4, Block "S" of PENINSULAR POINT UNIT NO. 5, according to the Plat thereof as
recorded in Plat Book 1, Page(s) 29, of the Public Records of Franklin County, Florida.



Overview



Legend

-  Parcels
-  Roads
-  City Labels

Parcel ID	02-075-02W-1045-0005-0050	Alternate ID	02W07502104500050050	Owner Address	RB ASSET MANAGEMENT,LLC
Sec/Twp/Rng	2-7S-2W	Class	VACANT		1843 COMMERCE BLVD
Property Address	1542 ALLIGATOR DR	Acreage	n/a		MIDWAY, FL 32343
District	7				
Brief Tax Description	UNIT 5 BL S LOT 5 PEN POINT				
	<i>(Note: Not to be used on legal documents)</i>				

Date created: 4/17/2020
 Last Data Uploaded: 4/17/2020 7:38:29 AM

Developed by  Schneider
 GEOSPATIAL

*This is Mr Deeb's Dock -
 Property Agraiser's drawing indicates
 it's on Mr Kirby's parcel -
 Spoke w/ Wade Dandridge - He said
 it is okay, they deal with this from
 time to time -*

Parcel Summary

Parcel ID 02-075-02W-1045-000S-0050
Location Address 1542 ALLIGATOR DR
 32346
Brief Tax Description* UNIT 5 BLS LOT 5 PEN POINT OR 171/69 647/477 1237/288
**The Description above is not to be used on legal documents.*
Property Use Code VACANT (000000)
Sec/Twp/Rng 2-7S-2W
Tax District Alligator Point (District 7)
Millage Rate 13.4617
Acreage 0.000
Homestead N

[View Map](#)

Owner Information

Primary Owner
[Rb Asset Management, LLC](#)
 1843 Commerce Blvd
 Midway, FL 32343

Land Information

Code	Land Use	Number of Units	Unit Type	Frontage	Depth
999910	<u>DOCK PERMISSIV</u>	1.00	UT	0	0

Sales

Multi Parcel	Sale Date	Sale Price	Instrument	Book	Page	Qualification	Vacant/Improved	Grantor	Grantee
N	03/07/2019	\$50,000	WD	1237	288	Qualified (Q)	Vacant	LONG	RB ASSET MANAGEMENT,LLC

Valuation

	2019 Preliminary Certified	2019 Certified	2018 Certified	2017 Certified	2016 Certified
Building Value	\$0	\$0	\$0	\$0	\$0
Extra Features Value	\$0	\$0	\$0	\$0	\$0
Land Value	\$35,000	\$35,000	\$25,000	\$15,000	\$15,000
Land Agricultural Value	\$0	\$0	\$0	\$0	\$0
Agricultural (Market) Value	\$0	\$0	\$0	\$0	\$0
Just (Market) Value	\$35,000	\$35,000	\$25,000	\$15,000	\$15,000
Assessed Value	\$7,321	\$8,053	\$6,655	\$6,050	\$5,500
Exempt Value	\$0	\$0	\$0	\$0	\$0
Taxable Value	\$7,321	\$8,053	\$6,655	\$6,050	\$5,500
Maximum Save Our Homes Portability	\$27,679	\$0	\$18,345	\$8,950	\$9,500

"Just (Market) Value" description - This is the value established by the Property Appraiser for ad valorem purposes. This value does not represent anticipated selling price.

TRIM Notices

2019 TRIM Notice

No data available for the following modules: Residential Buildings, Commercial Buildings, Extra Features, Sketches.

Franklin County, Florida, is a certified taxpayer's essential account. Changes to parcel information are reported in real-time and are available to the public through this website. This account will only update with the last certified tax roll. All data is subject to the jurisdiction of the county and is not certified to any other agency.

[User Privacy Policy](#)
[GDPR Privacy Notice](#)

Last Data Upload: 4/17/2020, 7:38:29 AM

Version 2.3.54

Developed by

Schneider
 GEOSPATIAL



FLORIDA DEPARTMENT OF Environmental Protection

Northwest District
160 W. Government Street, Suite 308
Pensacola, Florida 32502

Rick Scott
Governor
Carlos Lopez-Cantera
Lt. Governor
Noah Valenstein
Secretary

November 28, 2018

Robert Kirby
2755 Millstone Road
Tallahassee, Florida 32312
ripkirby@rhmgmt.us

File Name: Kirby Single-Family Dock
File No.: 0369382-001-EG-19, Franklin County

Dear Mr. Kirby:

On October 5, 2018, we received your notice of intent to use a General Permit (GP) pursuant to Rule 62-330.427, Florida Administrative Code (F.A.C.) to construct a 1,036 square-foot single-family dock consisting of a 229-foot by 4-foot access walkway and a 6-foot by 20-foot terminal platform with a single uncovered boatlift within Alligator Harbor, Class II Outstanding Florida Waters, Alligator Harbor Aquatic Preserve, Prohibited Shellfish Harvesting Area. The project is located at 1544 Alligator Drive, Alligator Point, Florida, 32346, Parcel No. 02-07S-02W-1045-000S-0040, in Section 2, Township 7 South, Range 2 West of Franklin County; at approximately 29°54'5.0" North Latitude, 84°24'4.68" West Longitude.

Your intent to use a general permit has been reviewed by Department staff for three types of authorization: (1) regulatory authorization, (2) proprietary authorization (related to state-owned submerged lands), and (3) federal authorization. The authority for review and the outcomes of the reviews are listed below. Please read each section carefully.

Your project qualifies for all three authorizations. However, this letter does not relieve you from the responsibility of obtaining other federal, state, or local authorizations that may be required for the activity.

If you change the project from what you submitted, the authorizations granted may no longer be valid at the time of commencement of the project. Please contact us prior to beginning your project if you wish to make any changes.

1. Regulatory Review – Approved

Based on the forms, drawings, and documents submitted with your notice, it appears that the project meets the requirements for the General Permit under Rule 62-330.427, F.A.C. Any activities performed under a general permit are subject to general conditions required in Rule 62-330.405, F.A.C. (attached) and the specific conditions of Rule 62-330.427, F.A.C. (attached). Any deviations from these conditions may subject the permittee to enforcement action and possible penalties.

Please be advised that the construction phase of the GP must be completed within five years from the date the notice to use the GP was received by the Department. If you wish to continue this GP beyond the expiration date, you must notify the Department at least 30 days before its expiration.

Authority for review – Part IV of Chapter 373, Florida Statutes (F.S.), Title 62, F.A.C., and in accordance with the operating agreements executed between the Department and the water management districts, as referenced in Chapter 62-113, F.A.C.

2. Proprietary Review – Granted

The Department acts as staff to the Board of Trustees of the Internal Improvement Trust Fund (Board of Trustees) and issues certain authorizations for the use of sovereign submerged lands. The Department has the authority to review activities on sovereign submerged lands under Chapters 253 and 258, F.S. and Chapters 18-20 and 18-21, F.A.C.

The activity appears to be located on sovereign submerged lands owned by the Board of Trustees. The activity is not exempt from the need to obtain the applicable proprietary authorization. As staff to the Board of Trustees, the Department has reviewed the activity described above and has determined that the activity qualifies for a Letter of Consent under Section 253.77, F.S. to construct and use the activity on the specified sovereign submerged lands, as long as the work performed is located within the boundaries as described herein and is consistent with the terms and conditions herein.

During the term of this Letter of Consent you shall maintain satisfactory evidence of sufficient upland interest as required by paragraph 18-21.004(3)(b), F.A.C. If such interest is terminated or the Board of Trustees determines that such interest did not exist on the date of issuance of this Letter of Consent, this Letter of Consent may be terminated by the Board of Trustees at its sole option. If the Board of Trustees terminates this Letter of Consent, you agree not to assert a claim or defense against the Board of Trustees arising out of this Letter of Consent.

Authority for review – Chapters 253 and 258, F.S., Chapters 18-20 and 18-21, F.A.C., and Section 62-330.075, F.A.C., as required.

3. Federal Review – SPGP Approved

Your proposed activity as outlined in your application and attached drawings qualifies for federal authorization pursuant to the State Programmatic General Permit (SPGP) V, and a **SEPARATE permit** or authorization **will not be required** from the U.S. Army Corps of Engineers (Corps). Please note that the federal authorization expires on July 26, 2021. However, your authorization may remain in effect for up to one (1) additional year if provisions of Special Condition B.27 of the SPGP V permit instrument are met. You, as permittee, are required to adhere to all General Conditions and Special Conditions that may apply to your project. Special conditions required for your project are attached. A copy of the SPGP V with all terms and conditions and the General Conditions may be found online in the Jacksonville District Regulatory Division Sourcebook.

Authority for review – an agreement with the Corps entitled “Coordination Agreement Between the U.S. Army Corps of Engineers (Jacksonville District) and the Florida Department of Environmental Protection, or Duly Authorized Designee, State Programmatic General Permit ” Section 10 of the Rivers and Harbor Act of 1899, and Section 404 of the Clean Water Act.

Additional Information

Please retain this general permit. The activities may be inspected by authorized state personnel in the future to ensure compliance with appropriate statutes and administrative codes. If the activities are not in compliance, you may be subject to penalties under Chapter 373, F.S. and Chapter 18-14, F.A.C.

NOTICE OF RIGHTS

This action is final and effective on the date filed with the Clerk of the Department unless a petition for an administrative hearing is timely filed under Sections 120.569 and 120.57, F.S. before the deadline for filing a petition. On the filing of a timely and sufficient petition, this action will not be final and effective until further order of the Department. Because the administrative hearing process is designed to formulate final agency action, the hearing process may result in a modification of the agency action or even denial of the application.

Petition for Administrative Hearing

A person whose substantial interests are affected by the Department’s action may petition for an administrative proceeding (hearing) under Sections 120.569 and 120.57, F.S. Pursuant to Rules 28-106.201 and 28-106.301, F.A.C., a petition for an administrative hearing must contain the following information:

- (a) The name and address of each agency affected and each agency’s file or identification number, if known;
- (b) The name, address, and telephone number of the petitioner; the name, address, and telephone number of the petitioner’s representative, if any, which shall be the address for service purposes during the course of the proceeding; and an explanation of how the petitioner’s substantial interests are or will be affected by the agency determination;
- (c) A statement of when and how the petitioner received notice of the agency decision;
- (d) A statement of all disputed issues of material fact. If there are none, the petition must so indicate;
- (e) A concise statement of the ultimate facts alleged, including the specific facts that the petitioner contends warrant reversal or modification of the agency’s proposed action;
- (f) A statement of the specific rules or statutes that the petitioner contends require reversal or modification of the agency’s proposed action, including an explanation of how the alleged facts relate to the specific rules or statutes; and
- (g) A statement of the relief sought by the petitioner, stating precisely the action that the petitioner wishes the agency to take with respect to the agency’s proposed action.

The petition must be filed (received by the Clerk) in the Office of General Counsel of the Department at 3900 Commonwealth Boulevard, Mail Station 35, Tallahassee, Florida 32399-3000, or via electronic correspondence at Agency_Clerk@dep.state.fl.us. Also, a copy of the petition shall be mailed to the applicant at the address indicated above at the time of filing.

Time Period for Filing a Petition

In accordance with Rule 62-110.106(3), F.A.C., petitions for an administrative hearing by the applicant and persons entitled to written notice under Section 120.60(3), F.S., must be filed within 14 days of receipt of this written notice. Petitions filed by any persons other than the applicant, and other than those entitled to written notice under Section 120.60(3), F.S., must be filed within 14 days of publication of the notice or within 14 days of receipt of the written notice, whichever occurs first. The failure to file a petition within the appropriate time period shall constitute a waiver of that person's right to request an administrative determination (hearing) under Sections 120.569 and 120.57, F.S. or to intervene in this proceeding and participate as a party to it. Any subsequent intervention (in a proceeding initiated by another party) will be only at the discretion of the presiding officer upon the filing of a motion in compliance with Rule 28 106.205, F.A.C.

Extension of Time

Under Rule 62-110.106(4), F.A.C., a person whose substantial interests are affected by the Department's action may also request an extension of time to file a petition for an administrative hearing. The Department may, for good cause shown, grant the request for an extension of time. Requests for extension of time must be filed with the Office of General Counsel of the Department at 3900 Commonwealth Boulevard, Mail Station 35, Tallahassee, Florida 32399-3000, or via electronic correspondence at Agency_Clerk@dep.state.fl.us, before the deadline for filing a petition for an administrative hearing. A timely request for extension of time shall toll the running of the time period for filing a petition until the request is acted upon.

Mediation

Mediation is not available in this proceeding.

FLAWAC Review

The applicant, or any party within the meaning of Section 373.114(1)(a) or 373.4275, F.S., may also seek appellate review of this order before the Land and Water Adjudicatory Commission under Section 373.114(1) or 373.4275, F.S. Requests for review before the Land and Water Adjudicatory Commission must be filed with the Secretary of the Commission and served on the Department within 20 days from the date when this order is filed with the Clerk of the Department.

Judicial Review


Once this decision becomes final, any party to this action has the right to seek judicial review pursuant to Section 120.68, F.S. by filing a Notice of Appeal pursuant to Florida Rules of Appellate Procedure 9.110 and 9.190 with the Clerk of the Department in the Office of General Counsel (Station #35, 3900 Commonwealth Boulevard, Tallahassee, Florida 32399-3000) and by filing a copy of the Notice of Appeal accompanied by the applicable filing fees with the appropriate district court of appeal. The notice must be filed within 30 days from the date this action is filed with the Clerk of the Department.

If you have any questions regarding this matter, please contact Jared Searcy at the letterhead address or at (850) 245-7625 or via email at Jared.Searcy@dep.state.fl.us.

EXECUTION AND CLERKING

Executed in Orlando, Florida.

STATE OF FLORIDA DEPARTMENT OF ENVIRONMENTAL PROTECTION



Jared Searcy
Environmental Specialist II
Submerged Lands and Environmental Resources Program

Attachments:

1. Rule 62-330.427, F.A.C., 2 pages
2. General Conditions for All General Permits, Rule 62-330.405, F.A.C., 3 pages
3. General Consent Conditions for Use of Sovereignty Submerged Lands, 2 pages
4. General Conditions for Federal Authorization for SPGP V, 2 pages
5. SPGP V: Special Conditions Related to All Review and Authorizations, 6 pages
6. Department of the Army Permit Transfer for SPGP V, 1 page
7. Project Drawings, 4 pages

CERTIFICATE OF SERVICE

The undersigned duly designated deputy clerk hereby certifies that this document and all attachments were sent on the filing date below to the following listed persons:

Tanya McHale, FDEP Northwest District, Tanya.McHale@dep.state.fl.us
Michael Fuller, FDEP Northwest District, Michael.Fuller@dep.state.fl.us
Dan Garlick, Garlick Environmental Associates, Inc., dan@garlickenv.com
Mary Ann Wasmund, Garlick Environmental Associates, Inc., maryann@garlickenv.com

FILING AND ACKNOWLEDGMENT

FILED, on this date, pursuant to Section 120.52, F.S., with the designated Department Clerk, receipt of which is hereby acknowledged.



November 28, 2018
Clerk **Date**

62-330.427 General Permit for Docks, Piers and Associated Structures.

(1) A general permit is granted to any person to construct, extend, or remove a dock or pier and associated structures as described below:

(a) A private, single-family pier or dock with up to two boat lifts that, together with all existing structures on the shoreline of the property, does not exceed a total area of 2,000 square feet over surface waters. Such a structure:

1. Shall not accommodate the mooring of more than two vessels, either in the water or on a boat lift. Solely for purposes of this general permit, up to two personal watercraft as defined in section 327.02(33), F.S., may be moored in lieu of either or both allowable vessels of another type. These limits shall not apply to the mooring, storage or other use of the dock or pier by:

a. Non-motor-powered vessels less than 16 feet in length that are stored on or under the dock or pier, or within an authorized mooring area; or

b. Personal watercraft, dinghies or similar small vessels that are stowed out of the water, upon a larger parent vessel that is moored at the dock in compliance with this general permit.

2. Shall be located such that all areas used for vessel mooring and navigational access already provide a minimum depth of two feet below the mean low water level for tidal waters, or two feet below the expected average low water depth for non-tidal waters as determined based on best available information for the water body at the project location; and

3. May include a roof over the vessel mooring areas, boat lifts, and terminal platform, or any portions thereof, subject to the applicable provisions of chapters 253 and 258, F.S., and the rules adopted thereunder. Portions of such roofs that overhang beyond the edge of decked portions of the pier or dock shall be included in the calculation of the total square footage of over-water structure allowed under paragraph (1)(a), above.

(b) A public fishing pier that does not exceed a total area of 2,000 square feet provided the structure is designed and built to discourage boat mooring by elevating the fishing pier to a minimum height of five feet above mean high water or ordinary high water, surrounding the pier with handrails, and installing and maintaining signs that state "No Boat Mooring Allowed."

(2) This general permit shall be subject to the following specific conditions:

(a) Construction or extension of the boat lift, boat mooring locations, or terminal platform, shall not occur over submerged grassbeds, coral communities or wetlands. However, the access walkway portion of the pier may traverse these resources provided it is elevated a minimum of five feet above mean high water or ordinary high water, contains handrails that are maintained in such a manner as to prevent use of the access walkways for boat mooring or access, and does not exceed a width of six feet, or a width of four feet in Aquatic Preserves;

(b) There shall be no structures enclosed by walls, screens, or doors on any side;

(c) The dock or pier will not facilitate vessel rentals, charters, or serve any other commercial purpose;

(d) There shall be no fish cleaning facilities, boat repair facilities or equipment, or fueling facilities on the structures authorized by this general permit. In addition, no overboard discharges

of trash, human or animal waste, or fuel shall occur from any structures authorized by this general permit;

(e) This general permit shall not authorize the construction or extension of more than one dock or pier per parcel of land or individual lot. For the purposes of this general permit, multi-family living complexes shall be treated as one parcel of property regardless of the legal division of ownership or control of the associated property; and

(f) Notwithstanding any other provisions of this general permit, the design, construction and operation of the dock or pier and associated vessels shall not conflict with any manatee protection plan approved and adopted under section 379.2431(2)(t), F.S.

Rulemaking Authority 373.026(7), 373.043, 373.118(1), 373.406(5), 373.4131, 373.414(9), 373.418, 403.805(1) FS. Law Implemented 373.118(1), 373.406(5), 373.413, 373.4131, 373.414(9), 373.416, 373.418, 373.426, 403.814(1) FS. History—New 10-3-95, Formerly 62-341.427, Amended 10-1-13, 6-1-18.

62-330.405 General Conditions for All General Permits.

The following general permit conditions are binding upon the permittee and are enforceable under chapter 373, F.S. These conditions do not apply to the general permit for stormwater management systems under section 403.814(12), F.S.

(1) The general permit is valid only for the specific activity indicated. Any deviation from the specified activity and the conditions for undertaking that activity shall constitute a violation of the permit and may subject the permittee to enforcement action and revocation of the permit under chapter 373, F.S.

(2) The general permit does not eliminate the necessity to obtain any required federal, state, local and special district authorizations prior to the start of any construction, alteration, operation, maintenance, removal or abandonment authorized by this permit; and it does not authorize any violation of any other applicable federal, state, local, or special district laws (including, but not limited to, those governing the "take" of listed species).

(3) The general permit does not convey to the permittee or create in the permittee any property right, or any interest in real property, nor does it authorize any entrance upon or activities on property which is not owned or controlled by the permittee, or convey any rights or privileges other than those specified in the general permit.

(4) The general permit does not relieve the permittee from liability and penalties when the permitted activity causes harm or injury to: human health or welfare; animal, plant or aquatic life; or property. It does not allow the permittee to cause pollution that violates state water quality standards.

(5) Section 253.77, F.S., provides that a person may not commence any excavation, construction, or other activity involving the use of state-owned or other lands of the state, the title to which is vested in the Board of Trustees of the Internal Improvement Trust Fund without obtaining the required consent, lease, easement, or other form of authorization authorizing the proposed use. Therefore, the permittee is responsible for obtaining any necessary authorizations from the Board of Trustees prior to commencing activity on state-owned lands.

(6) The authorization to conduct activities under a general permit may be modified, suspended or revoked in accordance with chapter 120, F.S., and section 373.429, F.S.

(7) The general permit is not transferable to a new third party. To be used by a different permittee, a new notice to use a general permit must be submitted in accordance with rule 62-330.402, F.A.C. Activities constructed in accordance with the terms and conditions of a general permit are automatically authorized to be operated and maintained by the permittee and subsequent owners in accordance with subsection 62-330.340(1), F.A.C. Any person holding the general permit, persons working under the general permit, and owners of land while work is conducted under the general permit shall remain liable for any corrective actions that may be required as a result of any permit violations prior to sale, conveyance, or other transfer of ownership or control of the permitted project, activity, or the real property at which the permitted project or activity is located.

(8) Upon reasonable notice to the permittee, Agency staff with proper identification shall have permission to enter, inspect, sample and test the permitted system to ensure conformity with the plans and specifications approved by the general permit.

(9) The permittee shall maintain any permitted project or activity in accordance with the plans submitted to the Agency and authorized in the general permit.

(10) A permittee's right to conduct a specific activity under the general permit is authorized for a duration of five years.

(11) Activities shall be conducted in a manner that does not cause or contribute to violations of state water quality standards. Performance-based erosion and sediment control best management practices shall be implemented and maintained immediately prior to, during, and after construction as needed to stabilize all disturbed areas, including other measures specified in the permit to prevent adverse impacts to the water resources and adjacent lands. Erosion and sediment control measures shall be installed and maintained in accordance with the *State of Florida Erosion and Sediment Control Designer and Reviewer Manual (Florida Department of Environmental Protection and Florida Department of Transportation, June 2007)*, available at <https://www.flrules.org/Gateway/reference.asp?No=Ref-04227>, and the *Florida Stormwater Erosion and Sedimentation Control Inspector's Manual (Florida Department of Environmental Protection, Nonpoint Source Management Section, Tallahassee, Florida, July 2008)*, available at http://publicfiles.dep.state.fl.us/DEAR/Stormwater_Training_Docs/erosion-inspectors-manual.pdf.

(12) Unless otherwise specified in the general permit, temporary vehicular access within wetlands during construction shall be performed using vehicles generating minimum ground pressure to minimize rutting and other environmental impacts. Within forested wetlands, the permittee shall choose alignments that minimize the destruction of mature wetland trees to the greatest extent practicable. When needed to prevent rutting or soil compaction, access vehicles shall be operated on wooden, composite, metal, or other non-earthen construction mats. In all cases, access in wetlands shall comply with the following:

- (a) Access within forested wetlands shall not include the cutting or clearing of any native wetland tree having a diameter four inches or greater at breast height;
- (b) The maximum width of the construction access area shall be limited to 15 feet;
- (c) All mats shall be removed as soon as practicable after equipment has completed passage through, or work has been completed, at any location along the alignment of the project, but in no case longer than seven days after equipment has completed work or passage through that location; and
- (d) Areas disturbed for access shall be restored to natural grades immediately after the maintenance or repair is completed.

(13) Barges or other work vessels used to conduct in-water activities shall be operated in a manner that prevents unauthorized dredging, water quality violations, and damage to submerged aquatic communities.

(14) The construction, alteration, or use of the authorized project shall not adversely impede navigation or create a navigational hazard in the water body.

(15) Except where specifically authorized in the general permit, activities must not:

(a) Impound or obstruct existing water flow, cause adverse impacts to existing surface water storage and conveyance capabilities, or otherwise cause adverse water quantity or flooding impacts to receiving water and adjacent lands; or

(b) Cause an adverse impact to the maintenance of surface or ground water levels or surface water flows established pursuant to section 373.042, F.S., or a Works of the District established pursuant to section 373.086, F.S.

(16) If prehistoric or historic artifacts, such as pottery or ceramics, projectile points, stone tools, dugout canoes, metal implements, historic building materials, or any other physical remains that could be associated with Native American, early European, or American settlement are encountered at any time within the project site area, the permitted project shall cease all activities involving subsurface disturbance in the vicinity of the discovery. The permittee or

other designee shall contact the Florida Department of State, Division of Historical Resources, Compliance Review Section (DHR), at (850)245-6333, as well as the appropriate permitting agency office. Project activities shall not resume without verbal or written authorization from the Division of Historical Resources. If unmarked human remains are encountered, all work shall stop immediately and the proper authorities notified in accordance with section 872.05, F.S.

(17) The activity must be capable, based on generally accepted engineering and scientific principles, of being performed and of functioning as proposed, and must comply with any applicable District special basin and geographic area criteria.

(18) The permittee shall comply with the following when performing work within waters accessible to federally- or state-listed aquatic species, such as manatees, marine turtles, smalltooth sawfish, and Gulf sturgeon:

(a) All vessels associated with the project shall operate at "Idle Speed/No Wake" at all times while in the work area and where the draft of the vessels provides less than a four-foot clearance from the bottom. All vessels will follow routes of deep water whenever possible.

(b) All deployed siltation or turbidity barriers shall be properly secured, monitored, and maintained to prevent entanglement or entrapment of listed species.

(c) All in-water activities, including vessel operation, must be shut down if a listed species comes within 50 feet of the work area. Activities shall not resume until the animal(s) has moved beyond a 50-foot radius of the in-water work, or until 30 minutes elapses since the last sighting within 50 feet. Animals must not be herded away or harassed into leaving. All onsite project personnel are responsible for observing water-related activities for the presence of listed species.

(d) Any listed species that is killed or injured by work associated with activities performed shall be reported immediately to the Florida Fish and Wildlife Conservation Commission (FWC) Hotline at 1(888)404-3922 and ImperiledSpecies@myFWC.com.

(e) Whenever there is a spill or frac-out of drilling fluid into waters accessible to the above species during a directional drilling operation, the FWC shall be notified at ImperiledSpecies@myfwc.com with details of the event within 24 hours following detection of the spill or frac-out.

(19) The permittee shall hold and save the Agency harmless from any and all damages, claims, or liabilities which may arise by reason of the construction, alteration, operation, maintenance, removal, abandonment or use of any activity authorized by the general permit.

(20) The permittee shall immediately notify the Agency in writing of any submitted information that is discovered to be inaccurate.

Rulemaking Authority 373.026(7), 373.043, 373.118(1), 373.406(5), 373.4131, 373.414(9), 373.4145, 373.418, 403.805(1) FS. Law Implemented 373.044, 373.118(1), 373.129, 373.136, 373.406(5), 373.413, 373.4131, 373.414(9), 373.4145, 373.416, 373.422, 373.423, 373.429, 403.814(1) FS. History—New 10-3-95, Amended 10-1-07, Formerly 62-341.215, Amended 10-1-13, 6-1-18.

**GENERAL CONSENT CONDITIONS FOR
USE OF SOVEREIGNTY SUBMERGED LANDS**

Any use of sovereignty submerged lands is subject to the following general conditions are binding upon the applicant and are enforceable under Chapters 253 and 258, F.S.

1. Sovereignty submerged lands may be used only for the specified activity or use. Any unauthorized deviation from the specified activity or use and the conditions for undertaking that activity or use will constitute a violation. Violation of the authorization will result in suspension or revocation of the applicant's use of the sovereignty submerged lands unless cured to the satisfaction of the Board of Trustees.
2. Authorization under Rule 18-21.005, F.A.C., conveys no title to sovereignty submerged lands or water column, nor does it constitute recognition or acknowledgment of any other person's title to such land or water.
3. Authorizations under Rule 18-21.005, F.A.C., may be modified, suspended, or revoked in accordance with its terms or the remedies provided in Sections 253.04, F.S. and Chapter 18-14, F.A.C.
4. Structures or activities will be constructed and used to avoid or minimize adverse impacts to resources.
5. Construction, use, or operation of the structure or activity will not adversely affect any species which is endangered, threatened, or of special concern, as listed in Rules 68A-27.003, 68A-27.004, and 68A-27.005, F.A.C.
6. Structures or activities will not unreasonably interfere with riparian rights. When a court of competent jurisdiction determines that riparian rights have been unlawfully affected, the structure or activity will be modified in accordance with the court's decision.
7. Structures or activities will not create a navigational hazard.
8. Structures will be maintained in a functional condition and will be repaired or removed if they become dilapidated to such an extent that they are no longer functional.
9. Structures or activities will be constructed, operated, and maintained solely for water dependent purposes.
10. The applicant agrees to indemnify, defend and hold harmless the Board of Trustees and the State of Florida from all claims, actions, lawsuits and demands in any form arising out of the authorization to use sovereignty submerged lands or the applicant's use and construction of structures on sovereignty submerged lands. This duty to indemnify and hold harmless will include any and all liabilities that are associated with the structure or activity including special assessments or taxes that are now or in the future assessed against the structure or activity during the period of the authorization.

11. Failure by the Board of Trustees to enforce any violation of a provision of the authorization or waiver by the Board of Trustees of any provision of the authorization will not invalidate the provision not enforced or waived, nor will the failure to enforce or a waiver prevent the Board of Trustees from enforcing the unenforced or waived provision in the event of a violation of that provision.

12. Applicant binds itself and its successors and assigns to abide by the provisions and conditions set forth in the authorization. If the applicant or its successors or assigns fails or refuses to comply with the provisions and conditions of the authorization, the authorization may be terminated by the Board of Trustees after written notice to the applicant or its successors or assigns. Upon receipt of such notice, the applicant or its successors or assigns will have thirty (30) days in which to correct the violations. Failure to correct the violations within this period will result in the automatic revocation of this authorization.

13. All costs incurred by the Board of Trustees in enforcing the terms and conditions of the authorization will be paid by the applicant. Any notice required by law will be made by certified mail at the address shown on page one of the authorization. The applicant will notify the Board of Trustees in writing of any change of address at least ten days before the change becomes effective.

14. This authorization does not allow any activity prohibited in a conservation easement or restrictive covenant that prohibits the activity.

General Conditions for Federal Authorization for SPGP V

1. The time limit for completing the work authorized ends on July 26, 2021.
2. You must maintain the activity authorized by this permit in good condition and in conformance with the terms and conditions of this permit. You are not relieved of this requirement if you abandon the permitted activity, although you may make a good faith transfer to a third party in compliance with General Condition 4 below. Should you wish to cease to maintain the authorized activity or should you desire to abandon it without a good faith transfer, you must obtain a modification of this permit from this office, which may require restoration of the area.
3. If you discover any previously unknown historic or archeological remains while accomplishing the activity authorized by this permit, you must immediately notify this office of what you have found. We will initiate the Federal and State coordination required to determine if the remains warrant a recovery effort or if the site is eligible for listing in the National Register of Historic Places.
4. If you sell the property associated with this permit, you must obtain the signature of the new owner on the enclosed form and forward a copy of the permit to this office to validate the transfer of this authorization.
5. If a conditioned water quality certification has been issued for your project, you must comply with the conditions specified in the certification as special conditions to this permit.
6. You must allow representatives from this office to inspect the authorized activity at any time deemed necessary to ensure that it is being or has been accomplished in accordance with the terms and conditions of your permit.

Further Information:

1. Limits of this authorization.
 - a. This permit does not obviate the need to obtain other Federal, State, or local authorizations required by law.
 - b. This permit does not grant any property rights or exclusive privileges.
 - c. This permit does not authorize any injury to the property or rights of others.
 - d. This permit does not authorize interference with any existing or proposed Federal projects.
2. Limits of Federal Liability. In issuing this permit, the Federal Government does not assume any liability for the following:
 - a. Damages to the permitted project or uses thereof as a result of other permitted or unpermitted activities or from natural causes.
 - b. Damages to the permitted project or uses thereof as a result of current or future activities undertaken by or on behalf of the United States in the public interest.
 - c. Damages to persons, property, or to other permitted or unpermitted activities or

- structures caused by the activity authorized by this permit.
- d. Design or Construction deficiencies associated with the permitted work.
 - e. Damage claims associated with any future modification, suspension, or revocation of this permit.
3. Reliance on Applicant's Data: The determination of this office that issuance of this permit is not contrary to the public interest was made in reliance on the information you provided.
 4. Reevaluation of Permit Decision: This office may reevaluate its decision on this permit at any time the circumstances warrant. Circumstances that could require a reevaluation include, but are not limited to, the following:
 - a. You fail to comply with the terms and conditions of this permit.
 - b. The information provided by you in support of your permit application proves to have been false, incomplete, or inaccurate (see 3 above).
 - c. Significant new information surfaces which this office did not consider in reaching the original public interest decision.
 5. Such a reevaluation may result in a determination that it is appropriate to use the suspension, modification, and revocation procedures contained in 33 CFR 325.7 or enforcement procedures such as those contained in 33 CFR 326.4 and 326.5. The referenced enforcement procedures provide for the issuance of an administrative order requiring you comply with the terms and conditions of your permit and for the initiation of legal action where appropriate. You will be required to pay for any corrective measures ordered by this office, and if you fail to comply with such directive, this office may in certain situations (such as those specified in 33 CER 209.170) accomplish the corrective measures by contract or otherwise and bill you for the cost.
 6. When the structures or work authorized by this permit are still in existence at the time the property is transferred, the terms and conditions of this permit will continue to be binding on the new owner(s) of the property. To validate the transfer of this permit and the associated liabilities associated with compliance with its terms and conditions, have the transferee sign and date the enclosed form.
 7. The Permittee understands and agrees that, if future operations by the United States require the removal, relocation, or other alteration, of the structures or work herein authorized, or if, in the opinion of the Secretary of the Army or his authorized representative, said structure or work shall cause unreasonable obstruction to the free navigation of the navigable waters, the Permittee will be required, upon due notice from the U.S. Army Corps of Engineers, to remove, relocate, or alter the structural work or obstructions caused thereby, without expense to the United States. No claim shall be made against the United States on account of any such removal, relocation or alteration.

Special Conditions Related to All Review and Authorizations

In addition to the conditions specified above, the following Special Conditions apply to all projects reviewed and/or authorized under the SPGP V.

1. The District Engineer reserves the right to require that any request for authorization under this SPGP V be evaluated as an Individual Permit. Conformance with the terms and conditions of the SPGP V does not automatically guarantee Federal authorization.
2. On a case-by-case basis the Corps may impose additional Special Conditions which are deemed necessary to minimize adverse environmental impacts.
3. Failure to comply with all conditions of the Federal authorizations under the SPGP V would constitute a violation of the Federal authorization.
4. No structure or work shall adversely affect or disturb properties listed in the National Register of Historic Places or those eligible for inclusion in the National Register. Prior to the start of work, the Applicant/Permittee or other party on the Applicant's/Permittee's behalf, shall conduct a search of known historical properties by contracting a professional archaeologist, and contacting the Florida Master Site File at 850-245-6440 or SiteFile@dos.state.fl.us. The Applicant/Permittee can also research sites in the National Register Information System (NRIS). Information can be found at <http://www.cr.nps.gov/nr/research>.
 - a. If, during the initial ground disturbing activities and construction work, there are archaeological/cultural materials unearthed (which shall include, but not be limited to: pottery, modified shell, flora, fauna, human remains, ceramics, stone tools or metal implements, dugout canoes or any other physical remains that could be associated with Native American cultures or early colonial or American settlement), the Permittee shall immediately stop all work in the vicinity and notify the Compliance and Review staff of the State Historic Preservation Office at 850-245-6333 and the Corps Regulatory Project Manager to assess the significance of the discovery and devise appropriate actions, including salvage operations. Based on the circumstances of the discovery, equity to all parties, and considerations of the public interest, the Corps may modify, suspend or revoke the permit in accordance with 33 CFR Part 325.7.
 - b. In the unlikely event that human remains are identified, they will be treated in accordance with Section 872.05, Florida Statutes; all work in the vicinity shall immediately cease and the local law authority, the State Archaeologist (850-245-6444), and the Corps Regulatory Project Manager shall immediately be notified. Such activity shall not resume unless specifically authorized by the State Archaeologist and the Corps.
5. No work shall be authorized under the SPGP V which proposes the use of prefabricated modules for habitat creation, restoration, or enhancement except as allowed in Special Condition 17 for *Living Shorelines* of the *Shoreline Stabilization* category.
6. The Design and construction of a Project must comply with the following.
 - a. Where aquatic vegetation is present, adverse impacts to aquatic vegetation from construction of piling-supported structures may be avoided/minimized by adherence to, or employing alternative construction techniques that provide a higher level of protection than, the

protective criteria in the joint U.S. Army Corps of Engineers'/National Marine Fisheries Service's "Construction Guidelines in Florida for Minor Piling-Supported Structures Constructed in or over Submerged Aquatic Vegetation (SAV), Marsh or Mangrove Habitat," U.S. Army Corps of Engineers/National Marine Fisheries Service August 2001 (updated June 2008). Unless otherwise specifically approved by the National Marine Fisheries Service, where aquatic vegetation is present, piling-supported structures authorized under the SPGP V must comply with, or provide a higher level of protection than, the criteria contained in the referenced construction guidelines. Mangrove impacts are limited to the removal of mangroves along 4 linear feet of shoreline to accommodate a 4-ft-wide access walkway associated with a dock that meets the above guidelines.

b. Additionally, because of concerns about adverse impacts to the endangered Johnson's seagrass (*Halophila johnsonii*) in the lagoon and canal systems on Florida's east coast from Sebastian Inlet (Brevard County) south to and including central Biscayne Bay (Miami-Dade County), the following requirements must be met:

(1) Piling-supported structures must comply with, or provide a higher level of protection than, the criteria contained in the construction guidelines titled "Key for Construction Conditions for Docks or Other Minor Structures Constructed in or Over Johnson's seagrass (*Halophila johnsonii*)," National Marine Fisheries Service/U.S. Army Corps of Engineers – February 2002 (updated October 2002).

(2) Removal of derelict vessels must comply with the practices of Special Condition 19.

(3) All other activities will have no effect on Johnson's seagrass, i.e., no seagrass is present.

c. The presence of seagrass will be determined utilizing the attached "Submerged Aquatic Vegetation Survey Guidelines."

7. For projects in waters accessible to sea turtles, Smalltooth sawfish, Gulf sturgeon, or Shortnose sturgeon, the Permittee will utilize the "Sea Turtle and Smalltooth Sawfish Construction Conditions" and the following additions:

a. Any collision(s) with and/or injuries to any whale, or sturgeon occurring during the construction of a project, shall be reported immediately to NMFS's Protected Resources Division (PRD) at (727-824-5312).

b. Reports to NMFS's Protected Resources Division (PRD) may be made by email to takereport.nmfsser@noaa.gov.

c. Sea turtle and marine mammal stranding/rescue organizations' contact information is available by region at <http://www.nmfs.noaa.gov/pr/health/networks.htm>.

d. Smalltooth sawfish encounters shall be reported to <http://www.flmnh.ufl.edu/fish/sharks/sawfish/sawfishencounters.html>.

e. All work must occur during daylight hours.

8. The Permittee is responsible for obtaining any "take" permits required under the U.S. Fish and Wildlife Service's regulations governing compliance with the Migratory Bird Treaty Act or the Bald and Golden Eagle Protection Act. The Permittee should contact the appropriate local office of the U.S. Fish and Wildlife Service to determine if such "take" permits are required for a particular activity.

9. The Permittee is responsible for compliance with 50 CFR 224.103(c) prohibiting approach within 500 yards of a right whale, with limited exceptions.

10. Turbidity control measures shall be used throughout construction to control erosion and siltation to ensure there are no violations of state or federal water quality standards. Turbidity control measures shall be: (1) for the smallest practicable area; (2) monitored daily to ensure listed species are not entangled or trapped in the project area; (3) shall be removed promptly upon project completion and the return of water quality conditions; (4) and shall not block entry to or exit from designated critical habitat. Siltation barriers shall be made of material in which listed species cannot become entangled (i.e., reinforced impermeable polycarbonate vinyl fabric [PVC]).

a. Turbidity curtains are not required where not practical in dynamic systems such as surf zones and could actually do more harm than good if the curtains become detached (e.g., they could entrap pelagic organisms and become entangled around benthic organisms, such as coral).

b. Turbidity barriers are not required if installation of single piling in deep water since is unlikely to adversely affect water quality.

11. In-water rope or chain must meet the following requirements: Industrial grade metal chains or heavy cables that do not readily loop and tangle; All in-water lines (rope and cable) must be thick and taut and cannot have excess line in the water; Lines can be enclosed in a plastic or rubber sleeve/tube to add rigidity.

12. No work shall occur where hard bottom or any hard or coral including ESA-listed coral species are present within the footprint of the project.

13. No work shall occur that results in removal of mangroves (including prop roots), except:

a. as provided by Special Condition 6.a.; or,

b. for removal of mangroves growing at the foot or from an existing seawall whose removal needed to repair the seawall.

14. No work shall occur that results in impacts to seagrass except as provided by Special Condition 6.

15. (For *Docks, Piers, Associated Facilities, and Other Minor Piling-Supported Structures and Boat Ramps and Boat Launch Areas and Structures Associated with Such Ramps or Launch Areas.*)

a. Aids to Navigation and Private Aids to Navigation (e.g., attached to the structures authorized by the SPGP) must be approved by and installed in accordance with U.S. Coast Guard requirements.

b. Temporary structures associated with marine events will be removed and the site restored upon completion of the event.

c. (For *multi-family residential docks (e.g., condos, trailer parks, apartment complexes) designated for fishing or vessel storage, for temporary marine event pile-supported structures involving high speed vessel traffic or fishing, and for commercial or public boat ramps.*) Install educational signs as follows in a visible location to alert boaters of listed species in the area susceptible to vessel strikes or hook-and-line captures. NMFS website

(http://sero.nmfs.noaa.gov/protected_resources/section_7/protected_species_educational_signs/index.html) provides sign installation guidance and most current version of the signs.

(1) All commercial and public boat ramps shall install the Save Sea Turtle, Sawfish, and Dolphin sign.

(2) If the Project occurs within the range of Gulf, Atlantic, or Shortnose sturgeon, the Permittee will install and maintain the *Report Sturgeon* sign.

(3) If the Project occurs within 14 miles of North Atlantic Right Whale critical habitat, the Permittee will install and maintain the *Help Protect North Atlantic Right Whales* sign.

d. Project construction will take place from uplands or from floating equipment (e.g., barge); prop or wheel-washing is prohibited.

16. (For *Transient activities*.)

a. Temporary structures shall not block access of species to an area such as preventing movement in or out of a river or channel.

b. (For *scientific sampling, measurement, and monitoring devices*.) No later than 24 months from initial installation, or upon completion of data acquisition, whichever comes first, the measuring device and any other structure or fills associated with that device (e.g., anchors, buoys, lines) must be removed and the site must be restored to pre-construction elevations.

17. (For *Living Shorelines* of the *Shoreline Stabilization* category.)

a. Only native plant species will be planted.

b. Not more than 500 linear feet in length, not more than 35 ft waterward of the high tide line (note that FAC 62-330 limits to 10 feet of the mean high water line) or result in more than 0.5 ac area between the natural shoreline and the structure.

c. No discharge of earthen fill material, other than earthen material associated with vegetative planting, is not authorized.

d. Construction, maintenance, and removal of approved permanent, shore-parallel wave attenuation structures are authorized. Approved permanent wave attenuation materials include oyster breakwaters (described below), clean limestone boulders, and prefabricated structures made of concrete and rebar that are designed in a manner that cannot trap sea turtles, Smalltooth sawfish, or sturgeon. Reef balls that are not open on the bottom, triangle structures with a top opening of at least 3 feet between structures, and reef discs stacked on a pile may be used.

e. (For oyster breakwaters.)

(1) Reef materials shall be placed in a manner to ensure that materials (e.g., bagged oyster shell, oyster mats, loose cultch surrounded and contained by a stabilizing feature, reef balls, and reef cradles) will remain stable and prevent movement of materials to surrounding areas.

(2) Materials must be placed in designated locations (i.e., shall not be indiscriminately/randomly dumped) and shall not be placed outside of the total project limits.

18. (For *Subaqueous Utility Lines* of the *Transient Activities* category.)

a. A Frac-out Contingency Plan similar to the attached plan will be developed, submitted with the application and then followed.

b. All subaqueous transmission lines crossing over, under, or in flood control channels/canals in Federal projects (either federally or locally maintained) which are installed with horizontal direction drilling (HDD) shall comply with the following:

(1) The project shall ensure the top of the HDD boring is a minimum of 10 feet beneath the bottom of the channel including a minimum 25 feet outside the channel edges and the estimated total drilling fluid pressure is less than 10 psi.

(2) Construction of directional boring vaults, junction boxes, and/or pads are not allowed within 25 feet of the top of the bank of any federal project.

(3) Projects not in compliance with these criteria shall not be eligible for authorization under SPGP V.

(4) Any activity within a Federal right-of-way shall require the Permittee to enter into a consent-to-easement with the Real Estate Division, U.S. Army Corps of Engineers, Jacksonville or Mobile District, as appropriate, prior to the commencement of any construction activity.

(5) The Permittee shall, upon completion of work, provide an as-built survey showing the horizontal and vertical location (X-Y-Z coordinates in NAD 83 and NAVD 88) of the object below the channel as it enters and exits the design edges of the authorized width of the channel, plus a minimum of 25 feet outside the channel edges.

c. Where the proposed subaqueous utility or transmission line is to be installed in navigable waters of the United States, at least 2 weeks prior to the start of the authorized work, the permittee must notify the National Oceanic and Atmospheric Administration (NOAA) and the Corps in writing that the work is commencing; and, again, upon completion of the work. The permittee shall notify the District Engineer in writing at the letterhead address, attention Regulatory Division; and, the NOAA, either in mailed correspondence to Nautical Data Branch Office of Coast Survey N/CS26, 1315 East-West Highway, Silver Spring, MD 20910-3282 or by electronic mail correspondence, with scans of the requisite documents attached, through osc.ndb@noaa.gov and spgp@usace.army.mil. The postconstruction notification will include "as-built plans," signed and sealed by a registered surveyor/engineer licensed in the State of Florida, that certify the project is constructed as authorized; and must include an accurate depiction of the location and configuration of the completed activity in relation to the mean high water of the navigable water.

19. (For *Removal of Derelict Vessels* of the *Transient Activities* category.)

a. Removal of marine debris shall require visual confirmation (e.g., divers, swimmers, camera) that the item can be removed without causing further damage to aquatic resources.

b. If an item cannot be removed without causing harm to surrounding coral, the item will be disassembled as much as practicable so that it no longer can accidentally harm or trap species.

c. Monofilament debris will be carefully cut loose from coral so as not to cause further harm. Under no circumstance will line be pulled through coral since this could cause breakage of coral.

d. Marine debris shall be lifted straight up and not be dragged through seagrass beds, coral, or hard bottom habitats. Debris shall be properly disposed of in appropriate facilities in accordance with applicable federal and state requirements.

20. For concrete piles installed by impact hammer:

a. The piles will be less than or equal to than 24 inches in diameter; and

b. Not more than 10 piles will be installed per day if in open water; or,

c. Not more than 5 piles will be installed per day in a *confined space*. A *confined space* is defined as any area that has a solid object (e.g., shoreline, seawall, jetty) or structure within

150 feet of the pile installation site that would effectively serve as a barrier or otherwise prevent animals from moving past it to exit the area. This does not include objects such as docks or other pile-supported structures that would not stop animal movement or significantly reflect noise.

21. Metal piles will NOT be installed by impact hammer.

22. Projects within the boundary of the NOAA Florida Keys National Marine Sanctuary require prior approval from the Sanctuary.

23. The Permittee shall use only clean fill material. The fill material shall be upland sources and be free of items such as trash, debris, automotive parts, asphalt, construction materials, concrete block with exposed reinforcement bars, and soils contaminated with any toxic substance, in toxic amounts in accordance with Section 307 of the Clean Water Act.

24. No blasting is authorized.

25. For Projects authorized under this SPGP V in navigable waters of the U.S., the Permittee understands and agrees that, if future operations by the United States require the removal, relocation, or other alteration, of the structures or work herein authorized, or if, in the opinion of the Secretary of the Army or his authorized representative, said structure or work shall cause unreasonable obstruction to the free navigation of the navigable waters, the Permittee will be required, upon due notice from the Corps of Engineers, to remove, relocate, or alter the structural work or obstructions caused thereby, without expense to the United States. No claim shall be made against the United States on account of any such removal or alteration.

26. The SPGP V will be valid for five (5) years from the date of issuance unless suspended or revoked by issuance of a public notice by the District Engineer. The Corps, in conjunction with the Federal resource agencies, will conduct periodic reviews to ensure that continuation of the permit during the five-year authorization period is not contrary to the public interest. If revocation occurs, all future applications for activities covered by the SPGP V will be evaluated by the Corps.

27. If the SPGP V expires or is revoked prior to completion of the authorized work, authorization of activities which have commenced or are under contract to commence in reliance upon the SPGP V will remain in effect provided the activity is completed within twelve (12) months of the date the SPGP V expired or was revoked.

28. The General Conditions attached hereto are made a part of this SPGP V and must be attached to all authorizations processed under this SPGP V.

Department of the Army Permit Transfer for SPGP V

PERMITEE: _____

PERMIT NUMBER: _____ DATE: _____

ADDRESS/LOCATION OF PROJECT:

(Subdivision)

(Lot)

(Block)

When the structures or work authorized by this permit are still in existence at the time the property is transferred, the terms and conditions of this permit will continue to be binding on the new owner(s) of the property. Although the construction period for works authorized by Department of the Army permits is finite, the permit itself, with its limitations, does not expire.

To validate the transfer of this permit and the associated responsibilities associated with compliance with its terms and conditions, have the transferee sign and date below and mail to the U.S. Army Corps of Engineers, Enforcement Branch, Post Office Box 4970, Jacksonville, FL 32232-0019.

(Transferee Signature)

(Date)

(Name Printed)

(Street address)

(Mailing address)

(City, State, Zip Code)



PREPARED BY: GARLICK ENVIRONMENTAL ASSOCIATES, INC.

PO BOX 385, APALACHICOLA FLORIDA 32329-0385

(850) 653-8899 FAX (850) 653-9656 garlick@garlickenv.com

7415

APPLICANT/CLIENT: Robert Kirby

WATERBODY/CLASS: Alligator Harbor / ClassII / OFW / AP

PURPOSE: Environmental Permitting

PROJECT LOCATION / USGS: Alligator Point / Franklin County

LATITUDE:

LONGITUDE:

SECTION: 2 TOWNSHIP: 7 South RANG: 2 West

JOB: 18-113


DEP:

COE:

OTHER:

DATE: October 2, 2018

SHEET: 1/4

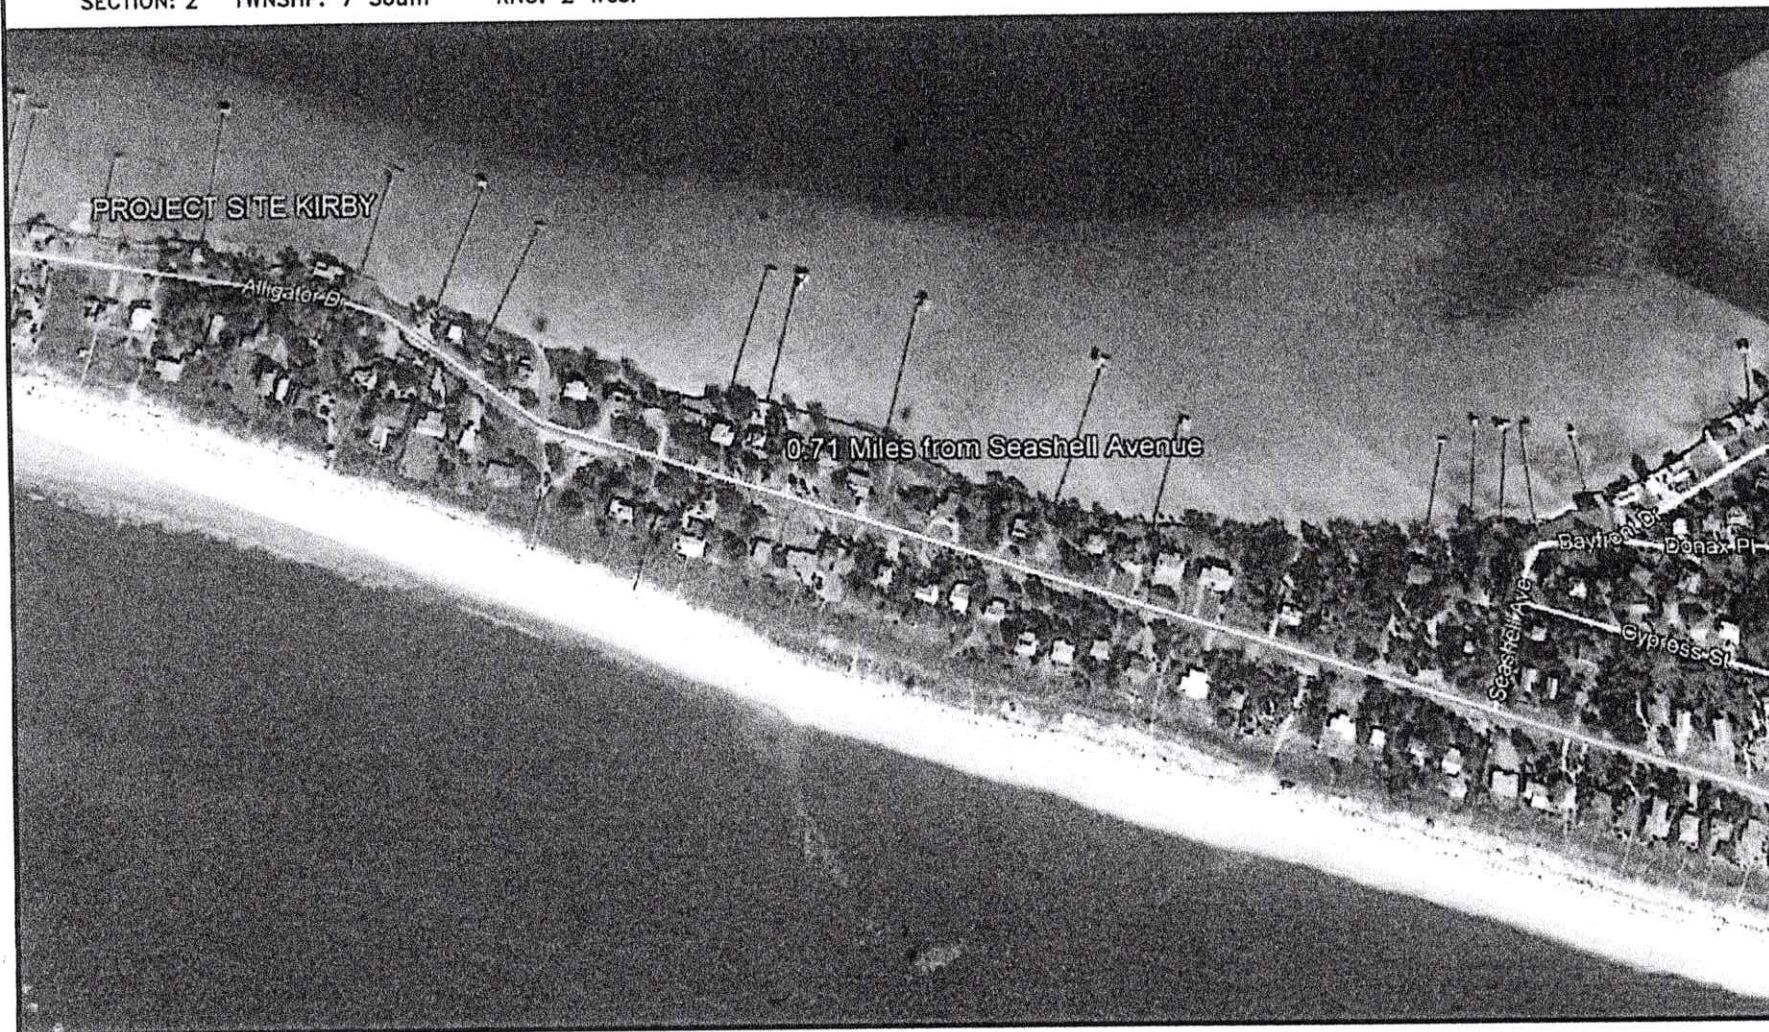




PREPARED BY: GARLICK ENVIRONMENTAL ASSOCIATES, INC.

APPLICANT/CLIENT: Robert Kirby
WATERBODY/CLASS: Alligator Harbor / ClassII / OFW / AP
PURPOSE: Environmental Permitting
PROJECT LOCATION / USGS: Alligator Point / Franklin County
LATITUDE:
LONGITUDE:
SECTION: 2 TWSHP: 7 South RNG: 2 West

JOB: 18-113
DEP:
COE:
OTHER:
DATE: October 2, 2018
SHEET: 2/4

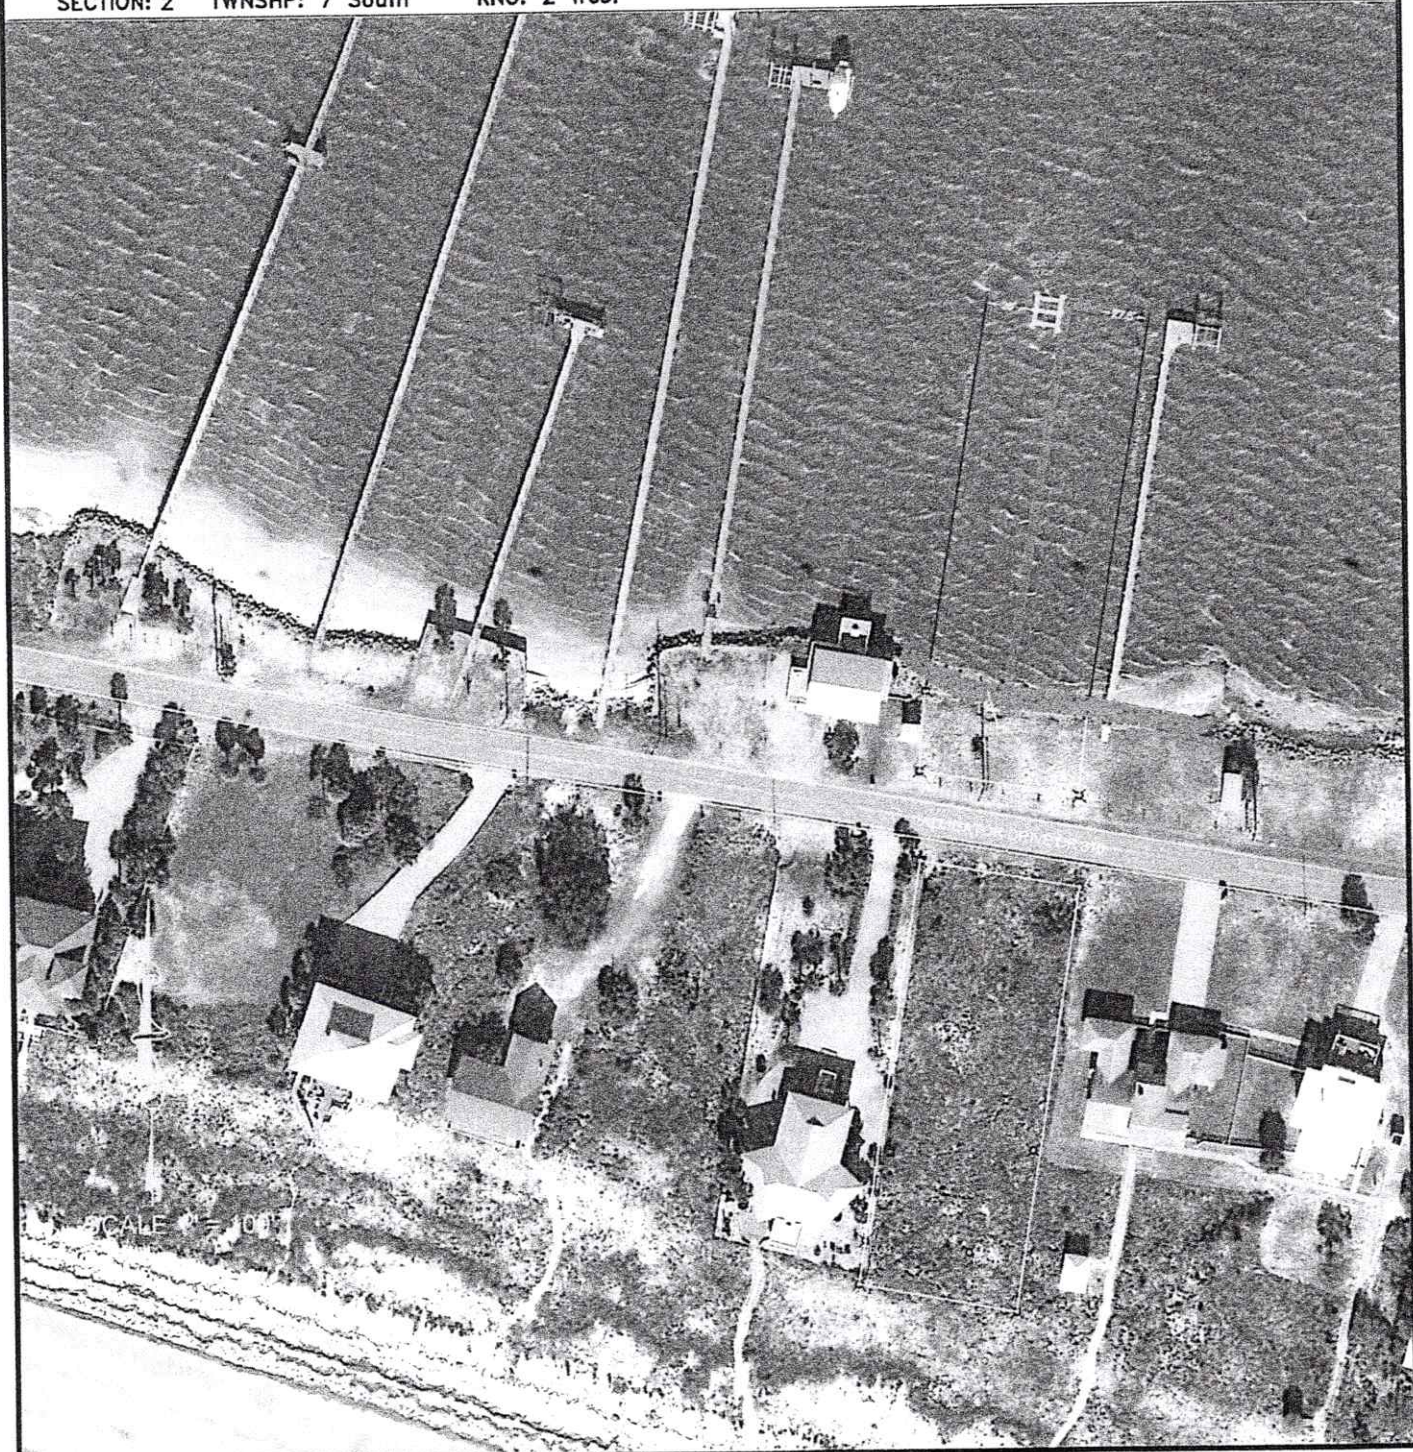




PREPARED BY: GARLICK ENVIRONMENTAL ASSOCIATES, INC.

APPLICANT/CLIENT: Robert Kirby
WATERBODY/CLASS: Alligator Harbor / ClassII / OFW / AP
PURPOSE: Environmental Permitting
PROJECT LOCATION / USGS: Alligator Point / Franklin County
LATITUDE:
LONGITUDE:
SECTION: 2 TOWNSHIP: 7 South RANG: 2 West

JOB: 18-113
DEP:
COE:
OTHER:
DATE: October 2, 2018
SHEET: 3/4

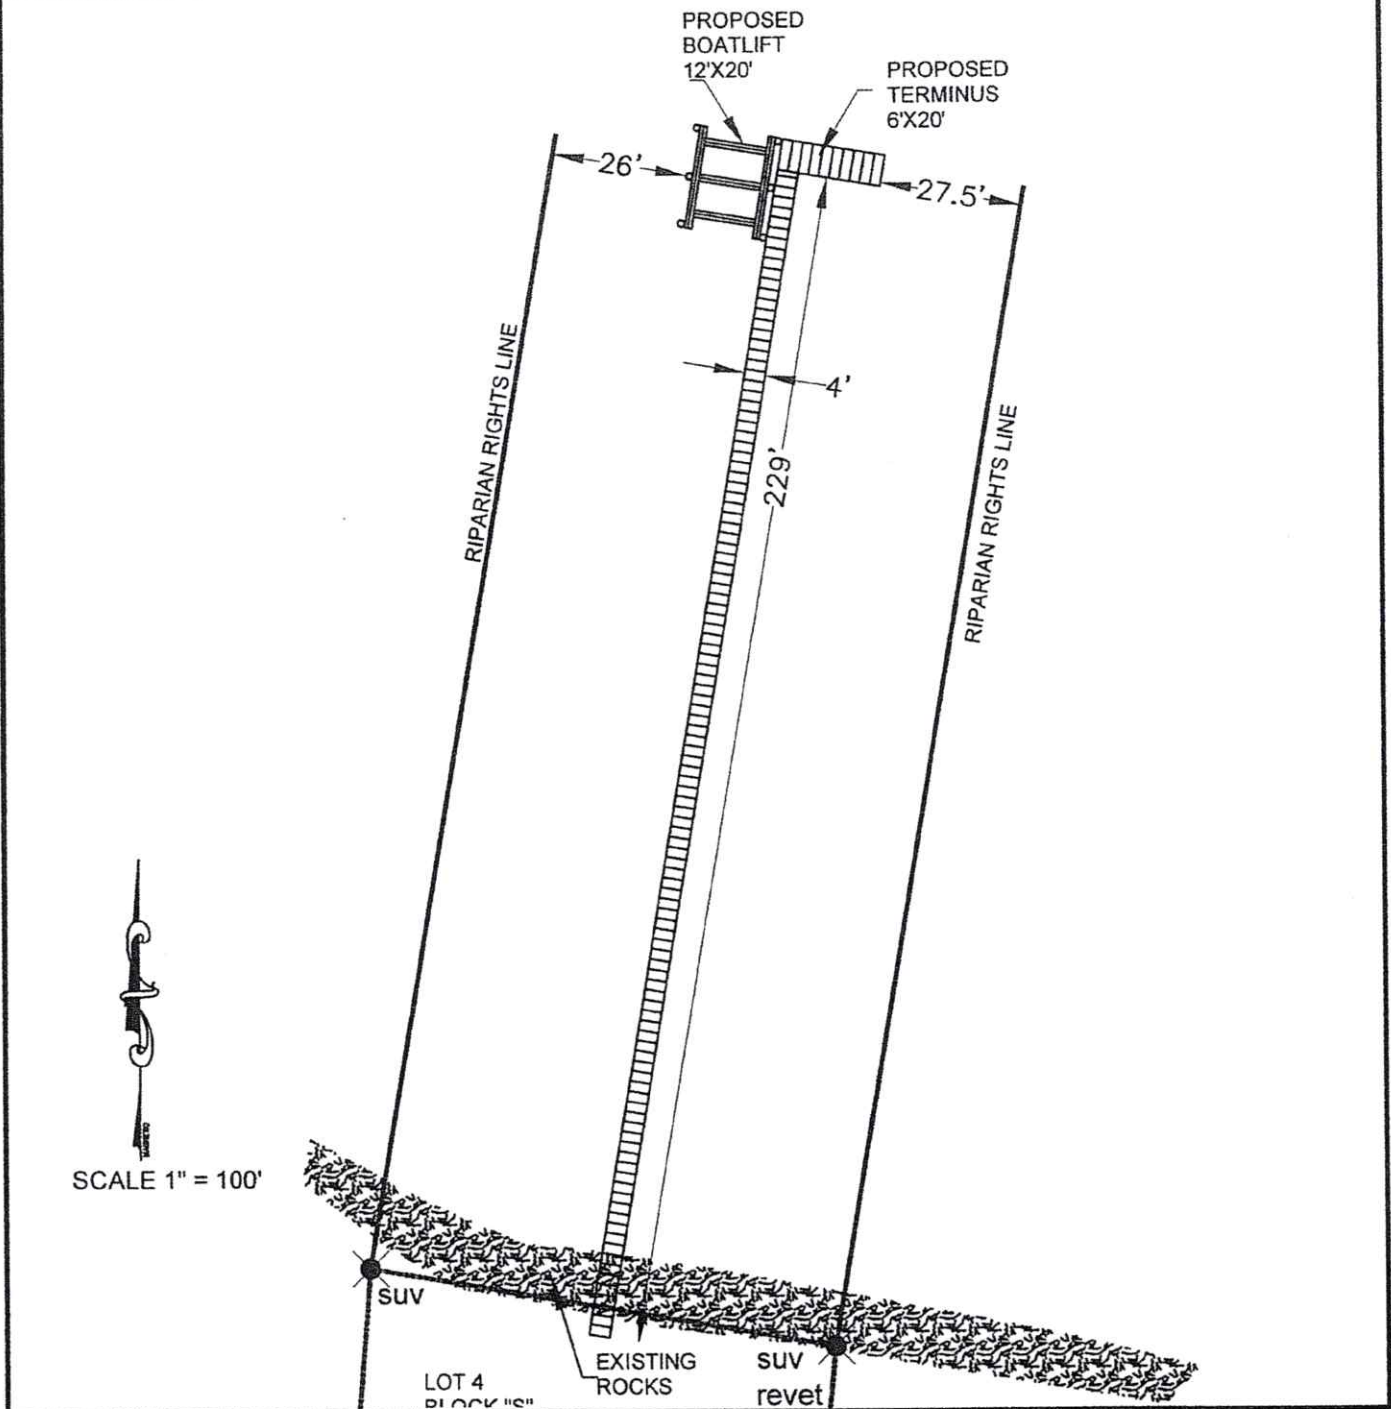



PREPARED BY: GARLICK ENVIRONMENTAL ASSOCIATES, INC.

BOX 385, APALACHICOLA FLORIDA 32329-0385 (850) 653-8899 FAX (850) 653-9656 garlick@garlickenv.com



APPLICANT/CLIENT: *Robert Kirby*
WATERBODY/CLASS: Alligator Harbor / ClassII / OFW / AP
PURPOSE: Environmental Permitting
PROJECT LOCATION / USGS: Alligator Point / Franklin County
LATITUDE:
LONGITUDE:
SECTION: 2 TWSHP: 7 South RNG: 2 West

JOB: 18-113
DEP:
COE:
OTHER:
DATE: October 2, 2018
SHEET: 4/4

CROSS SECTION
OF PROPOSED DOCK
Not To Scale

