Luminaire Schedule								
Project: Suburban Accessories - Site								
Symbol	Qty	Label	Arrangement	Description	LLF	Luminaire Lumens	Luminaire Watts	Total Watts
	10	WP1	Single	Lithonia RSX2 LED P6 40K R4 MVOLT WBA FINISH	0.903	30662	246.63	2466.3
	2	WP2	Single	Lithonia RSX1 LED P4 40K R3 MVOLT WBA FINISH	0.903	16359	133.14	266.28

Calculation Summary								
Project: Suburban Accessories - Site								
Label	CalcType	Units	Avg	Max	Min	Avg/Min	Max/Min
CalcPts taken Overall	Illuminance	Fc	0.59	5.9	0.0	N.A.	N.A.
StatArea - East Parking Lot	Illuminance	Fc	1.69	4.1	0.7	2.41	5.86
StatArea - North Dock	Illuminance	Fc	2.36	5.9	1.2	1.97	4.92
StatArea - South Parking Lot	Illuminance	Fc	1.98	5.9	0.7	2.83	8.43

NOTES:
FIXTURES ARE MOUNTED ON BLDG AT 30'-0" A.F.G.

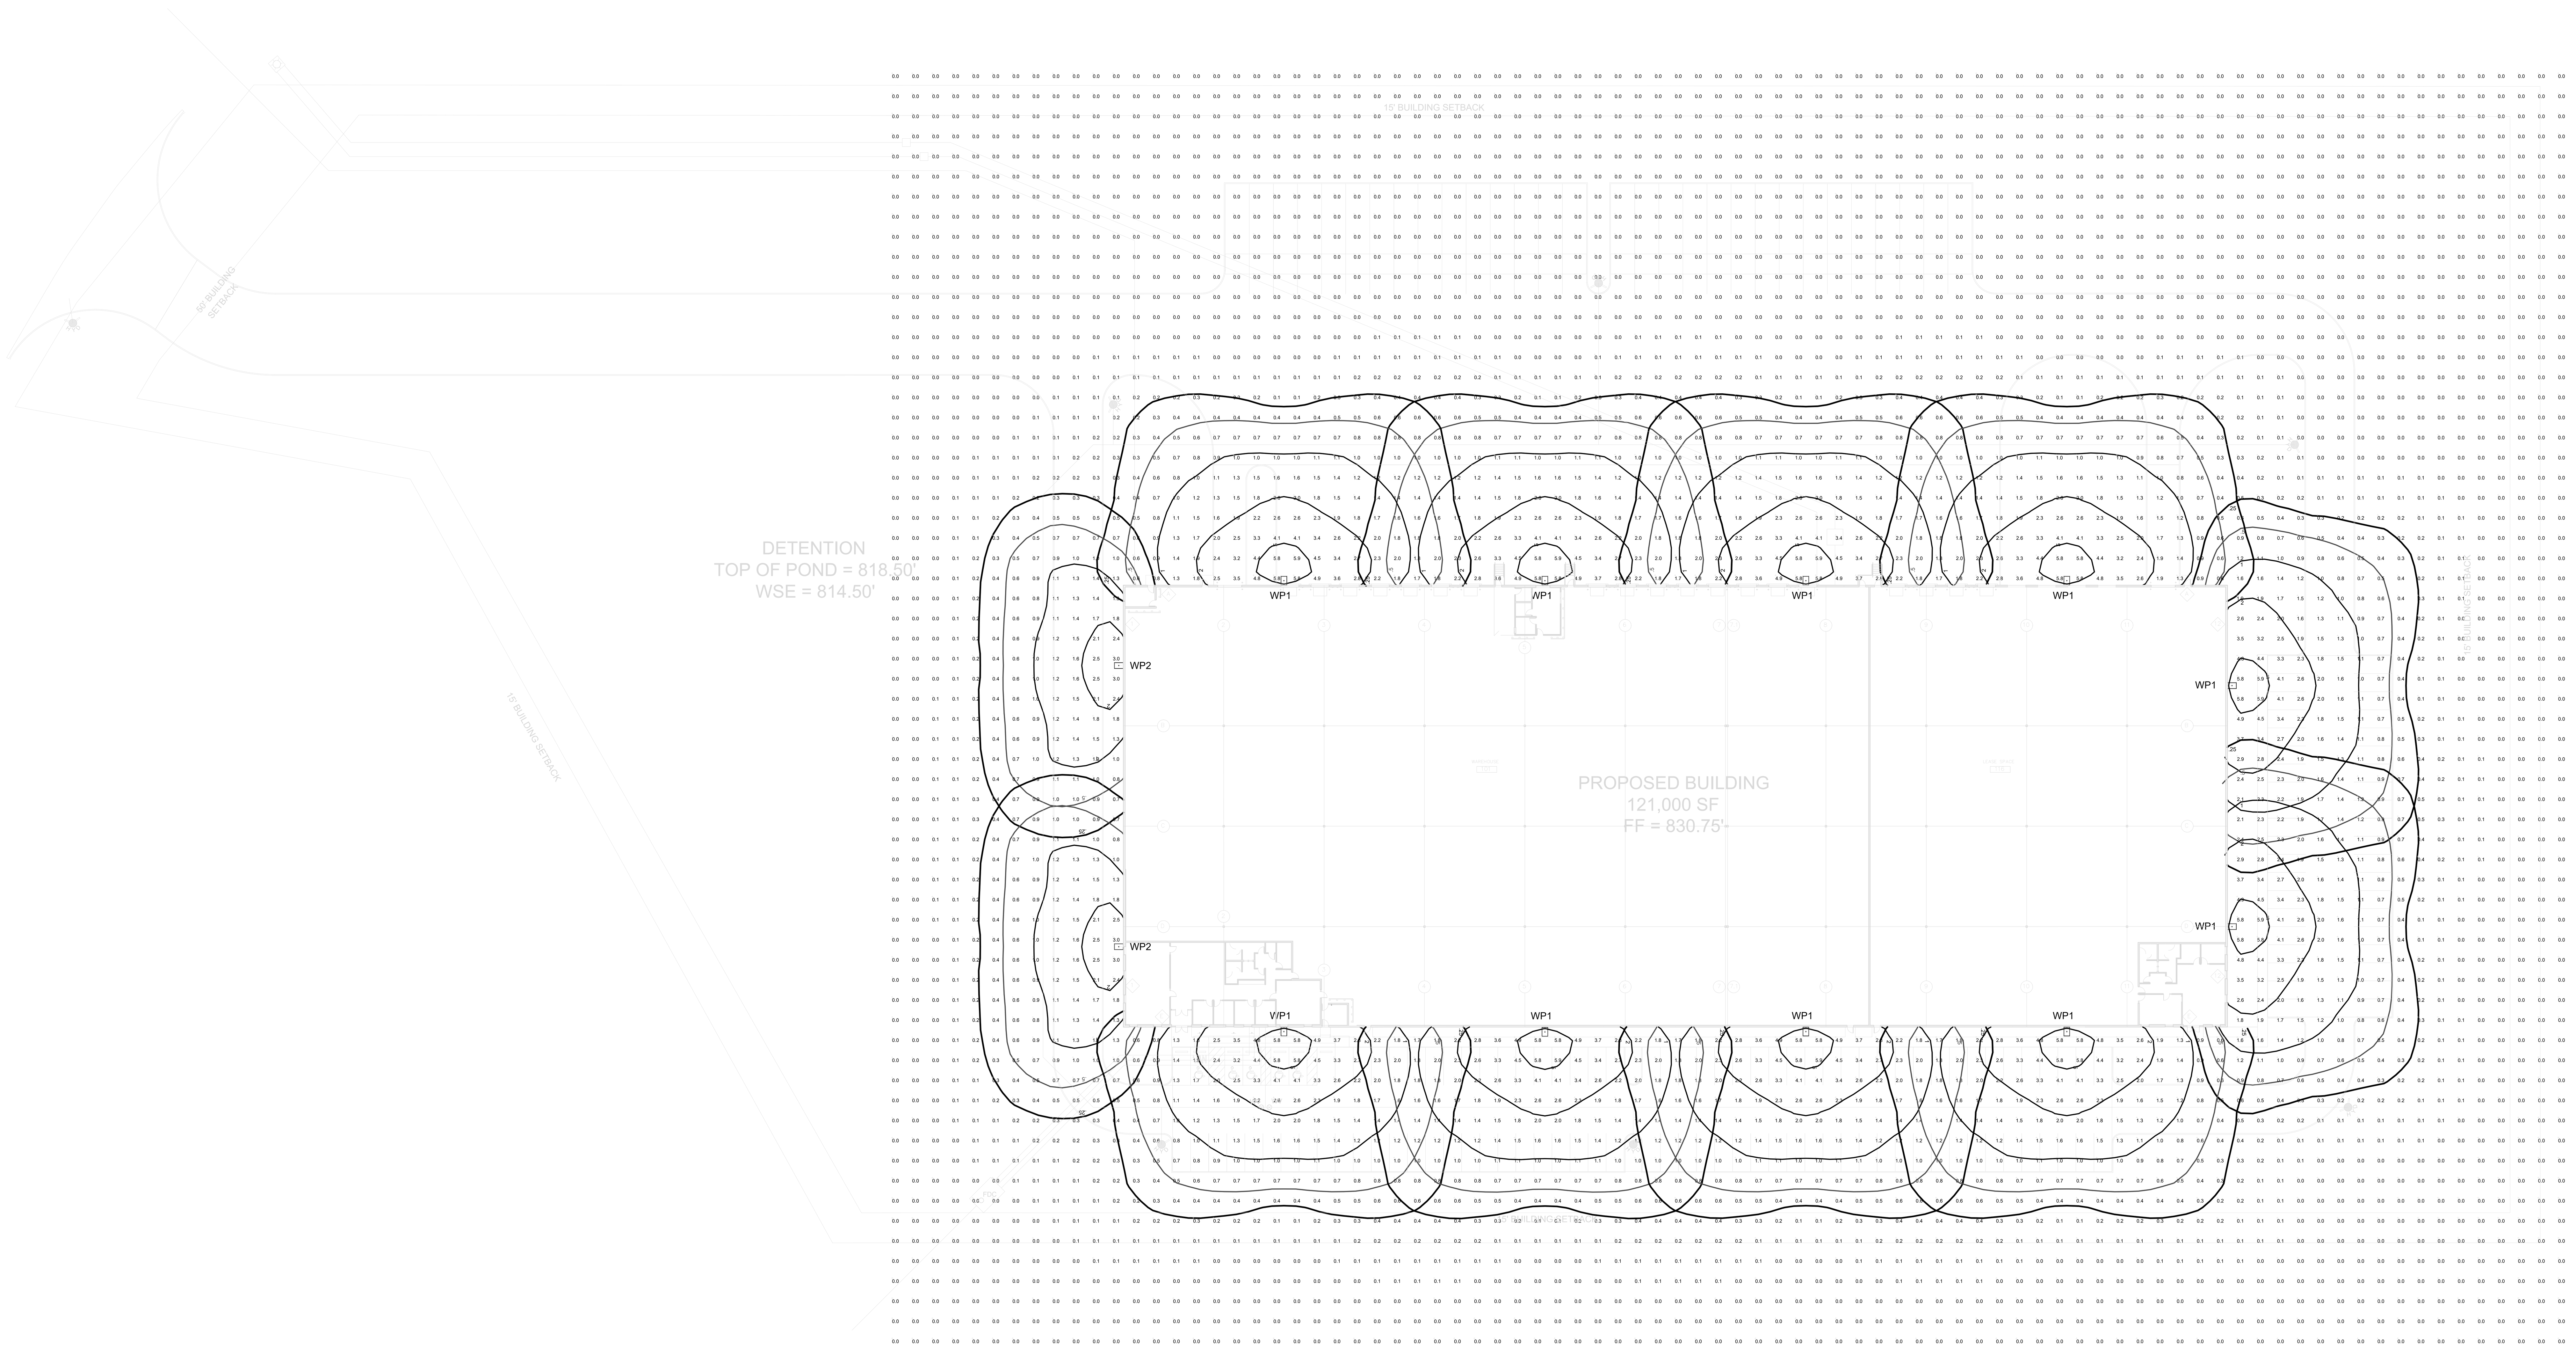

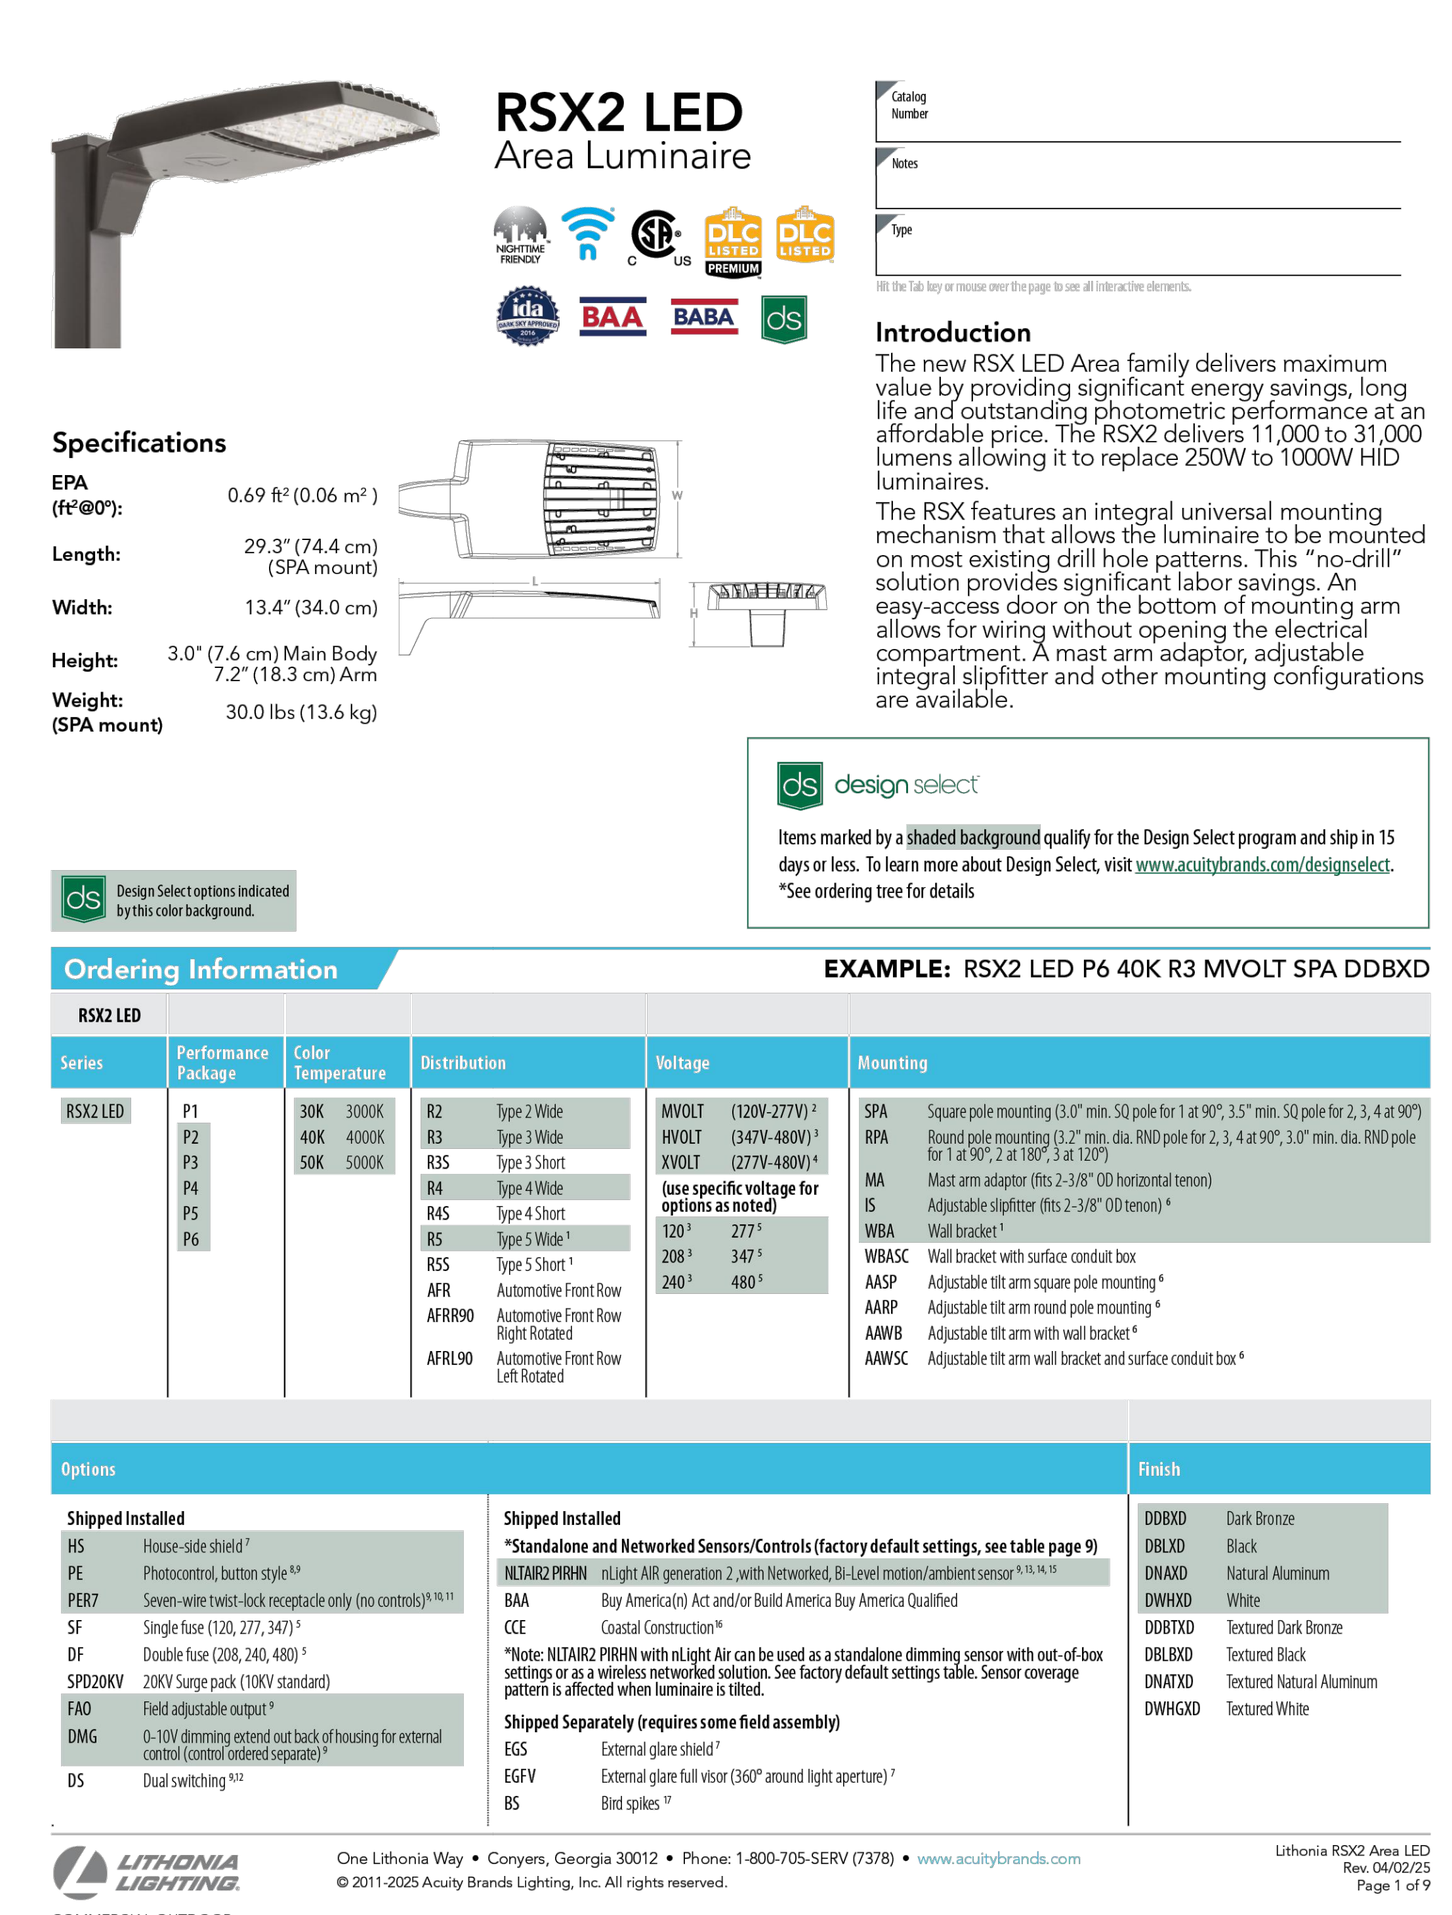

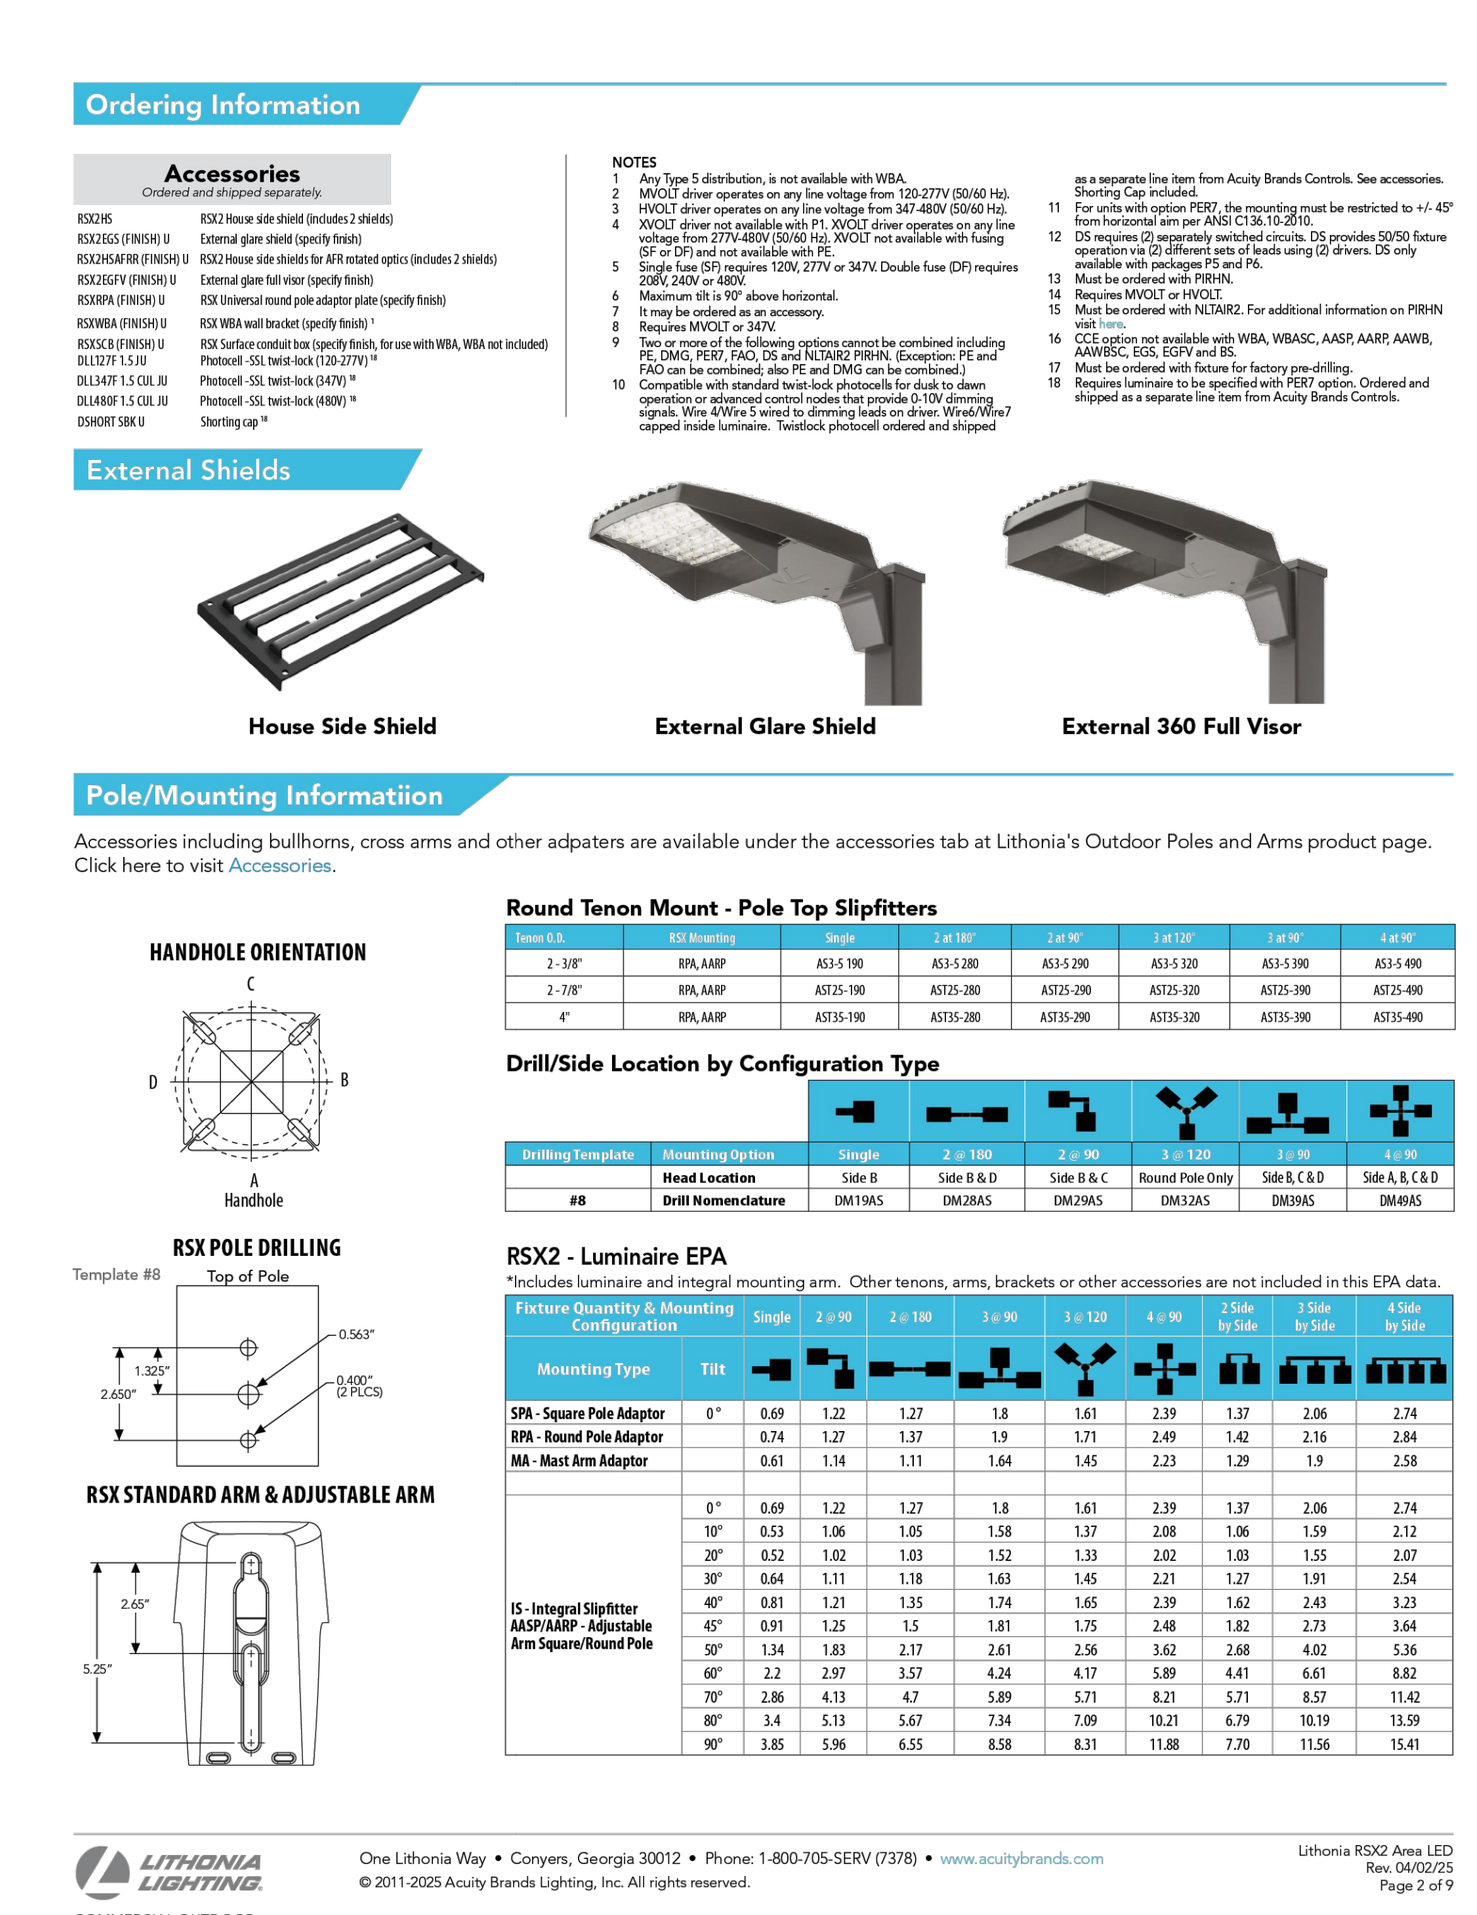

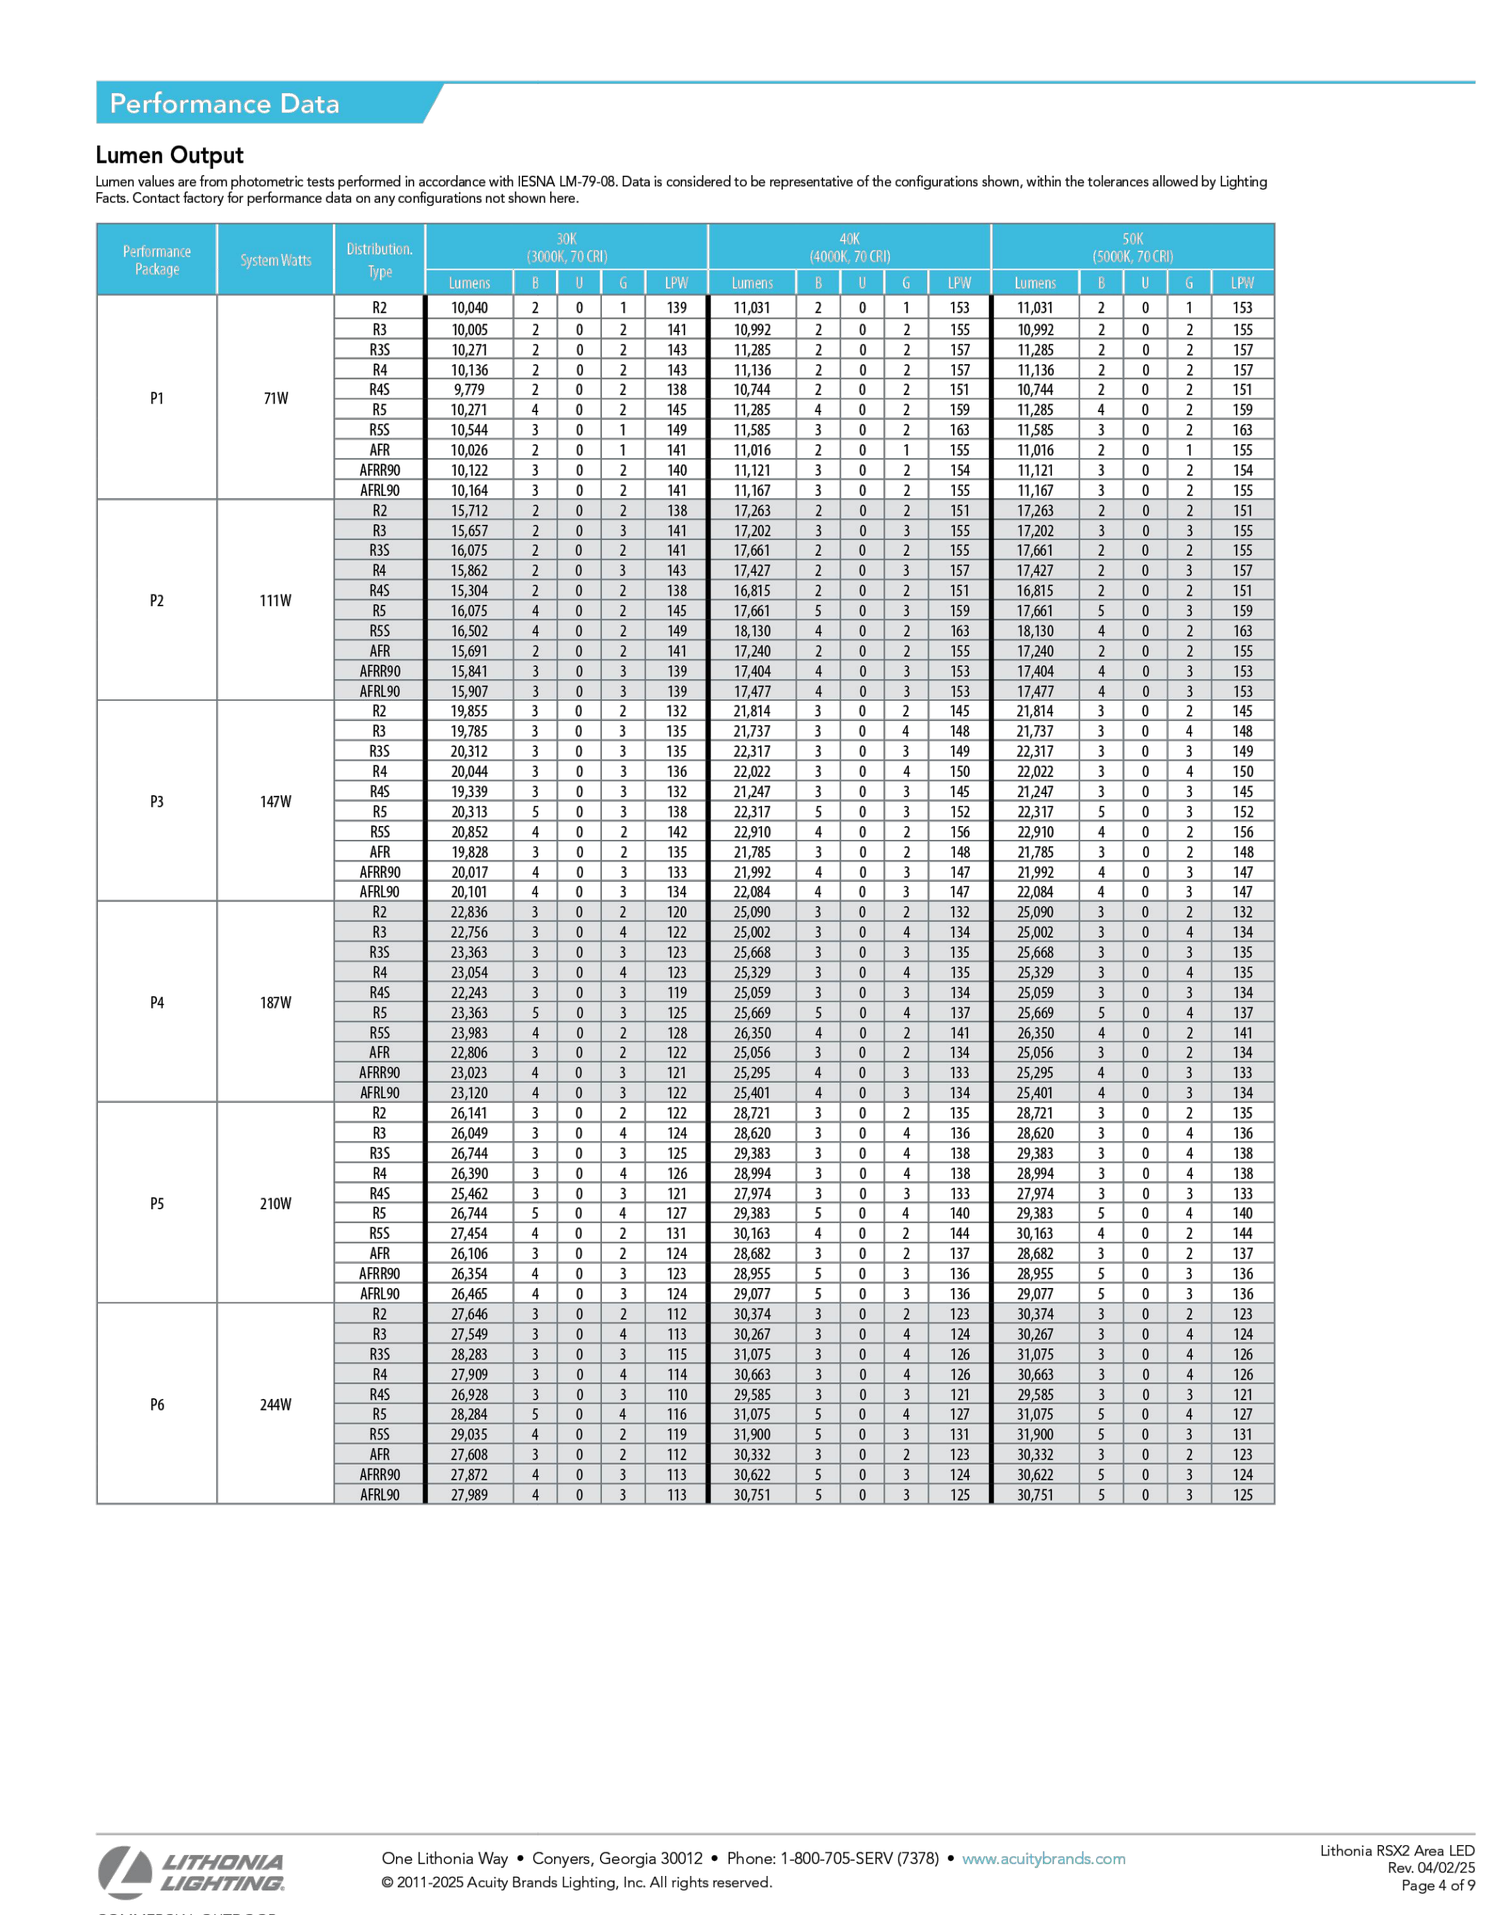

SITE PHOTOMETRIC PLAN

SCALE : 1" = 40' -0"

SECO Electric Co., Inc.
350 W PIKE STREET
COVINGTON KY 41011
p 859-491-2984
www.SECOelectric.net

SITE PHOTOMETRIC FOR:
SHAKER INDUSTRIAL PARK – SUBURBAN ACCESSORIES
FRANKLIN, OHIO

STATUS:

REVISION:

PROJECT NUMBER:
26-0396

DATE:
21 APRIL 2026

SHEET NAME:
FIRE ALARM PLAN, LEGEND, AND NOTES

SHEET NUMBER:
SP-1