



KENWORTH SALES COMPANY - SALT LAKE CITY (K340)
2125 S. CONSTITUTION BLVD
WEST VALLEY CITY, Utah 84119

SAN JUAN COUNTY LANDFILL
117 SOUTH MAIN
MONTICELLO, Utah 84535
United States of America

Bridger Clayton
Cell Phone:
Office Phone:
Email: bbclayton@kwsco.com

JED TATE
Email: jtate@sanjuancountyut.gov

Vehicle Summary

Unit		Chassis	
Model:	T880 Series Conventional	Fr Axle Load (lbs):	12350
Type:	FULL TRUCK	Rr Axle Load (lbs):	46000
Description 1:	T880 ROLL OFF CHASSIS	G.C.W. (lbs):	66000
Description 2:			
Application		Road Conditions:	
Intended Serv.:	Construction: Vehicles used in the cons	Class A (Highway)	78
Commodity:	Gravel/Crushed Rock/Sand	Class B (Hwy/Mtn)	20
Body		Class C (Off-Hwy)	2
Type:	Flatbed	Class D (Off-Road)	0
Length (ft):	18	Maximum Grade:	6
Height (ft):	6	Wheelbase (in):	258
Max Laden Weight (lbs):	2000	Overhang (in):	63
Trailer		Fr Axle to BOC (in):	74
No. of Trailer Axles:	3	Cab to Axle (in):	184
Type:	Flatbed	Cab to EOF (in):	247
Length (ft):	48	Overall Comb. Length (in):	945.5
Height (ft):	12.5	Special Req.	
Kingpin Inset (in):	24	U.S. Domestic Registry, 50-state.	
Corner Radius (in):	2		
Restrictions			
Length (ft):	75		
Width (in):	102		
Height (ft):	13.5		

Approved by: _____

Date: _____

Note: All sales are F.O.B. designated plant of manufacture.

Price Level: January 1, 2024
Deal: T880 ROLL OFF CHASSIS
Printed On: 1/9/2025 1:12:19 PM

98% Complete

Date: January 08, 2025
Quote Number: QUO-1078663-D1M4C0

Std/ Opt	Description	\$ List	Weight
Model			
S	T880 Series Conventional	234,126	15,549
S	T880	0	0
O	CARB Low NOX Omnibus Registration Guidelines Dealer/Customer acknowledges that this vehicle is NOT intended for registration or domicile/primary use in the State of California.	0	0
O	EPA Clean Idle Label - Cummins Engines	107	0
S	Non-Sleeper w/ Rear Axle Capacity less than 59K.	0	0
O	State of Registry: Utah	0	0
Engine & Equipment			
O	Cummins X15 500V 500@1900 1850@900, 2024 with Intebrake, Productivity Series N09420 C333 0.....Reserve Speed Limit Offset (N09380 C334 0.....Maximum Cycle Distance (C334 N09360 C400 252...Reserve Speed Function Reset N09200 C399 100...Standard Maximum Speed Limit N09400 C401 10....Maximum Active Distance (C40 N09220 C402 0.....Expiration Distance (C402) N09540 C395 0.....Expiration Distance (C395) N09260 C121 65....Maximum Accelerator Pedal Ve N09440 C234 NO....Engine Protection Shutdown (N09460 C231 NO....Gear Down Protection (C231) N09580 C133 5.....Timer Setting (C133) N09680 C233 NO....Idle Shutdown Manual Overrul N09480 C132 1400..Max PTO Speed (C132) N09300 C128 65....Maximum Cruise Speed (C128) N09500 C239 NO....Cruise Control Auto Resume (N09520 C238 NO....Auto Engine Brake in Cruise N09240 C209 100...Hard Maximum Speed Limit (C2 N09780 C190 80....High Ambient Temperature Thr N09740 C188 40....Low Ambient Temperature Thre N09760 C189 60....Intermediate Ambient Tempera N09720 C382 YES...Enable Hot Ambient Automatic N09600 C396 YES...Enable Impending Shutdown Wa N09620 C397 60....Timer For Impending Shutdown N09640 C206 35....Engine Load Threshold (C206) N09560 C225 YES...Enable Idle Shutdown Park Br	11,510	470
O	EPA Emissions Warranty Engine	0	0
S	PremierSpec	0	0
O	Gearing Analysis: Balance power/economy blend results.	0	0

Price Level: January 1, 2024
Deal: T880 ROLL OFF CHASSIS
Printed On: 1/9/2025 1:12:19 PM

98% Complete

Date: January 08, 2025
Quote Number: QUO-1078663-D1M4C0

Std/ Opt	Description	\$ List	Weight
O	Customer's Typical Operating Spd: 65 MPH	0	0
	RegistrationYear Year of Registration: 2025	0	0
	Effective VSL Setting NA	0	0
O	Engine Idle Shutdown Timer Disabled	0	0
O	Eff EIST NA Expiration Miles Use only with MX and Cummins engines	0	0
O	Air Compressor: Cummins 18.7 CFM, Naturally Aspirated for Cummins X15 and X15N engines	211	0
S	Air Cleaner: Composite Firewall Mounted PACCAR or Cummins Engines	0	0
O	Pre-Cleaner Mounted in the Hood Plenum	317	0
O	Fan Hub: Horton 2-Speed for X15/X15N	24	0
S	Cooling module: 1330 square inches. Includes aluminum radiator core, aluminum charge air cooler, translucent surge tank and washer bottle, silicone hoses, and extended life coolant.	0	0
O	EXH: Single Can 2024 RH Under with RH Horizontal Tailpipe Below Rail	-523	0
O	Fuel Filter:PACCAR Standard Service Interval Fuel/Water Separator. 2017 and Later Emissions	74	0
S	Run Aid:Fuel Heat *For Fuel Filter	0	0
S	Start Aid:12V Heat *For Fuel Filter	0	0
O	Kenworth fuel cooler for single fuel tanks.	76	0
O	Immersion Block Heater 120V 1500W W/ Plug Under Door on C500, T660, T800 & W900.	150	2
O	Alternator: PACCAR 160 amp, Brush Type	-6	0
S	Batteries: 3 PACCAR GP31 Threaded Post (700-730) 2100-2190 CCA dual purpose.	0	0
O	PACCAR Premium 12V Starter W/ Cummins X15 Engines PACCAR 12 volt electrical system. With centralized power distribution incorporating plug-in style relays. Circuit protection for serviceability, 12- volt light system with circuit protection circuits number & color coded.	123	0
S	12V Low Voltage Disconnect for Battery Protection	0	0
O	Jump Start Terminals Under Hood.	276	12
S	Remote PTO/Throttle, 12-Pin, Engine Bay Remote Control Provision	0	0

Transmission & Clutch

Price Level: January 1, 2024
 Deal: T880 ROLL OFF CHASSIS
 Printed On: 1/9/2025 1:12:19 PM

98% Complete

Date: January 08, 2025
 Quote Number: QUO-1078663-D1M4C0

Std/ Opt	Description	\$ List	Weight
O	Transmission: Fuller RTLO20918B 18-speed w/oil cooler & pump. Standard with synthetic lubricant. Includes severe-duty pilot bearing on all class 8 models. *Torque Limit: 2050 pound-feet.	1,013	214
O	Clutch: Eaton 15-1/2 in. Advantage Self-Adjust to 1850 ft-lb, Ceramic, 6-Paddle, Predamper	1,478	6
O	Air-Assisted Hydraulic Clutch	0	0
O	Driveline: 2 Meritor RPL25 SD; 1 Centerbearing	964	114
O	First Transmission PTO Compatibility - Chelsea 230/236/238/442/489/660/680-V3 or Muncie CS8/SH8/TG8S-P1 bottom mounted 6 or 8-Bolt PTO's for all Eaton & PACCAR transmissions. This application includes use of the standard hydraulic clutch actuator on Eaton FR & RT transmissions and supports bottom mounted 6 and 8-Bolt PTO's with single acting air actuation.	0	0
O	Rear Transmission Support Springs for transmission PTO applications are required to ensure that engine flywheel housings are not overloaded when transmission PTO's are installed.	92	0
O	First Customer Installed Eaton/PACCAR Trans PTO.	0	0
O	14" Eaton High Capacity Standard Cooler Oil to Water. For Transmission 1550-2250 LBFT, 18-speed AutoShift.	0	0
O	Aluminum Clutch Housing	0	0
O	Grease Bank for Clutch Throwout Bearing	111	4
Front Axle & Equipment			
O	Meritor MFS20 Front Axle rated 20K 3.5 in. drop, standard track.	-145	-7
S	Front Brakes: 14,601-22K Bendix Air Disc Brakes.	0	0
O	Splined Rotor for Front Air Disc Brakes for Use with Iron Hubs.	-199	0
O	Front Hubs Iron Hub Pilot 20,000 lbs. 10 Bolt 16.5x6in. or 7in. or air disc brakes. 10 Bolt, 11-1/4 in. bolt circle. Consider Wheelguards (5850002) with aluminum wheels.	-185	80
S	ConMet PreSet Plus Hub Package; Front Axle.	0	0
S	Hubcap: Front Vented.	0	0
S	Slack Adjusters Included W/ Front Axle or Brakes. Also use with disc brakes.	0	0
S	Front Springs: Taperleaf 20K W/ Shock Absorbers w/ maintenance-free elastomer spring pin bushings. Standard with rubber pins except for C500 which has threaded pins. Not available on W900L. W900B use 2866021.	0	0

Price Level: January 1, 2024

98% Complete

Date: January 08, 2025

Deal: T880 ROLL OFF CHASSIS

Quote Number: QUO-1078663-D1M4C0

Printed On: 1/9/2025 1:12:19 PM

Std/ Opt	Description	\$ List	Weight
S	Dual Power Steering Gear: 16-22K TRW THP60 Not for use on T3.	73	54
S	Power Steering Cooler: Radiator Mounted Air-to-Oil	0	0
O	Threaded Bushings for Taperleaf Spring 16K, 18/20K, 22K, 40K replacing rubber.	103	0
Rear Axle & Equipment			
S	Dual Meritor RT46-160 Rear Axle rated at 46K. Tandem rear axles.	0	0
O	Rear Axle Ratio - 3.91.	0	0
S	Dual Rear Bendix Air Disc Brakes for Dual rear axles to 46K capacity.	0	0
S	Splined Rotor for Dual Rear Air Disc Brake for use with aluminum hubs.	0	0
S	Dual Rear Hubs: Aluminum Hub Pilot 46K; 11.25" bolt circle. Requires "R" series outer ends.	0	0
S	ConMet PreSet Plus Hub Package; Dual Rear Axle.	0	0
S	Rear Slack Adjusters Included W/ Axle or Air disc brakes.	0	0
S	Spring Brakes Included W/ Dual Rear Air Disc brakes.	0	0
O	Bendix 4S/4M Anti-Lock Brake System W/ Air traction control (ATC).	-2,507	2
S	Interaxle Driveline: 1 Meritor RPL20 Replacing I/A *Use W/ RPL(SD) 25 Main D/L	0	0
O	Driver Controlled Differential Lock (Crosslock) for Meritor Axles 40K to 52K forward rear & rear rear axle. Under Speed Interlock is standard on T680.	2,676	39
O	Separate Switch for Dual Axles: differential lock or crosslock.	13	0
S	Rear suspension: Tandem Kenworth Airglide 460 46K 54 in. axle spacing. 10.5 in. ride height. Includes air suspension dump valve.	0	0
S	Air Springs: Heavy-Duty for Airglide 460. Replaces standard duty air springs.	0	0
O	Heavy-Duty Gussets for Forward Suspension crossmember on Airglide 400/460, Chalmers, or Hendrickson beam suspensions. This replaces the standard gussets.	103	12
Tires & Wheels			
O	Front tires: Continental HSR3 11R22.5 14PR	-1,428	-118
O	Rear tires: Continental HDR2+ 11R22.5 14PR	-3,684	176
O	Rear Tire Quantity: 8	0	0

Std/ Opt	Description	\$ List	Weight
O	Front Wheel: Accuride 50344 22.5x8.25 steel Steel Armor[TM] powder coat, hub-pilot mount.heavy-duty 5 hand-hole hub pilot mount.	-848	20
S	Rear Wheel: Accuride 50344 22.5x8.25 steel Steel Armor[TM] powder coat, hub-pilot mount. Heavy-duty 5 hand-hole hub pilot mount. Code is priced per pair of wheels.	0	0
O	Powder Coat White Steel Wheel. Use in Conjunction with front, dual front, rear, spare or lift axle wheel code(s). All wheels on chassis must have same finish color.	0	0
O	Rear Wheel/Rim Quantity: 8	0	0

Frame & Equipment

O	Frame Rails: 10-11/16 x 3-1/2 x 1/2 in. Steel to 455 in. Truck frame weight is 4.70 lb.-in. per pair of rails. Section modulus is 22.35, RBM is 2,683,000 in-lbs per rail. Frame rail availability may be restricted based upon application, axle/suspension capacity, fifth wheel setting, or component/dimensional specifications. The results of the engineering review may result in a change to the requested frame rail. If a change is required Kenworth Application Engineering will advise the dealer of the appropriate material specification for a substitute rail.	6,441	929
O	Bumper: Tapered Painted Steel Channel. Requires a bumper setting code.	-92	44
S	48.5 in. Bumper Setting. Requires a Bumper Code.	0	0
O	Front Tow Hook: Center Mounted, Cast. Requires iron front drive brackets.	303	28
O	Steel Shackle Links.	10	8
O	Front Mudflaps.	0	0
O	Custom Frame Layout: One Chassis CFL A/T: in frame rails CFL F/T: Far forward as possible	1,380	0
O	Huck Bolts Throughout Frame, where Possible.	322	0
O	Short Length Steel Parallel Battery Box Module under cab, aluminum integral step, diamond plate cover. Up to 2 air tanks may mount to bottom of box. Batteries will be oriented perpendicular on rail.	-18	53
S	Battery Box Location: LH Side.	0	0
O	C5, T6, T8 Non-Polished DPF/SCR or CNG cover, diamond plate with cab access step and polished end plates. For use with 2017 or later RH under exhaust systems. For T8, use extended length non-polished battery box on opposite rail to match the length of under cab components. For use with frame paint color other than standard black. The cover will be unpolished diamond-plate and the end plates will be polished.	165	0
O	Rear Mudflap Arms: Fleet Engineers, FB27 Shortie 033-00865. 45 degree angle, polished stainless steel.	168	6

Price Level: January 1, 2024

98% Complete

Date: January 08, 2025

Deal: T880 ROLL OFF CHASSIS

Quote Number: QUO-1078663-D1M4C0

Printed On: 1/9/2025 1:12:19 PM

Std/ Opt	Description	\$ List	Weight
S	Rear Mudflap Shields: White Plastic Antisail W/ Kenworth logo.	0	0
O	Square End-of-Frame W/ Crossmember; Non-Towing.	307	30
Fuel Tanks & Equip			
S	Fuel Tank: 100 US Gallon 24.5 in. Aluminum BOC replace. Class 8 fuel tanks w/o locking caps include an anti-siphon device on the filler neck.	0	0
S	Small Round DEF Tank, 14 Gallons. The DEF tank will be located on the side you specified. If you have specific configuration or body builder concerns, please utilize the Custom Frame Layout option. Standard capacity is calculated by fuel capacity of the vehicle and will accommodate two diesel fill-ups for every DEF fill-up. For 1:1 DEF fuel fill ratio, add 7889204.	0	0
O	Minimum Required DEF to Fuel Fill Ratio 1:1.	0	0
O	DEF capacity ratio - Truck to be centrally fueled	0	0
S	Anti-Siphon Device in Fuel Tank Filler Neck. For any number of fuel tanks.	0	0
S	DEF Tank Location is LH.	0	0
O	Location: 100 gal fuel tank LH behind cab	0	0
Cab & Equipment			
S	Cab: Stamped Aluminum Cab with Panoramic Curved glass windshield. Standard with stamped aluminum doors, heavy duty in-swinging hinges, and triple sealed doors. Manufactured using self-piercing rivets and structural adhesive. Includes LED exterior marker lights and turn signals.	0	0
O	Hood: T880 Set-Back Medium Length. 122.6 inch BBC W/Std Bumper.	350	15
O	Bright Engine Air Intake Chrome Trimmed Engine Air Intake on Both Sides of Hood	109	0
S	Cab HVAC - Day Cab and 40 in. Sleeper System With Defrost, A/C, and 48,000 BTU/hr Heater. Includes automatic temperature control with one touch defrost operation and dash mounted cab temperature and solar intensity sensors. Pleated fresh air filter and cabin recirculation air filter standard. The Kenworth HVAC system is designed to provide optimal heating and cooling in all operating environments without need for additional insulation. Cab HVAC without sleeper heater AC is available with 40in sleeper.	0	0
O	Kenworth Smartwheel: 18 in. Leather Wrapped With Integrated Radio and Cruise Controls.	94	2
O	Column Mtd Retarder Control, RH Side Use with Manual & Allison Transmissions Only.	0	0
S	Adjustable Telescoping Tilt Steering Column.	0	0
O	5 Sets of Keys. Replaces Standard 2 Sets of Keys.	32	0

Std/ Opt	Description	\$ List	Weight
O	Customer Specified Tumbler P/N. All Chassis keyed alike if applicable. Includes ignition, cab doors & if applicable, sleeper tool box door. 2.1m models. G key will not work on new P lock and ignition.	449	0
	<i>Narr P0949</i>		
O	Dash Mounted Compact Trailer Brake Valve. Self Returning.	0	0
O	Information for Customer-Installed PTO Chelsea 8-bolt.	46	0
O	Dash Switch: 1st Single-Acting Eaton or PACCAR Mounted PTO. Electric switch, wiring, software, air solenoids, and plumbing are factory-installed to control the 1st Eaton (single-acting) trans PTO.	109	0
O	Two Spare Switches: Wired to Power.	68	0
O	Gauge: Air Suspension Pressure Gauge.	143	0
O	Gauge: Engine Oil Temperature Gauge With Integral warning light. The NavPlus HD unit includes a virtual engine oil temperature gauge.	45	0
S	Gauge: DD Virtual Gauge - Oil Temp Engine	0	0
S	Gauge: DD Virtual Gauge - Air Filter Restriction	0	0
S	Gauge: DD Virtual Gauge - Manifold Pressure Boost	0	0
S	Gauge: DD Virtual Gauge - Engine Percent Torque	0	0
O	Gauge: DD Virtual Gauge - Secondary Fuel	73	0
O	Gauge: Manifold Pressure Gauge. The NavPlus HD unit includes a virtual manifold pressure gauge.	31	0
O	Gauge: Axle Oil Temperature, Dual-Drive Axle. (2 gauges) w/integral warning light.	227	0
O	Gauge: Oil Temperature Gauge Transmission. The NavPlus HD unit includes a virtual transmission oil temperature gauge.	62	0
S	Main Instrument Package: 15" Digital Display. Includes Speedometer, Tachometer, Primary Air Pressure, Secondary Air Pressure, Fuel Level #1, DEF Level, DPF Filter Status, Fuel Economy, Oil Pressure, Coolant Temp, OAT and Voltmeter, and Air Application.	0	0
O	Modular Dash Options: RH Dash Storage Unit With two shelves. Reduces total gauge count; HD by 6 and MD by 4.	47	0
O	USB Charging Port - Dash Panel *Requires 15" Digital Display 8282027/8282028	30	0

Price Level: January 1, 2024

98% Complete

Date: January 08, 2025

Deal: T880 ROLL OFF CHASSIS

Quote Number: QUO-1078663-D1M4C0

Printed On: 1/9/2025 1:12:19 PM

Std/ Opt	Description	\$ List	Weight
S	Interior Color: Slate Gray	0	0
S	Interior Package: Vantage Daycab Includes durable headliner and vinyl sidewalls with geometric patterned trim and anodized aluminum accents throughout. Convenient overhead storage cubbies, full size glove box, two center console cupholders, and large door pad map pocket. Standard LH/RH power windows, electric door locks, interior LED lighting, nighttime-friendly red ambient lighting for dash and footwell, and door mounted courtesy light. Includes two standard 12V power outlets. Driver sunvisor includes strap.	0	0
S	Rubber Floormat	0	0
S	Driver Seat: GT701 HB with DuraCloth w/ Vinyl material. The GT701 is standard with a single air bag, scissor linkage seat suspension. It includes a single chamber lumbar support, 10in Fore/Aft adjustment, 7in Up/Down adjustment, 2.5in pan extension, 51 degree seat back recline, and 16 degree full seat tilt. Includes 3-point matching seat belts. DR seat standard w/ dual armrests.	0	0
S	Rider Seat: GT100 Toolbox HB with DuraCloth w/ Vinyl material. The GT100 seats are standard with fixed base. Includes 3-point matching seat belts. Rider seat standard w/ LH armrest.	0	0
S	Seat Color: Black	0	0
O	Kenworth Radio DEA730 AM/FM/WB/USB, Bluetooth & Sirius-XM Satellite	225	0
O	CB Radio: Bearcat 880. Includes Weatherband w/header mounted quick release. Includes transceiver & separate speaker remote-mounted in headliner & dual CB antennas. Includes sound tracker & illuminated panel.	580	0
S	Base Level Audio System - Daycab:High Performance Door Speakers.	0	0
S	Turn Signal: Non-Self Cancelling	0	0
S	LH and RH Trip Ledge Rain Deflectors	0	0
S	Global Telematics Unit	0	0
S	Dual Cab Interior Grabhandles: A Pillar Mounted Dash Wrap and B Pillar Mounted Grabhandles	0	0
S	Kenworth Daylite Door With Standard LH/RH electric door locks and LH/RH electric window controls.	0	0
S	Single Air Horn Under Cab.	0	0
S	Look-Down, Pass. Door, Black 11x6	0	0
O	Mirror: LH Hood Mounted, Round Convex, Chrome Heated	240	12
O	Mirror: RH Hood Mounted, Round Convex, Chrome Heated	240	12

Std/ Opt	Description	\$ List	Weight
S	Aero Mirror: Dual Kenworth Aerodynamic Motorized heated mirrors, 7in X 13in with cab color mirror shell and black mirror arms. Also includes LH/RH heated 6in X 7in convex mirrors. Mirror brackets set for 8-1/2 ft load width. Mirror controls located on driver side door pad.	0	0
S	Rear Cab Stationary Window 19in x 36in	0	0
O	3.5in x 11.5in Plastic Records Holder:Mounted On Rear Cab Panel. Not available With Sleeper Or 2 Person Bench Seat.	64	0
S	One-Piece Bonded-In Windshield With Curved Glass. Standard.	0	0
O	Delete Wheelwell Fender Extension	-291	-4
S	Kenworth Cab/Sleeper Air Suspension.	0	0
O	Extreme Temperature Insulation: Daycab Additional cab side wall insulation with improved material properties over standard insulation package.	159	0
Lights & Instruments			
S	Headlamps: SAE Dual Halogen Complex Reflector	0	0
S	Marker Lights: Five Rectangular LED.	0	0
S	Turn Signal Lights: Flush Mounted LED. Mounted at top of fender wheel arc.	0	0
S	LED Stop,Turn,Tail: With Two LED Backup Lights and With An LED License Plate.	0	0
O	Dual Pedestal Floodlights: First Set	279	2
O	Floodlight Location: Located High - First Set. This Code To Be Used With Flush-Mount (9052011) or C/I (9058071) Codes Only.	0	0
S	Marker Lights: Interrupter Switch. Included in Turn Signal For All Models Except T3. The T3 Switch Is In The Dash.	0	0
S	Omit Brake Light with Engine Brake. Can only be selected when chassis also has engine brake. Cannot be used with options to delete engine brake.	0	0
O	Reflectors: Two Midframe	24	0
O	Electric Backup Alarm: Meets SAE J994 & OSHA requirements.	175	4
O	Polyswitches Replacing Fuses. Switch Will automatically reset after removal of excess load.	49	0
Air Equipment			
S	Air Dryer: Bendix AD-HF Puraguard Heated	0	0

Std/ Opt	Description	\$ List	Weight
S	Moisture Ejection Valve W/ Pull Cable Drain.	0	0
O	Full Truck Kit Gladhands mounted at end-of-frame. Seven-way female receptacle mounted at end-of-frame in taillamp bracket. Kit includes dash mounted trailer air supply valve, trailer hand control valve, and hoses/fittings for the valves. Dash mounted parking brake valve, tractor protection valve, and spring brake inversion/relay valves are standard.	981	15
S	Nylon Air Tubing in Frame & Cab, Excluding Hoses subject to excessive heat or flexing.	0	0
O	Trailer ABS Electric Supply Through SAE J560 7-pin connector per TMC RP137).	0	0
Extended Warranty			
S	Base Warranty - Standard Service Heavy Duty 12 months / 100,000 miles / 160,000 km.	0	0
O	TruckTech+ RD - 5YR Sub Cummins Engines	799	0
O	Base Warranty: Emissions 5YR/100K MI - EPA Engine	0	0
Miscellaneous			
O	GHG Secondary Manufacturer: Does Not Apply	0	0
O	Warning Triangle Reflector Kit: Shipped Loose. Kit consists of 3 triangles in plastic carrying case. Not floor mounted.	56	4
S	EMUX Architecture	0	0
Promotions			
Paint			
O	Paint Color Number(s). N9702 A - L0006 WHITE N9770 BUMPER N0001 BLACK N9720 FRAME N0001 BLACK	0	0
O	Steel Bumper Painted Frame Color	0	0
O	Day Cab Bulk Paint	0	0
O	Day Cab Standard Paint	0	0
S	1 - Color Paint - Day Cab Color will be White if no other color is specified.	0	0
S	Base Coat/ Clear Coat. The Kenworth Color Selector contains additional instructions, as well as information on Kenworth paint guidelines and surface finish applications. Kenworth is standard with Dupont Imron Elite paint.	0	0

<i>Std/ Opt</i>	<i>Description</i>	<i>\$ List</i>	<i>Weight</i>
---------------------	--------------------	----------------	---------------

Special Requirements

Special Requirement 1 0098025
Special Requirement 2
Special Requirement 3
Special Requirement 4

Order Comments

Total Weight (lbs)

17,789


Prices and Specifications Subject to Change Without Notice.

Unpublished options may require review/approval.Dimensional and performance data for unpublished options may vary from that displayed in CRM.

PRICING DISCLAIMER


While we make every effort to maintain the web site to preserve pricing accuracy, prices are subject to change without notice. Although the information in this price list is presented in good faith and believed to be correct at the time of printing, we make no representations or warranties as to the completeness or accuracy of this information. We reserve the right to change, delete or otherwise modify the pricing information which is represented herein without any prior notice. We carefully check pricing specifications, but occasionally errors can occur, therefore we reserve the right to change such prices without notice. We disclaim all liability for any errors or omissions in the materials. In no event will we be responsible for any damages of any nature whatsoever from the reliance upon information from these materials. Please check your order prebills to confirm your pricing information

HORIZONTAL DIMENSIONS

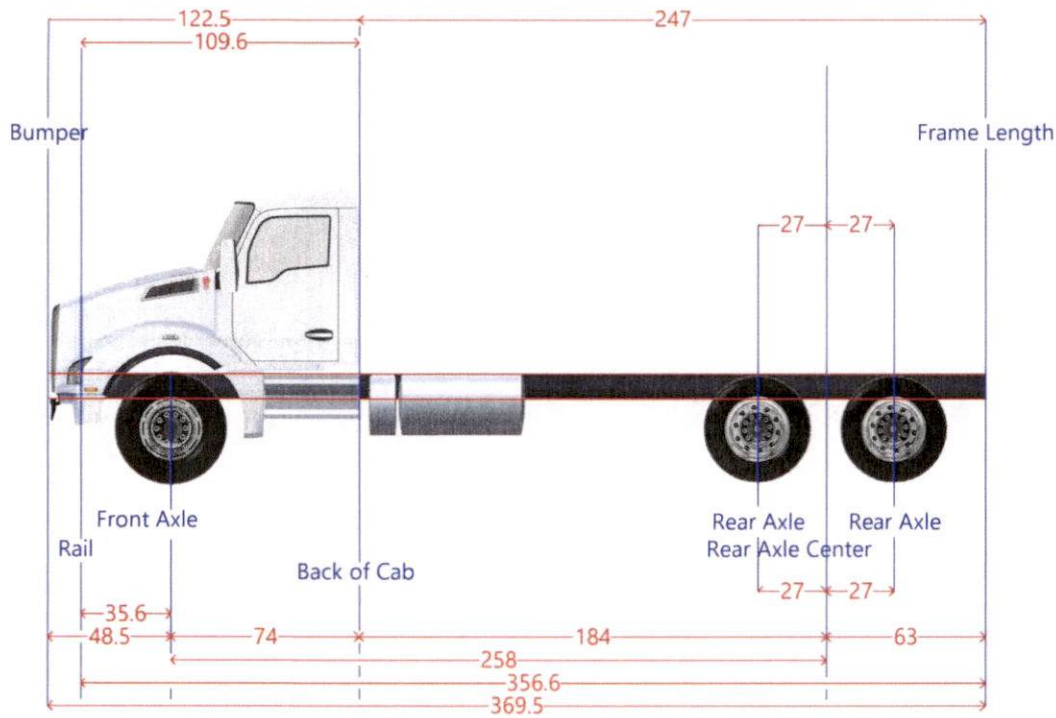

Dimension	Measurement	Start	End
Axle Spacing	54	231	285
Bumper to Back of Cab	122.5	-48.5	74
Bumper to Front Axle	48.5	-48.5	0
Bumper to Front Frame	12.9	-48.5	-35.6
Cab to End of Frame	247.0	74	321
Cab to Rear Axle	184.0	74	258
Effective Bumper to Back Of Cab	122.5	-48.5	74
Frame Length	356.6	-35.6	321
Front Axle to Back of Cab	74.0	0	74
Front of Frame to Axle	35.6	-35.6	0
Load Space	247.0	74	321
Overall Length	369.5	-48.5	321
Overhang	63.0	258	321
Pusher Offset #1	27.0	231	258
Pusher Offset #2	27.0	231	258
Pusher Offset #3	27.0	231	258
Tag Offset	27.0	258	285
Wheelbase	258	0	258

FRAME LAYOUT

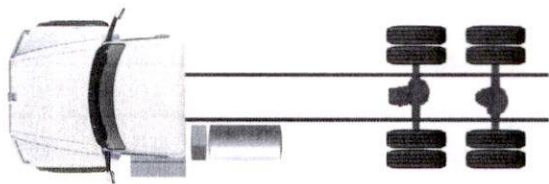

Note: Optional content may be displayed. The order has not yet received an engineering review. The actual arrangement of components may not be exactly as pictured. Additional changes may be made to the layout by Kenworth. Add a Custom Frame Layout code if an exact layout is required.

Selected Options (Wheelbase: 258)

Sales Code	Description	Length	Side
7214100	Fuel Tank: 100 US Gallon 24.5 in. Aluminum BOC	50	Left
7722153	Small Round DEF Tank, 14 Gallons	10.2	Left
6405102	Short Length Steel Parallel Battery Box Module	38	Left



Truck Purchase Order

Kenworth Sales Company, Inc.

2125 S Constitution Blvd
Salt Lake City, UT 84119-1219

Date: 01/09/2025
Quote #: DE-09300
Department: NewTrucks
Salesperson: Bridger Clayton
Customer PO#:

Bill To: PROS-004388
SAN JUAN COUNTY LANDFILL (TRUCK SALES)
117 SOUTH MAIN
MONTICELLO UT 84535
P:(435) 587-3223

Ship To:
SAN JUAN COUNTY LANDFILL (TRUCK SALES)
117 SOUTH MAIN
MONTICELLO, UT 84535

Stock#:	VIN:ROLL OFF CHASSIS	New 2026 Kenworth T880	Price:	\$174,113.93
Mileage:0	BodyType:ROLL OFF	Color:WHITE		

Total Price	\$174,113.93
Documentation Fee	\$200.00
Total	\$174,313.93

SOURCEWELL CONTRACT 060920-KTC

NEW VEHICLE SALE - The sold warranty applying to the Vehicle(s) are those offered by the manufacturer.

NO LIABILITY INSURANCE INCLUDED UNLESS SPECIFICALLY INDICATED

If this transaction is to be a retail installment sale, this contract is not effective unless financing is obtained on terms satisfactory to the parties, and the credit terms disclosure statement is fully completed. Until made effective, this order is not binding and purchaser may cancel and recover deposit.

SECURITY AGREEMENT: Purchaser hereby grants Seller, its successors and assigns, a security interest in the motor vehicle, equipment and accessories to be purchased pursuant to this agreement, and such security interest shall remain in effect until all sums due hereunder have been paid in full. The undersigned acknowledges receipt of a complete copy of this agreement, comprised of this Purchase Order, together with documents referenced herein. The undersigned hereby certifies that (s)he is 18 years of age or older and has read and understands sections 19-22 of this agreement.

I/We understand these conditions as reviewed.

SAN JUAN COUNTY LANDFILL (TRUCK SALES)

Purchaser

Purchaser's Signature

Date

Dealer Representative's Signature

Date