



1505 West 130 South
Orem, UT 84058



METER QUOTE

SANTAQUIN CITY CORPORATION

SANTAQUIN, UT



MOUNTAIN CONTRACTORS
SUPPLY GROUP

(801) 224-6050

Table of Contents


\$387,500 FOR 1” IPERL METER &520M RADIO \$150.00 FOR INSTALLATION PER-
METER & RADIO \$400,055 TOTAL FORINSTALLATION **3**

SENSUS 1 IPERL 10.75 LL 1000G TR/PL 2-WIRE TRPL W/ 6FT CABLE 1000GAL CON-
FIG# I4-S-1GL-XX 4

SENSUS 520M SINGLE PORT SMPT RADIO PIT-SET WITH TRPL TOUCHCOUPLER
INTERVAL DATA 8

\$387,500 FOR 1" IPERL METER & 520M RADIO \$150.00 FOR INSTALLATION PERMETER &

**\$387,500 FOR 1" IPERL METER & 520M
RADIO \$150.00 FOR INSTALLATION
PERMETER & RADIO \$400,055 TOTAL
FOR INSTALLATION**

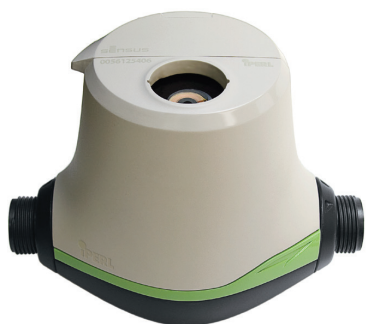

iPERL Smart Water Meter

Electromagnetic Flow Measurement System

CAPABILITIES

- The iPERL meter has an operating range of 0.11 gpm (0.025 m³/hr) to 55 gpm (12.5 m³/hr)—it even starts to register flow as low as 0.03 gpm (0.007 m³/hr).
- Sizes include: 5/8" (DN 15mm), 3/4" (DN 20mm) and 1" (DN 25mm)
- iPERL can be installed horizontally, vertically or diagonally.

BENEFITS

- Maximize investment with iPERL's magnetic technology, which delivers a 20-year accuracy warranty, with no repairs
- Get smart water alarms to detect issues such as leaks, reverse flow, empty pipe, etc.
- Improve low flow accuracy to drive additional revenue

Sensus iPERL[®] smart water meters are designed to capture both lost water and lost revenue. The innovative magnetic technology delivers unmatched low flow registration and minimal pressure loss. With no moving parts, iPERL maintains its accuracy over a 20 year lifetime and is equipped with smart water alarms – delivering the intelligence you need to quickly resolve issues in the field.

Industry Leading Performance

The patented measurement technology of the iPERL water meter provides enhanced accuracy at both low and high flows. Over a 20-year lifespan, your iPERL will measure just as accurately as the day it was installed.

Solid State Magnetic Technology

By avoiding the use of a mechanical measuring element inside the flow tube, metering performance is linear over the entire flow range – ensuring no reduction in accuracy at any flow rate over the life of the meter. The iPERL meter uses our patented remanent magnetic field technology – requiring far less energy and delivering superior accuracy.

Alarms

Quick resolution of field issues is made possible with smart water alarms including leak detection, reverse flow, empty pipe, magnetic tamper and low battery. When integrated with our FlexNet[®] communication network, remotely gathering and transmitting data has never been more reliable or profitable.

Construction

The iPERL meter body is made of composite alloy and contains no metal material. Inside the meter body is an electronic register and a measuring device that is comprised of a composite alloy flow tube. Embedded in the flow tube are coated silver electrodes. iPERL utilizes these to measure the fluid velocity through the flow tube – enabling less power consumption and predictable meter performance. The iPERL meter has a 20-year accuracy warranty and a 20-year battery life guarantee.



iPERL Smart Water Meter

Electronic Register

The 9-digit hermetically-sealed electronic register with LCD display was designed to eliminate dirt, fog and moisture contamination in pit settings. The large, easy-to-read display includes AMR digits, direction of flow, units of measure and smart water alarms. The AMR digits and units of measure are fully programmable. The register also provides integrated customer data logging.

AMI / AMR Compatibility


Sensus iPERL meters are compatible with common AMR/AMI systems, including the Sensus FlexNet® communication network.

Conformance to Standards

The iPERL meter far exceeds the most recent revision of ANSI/AWWA Standard C-700 and C-710 for accuracy and pressure loss requirements. All iPERL meters are NSF/ANSI Standard 61 Annex F and G compliant and tested to AWWA standards.

Tamper Resistant

The integrated construction of the iPERL water meter prevents removal of the register to obtain free water. The magnetic tamper and low field alarms will both indicate any attempt to tamper with the magnetic field of the iPERL meter.

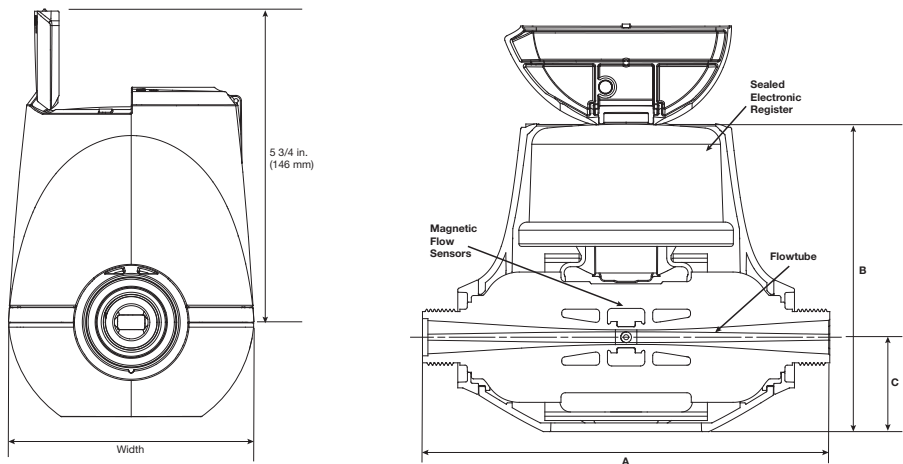

Dimensions and Net Weights

Size	A (lay length)	B	C	Spud Ends	NPSM Thread Size	Width	Net Weight
5/8" (DN 15 mm)	7-1/2" (190 mm)	6-1/10" (155 mm)	1-3/4" (44 mm)	5/8" (15 mm)	3/4" (19 mm)	4-1/2" (114 mm)	3.1 lb. (1.4 kg)
3/4"S (5/8" x 3/4") (DN 20 mm)	7-1/2" (190 mm)	6-1/10" (155 mm)	1-3/4" (44 mm)	3/4" (20 mm)	1" (25 mm)	4-1/2" (114 mm)	3.1 lb. (1.4 kg)
3/4" (DN 20 mm)	9" (229 mm)	6-1/10" (155 mm)	1-3/4" (44 mm)	3/4" (20 mm)	1" (25 mm)	4-1/2" (114 mm)	3.2 lb. (1.5 kg)
1" (DN 25 mm)	10-3/4" (273 mm)	6-1/10" (155 mm)	1-3/4" (44 mm)	1" (25 mm)	1-1/4" (32 mm)	4-1/2" (114 mm)	3.3 lb. (1.6 kg)









iPERL Smart Water Meter

Specifications

Service	Measurement of potable and reclaimed water. Water operating temperature range of 33°F (0.56°C) -80°F (26.7°C)
Starting Flow	5/8" (DN 15mm) size: 0.03 gpm (0.007 m³/h) 3/4" (DN 20mm) size: 0.03 gpm (0.007 m³/h) 1" (DN 25mm) size: 0.11 gpm (0.025 m³/h)
Low Flow Range (±3%)	5/8" (DN 15mm) size: >0.11 gpm (0.025 m³/hr) to <0.18 gpm (0.041 m³/hr) 3/4" (DN 20mm) size: >0.11 gpm (0.025 m³/hr) to <0.18 gpm (0.041 m³/hr) 1" (DN 25mm) size: >0.3 gpm (0.068 m³/hr) to <0.4 gpm (0.09 m³/hr)
Normal Water Operating Flow Range (±1.5%)	5/8" (DN 15mm) size: 0.18 to 25 gpm (0.04 to 5.7 m³/hr) 3/4" (DN 20mm) size: 0.18 to 35 gpm (0.04 to 8.0 m³/hr) 1" (DN 25mm) size: 0.4 to 55 gpm (0.09 to 12.5 m³/hr)
Maximum Operating Pressure	5/8" and 3/4" size: 200 psi (13.8 bar) 1" size: 175 psi (12.1 bar)
Measurement Technology	Solid state electromagnetic flow
Register	Hermetically sealed, 9-digit programmable electronic register; AMR/AMI compatible; iPERL register programmable using the UniPro® communicator and FieldLogic™ software
Materials	External housing – Thermal plastic; Flowtube – Polyphenylene sulfide alloy; Electrode – Silver/silver chloride; Register cover – Tempered glass
Alarm Defaults	Alarm Duration – 90 days; Leak Duration before alarm is triggered – 24 hours; Datalog Interval – 1 hour; Alarm Mask

Headloss Curves

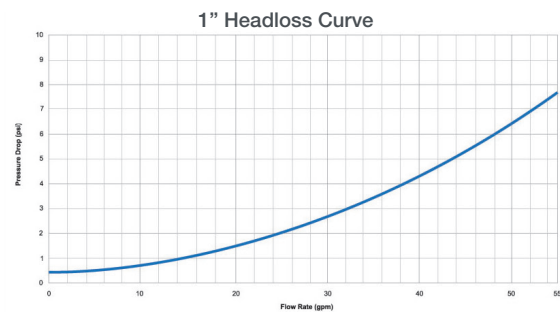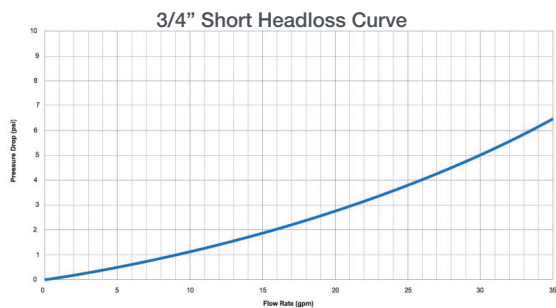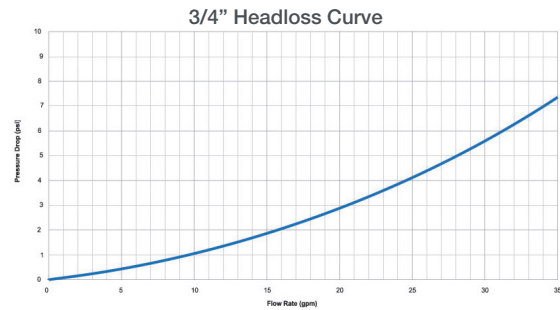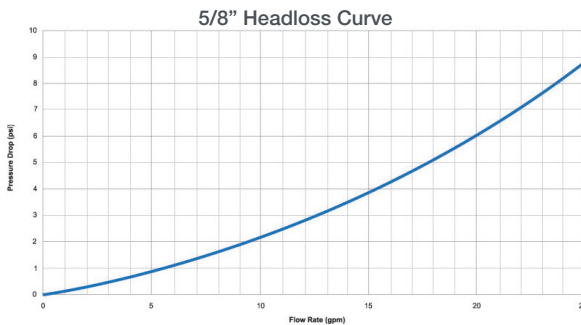

\$387,500 FOR 1" IPERL METER & 520M RADIO \$150.00 FOR INSTALLATION PERMETER &



8601 Six Forks Rd, Ste 700
Raleigh, NC 27615
1-800-638-3748
sensus.com

©2017 Sensus. All products purchased and services performed are subject to Sensus' terms of sale, available at either sensus.com/TC or 1-800-638-3748. Sensus reserves the right to modify these terms and conditions in its own discretion without notice to the customer.
The Sensus logo is a registered trademark of Sensus.

This document is for informational purposes only, and SENSUS MAKES NO EXPRESS WARRANTIES IN THIS DOCUMENT. FURTHERMORE, THERE ARE NO IMPLIED WARRANTIES, INCLUDING WITHOUT LIMITATION, WARRANTIES AS TO FITNESS FOR A PARTICULAR PURPOSE AND MERCHANTABILITY. ANY USE OF THE PRODUCTS THAT IS NOT SPECIFICALLY PERMITTED HEREIN IS PROHIBITED.

\$387,500 FOR 1" IPERL METER & 520M RADIO \$150.00 FOR INSTALLATION PERMETER &


DS-W-AMR-00-01-0312-02-A

FlexNet™
SmartPoint™ M2

Description

Model 520M – Pit Set

The FlexNet SmartPoint M2 is a radio transceiver that provides water utilities inbound and outbound access to water measurement and ancillary device diagnostics via radio signal. The SmartPoint 520M is designed for submersible, pit-set environments. With its migratable, two-way communication ability, the M-Series SmartPoint functions as a walk-by/drive-by endpoint, fixed base endpoint, or combination of the two. This flexibility increases utility data collection capabilities and streamlines operations.



Features

TOUCHCOUPLER DESIGN

The SmartPoint M2 utilizes TouchCoupler, the patented Sensus inductive coupling communication platform to interface with the encoded meter. With TouchCoupler, the SmartPoint M2 can connect to the meter using existing two wire AMR installations instead of requiring utilities to access the meter to install a new three-wire connection. This results in a fast, efficient and reliable connection at minimal cost.

OPERATION

The FlexNet SmartPoint M2 receives input from the meter register and remotely sends data to a walk-by/ drive-by or fixed base collection device. The SmartPoint M2 easily migrates from walk-by/drive-by to fixed base by simply installing a Base Station.

In walk-by/drive-by mode, the SmartPoint M2 collects data and awaits an activation signal from the Vehicle Gateway Basestation (VGB) or Hand-Held Device (HHD). Upon signal receipt, it transmits readings, the meter identification number and any alarms.

As a fixed-base endpoint, the SmartPoint M2 interacts with one or more strategically placed Base Stations located in the utility service area. Top of the hour readings and other diagnostics are instantly forwarded to the Regional Network Interface (RNI) at time of transmission. The FlexNet system provides unmatched reliability by

using expansive tower receiver coverage of metering end points, data/message redundancy, fail over back up provisions and operation on FCC primary use (unshared) RF spectrum.

POWERFUL TRANSMISSION,
FLEXIBLE PLATFORM

The SmartPoint M2 offers several advantages that control both deployment and lifetime operation costs. It's powerful, industry leading two watt transmitter broadcasts over large distances and minimizes collection infrastructure. And once the SmartPoint M2 is installed, its migratable, two-way system platform can be updated without requiring personnel to visit each meter and/or inconveniencing customers.

ADDITIONAL SMARTPOINT M2
FEATURES

The SmartPoint M2 obtains hourly readings and can monitor continuous flow over a programmable period of time, alerting the utility to leak conditions. In addition, the SmartPoint M2 stores up to 840 consumption intervals (35 days of hourly consumption), providing the utility with the ability to extract detailed usage profiles for consumer information and dispute resolution. The SmartPoint M2 also incorporates a two-port design, allowing the utility to connect multiple registers and ancillary devices (such as acoustic monitoring) to a single SmartPoint. This results in a compact installation that saves


time, space and money - without reducing system performance.

SPECIFICATIONS

SERVICE	Pit set installation interfacing the utility meter to the Sensus FlexNet system. Unit requires 1.75" diameter hole in pit lid; fits pit lid thicknesses up to 1.75"
PHYSICAL CHARACTERISTICS	Width: 4.43" x Height: 5.09" x Depth: 3"
WEIGHT	1.0 lbs/16.0 oz
COLOR	Black
FREQUENCY RANGE	900 – 950 MHz, 8000 channels X 6.25 kHz steps
MODULATION	Proprietary Narrow Band
MEMORY	Non-Volatile
POWER	Lithium Thionyl Chloride batteries
APPROVALS	US: FCC CFR 47: Part 90, Part 24D, Part 101C, Part 15 Licensed operation Canada: Industry Canada (IC) RSS-134, RSS-119, RSS-210
OPERATING TEMPERATURE	- 22° F to +185° F - 30° C to + 85° C
OPTIONS	Dual or single port availability; TouchCoupler only, wired only, Nicor connection
INSTALLATION ENVIRONMENT	100% condensing, water submersible
COMPATIBILITY	TouchCoupler and Wired Version: Sensus Encoded Registers Badger ADE water registers and MasterMeter AccuLinX Wired Version Only: Elster Encoder (Sensus protocol) and Neptune ARB VI (ProRead). Hersey Translator
WARRANTY	20 years – Based on six transmissions per day. Refer to Sensus G-500 for warranty.

© All products purchased and services performed are subject to Sensus' terms of sale, available at either; <http://na.sensus.com/TC/TermsConditions.pdf> or 1-800-METER-IT. Sensus reserves the right to modify these terms and conditions in its own discretion without notice to the customer.

This document is for informational purposes only, and SENSUS MAKES NO EXPRESS WARRANTIES IN THIS DOCUMENT. FURTHERMORE, THERE ARE NO IMPLIED WARRANTIES, INCLUDING WITHOUT LIMITATION, WARRANTIES AS TO FITNESS FOR A PARTICULAR PURPOSE AND MERCHANTABILITY. ANY USE OF THE PRODUCTS THAT IS NOT SPECIFICALLY PERMITTED HEREIN IS PROHIBITED.



8601 Six Forks Road, Suite 400
Raleigh, NC 27615
1-800-638-3748
www.sensus.com/water

