



P.O. BOX 456  
GREEN COVE SPRINGS, FLORIDA 32043  
904-284-3165  
CU-C057244

**REVISED (2) PROPOSAL**

To: CGCS

JOB: Sewer Main Replacement

DATE: May 12th 2021

Attn: Greg Bauer/ Scott Schultz

LOCA: Scioto Court

We hereby propose to furnish material and labor to complete in accordance with the specifications below

- \* Replace 215 feet +/- of Sanitary Sewer Main from the MH at the intersection of Scioto Ct and Colonial Dr to the upstream MH in the Cul-De-Sac of Scioto Ct. We intend to replace it with 8" SDR26 PVC, adjusting the downstream invert to allow for positive flow from the upstream MH.
- \* Adjust the upstream MH lid as may be needed.
- \* Remove existing asphalt paving, aggregate base and sub-base as needed.
- \* Prepare for an overlay of existing asphalt paving.
- \* Provide & install dewatering for the sewer replacement.
- \* T.V. Inspection of the Completed Replacement.
- \* Build a temporary lane around the excavation at the intersection for traffic on Colonial Dr.
- \* Restore the temp lane after completing the sewer replacement and asphalt repair.

**\$ 80,000.00**

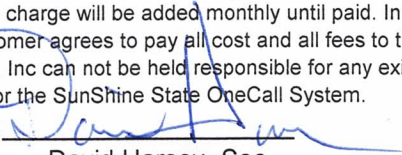
\* **ADD:** 1-1/4" Asphalt overlay of the entire street (Scioto Ct) and Cul-De-Sac and a uniform section of the tie-in at the downstream MH on Colonial Dr. Using SP9.5 Asphalt Mix

**\$ 16,000.00 - 1000 SY +/- 6%**

Exclusions: Engineering & Permitting of any kind.

Hand Drawn As-builts will be provided to the City for their inclusion into their in house As-Built System. NO CERTIFIED AS\_BUILTS

All material is guaranteed to be as specified. All work to be completed in a workmanlike manner according to standard practices. Any alteration or deviation from specifications involving extra costs will be executed only upon written orders and will become an extra charge over and above this estimate. All agreements are contingent upon strikes, accidents or delays beyond our control. Owner to carry fire, tornado and other necessary, industry standard owner required insurance. Our workers are fully covered by Workman's Compensation Insurance. Payment is due upon completion. If not paid within 30 days of completion a 1.5% finance charge will be added monthly until paid. In the event this account is placed in the hands of an attorney for collection, whether or not a suit be brought, the customer agrees to pay all cost and all fees to the attorneys of Jeff's Excavating, Inc for their services rendered in collection of this account. Jeff's Excavating, Inc can not be held responsible for any existing concrete sidewalks, driveways, paving and/or underground piping that has not been located by the owner and/or the SunShine State OneCall System.

Authorized Signature:   
David Harsey -Sec.

Note: this proposal may be withdrawn by us if not accepted within 30 days.

The above prices, specifications and conditions are satisfactory and are hereby accepted. You are authorized to do the work as specified. Payment will be made as outlined above.

**Acceptance of Proposal**

Date of acceptance: \_\_\_\_\_

Authorized Signature: \_\_\_\_\_