Public Works Committee

STAFF REPORT



SUBJECT: Road Construction Work On-Call Contract
MEETING: Regular City Council Meeting - 05 Apr 2022

DEPARTMENT: Public Works **STAFF CONTACT:** Nick Williams

RECOMMENDATION:

It is the recommendation of the Public Works and Purchasing Departments that the contract for this year's Road Construction Work On-Call be awarded to Cruz Hernandez Construction and Pavement Restoration, Inc.

BACKGROUND:

Similar contracts have been awarded and renewed in previous years. This contract was originally awarded in FY16-17 and the City reserved the right to renew the contract for successive in increments of one year periods.

This bid has 48 total items and is split between two vendors - Cruz Hernandez Construction and Pavement Restoration.

FY 2022-2023 prices are attached and items on bid were split as follows:

- Pavement Restoration, Inc. item 19
- Cruz Hernandez Construction items 1, 21-31, 34-38, 41

PROJECT:

The contract provides for on-call services to address paving projects as needed in a time-efficient manner.

ATTACHMENTS:

Cruz Hernandez Construction Bid Pavement Restoration, Inc. Bid

SCHEDULE OF ITEMS

disposal of all material. 0 – 500 CY 501 – 1,000 CY 1,001 - over CY 20.00 per cubic yard \$20.00 per square yard	Item No.	Quantity Range	Item Description & Unit Price	
0 – 500 CY 501 – 1,000 CY 1,001 - over CY \$20.00 per cubic yard per cubic yard \$20.00 per cubic yard per cubic yard \$20.00 per cubic yard \$20.00 per cubic yard 2 Pulverizing existing asphalt and base material; 6" deep only (No compaction). 0 – 1,000 SY 1,001 – 5,000 SY 5,001 - over SY 2 Recycling or Pulverizing existing asphalt and base material a minimum of 6" deep; scarify subgrade 6" deep; compact & finish subgrade & pulverize material complete in place (95% subgrade and base compaction required). 0 – 1,000 SY 1,001 – 5,000 SY 5,001 - over SY 4 Recycling or Pulverizing existing asphalt and base material a minimum of 6"; scarify subgrade 6"; compact and finish subgrade & pulverized base course complete in place (3% Portland cement treated base and compaction required). 0 – 1,000 SY 1,001 – 5,000 SY 5,001 - over SY Milling existing asphaltic pavement 2" deep with haul-off of materials and with traffic control. 0 – 1,000 SY 1,001 – 5,000 SY 5,001 - over SY Dig out 8" and replace with Type B, Hot Mix Asphaltic Concr with haul-off and with traffic control. 0 – 250 TON 251 – 500 TON per Ton	1		Removal of existing asphalt, excavation of street section and	
2 Pulverizing existing asphalt and base material; 6" deep only (No compaction). 0 – 1,000 SY 1,001 – over SY 2 Per square yard 5,001 – over SY 2 Per square yard 3 Recycling or Pulverizing existing asphalt and base material a minimum of 6" deep; scarify subgrade 6" deep; compact & finish subgrade & pulverize material complete in place (95% subgrade and base compaction required). 0 – 1,000 SY 1,001 – 5,000 SY 5,001 – over SY 2 Per square yard 4 Recycling or Pulverizing existing asphalt and base material a minimum of 6"; scarify subgrade 6"; compact and finish subgrade & pulverized base course complete in place (3% Portland cement treated base and compaction required). 0 – 1,000 SY 1,001 – 5,000 SY 2,001 – over SY 2 Per square yard 5 Milling existing asphaltic pavement 2" deep with haul-off of materials and with traffic control. 0 – 1,000 SY 1,001 – 5,000 SY 5,001 – over SY Dig out 8" and replace with Type B, Hot Mix Asphaltic Concr with haul-off and with traffic control. 0 – 250 TON 251 – 500 TON per Ton			disposal of all material.	
2 Pulverizing existing asphalt and base material; 6" deep only (No compaction). 0 – 1,000 SY 1,001 – 5,000 SY 5,001 - over SY 2 Recycling or Pulverizing existing asphalt and base material a minimum of 6" deep; scarify subgrade 6" deep; compact & finish subgrade and base compaction required). 0 – 1,000 SY 1,001 – 5,000 SY 5,001 - over SY 4 Recycling or Pulverizing existing asphalt and base material a minimum of 6" deep; scarify subgrade 6" deep; compact & finish subgrade and base compaction required). 9 – 1,000 SY 1,001 – over SY 4 Recycling or Pulverizing existing asphalt and base material a minimum of 6"; scarify subgrade 6"; compact and finish subgrade & pulverized base course complete in place (3% Portland cement treated base and compaction required). 0 – 1,000 SY 1,001 – 5,000 SY 5,001 – over SY Milling existing asphaltic pavement 2" deep with haul-off of materials and with traffic control. 0 – 1,000 SY 1,001 – 5,000 SY 5,001 – over SY Dig out 8" and replace with Type B, Hot Mix Asphaltic Concr with haul-off and with traffic control. 0 – 250 TON 251 – 500 TON per Ton		0 - 500 CY	\$25.00 per cubic yard	
Pulverizing existing asphalt and base material; 6" deep only (No compaction). 0 - 1,000 SY 1,001 - 5,000 SY 5,001 - over SY Recycling or Pulverizing existing asphalt and base material a minimum of 6" deep; scarify subgrade 6" deep; compact & finish subgrade & pulverize material complete in place (95% subgrade and base compaction required). 0 - 1,000 SY 1,001 - 5,000 SY 5,001 - over SY Recycling or Pulverizing existing asphalt and base material a minimum of 6"; scarify subgrade 6"; compact and finish subgrade & pulverized base course complete in place (3% Portland cement treated base and compaction required). 0 - 1,000 SY 1,001 - 5,000 SY 5,001 - over SY Milling existing asphaltic pavement 2" deep with haul-off of materials and with traffic control. 0 - 1,000 SY 1,001 - 5,000 SY 5,001 - over SY Dig out 8" and replace with Type B, Hot Mix Asphaltic Concrewith haul-off and with traffic control. 0 - 250 TON 251 - 500 TON per Ton		501 - 1,000 CY	\$20.00 per cubic yard	
6" deep only (No compaction). 0 - 1,000 SY 1,001 - 5,000 SY 5,001 - over SY Recycling or Pulverizing existing asphalt and base material a minimum of 6" deep; scarify subgrade 6" deep; compact & finish subgrade & pulverize material complete in place (95% subgrade and base compaction required). 0 - 1,000 SY 1,001 - 5,000 SY 5,001 - over SY Recycling or Pulverizing existing asphalt and base material a minimum of 6"; scarify subgrade 6"; compact and finish subgrade & pulverized base course complete in place (3% Portland cement treated base and compaction required). 0 - 1,000 SY 1,001 - 5,000 SY 5,001 - over SY Milling existing asphaltic pavement 2" deep with haul-off of materials and with traffic control. 0 - 1,000 SY 1,001 - 5,000 SY 5,001 - over SY Dig out 8" and replace with Type B, Hot Mix Asphaltic Concr with haul-off and with traffic control. 0 - 250 TON 251 - 500 TON per Ton		1,001 - over CY	\$20.00 per cubic yard	
3 Recycling or Pulverizing existing asphalt and base material a minimum of 6" deep; scarify subgrade 6" deep; compact & finish subgrade & pulverize material complete in place (95% subgrade and base compaction required). 0 - 1,000 SY per square yard 1,001 - 5,000 SY per square yard 4 Recycling or Pulverizing existing asphalt and base material a minimum of 6"; scarify subgrade 6"; compact and finish subgrade & pulverized base course complete in place (3% Portland cement treated base and compaction required). 0 - 1,000 SY per square yard 1,001 - 5,000 SY per square yard 5 Milling existing asphaltic pavement 2" deep with haul-off of materials and with traffic control. 0 - 1,000 SY per square yard 5 Dig out 8" and replace with Type B, Hot Mix Asphaltic Concr with haul-off and with traffic control. 0 - 250 TON per Ton	2		Pulverizing existing asphalt and base material;	
1,001 – 5,000 SY 5,001 - over SY Recycling or Pulverizing existing asphalt and base material a minimum of 6" deep; scarify subgrade 6" deep; compact & finish subgrade & pulverize material complete in place (95% subgrade and base compaction required). 0 – 1,000 SY 1,001 – 5,000 SY 5,001 - over SY Recycling or Pulverizing existing asphalt and base material a minimum of 6"; scarify subgrade 6"; compact and finish subgrade & pulverized base course complete in place (3% Portland cement treated base and compaction required). 0 – 1,000 SY 1,001 – 5,000 SY 5,001 - over SY Milling existing asphaltic pavement 2" deep with haul-off of materials and with traffic control. 0 – 1,000 SY 1,001 – 5,000 SY 5,001 - over SY Dig out 8" and replace with Type B, Hot Mix Asphaltic Concr with haul-off and with traffic control. 0 – 250 TON 251 – 500 TON per Ton			6" deep only (No compaction).	
3 Recycling or Pulverizing existing asphalt and base material a minimum of 6" deep; scarify subgrade 6" deep; compact & finish subgrade & pulverize material complete in place (95% subgrade and base compaction required). 0 - 1,000 SY		0 - 1,000 SY	per square yard	
Recycling or Pulverizing existing asphalt and base material a minimum of 6" deep; scarify subgrade 6" deep; compact & finish subgrade & pulverize material complete in place (95% subgrade and base compaction required). 0 - 1,000 SY		1,001 - 5,000 SY	per square yard	
minimum of 6" deep; scarify subgrade 6" deep; compact & finish subgrade & pulverize material complete in place (95% subgrade and base compaction required). 0 - 1,000 SY		5,001 - over SY	per square yard	
finish subgrade & pulverize material complete in place (95% subgrade and base compaction required). 0 - 1,000 SY	3		Recycling or Pulverizing existing asphalt and base material a	
subgrade and base compaction required). 0 - 1,000 SY				
1,001 – 5,000 SY per square yard 5,001 - over SY per square yard 5,001 - over SY per square yard Recycling or Pulverizing existing asphalt and base material a minimum of 6"; scarify subgrade 6"; compact and finish subgrade & pulverized base course complete in place (3% Portland cement treated base and compaction required). 0 – 1,000 SY per square yard 5,001 - over SY per square yard Milling existing asphaltic pavement 2" deep with haul-off of materials and with traffic control. 0 – 1,000 SY per square yard 5,001 - over SY per square yard 5,001 - over SY per square yard 5,001 - over SY per square yard 6 Dig out 8" and replace with Type 8, Hot Mix Asphaltic Concrewith haul-off and with traffic control. 0 - 250 TON per Ton				
1,001 – 5,000 SY 5,001 - over SY Recycling or Pulverizing existing asphalt and base material a minimum of 6"; scarify subgrade 6"; compact and finish subgrade & pulverized base course complete in place (3% Portland cement treated base and compaction required). 0 – 1,000 SY 1,001 – 5,000 SY 5,001 - over SY Milling existing asphaltic pavement 2" deep with haul-off of materials and with traffic control. 0 – 1,000 SY 1,001 – 5,000 SY 2,001 - over SY Dig out 8" and replace with Type B, Hot Mix Asphaltic Concrewith haul-off and with traffic control. 0 - 250 TON 251 – 500 TON per Ton			subgrade and base compaction required).	
Feet Sy square yard Recycling or Pulverizing existing asphalt and base material a minimum of 6"; scarify subgrade 6"; compact and finish subgrade & pulverized base course complete in place (3% Portland cement treated base and compaction required). O = 1,000 SY per square yard 1,001 = 5,000 SY per square yard Milling existing asphaltic pavement 2" deep with haul-off of materials and with traffic control. O = 1,000 SY per square yard 1,001 = 5,000 SY per square yard 5,001 - over SY per square yard Dig out 8" and replace with Type B, Hot Mix Asphaltic Concrewith haul-off and with traffic control. O = 250 TON per Ton		0 – 1,000 SY	per square yard	
A Recycling or Pulverizing existing asphalt and base material a minimum of 6"; scarify subgrade 6"; compact and finish subgrade & pulverized base course complete in place (3% Portland cement treated base and compaction required). 0 – 1,000 SY		1,001 - 5,000 SY	per square yard	
minimum of 6"; scarify subgrade 6"; compact and finish subgrade & pulverized base course complete in place (3% Portland cement treated base and compaction required). 0 - 1,000 SY		5,001 - over SY	per square yard	
subgrade & pulverized base course complete in place (3% Portland cement treated base and compaction required). 0 - 1,000 SY	4		Recycling or Pulverizing existing asphalt and base material a	
Portland cement treated base and compaction required). 0 - 1,000 SY				
0 - 1,000 SY				
1,001 – 5,000 SY			Portland cement treated base and compaction required).	
5 Milling existing asphaltic pavement 2" deep with haul-off of materials and with traffic control. 0 – 1,000 SY per square yard 1,001 – 5,000 SY per square yard 5,001 - over SY per square yard Dig out 8" and replace with Type B, Hot Mix Asphaltic Concr with haul-off and with traffic control. 0 - 250 TON per Ton 251 – 500 TON per Ton			per square yard	
Milling existing asphaltic pavement 2" deep with haul-off of materials and with traffic control. 0 – 1,000 SY		1,001 - 5,000 SY	per square yard	
materials and with traffic control. 0 - 1,000 SY		5,001 - over SY	per square yard	
0 - 1,000 SY per square yard 1,001 - 5,000 SY per square yard 5,001 - over SY per square yard 6	5		Milling existing asphaltic pavement 2" deep with haul-off of	
1,001 – 5,000 SY per square yard 5,001 - over SY per square yard per square yard per square yard		0 1000 54		
5,001 - over SY per square yard Dig out 8" and replace with Type B, Hot Mix Asphaltic Concr with haul-off and with traffic control. 0 - 250 TON per Ton 251 - 500 TON per Ton				
Dig out 8" and replace with Type B, Hot Mix Asphaltic Concr with haul-off and with traffic control. 0 - 250 TON per Ton 251 - 500 TON per Ton				
with haul-off and with traffic control. 0 - 250 TON per Ton 251 - 500 TON per Ton		5,001 - over SY	per square yard	
0 - 250 TON per Ton 251 - 500 TON per Ton	6		Dig out 8" and replace with Type B, Hot Mix Asphaltic Concrete	
251 – 500 TON per Ton		0. 350 704		
501 - over ION per Ton				
		201 - Over 10N	per ton	

14	Single Course Treatment, Grade 4 coverstone, CHFRS-2 @ 0.40			
	0 4 000 004	gal/SY, complete in place.		
	0 - 1,000 SY	per square yard		
	1,001 - 5,000 SY	per square yard		
	5,001 – over SY	per square yard		
15		Single Course Treatment, Grade 4 coverstone, CRS-2TR @ 0.40		
		gal/SY, complete in place.		
	0 - 1,000 SY	per square yard		
	1,001 - 5,000 SY	per square yard		
	5,001 – over SY	per square yard		
16		Fog Seal Treatment, TRMSS @ 0.20 gal/SY, complete in p	olace.	
	0 - 1,000 SY	per square yard		
	1,001 - 5,000 SY	per square yard		
	5,001 – over SY	per square yard		
17		Fog Seal Treatment, TRFog @ 0.20 gal/SY, complete in place.		
	0 - 1,000 SY	per square yard		
	1,001 - 5,000 SY	per square yard		
	5,001 – over SY	per square yard		
18		Fog Seal Treatment, CSS-1h @ 0.20 gal/SY, complete in place.		
	0 - 1,000 SY	per square yard		
	1,001 - 5,000 SY	per square yard		
,	5,001 – over SY	per square yard		
19		Rejuvenation Treatment, Reclamite @ 0.10 gal/SY, comp place.	olete	
	0 - 1,000 SY	per square yard		
	1,001 - 5,000 SY	per square yard		
	5,001 – over SY	per square yard		
20		Crack Sealing (Crafco Polyflex Type 3)		
	0 - 500 LF	per linear feet		
	501 - 1000 LF	per linear feet		
	1,001 - over LF	per linear feet		
21		Removal of curb & gutter.		
	0 - 50 LF	\$3.00 per linear feet		
	51 - 100 LF	\$3.00 per linear feet		
	101 - over LF	\$3.00 per linear feet		

ITB 3294 PAGE 13


22		Removal of reinforced concrete.	
	0 - 50 CY	\$25.00	per cubic yard
	51 - over CY		_ per cubic yard
23		Curb & Gutter, standard 24" section	
		complete in place (Inclusive of 3-N	lo. 3 bars). To include backfill
		behind curb.	
		\$25.00	_ per linear feet
	51 – 100 LF		_ per linear feet
	101 - over LF	\$25.00	_ per linear feet
24		Curb & Gutter, standard 30" section	on, 3000 psi concrete,
		complete in place (Inclusive of 3-N	lo. 3 bars). To include backfill
		behind curb.	
	0 – 50 LF	\$25.00	_ per linear feet
	51 – 100 LF		_ per linear feet
	101 - over LF	\$25.00	_ per linear feet
25		Standup Curb, TxDOT Type II, 300	Incl concrete complete in
23		place (Inclusive of 2-No. 3 bars). T	
	0-50 LF	\$25.00	per linear feet
	51 – 100 LF	\$25.00	per linear feet
	101 - over LF	\$25.00	_ per linear feet
	202 0101 0	420.00	_ per micar rece
26		Ribbon Curb, standard 6" x 12" se	
		complete in place (Inclusive of 2-N	lo. 3 bars). To include backfill
		behind curb.	
	0 – 50 LF		_ per linear feet
	51 – 100 LF		_ per linear feet
	101 - over LF	\$25.00	_ per linear feet
27		4' Concrete Sidewalk, 4" thick, 300	00 psi concrete, with
		reinforcement, complete in place.	
	0 - 1,000 SF	\$5.50	per square feet
	1,001 - 5,000 SF	\$5.50	per square feet
28		4' Concrete Sidewalk, 6" thick, 300	10 nei concrete with
		reinforcement, complete in place.	
	0 - 1,000 SF		
	1,001 - 5,000 SF		_ per square feet
29		Structural Concrete with reinforce	
	0 – 50 CY		
	51 – over CY	\$155.00	_ per cubic yard

30		Structural Concrete with reinforce	ment
		(retaining walls, box culverts)	
	0 - 50 CY	\$155.00	_ per cubic yard
	51 – over CY	\$155.00	_ per cubic yard
31		Structural Concrete riprap with re	inforcement
-		(slope & flat work)	and the same of th
	4"	** *** ***	_ per square foot
	6"	\$6.50	
	8°	\$7.50	per square foot
32		Rock riprap (grouted) and placeme	ent .
-	3" - 5"	Trock riprap (6) outco, and placem	
	10" - 12"		per cubic yard
	10 -12		_ per cable yara
33		Rock riprap (ungrouted) and placement	
	3" - 5"		
	10" - 12"		
34		Typical Sidewalk Ramp Type 1 (Txl	OOT Standard)
	0-5 EA	\$950.00	_ each
			_
35		Typical Sidewalk Ramp Type 2 (Txi	OOT Standard)
	0-5 EA	\$950.00	_ each
36		Typical Sidewalk Ramp Type 5 (Txi	
	0-5 EA	\$950.00	_ each
37		Typical Sidewalk Ramp Type 7 & 1	
	0-5 EA	\$950.00	_ each
38		Typical Sidewalk Ramp Type 20 (T	(DOT Standard)
	0-5 EA	\$1,000.00	_ each
39		Adjust standard water valve boxes	& install concrete coller
33	0-5 EA	Aujust standard water valve boxes	each
	0-3 EX		eacn
40		Adjust standard storm water and sewer manhole ring & install	
		concrete collar.	retter mannote ting a nistan
	0-5 EA		_ each
41		Structural excavation and backfill	
	0-100 CY	\$25.00	
	101 – over CY	\$25.00	_ per cubic yard

COMPANY NAME	Cruz Hernandez Concrete Construction
ADDRESS	
	5595 County Road 456
	Stephenville, Tx. 76401
AUTHORIZED BIDDER	Print or type Grus Legy Signature
Phone <u>254-968-3515</u>	Fax _254-968-1028
Data March2 2022	Email ch.concretelic@gmail.com

Note: Bid must be signed by a person having the authority to bind the firm in a contract
Bids not manually signed will be rejected

PAGE 12

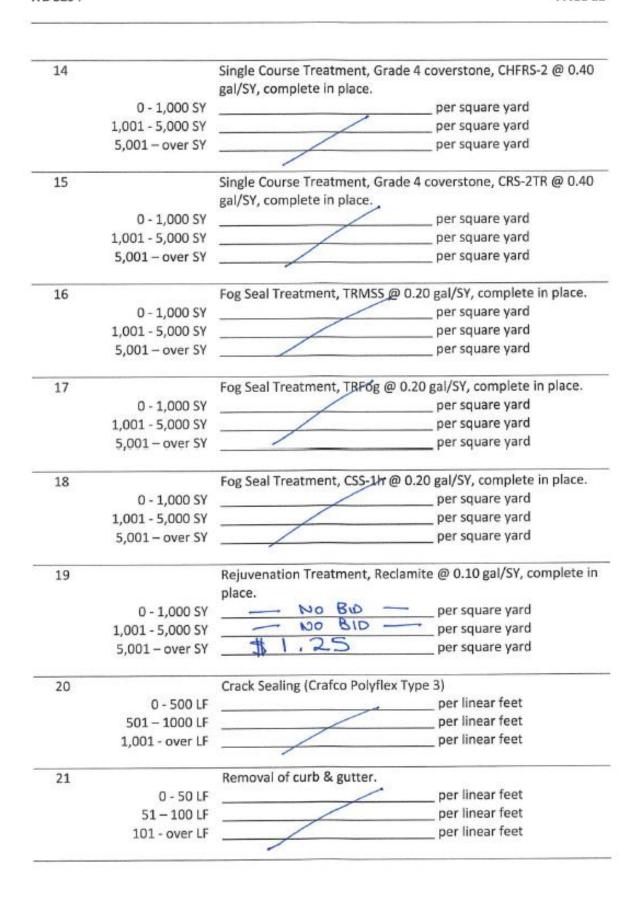

Email ROB. Wa PAUSKESTORE. COM

COMPANY NAME	PAVEMENT RESTORATION INC
ADDRESS	BOSENE TX
	78006
AUTHORIZED BIDDER	ROBERT WIGGINS Print or type
	Signature
Phone 813 - 323 271	O Fax

Note: Bid must be signed by a person having the authority to bind the firm in a contract
Bids not manually signed will be rejected