

NEW


Kore EX5 IP65

Exton Monopoint System

Rigid Stem 4" Monopoint Pendant
"S" Envelopes, Brilliant Gems & Disk Shades




- Category:** Exton 24" Rigid Stem Monopoint with a glass "S" (Sign) Envelope, Brilliant Gem and architectural Disk Shade. Remote Power Supply Enclosure with Driver. Optional 0-10V Dimming.
- Material:** **Monopoint/Stem:** Powdercoated Stainless Steel.
Kore EX5 LED Module: UV stable exterior anodized aluminum, UV stable polycarbonate, rubber O-rings.
Envelope: Hand blown, tooled glass. Note: Tegan's Glass Envelopes are hand blown with tooling. While the tooling provides consistency in scale, the Envelopes will have minor variations from Envelope-to-Envelope and batch-to-batch in scale and appearance. There also can be minor bubbles (clear/frosted versions) and tool marks on the surface. These are all common attributes of blown glass.
Gem: Faceted glass, tooled.
Architectural Metal Shade: Powdercoated Aluminum.
- Finish:** **Kore EX5 LED Module:** Exterior rated, brushed, two-step electrolytic color anodizing. Anodized Black (BLK) or Anodized Aluminum (AL).
S Envelope: Clear/Frosted, Clear Rain Bubble Pattern, Amber Rain Bubble Pattern.
Shade: Powdercoated Black.
24" (max) Rigid Stem: Field cuttable, finish to match Module.
- Power Supply Enclosure:** Refer to [Exton Power Supply IP20 Specs sheet](#), [IP24 Specs sheet](#) or [IP66 Specs sheet](#) for details.
- Kore-EX5 LED:** 5W Kore EX5 LED Pendant - Anodized Aluminum or Anodized Black finish.
- LED:** High Wattage Array Cree LED, 2-Step Macadam. 5W @ 500 Lumen Output with 2700K 82-85 CRI typical. All values are initial lumens. For exact lumen output and wattage consumption data, please consult IES reports. Online power consumption does not include driver losses. Contact factory for 3000K, 3500K, 4000K or 90 CRI.
- Electrical:** 24VDC. Total input watts: 6.5W. 300W max. per circuit.
- Optics:** A 15° reflector is supplied in all decorative options to maximize decorative element illumination. Refer to photometric report for details.
- Remote Power Supply Option:** The Exton System can be used with a Remote Power Supply Enclosure and Driver. Refer to [Exton Power Supply IP20 Specs sheet](#), [IP24 Specs sheet](#) or [IP66 Specs sheet](#) for details. Use of Tegan Lighting Power Enclosures and Drivers only. If supplied "by others" the warranty and listing are void.
- Envelopes:** "S" (Sign) Glass Envelope Clear (SEC), "S" (Sign) Glass Envelope Frosted (SEF), "S" (Sign) Glass Envelope Clear Rain Bubble Pattern (SECRP), "S" (Sign) Glass Envelope Amber Rain Bubble Pattern (SEARP). Contact factory for alternative stock or custom colors (100+ units).
- Glass Gems:** Faceted "Brilliant" Clear Sparkle Gem (BCG), Faceted "Brilliant" Frosted Gem (BFG), Faceted "Brilliant" Amber Sparkle Gem (BAG). Contact factory for alternative stock or custom colors.
- Architectural Shade:** 12" Disk Shade; Powdercoated Black (DS-BLK). Contact factory for one-tone or two-tone custom colors (no minimum quantity).
- Accessories:** 22K Color Correction Filter (EX5-CCT-22K), 24K Color Correction Filter (EC5-CCT-24K).
Note: CCT22/24 = Kelvin Temperature results when used with the standard 27K Cree LED.
- Installation:** Kore EX5 LED Pendant mounts to a 4" metal IP65 J-Box by others rated between 50-150lbs fixture support securely mounted to building structure. Refer to installation instruction drawings for secure mounting examples. Refer to [Installation Instructions #24](#) for details. For system layout, and specification assistance, refer to the [Exton IP65 Application Guide](#) for details.
- Labels:** ETL Listed; Tested to UL 2108 Low Voltage Lighting Systems. In a continuing effort to offer the best product possible we reserve the right to change, without notice, specifications or materials. Technical specification sheets that appear on teganlighting.com are the most recent version and supersede all other versions that exist in any other printed or electronic form. Kore EX5 Module, Monopoint Mounting - 3 year warranty.



Exton Monopoint System



Exton - Kore-EX5 Glass "Gem" Types



Exton Brilliant Clear, Frosted or Amber Gem
Multifaceted "Brilliant" Sparkle glass Gem for Kore-EX5 Module.

1. Contact factory for a custom design gem Refer to page 1 for minimum units.

Exton - Kore EX5 Glass Envelopes - Sign (S) Types





"S" Glass Envelope, Clear
Hand Blown, Clear Sign (S) Shape Glass Envelope for Kore-EX5.

"S" Glass Envelope, Clear or Amber Bubble Pattern
Hand Blown, Clear or Amber Rain Bubble Pattern Sign (S) Shape Glass Envelope for Kore-EX5.

1. Contact Factory for alternative color options. Refer to page 1 for minimum units.


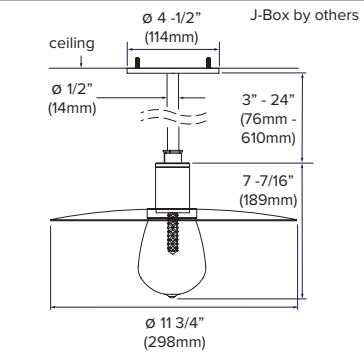
Exton - Kore EX5 Architectural Shade - Metal Type

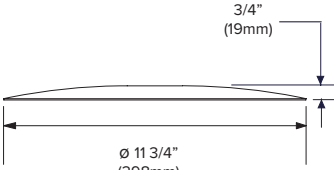

12" Dysk Shade, Black finish.

1. Can be field painted or contact factory for custom colors

Exton - 4" Rigid Stem Monopoint - Kore EX5 24VDC Pendant with "S" Envelope, Gem & Disk Shade

Kore EX5 Stem Pendant Monopoint with S Envelope Clear, Brilliant Clear Gem, Dysk Shade, shorter field-cut length shown. 24" Field-cutttable rigid stem, 3" length minimum.
Kore EX5/Stem: Aluminum or Black finish.
Dysk Shade: Black finish.
(EX5-K-P24-4MP-RGS-SEC-BCG-AL-DS-BLK)
(EX5-K-P24-4MP-RGS-SEC-BCG-BLK-DS-BLK)

Kore EX5 Stem Pendant Monopoint with S Envelope Clear, Brilliant Frosted Gem, Dysk Shade, shorter field-cut length shown. 24" Field-cutttable rigid stem, 3" length minimum.
Kore EX5/Stem: Aluminum or Black finish.
Dysk Shade: Black finish.
(EX5-K-P24-4MP-RGS-SEC-BFG-AL-DS-BLK)
(EX5-K-P24-4MP-RGS-SEC-BFG-BLK-DS-BLK)

Kore EX5 Stem Pendant Monopoint with S Envelope Clear, Brilliant Amber Gem, Dysk Shade, shorter field-cut length shown. 24" Field-cutttable rigid stem, 3" length minimum.
Kore EX5/Stem: Aluminum or Black finish.
Dysk Shade: Black finish.
(EX5-K-P24-4MP-RGS-SEC-BAG-AL-DS-BLK)
(EX5-K-P24-4MP-RGS-SEC-BAG-BLK-DS-BLK)


1. Order Remote Power Supplies separately. Refer to Exton Power Supply IP20 Specs sheet, IP24 Specs sheet or IP66 Specs sheet for options.
2. Order Accessories separately.
3. 24VDC Operation.



Exton Monopoint System

Kore EX5 IP65
Rigid Stem 4" Monopoint Pendant
"S" Envelopes, Brilliant Gems & Disk Shades

Exton - 4" Rigid Stem Monopoint - Kore EX5 24VDC Pendant with "S" Envelope, Gem & Disk Shade

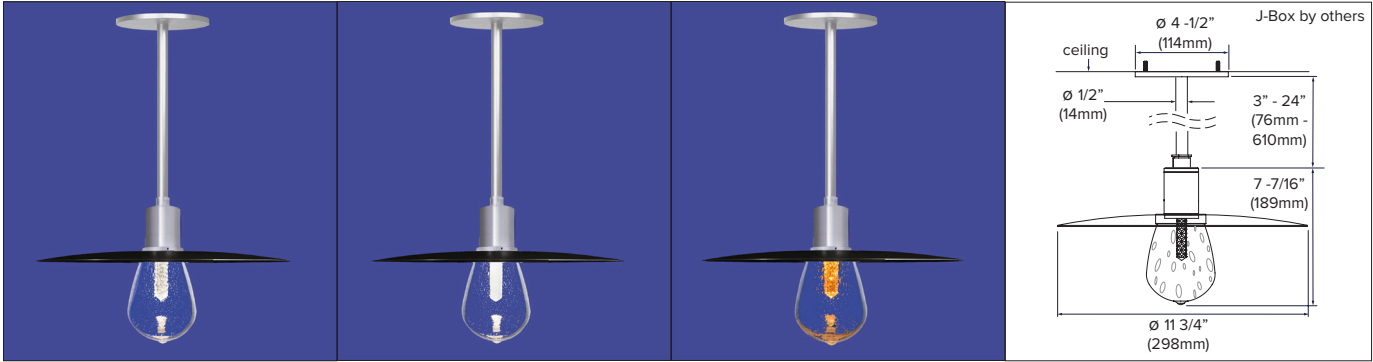

Kore EX5 Stem Pendant Monopoint with S Envelope Clear Rain Bubble Pattern, Brilliant Clear Gem, Disk Shade, shorter field-cut length shown. 24" Field-cutttable rigid stem, 3" length minimum.

Kore EX5/Stem: Aluminum or Black finish.
Disk Shade: Black finish.

(EX5-K-P24-4MP-RGS-SECRP-BCG-AL-DS-BLK)
(EX5-K-P24-MP-JBPS-SECRP-CG-BLK-DS-BLK)

Kore EX5 Stem Pendant Monopoint with S Envelope Clear Rain Bubble Pattern, Brilliant Frosted Gem, Disk Shade, shorter field-cut length shown. 24" Field-cutttable rigid stem, 3" length minimum.


Kore EX5/Stem: Aluminum or Black finish.
Disk Shade: Black finish.

(EX5-K-P24-4MP-RGS-SECRP-BFG-AL-DS-BLK)
(EX5-K-P24-MP-JBPS-SECRP-BFG-BLK-DS-BLK)

Kore EX5 Stem Pendant Monopoint with S Envelope Clear Rain Bubble Pattern, Brilliant Amber Gem, Disk Shade, shorter field-cut length shown. 24" Field-cutttable rigid stem, 3" length minimum.

Kore EX5/Stem: Aluminum or Black finish.
Disk Shade: Black finish.

(EX5-K-P24-4MP-RGS-SECRP-BAG-AL-DS-BLK)
(EX5-K-P24-4MP-RGS-SECRP-BAG-BLK-DS-BLK)

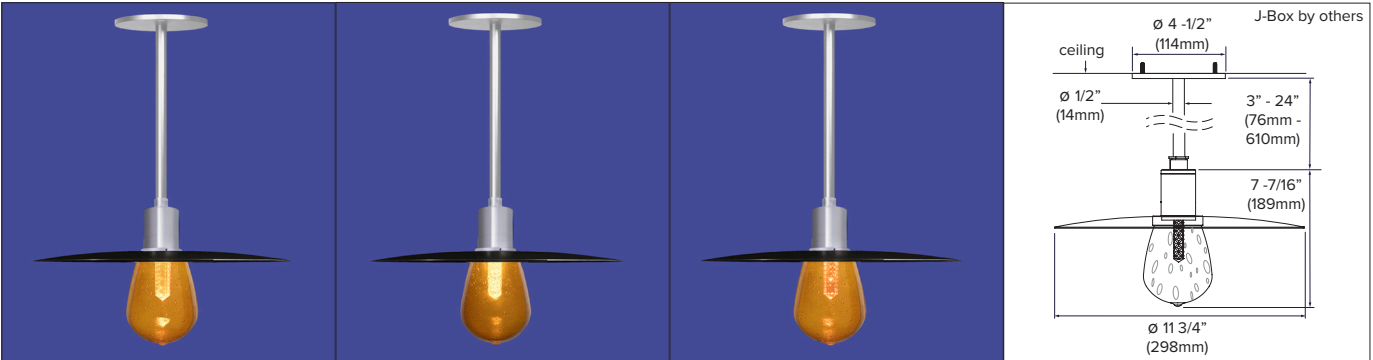

Kore EX5 Stem Pendant Monopoint with S Envelope Clear, Brilliant Clear Gem, Disk Shade, shorter field-cut length shown. 24" Field-cutttable rigid stem, 3" length minimum.

Kore EX5/Stem: Aluminum or Black finish.
Disk Shade: Black finish.

(EX5-K-P24-4MP-RGS-SEC-BCG-AL-DS-BLK)
(EX5-K-P24-4MP-RGS-SEC-BCG-BLK-DS-BLK)

Kore EX5 Stem Pendant Monopoint with S Envelope Clear, Brilliant Frosted Gem, Disk Shade, shorter field-cut length shown. 24" Field-cutttable rigid stem, 3" length minimum.

Kore EX5/Stem: Aluminum or Black finish.
Disk Shade: Black finish.

(EX5-K-P24-4MP-RGS-SEC-BFG-AL-DS-BLK)
(EX5-K-P24-4MP-RGS-SEC-BFG-BLK-DS-BLK)


Kore EX5 Stem Pendant Monopoint with S Envelope Clear, Brilliant Amber Gem, Disk Shade, shorter field-cut length shown. 24" Field-cutttable rigid stem, 3" length minimum.

Kore EX5/Stem: Aluminum or Black finish.
Disk Shade: Black finish.

(EX5-K-P24-4MP-RGS-SEC-BFAG-AL-DS-BLK)
(EX5-K-P24-4MP-RGS-SEC-BAG-BLK-DS-BLK)

1. Order Remote Power Supplies separately. Refer to [Exton Power Supply IP20 Specs sheet](#), [IP24 Specs sheet](#) or [IP66 Specs sheet](#) for options.
2. Order Accessories separately.
3. 24VDC Operation.

Exton - Kore-EX5 LED - Accessories

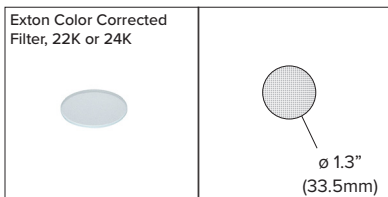

Exton Color Corrected Filter, 22K or 24K

(EX5-CCT-22K/24K)

22K or 24K Kelvin Temperature results when used with the standard 27K Cree LED.



Click on the linked images below to visit the [Exton IP65 Gallery](#).



Kore EX5 LED Rigid Stem Monopoint
Pendant, Black, Remote Power Supply,
G Envelope Frosted, Dysk Shade



Kore EX5 LED Rigid Stem Monopoint
Pendant, Black, Remote Power Supply,
S Envelope Amber Rain Bubble Pattern,
Dysk Shade

Click on the image below to visit the [Exton IP65 Application Guide](#).

