

*Proposed*

**Line:** 2      **Location:**

**Quantity:** 1      Ultra C650, 3642U, IS4P2S, 1 3/8" Setback, Ext Frost / Int White, U-Factor: .30, SHGC: .14, VT: .31

1/8" SunCoatMAX (Low-E) Tempered over 1/8" Clear Tempered

Narrow Vintage, Ext Frost/Int Painted Wood, Colonial 6W5H

Foam fill Frame

Argon Gas Filled

Tariff

**Item Total:**

Model = Inswing Two Panel Two Inswing Sidelite

Size = RO: 120" x 90"

Net Frame: 119 1/2" x 89 1/2"

Dimensions = Door Width: 72"

Handing = Operable / Active / Passive / Operable

Composite Method = Vertical: IMR

Energy Star Zone(s) = Meets Title 24 2019

Glass = 1/8" SunCoatMAX (Low-E) Tempered over 1/8" Clear Tempered with Gra

Glazing = 7/8" OA Dual Glaze with Argon

Grids = Narrow Vintage, Ext Frost / Int Painted Wood, Colonial 6W5H

Wall = 4 9/16" Wall Condition

Hardware = Madrona Handle, Ext Slate Black, Int Slate Black, Slate Black Hinge F

Other Options = Standard Sill, Glazing Policy: Glazed and Panel In, Foam Fill


Screen = Standard with Fiberglass Mesh, Screen Ship Loose

Ratings = STC: 29, OITC: 24, PG: LC-PG30

Clear Opening = W 63 3/4" x H 85 1/2" Sq. Ft. 37.85, Egress: Yes

Calculations = Unit Area (Sq. Ft.): 75, Unit Perimeter (nominal in lineal ft): 37'

Other Ratings = CPD: MIL-A-242-18025-00002

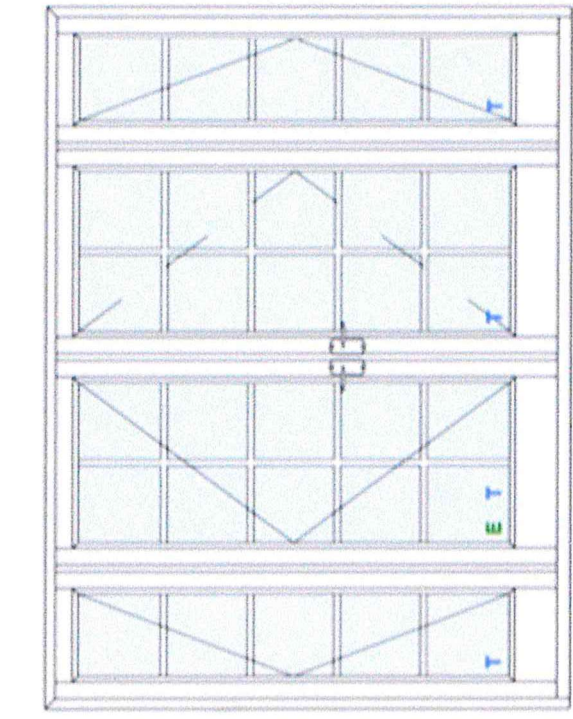

Viewed From Exterior

**Customer Approval:**