

NOTICE OF AWARD

Owner: Hildale City
Project: Hildale City Headworks Building
Bidder: Aardvark Underground Inc.
Bidders Address: PO Box 2247, Colorado City, AZ 86021

Date of Council Approval: July 12, 2023

You are notified that Owner has accepted your Bid dated July 10, 2023 for the above Contract, and that you are the Successful Bidder and are awarded a Contract for:

Hildale City Headworks Building

Construction of a new block building at the Hildale Sewer Lagoons on Uzona Avenue west of Hildale according to plans and specifications. The Contract Price of the awarded Contract is a lump sum price of \$61,000.

Owner: Hildale City

By (signature): _____

Name (printed): _____


Acceptance of Notice

Receipt of the NOTICE OF AWARD is hereby acknowledged by _____
(Contractor)


This _____ day of _____, 20_____.


By (signature): _____

Name (printed): _____

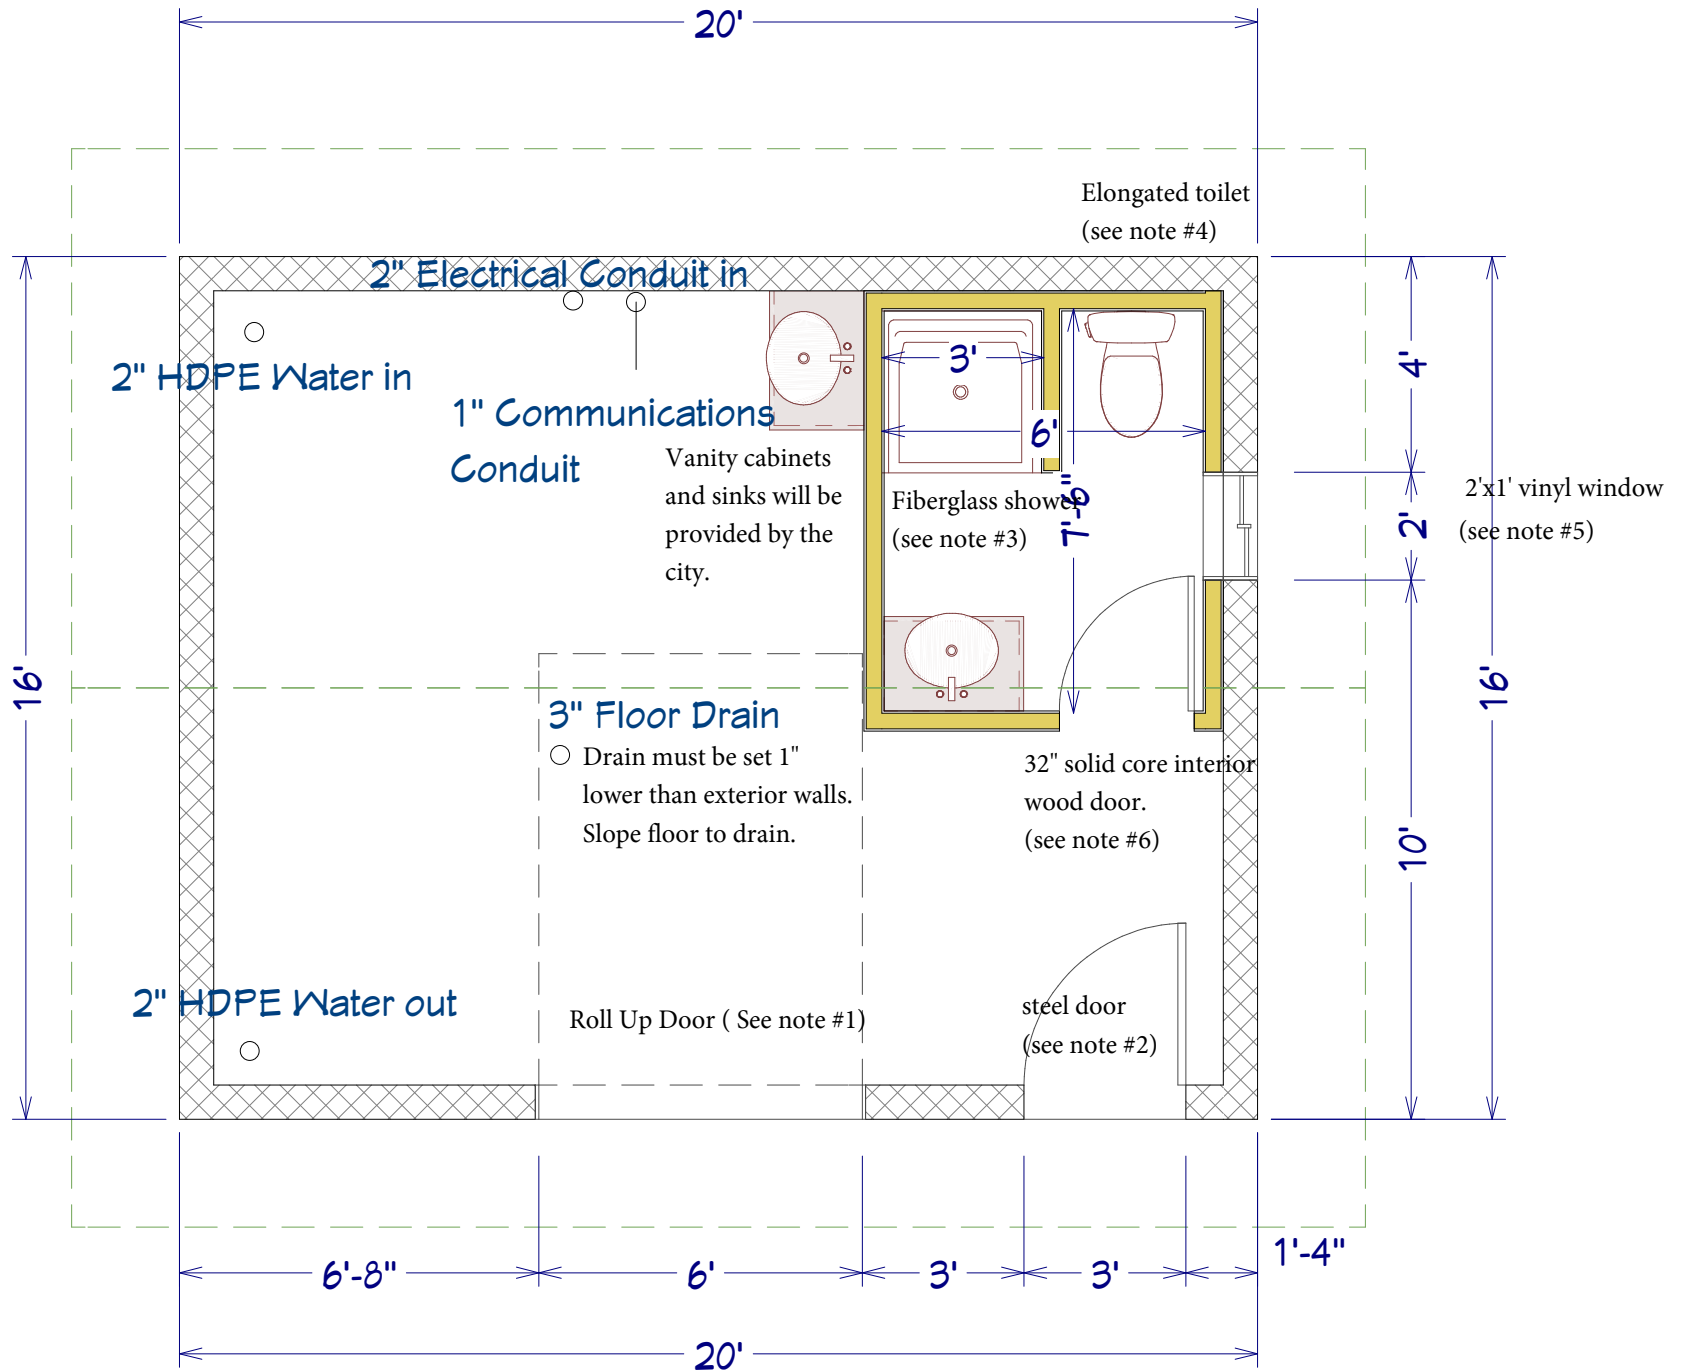

AREA
320 SQ FT

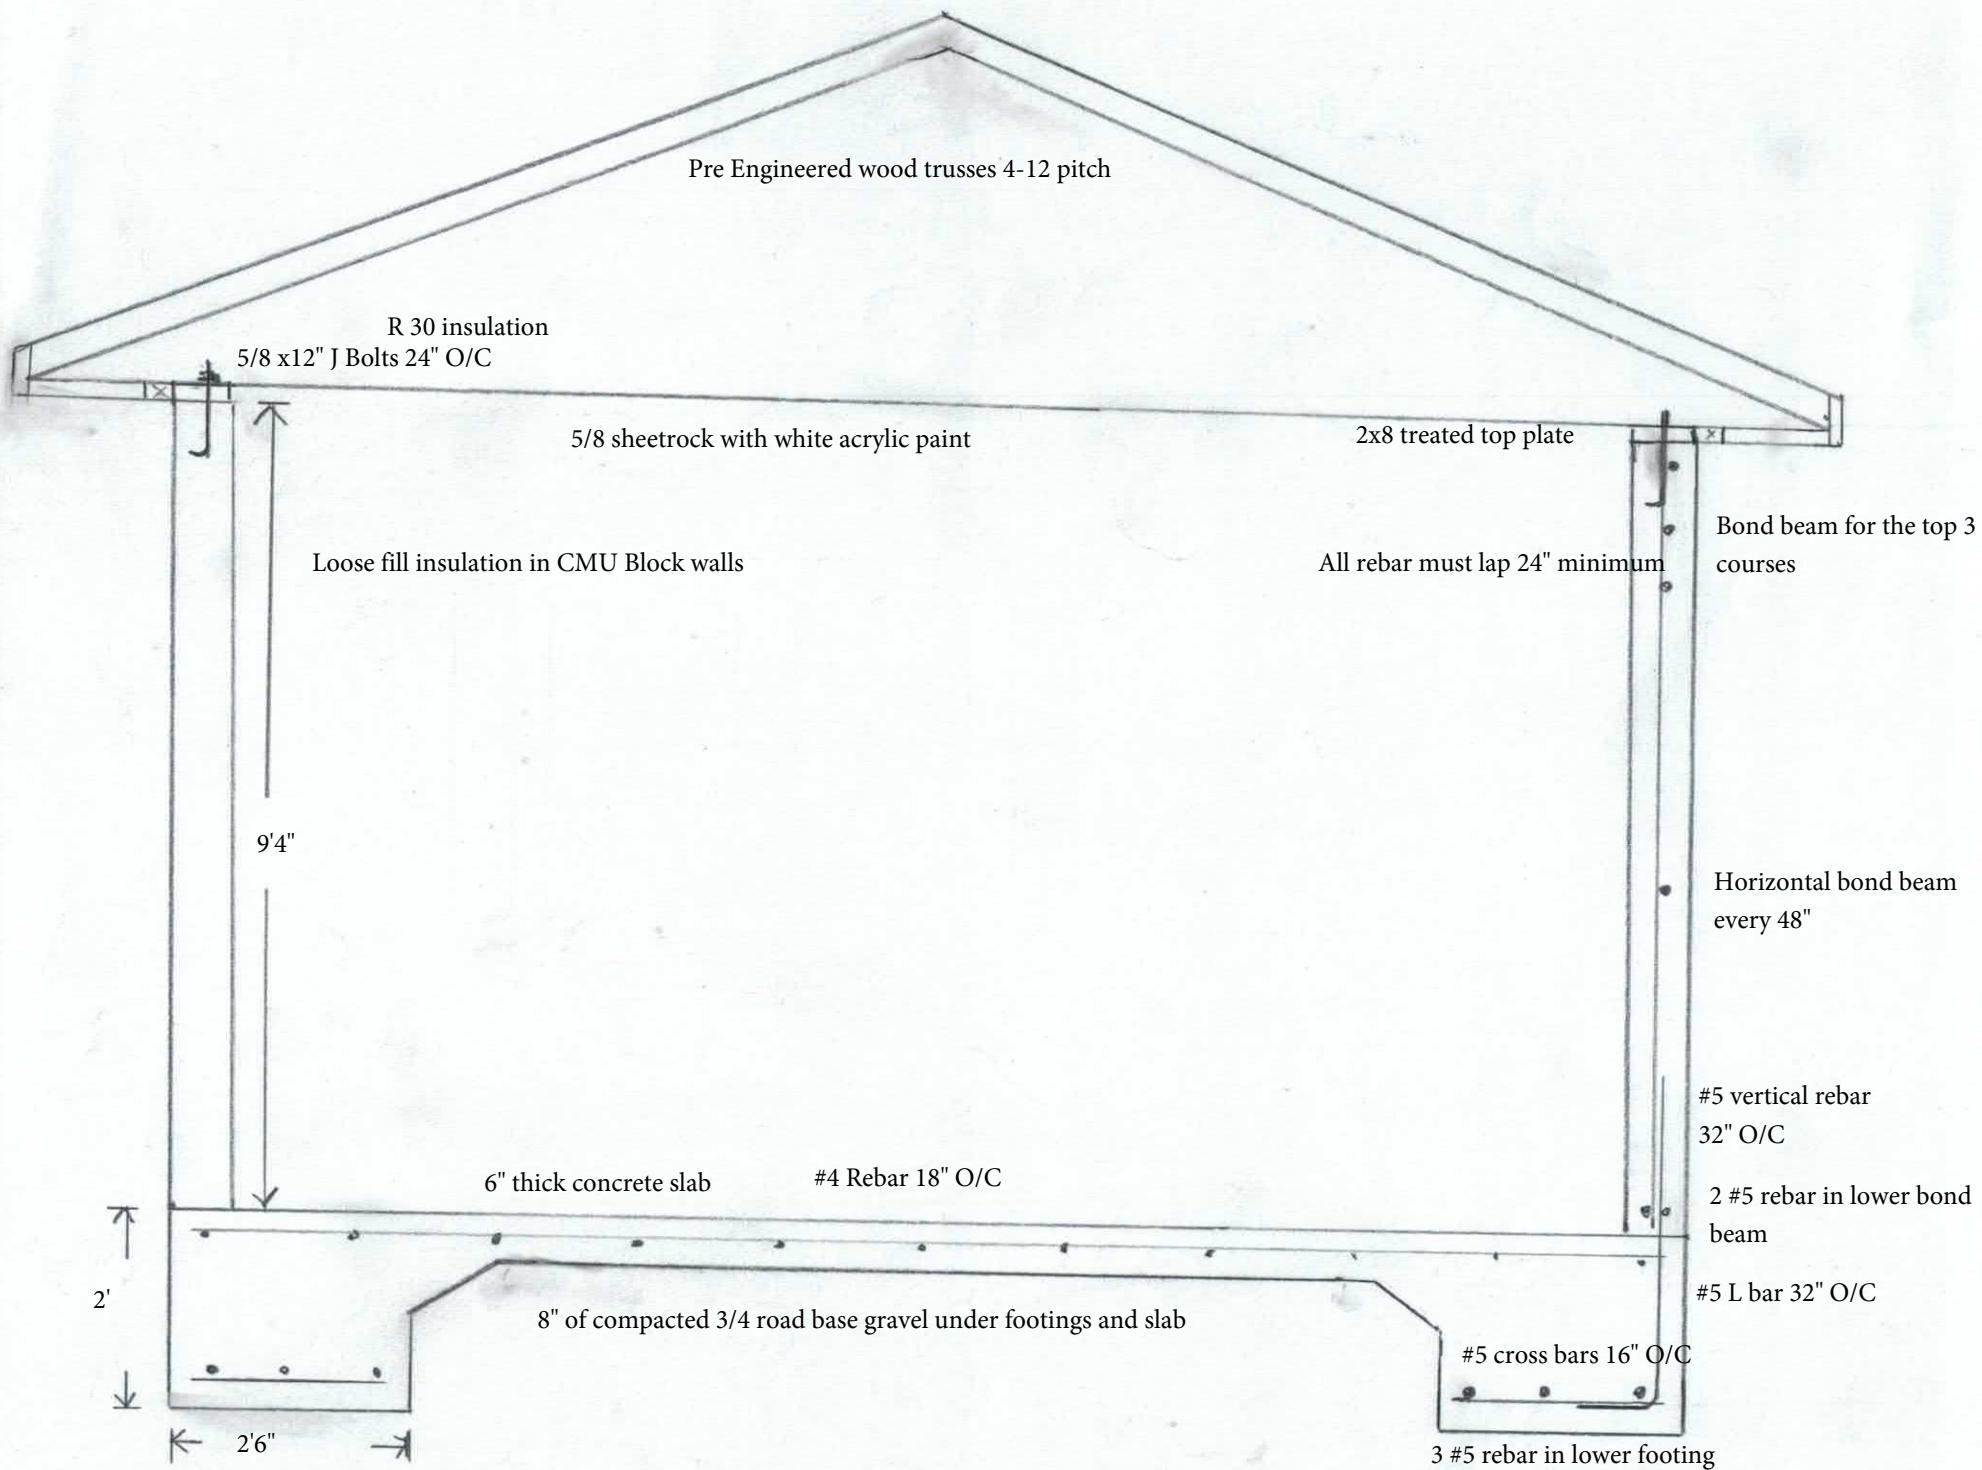

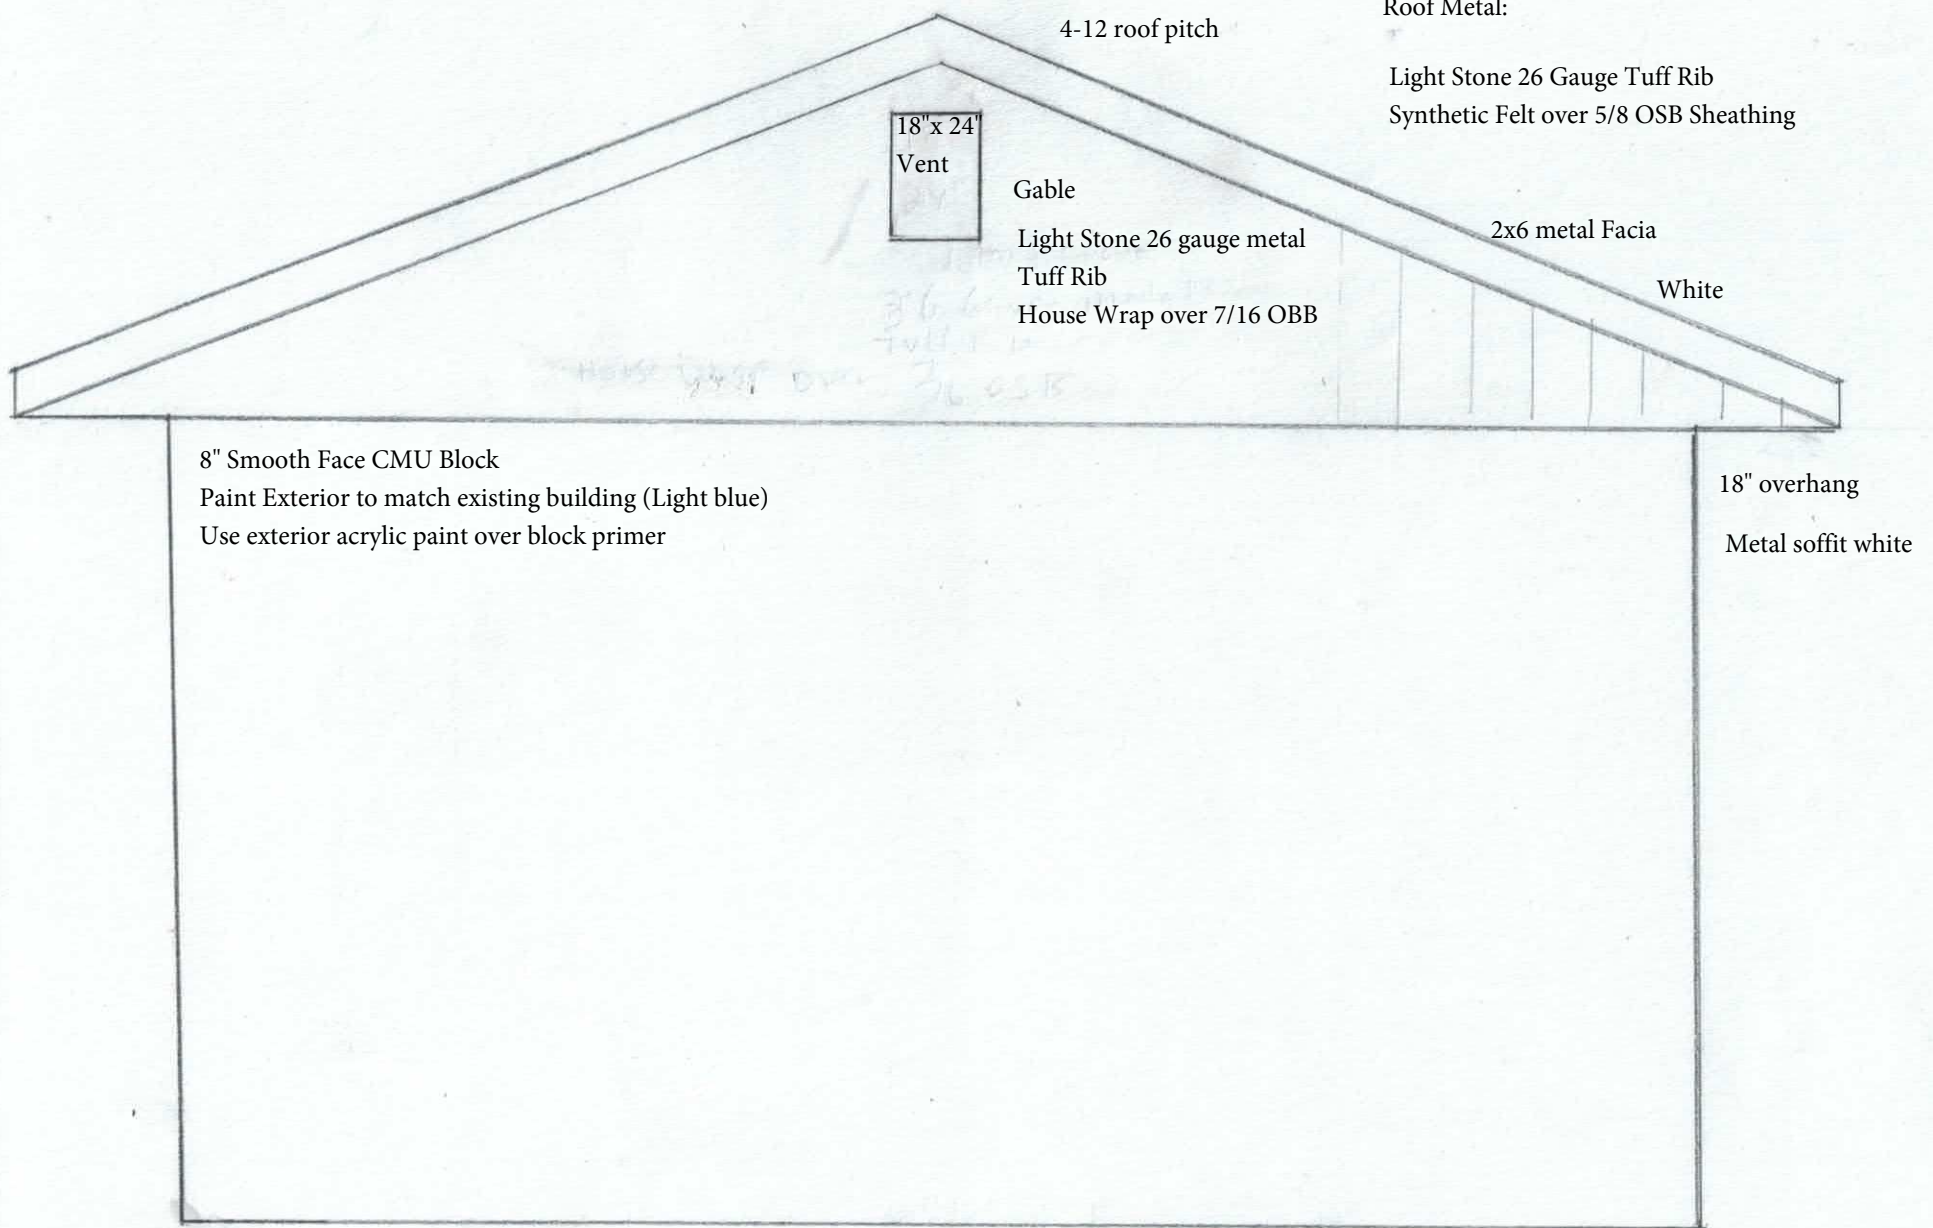

Hildale City Headworks Building

Notes:

1. 6' wide by 7' tall steel rollup door to be provided by the city and installed by the contractor
2. 3' wide steel entry door, jamb, and hardware to be provided by the city and installed by the contractor
3. 1 piece fiberglass shower stall (Everyday AcrylX 36 in. x 36 in. x 72 in. 1-Piece Shower Stall with Center Drain in White or equal, with MOAN posi-temp valve and trim {satin nickel finish}) to be provided and installed by contractor
4. Elongated toilet (KOHLER Highline Arc The Complete Solution 2-piece 1.28 GPF Single Flush Elongated Toilet in White (Slow-Close Seat Included) or equal) to be provided and installed by contractor
5. 24" wide by 12" tall obscure single vent vinyl window to be provided and installed by contractor
6. 32" solid core interior door (JELD-WEN 32 in. x 80 in. 6 Panel Colonist Primed Left-Hand Textured Solid Core Molded Composite MDF Single Prehung interior Door with privacy knob {satin nickel finish} or equal) to be provided and installed by the contractor
7. Baseboard on the interior wood walls and door casing to be provided and installed by contractor and painted to match interior walls and ceiling (finger joint pine)
8. Electrical work and fixtures will be provided and installed by the city.
9. Vanity cabinets, sinks, countertops, and hardware will be provided by the city and installed by the contractor.
10. Testing, inspections, and survey for this building will be provided by the city.
11. All work must be done to local building standards. And to the satisfaction of the city.
12. Only the items listed above will be provided by the city. All other materials and labor shown on the plans will be the contractor's responsibility.