NOTICE OF PROPOSED UTILITY WORK IN WALLER COUNTY RIGHT-OF-WAY

Formal notice is	hereby given that <u>American Comm</u>	unications	Construction	Inc. (utility contractor) proposes to place a
Underground Cond	duit and Fiber cable within the right-o	f-way of		Clay Rd	as follows:
pavement), etc.	or location, length, construction met		The state of the s	ensions from ROW line,	edge of curb or
	A PAIN		7 11		
The	UG fiber cable			structed and maintain	_
that the County	ed by Waller County Road & Bridge i considers proper traffic control mea orm Traffic Control Devices required	sures as th	ose complyin	g with applicable portion	ons of the <u>Texas</u>
The location and control attached	description of the proposed work a to this notice.	nd appurte	nances is mo	re fully shown by a PDI	F drawing and traffic
Construction is p	proposed to begin on or after the	19	_ day of	Febuary	20_24
Firm: Black & Veatch	h (Permitting on the behalf of Comcast of Houston L	LC) Addres	s: 11401 Lamar	Avenue, Overland Park, KS 6621	
By: Paul Rader				MAN -	
Signature: Par	ul Rader	Phone	+1 913-458-913	New Part II	211
Title: Permit Coordin	nator	Email:	BVPermitting@b	v.com / raderp@bv.com	17
	11-31/16	APPROV	AL A	1/ X	7 V
This application	is hereby approved subject to the fo	llowing un	derstandings	and restrictions.	1
or upon this Cou work, improve, r	iderstood that the said Waller Count unty Road; and it is further understo relocate, widen, increase, add to, de affected, will be moved at the direc n notice.	ood that in crease, or i	the future, sh n any manner	ould Waller County, for change the structure of	or any reason, need to of this road or right-of-
minimum of inc Formal Notice p	work shall not damage any part of onvenience to traffic and adjacent presentation in Commissioners Court, a written request is sent and approv	property or , for a dura	wners. Permition of one (1)	t shall be effective upo year, with the opportu	on acceptance date of
Kos	r or Road Administrator	EPT.	Traffic Cont Bond: Y	CI DAME	YN

PERMIT TO CONSTRUCT UTILITY IN WALLER COUNTY RIGHT-OF-WAY

ROAD: Clay Rd

DATE: 1/03/2024

To: American Communications Construction, Inc. Black & Veatch -Comcast of Houston, LLC 11401 Lamar Avenue
Overland Park, Kansas 66211
Permit # 23.UP.053

The location on the right-of-way of your proposed buried line as shown by the accompanying notice dated 1/02/2024 is approved.

Your attention is directed to Art. 1436A (for power lines) and Art. 1416 (for communication lines) Vernon's Annotated Texas Civil Statutes with particular attention to the following provisions:

- 1. The Court Commission may designate the place along the right-of-way where such lines shall be constructed.
- 2. Emplacement of buried lines shall be a minimum of 36 inches below the flow line of the existing ditch. For installations parallel to the right-of-way, the utility shall be located within three (3) feet of the edge of the right-of-way, unless otherwise approved by the County.
- 3. All placement of lines beneath roadways and asphalt or concrete paved driveways shall be jacked or bored. No open cut will be allowed within five feet of the edge of roadways or such driveways. Open cuts on unpaved driveways shall be performed only with a trenching machine and shall not be excavated. In such cases the trench shall be backfilled and compacted. The driveway surface shall be restored to its original condition. Any variance to these requirements shall have the Commissioners' Court approval.
- 4. All buried water lines shall be marked thoroughly with detectable tracer wire. All other lines shall be marked thoroughly with detectable underground warning tape. Public to be safe-guarded by use of construction signs and barricades. Identification markers shall be placed along right-of-way lines, that is readily identifiable, indicating name of Company, type of line and emergency contact number.
- 5. Restore roads to their original condition. Trench is to be back-tracked, dragged, graded and filled as necessary to minimize erosion and sedimentation resulting from the proposed installation. Ditches are to be left clear for drainage.
- 6. The Court Commission may require the owner to relocate this line, for valid reasons under the law by giving thirty (30) days written notice.

The contractor must notify the County Engineer at (979) 826-7670, forty-eight (48) hours prior to starting construction of the line in order that we may have a representative present. An inspection of the line installation is required prior to backfilling the excavation to confirm proper cover depth.

SPECIAL PROVISIONS:

WALLER COUNTY COMMISSIONERS' COURT

ATCai	rbett "Trey" J. Duhon III, County Judge
It is ORDERED by the Court on motion by	Commissioner, duly
seconded by Commissioner	, that the above and foregoing request be
and the same is hereby approved, with	members present voting in favor and
members present voting opposed.	The County Engineer is authorized to comply
with the above requests.	100
Date	
Debbie Hollan, County Clerk	
Deputy	COUT



CHECKOUT FOOD STORES - CLAY PITTS 4011 PITTS RD KATY, TX 77493

WALLER COUNTY **VICINITY MAP**



BUILD (ROW WORK ONLY) BORE FOOTAGE:-

OVERPULL EXISTING CONDUIT:-

TOTAL PROJECT FOOTAGE:

SCOPE OF WORK

COMCAST PROPOSES TO BEGIN AT EXISTING EDGE OF ROW 40' NORTH OF CENTERLINE OF CLAY RD. BORE SOUTH 3' TO PROPOSED BORE PIT.
THEN TURN EAST AND BORE 180' TO PROPOSED PEDESTAL. CONTINUE BORE 5' TO DIG AND RETRIEVE EXISTING CONDUIT, PROJECT CONTINUES NORTH OUTSIDE OF ROW INSIDE BUILDING OWNED CONDUIT. INSTALL (1) 2" CONDUIT AND PULL CABLE THROUGH.

CONTRACTOR NOTE

CONTRACTOR SHALL COMPLETE INSTALL PER THE SET OF DRAWINGS. ANY NECESSARY DEVIATIONS FROM THE DRAWINGS MUST BE SUBMITTED THROUGH AN RFI REQUEST PROCESS WITH **ENGINEERING FOR AN APPROVAL PRIOR TO CONTRACTOR** PROCEEDING WITH A DEVIATION OF THE SET OF DRAWINGS

ENGINEER OF RECORD

BLACK & VEATCH CORPORATION

CALL BEFORE YOU DIG



UNDERGROUND SERVICE ALERT UTILITY NOTIFICATION CENTER OF TEXAS

811 OR 1-800-344-8377

11"x17" PLOT WILL BE HALF SCALE UNLESS NOTED

DRAWING INDEX

DO NOT SCALE DRAWINGS CONTRACTOR SHALL VERIFY ALL PLANS, EXISTING DIMENSIONS &

CONDITIONS ON THE JOB SITE & SHALL IMMEDIATELY NOTIFY THE

WITH THE WORK.

ENGINEER IN WRITING OF ANY DISCREPANCIES BEFORE PROCEEDING

TITLE SHEET & PROJECT DATA

OVERALL SITE PLAN

TRAFFIC CONTROL PLAN

SHEET TITLE

SHEET NO:





11401 LAMAR AVE OVERLAND PARK, K\$ 66211 (913) 458-2000

PROJECT NO:	405451
DRAWN BY:	MBP
CHECKED BY:	JMG

RE	v	DATE	DESCRIPTION
	1	2/10/23	ISSUED FOR PERMITTING
	\top		
	Т		
Γ	Т		

BLACK & VEATCH ENGINEERING

IT IS A VIOLATION OF LAW FOR ANY PERSON, UNLESS THEY ARE ACTING UNDER THE DIRECTION OF A

REV

NO:

0


0


CHECKOUT FOOD STORES - CLAY PITTS 4011 PITTS RD **KATY, TX 77493**

TITLE SHEET

SHEET NUMBER

T-1

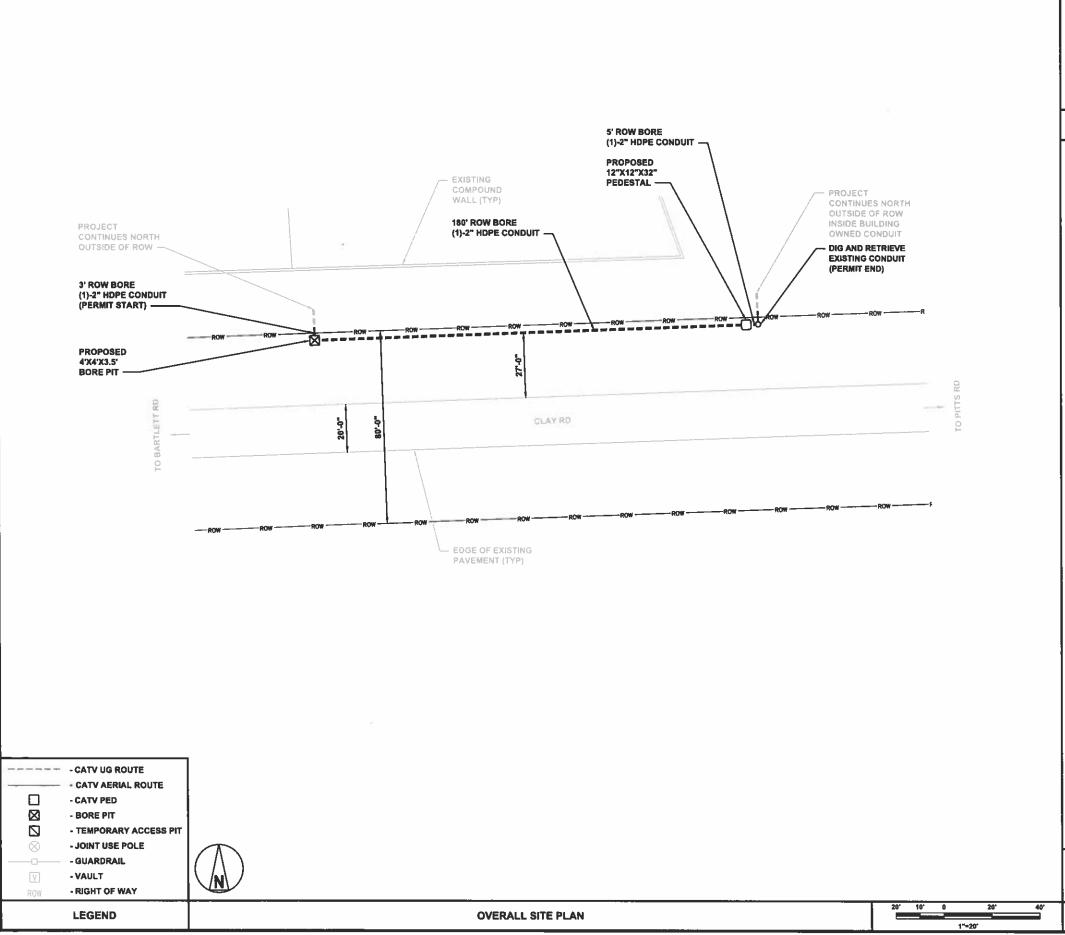

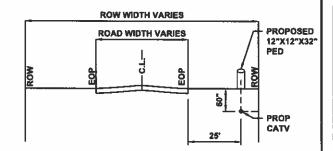



TYPICAL BORE PROFILE ADJACENT TO ROAD CABLE PULLED THROUGH (1)-2" HDPE CONDUIT

DEPTH OF UTILITIES WILL BE DETERMINED BY POTHOLE PRIOR TO CONSTRUCTION

- 1. THE CONTRACTOR SHALL CONTACT TEXAS ONE CALL SYSTEM AT 1-800-245-4545 MIN. 48 HOURS BEFORE DIGGING.
- 2. THE CONTRACTOR SHALL DETERMINE THE EXACT LOCATION OF ALL UNDERGROUND FACILITIES BEFORE COMMENCING WORK AND AGREE TO BE FULLY RESPONSIBLE FOR ALL DAMAGES CAUSED BY HIS FAILURE TO EXACTLY LOCATE AND PRESERVE ALL UNDERGROUND FACILITIES.
- NO MORE TRENCH OPENED AT ONE TIME THAN CAN BE BACKFILLED AND COMPACTED IN 10" LIFTS AT THE END OF EACH DAY. (NO TRENCH LEFT OPENED OVERNIGHT.)
- ALL EXCESS EXCAVATION TO BE REMOVED FROM THE ROAD RIGHT-OF-WAY AT THE END OF EACH DAY.
- 5. DITCHES TO BE OPENED AT THE END OF EACH DAY TO ASSURE ADEQUATE DRAINAGE.
- 6. ROAD MUST BE KEPT OPEN TO TRAFFIC AND CONSTRUCTION MUST PROVIDE ADEQUATE FLAGMEN. SIGNALS, ETC., TO PROVIDE COMPLETE SAFETY TO THE PUBLIC.
- 7. IF IT BECOMES NECESSARY FOR EQUIPMENT OPERATION ON A PORTION OF THE PAVEMENT, PRECAUTIONS MUST BE TAKEN TO PREVENT ANY DAMAGE WHATSOEVER TO THE PAVEMENT.
- 8. CONDITION OF ROAD UPON COMPLETION OF JOB SHALL BE AS GOOD OR BETTER THAN PRIOR TO STARTING.
- 9. CONTRACTOR SHALL COMPLY WITH ALL APPLICABLE NATIONAL ELECTRICAL SAFETY CODE (NESC) REQUIREMENTS, CENTERPOINT ENERGY ELECTRICAL POLE ATTACHMENT GUIDELINES & PROCEDURES AND ALL APPLICABLE LOCAL REQUIREMENTS AND REGULATIONS FOR PLACEMENT OF AERIAL CABLE FACILITIES, 18' MIN. VERTICAL CLEARANCE.
- 10. ALL UTILITIES WILL BE IDENTIFIED BY POTHOLE BEFORE ANY CONSTRUCTION.
- 11. COMCAST WILL MAINTAIN (2 FT) HORIZONTAL & VERTICAL SEPARATION FROM ANY EXISTING UTILITIES.



11401 LAMAR AVE OVERLAND PARK, KS 68211 (913) 458-2000

DRAWN BY: MB
CHECKED BY: JM

REV	DATE	DESCRIPTION
0	12/18/23	ISSUED FOR PERMITTING
		<u></u>

BLACK & VEATCH ENGINEERING F-258

IT IS A VIOLATION OF LAW FOR ANY PERSON, UNLESS THEY ARE ACTING UNDER THE DIRECTION OF A LICENSED PROFESSIONAL ENGINEER, TO ALTER THIS DOCUMENT.

> PRM0000499743 CHECKOUT FOOD STORES - CLAY PITTS 4011 PITTS RD KATY, TX 77493

> > SHEET TITLE

OVERALL SITE PLAN


SHEET NUMBER

C-1

ENGINEER AT (978) 826-7670, FORTY-EIGHT (48) HOURS PRIOR TO STARTING CONSTRUCTION OF THE LINE IN ORDER THAT WE MAY HAVE A REPRESENTATIVE PRESENT.

48 HOUR NOTICE: CONTRACTOR SHALL NOTIFY WALLER COUNTY

NOTES

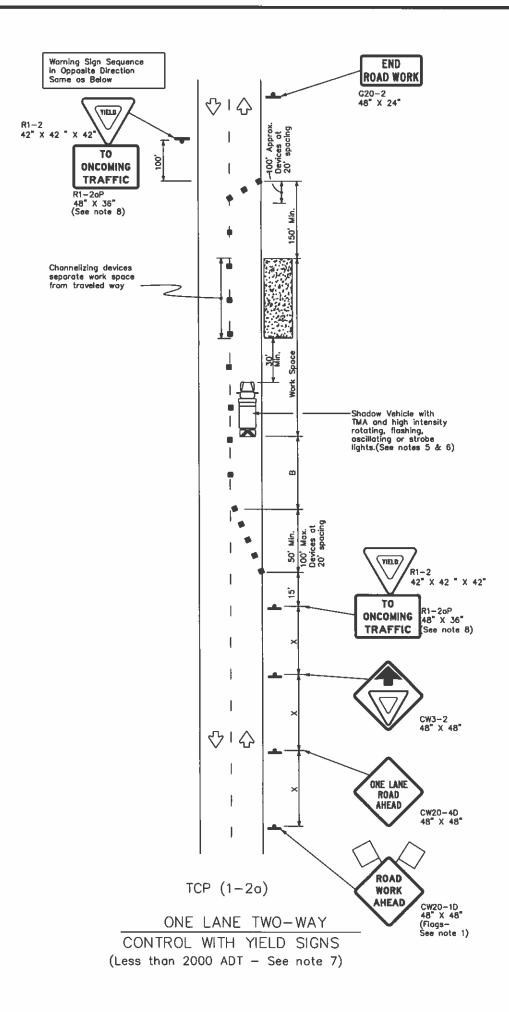

TRAFFIC CONTROL PLAN SECTION SHALL BE COMPLETED BY ENGINEER

ROADNAY	POSTED SPEED	TAPER LENGTH	SPACING CHANNELIZING DEVICES		SIGN SPACING	BUFFER SPACE
			TAPER	TAPER TANCENT		
CLAY RD	45	540	45	90	320	195

	LEGEND						
27773	Type 3 Barricade	••	Channelizing Devices				
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)				
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)				
-	Sign	♦	Traffic Flow				
	Flag	ГO	Flagger				

Posted Formulo			Minimur Desirable per Leng * *	8	Spaci Chann	Moximum ng of elizing ices	Minimum Sign Specing "X"	Suggested Longitudinal Buffer Space	Stopping Sight Distance
1		10' Offset	11° Offset	12' Offset	On a Toper	On a Tongent	Distance	*8*`	
30	2	150°	165'	180'	30'	60'	120'	90'	200'
35	$-\frac{WS^2}{60}$	205'	225'	245'	35'	70'	160'	120'	250'
40	90	265°	295'	320'	40"	80'	240'	155'	305°
45		450'	495'	540'	45'	90'	320'	195"	360'
50		500'	550'	600'	50'	100'	400'	240'	425'
55	L=WS	550'	605	660'	55'	110'	500'	295'	495'
60	1=#3	600"	660'	720	60'	120'	600'	350"	570'
65		650'	715'	780'	65'	130'	700'	410'	645'
70]	700'	770'	840'	70°	140'	800'	475'	730'
75		750'	825'	900'	75'	150'	900'	540'	820'

* Conventional Roads Only

** Toper lengths have been rounded off.
L=Length of Taper(FT) W=Width of Offset(FT) S=Posted Speed(MPH)

TYPICAL USAGE						
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY		
	4	1				

GENERAL NOTES

1. Flags attached to signs where shown are REQUIRED.

- 2. All traffic control devices illustrated are REQUIRED, except those denoted with the triangle symbol may be omitted when stated elsewhere in the plans, or for routine
- maintenance work, when approved by the Engineer.

 3. The CW3-4 "BE PREPARED TO STOP" sign may be installed after the CW20-4D "ONE LANE ROAD AHEAD" sign, but proper sign spacing shall be maintained.

 4. Sign spacing may be increased or an additional CW20-1D "ROAD WORK AHEAD" sign may be used if advance warning chead of the flagger or R1-2 "YIELD" sign is less than 1500 feet.
- 5. A Shadow Vehicle with a TMA should be used anytime it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the performance or quality of the work. If workers are no longer present but road or work conditions require the traffic control to remain in place, Type 3 Barricodes or other channelizing devices may be substituted for the Shadow Vehicle and TMA.
- 6. Additional Shodow Vehicles with TMAs may be positioned off the paved surface, next to those shown in order to protect wider work spaces.

TCP (1-2a)

- 7. R1-2 "YIELD" sign traffic control may be used on projects with approaches that have adequate sight distance. For projects in urban areas, work spaces should be no longer than one half city block. In rural areas on roadways with less than 2000 ADT, work spaces should be no longer than 400 feet. 8. R1-2 "YIELD" sign with R1-2oP "TO ONCOMING TRAFFIC" plaque shall be placed on a support
- at a 7 foot minimum mounting height.

TCP (1-2b)

- 9. Flaggers should use two-way radios or other methods of communication to control traffic.
- Length of work space should be based on the ability of flaggers to communicate.
 If the work space is located near a horizontal or vertical curve, the buffer distances
- should be increased in order to maintain adequate stopping sight distance to the flagger and a queue of stopped vehicles (see table above).
- 12. Channelizing devices on the center-line may be amitted when a pilot car is leading traffic and approved by the Engineer.

 13. Flaggers should use 24° STOP/SLOW paddles to control traffic. Flags should be
- limited to emergency situations.





11401 LAMAR AVE OVERLAND PARK, KS 66211 (913) 458-2000

DRAW	W BY:	MBP			
CHEC	CHECKED BY:				
0	12/18/23	ISSUED FOR PERMITTING			
REV	DATE	DESCRIPTION			
		· · · · · · · · · · · · · · · · · · ·			

PROJECT NO:

BLACK & VEATCH ENGINEERING F-258

IT IS A VIOLATION OF LAW FOR ANY PERSON, UNLESS THEY ARE ACTING UNDER THE DERECTION OF A LICENSED PROFESSIONAL ENGINEER, TO ALTER THIS DOCUMENT.

PRM0000499743 **CHECKOUT FOOD** STORES - CLAY PITTS 4011 PITTS RD **KATY, TX 77493**

SHEET TITLE

TRAFFIC CONTROL PLAN

SHEET NUMBER

TCP-1