

PRO SERIES

W I N D O W S

 **PLY GEM**
WINDOWS




CLASSIC SLIDING PATIO DOOR



SUPERIOR PERFORMANCE. ELEGANT CRAFTSMANSHIP.

There's a clear choice when it comes to finding the style and durability you want in patio doors — Ply Gem Windows Pro Series. Our distinct product offerings provide you with the selection and craftsmanship you need to bring your next project to life. You get great looks and quality without compromise.

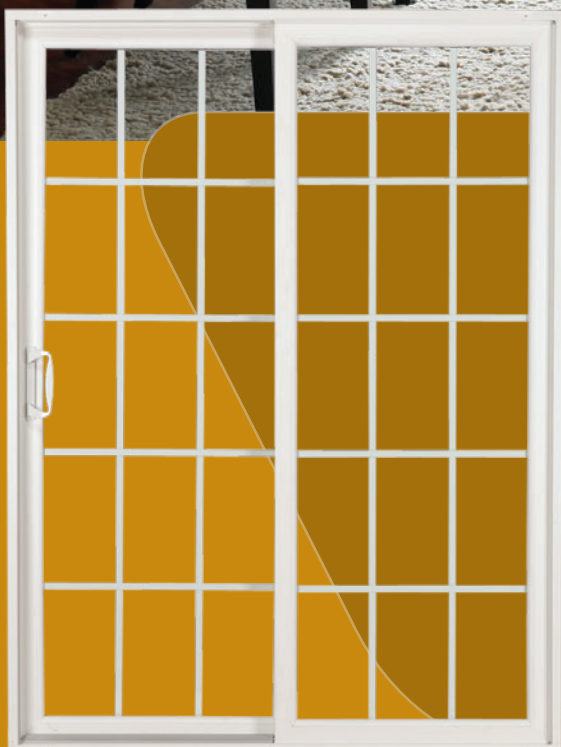

windows.plygem.com



CLASSIC SLIDING PATIO DOOR



THERMAL PERFORMANCE

	NFRC CERTIFIED			
	R Value	U Factor	SHGC	VT
WITH WARM EDGE				
LE (Low-E, Air IGU)	3.00	0.33	0.29	0.55
LE ^{SC} (Solar Cooling Low-E, Air IGU)	3.03	0.33	0.23	0.43
LE2+ (Low-E, Air IGU)	3.57	0.28	0.28	0.53
LE2+ ^{SC} (Low-E, Air IGU)	3.57	0.28	0.22	0.42
HP (Low-E, Argon IGU)	3.33	0.30	0.29	0.55
HP ^{SC} (Solar Cooling Low-E, Argon IGU)	3.45	0.29	0.22	0.43
HP2+ (Two Lites Low-E, Argon IGU)	3.85	0.26	0.28	0.53
HP2+ ^{SC} (Two Lites Low-E, Argon IGU)	4.00	0.25	0.21	0.42
WITH WARM EDGE+				
LE (Low-E, Air IGU)	3.03	0.33	0.29	0.55
LE ^{SC} (Solar Cooling Low-E, Air IGU)	3.13	0.32	0.23	0.43
LE2+ (Low-E, Air IGU)	3.57	0.28	0.28	0.53
LE2+ ^{SC} (Low-E, Air IGU)	3.57	0.28	0.22	0.42
HP (Low-E, Argon IGU)	3.45	0.29	0.29	0.55
HP ^{SC} (Solar Cooling Low-E, Argon IGU)	3.57	0.28	0.22	0.43
HP2+ (Two Lites Low-E, Argon IGU)	4.00	0.25	0.28	0.53
HP2+ ^{SC} (Two Lites Low-E, Argon IGU)	4.00	0.25	0.21	0.42

All units are NAMI certified and rated in accordance with NFRC 100/200 standards by an AAMA accredited lab. Performance values reflect the performance of units tested with the following configuration: 3/4" IGU, 3mm glass and no grilles.

R-value: Restrictive ambient air flow; U-factor: Rate of heat loss; SHGC: Solar Heat Gain Coefficient; VT: Visible Transmittance

1. DP50 rating for call size 60610 straight out of the box
2. Impact Rated units are available in select sizes and configurations.

STANDARD FEATURES

- Maintenance-free multi-chamber PVC construction with fully-welded corner
- Self-centering interlock satisfies forced entry requirements
- Full-perimeter weatherstripping for a tight and consistent seal
- Energy-efficient WarmEdge insulating tempered glass for enhanced energy performance
- Simple roller adjustment access through end panel
- Integral nail fin with welded corners for simple and accurate installation
- Interior accessory groove for drywall return and extension jamb application
- Unique design allows for simple field reversibility before installation
- Aluminum threshold and sill track



OPTIONS

GLASS OPTIONS:

Low-E, Low-E^{SC}, Low-E2+, Low-E2+^{SC}, HP, HP^{SC}, HP2+, HP2+^{SC}, WarmEdge+, tinted and sound control

GRILLE OPTIONS:

Color-coordinated grilles-between-the-glass (GBG) in flat 7/8", sculptured 5/8" and 1" styles

EXTENSION JAMBS:

Custom to 6-9/16" in primed or natural "clear" wood

ACCESSORIES:

ADA compliance kit with handle and ramps, snap-on exterior brick mould (field applied) and coastal hardware and bright brass hardware

PRODUCT CONFIGURATION:

Sidelites, transoms and segmented transoms

COLOR OPTIONS:

WHITE

BEIGE

NOTE: Colors shown are close approximations and may not be accurate representations for color matching.

