



STREET SIDE



ACCESS DOOR
GFI LPIUC

14" DIA. BC, DIAMOND PATTERN
(4) 3/4" X 18" BOLTS

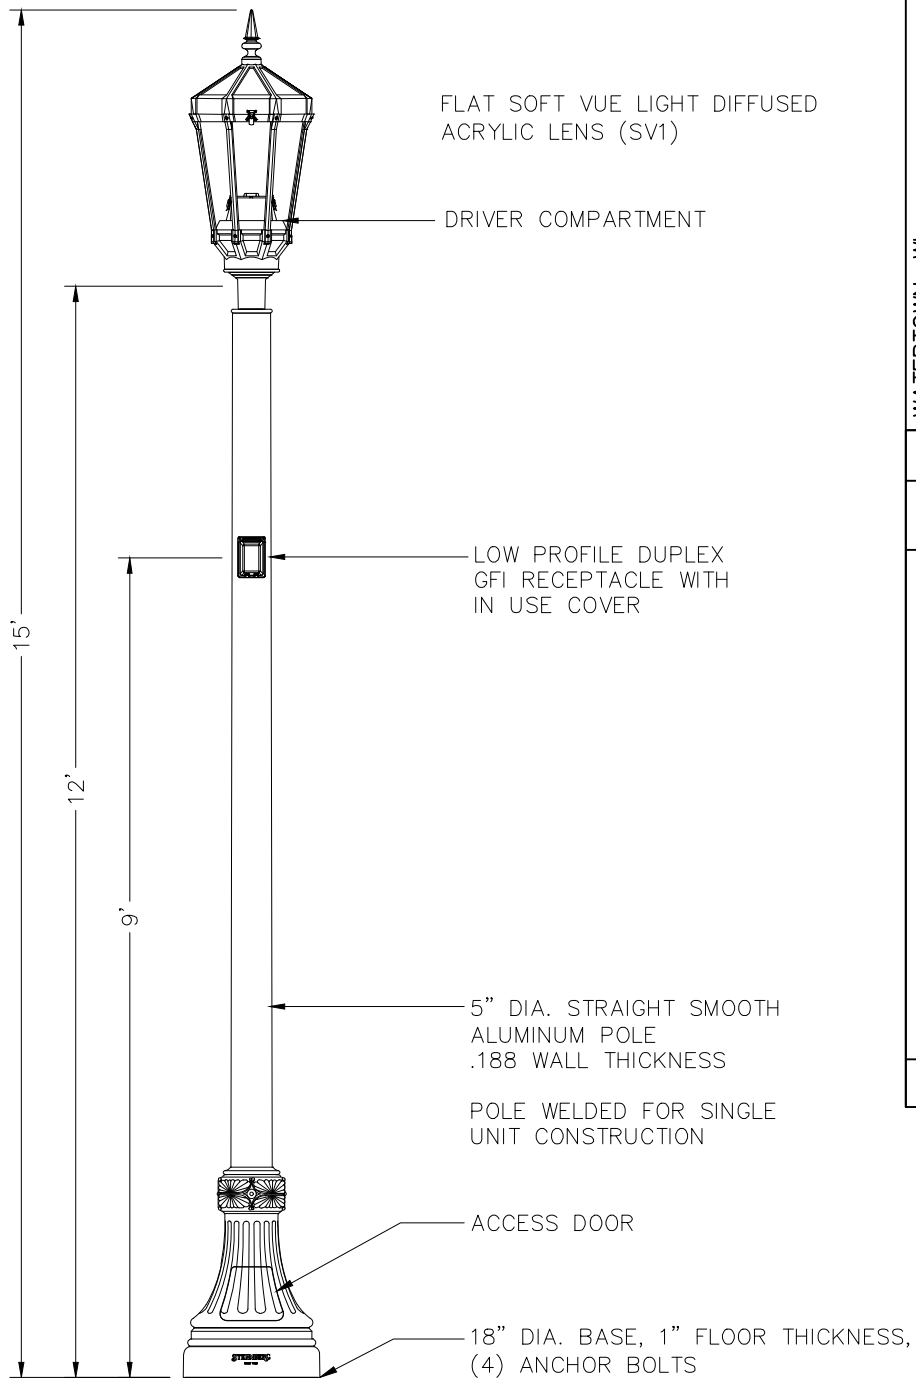

FLAT SOFT VUE LIGHT DIFFUSED
ACRYLIC LENS (SV1)

DRIVER COMPARTMENT


LOW PROFILE DUPLEX
GFI RECEPTACLE WITH
IN USE COVER

5" DIA. STRAIGHT SMOOTH
ALUMINUM POLE
.188 WALL THICKNESS

POLE WELDED FOR SINGLE
UNIT CONSTRUCTION

ACCESS DOOR

18" DIA. BASE, 1" FLOOR THICKNESS,
(4) ANCHOR BOLTS

REV	REVISIONS	DATE	RVSD	WATERTOWN, WI	DRAWN	EH
A	ORIGINAL	2/8/24		WATERTOWN, WI	SCALE	
				PT-MS805BLED-3-12L40T3-MDL008-SV1/6212P5-.188-GFI LPIUC/BK		
				 SternbergLighting ESTABLISHED 1923 / EMPLOYEE		DRAWING NUMBER
						SC47652-1

POLE HEIGHTS HAVE
A TOLERANCE OF
+ .0R - 2"