

DEVELOPER PROPOSED
CONCESSIONS

PROPOSED DEVELOPMENT IS LIHTC (LOW INCOME HOUSING TAX
CREDIT) WITH ALL (46 UNITS) OF THE UNITS AT OR BELOW 80%
AMI. PROPOSED DEVELOPMENT WILL PROVIDE SENIOR
AFFORDABLE HOUSING AS GOVERNED BY NORTH CAROLINA
HOUSING FINANCE AGENCY REQUIREMENTS.

DEVELOPER SHALL PROVIDE EVERGREEN SHRUBS AND LANDSCAPE PLANTER AT INTERSECTION TO PROVIDE BUFFER SCREEN FOR PROPOSED PARKING.

DEVELOPER PROPOSES TO INCREASE VISUAL INTEREST WITH VARIED HEIGHTS OF THE PARAPET ALONG EACH FACADE AS WELL AS THE HEIGHTS OF THE WALL PROJECTIONS.

DEVELOPER PROPOSED CONDITIONS

THE APPLICANT REQUEST THAT RELIEF BE GRANTED FROM SECTION 5-25-2 OF THE ZONING CODE AS IT RELATES TO FUTURE LAND USE DESIGNATION OF URBAN INSTITUTIONAL NOT BEING LISTED AS A PERMITTED FUTURE LAND USE DESIGNATION FOR URBAN RESIDENTIAL ZONING.

BASED ON THE SITE CONSTRAINTS AND THE PROJECT BEING AFFORDABLE HOUSING THE DEVELOPER REQUEST TO KEEP THE BUILDING FACADE PROJECTIONS TO 1'.

DEVELOPER HAS PROVIDED A TRAFFIC IMPACT STUDY TO THE CITY OF HENDERSONVILLE WITH THE REZONING, BUT REQUEST TO DEFER THE TRAFFIC IMPACT ANALYSIS UNTIL AFTER THE REZONING IS APPROVED.

EXISTING TREES TO REMAIN (2 TREES)

EXISTING TREES TO BE REMOVED (4 TREES)

TREE LEGEND

PROPERTY OWNERS: HUBERT, SANDRA & MINNIE BURGESS 950 FRUITLAND RD HENDERSONVILLE, NC 28792 PARCEL #: 9579343520 2003E/704 DEED BOOK & PAGE: TOTAL SITE ACREAGE: ±2.09 AC (±91,055 SF) CURRENT ZONING: PROPOSED ZONING: VACANT/SINGLE-FAMILY EXISTING USE: PROPOSED USE: MULTI-FAMILY HOUSING (SENIOR) PROPOSED UNITS: FRONT SETBACK: 14' (FROM EX/PROP BACK OF CURB) SIDE YARD: REAR YARD: REQUIRED PARKING: -1.0 SPACE PER UNIT (ELDERLY MULTI-FAMILY DWELLING) PROPOSED PARKING: OPEN SPACE/FOOTPRINT REQUIRED ±22,100 SF PROPOSED FOOTPRINT: GROSS FLOOR AREA (EXCLUDING GAZEBO) ±52,400 SF REQUIRED MINIMUM OPEN SPACE: 30% (27,312 SF) PROPOSED OPEN SPACE: 30% (27,312 SF)

PROPOSED ASPHALT AREA:

(10% OF TOTAL SITE)

PROPOSED SIDEWALK/CONCRETE AREA:

REQUIRED MINIMUM COMMON OPEN SPACE:

(HATCHED AREA INDICATED COMMON OPEN SPACE)

TOTAL PROPOSED BUILT UPON AREA:

PROPOSED COMMON OPEN SPACE:

DEVELOPMENT SUMMARY

±18,654 SF

±45,844 SF

±5,090 SF

9,105 SF

9,105 SF

GRAPHIC SCALE

( IN FEET )
1 inch = 30 ft.

-TOTAL VEHICULAR USE AREA: ±21,223 SF -TOTAL TREES REQUIRED/PROPOSED: 14/14 -TOTAL SHRUBS REQUIRED: WHEN A DEVELOPMENT CONTAINS 20 OR MORE PARKING SPACES, 50 PERCENT OF THE TREES AND SHRUBS REQUIRED MUST BE PLANTED IN ISLANDS OR MEDIANS LOCATED WITHIN THE PARKING LOT. NO LANDSCAPING SHALL BE WITHIN THE SIGHT TRIANGLES. STREET TREES ONE LARGE-MATURING TREE FOR EVERY 40 LF OF PROPERTY ABUTTING A STREET OR ONE SMALL-MATURING FOR EVERY 30 LF OF PROPERTY ABUTTING A STREET IF OVERHEAD UTILITY LINES ARE PRESENT. JACK STREET -TOTAL LINEAR FOOTAGE OF RIGHT OF WAY: 302' -REQUIRED SMALL MATURING (30' ON CENTER): 10 -TOTAL PROPOSED SMALL MATURING TREES: FREEMAN STREET 604' -TOTAL LINEAR FOOTAGE OF RIGHT OF WAY: -REQUIRED LARGE MATURING (40' ON CENTER): -TOTAL PROPOSED LARGE MATURING TREES: GEORGE STREET -TOTAL LINEAR FOOTAGE OF RIGHT OF WAY: -REQUIRED LARGE MATURING (40' ON CENTER): -TOTAL PROPOSED LARGE MATURING TREES: -EX LARGE MATURING TREES: BUFFERING FROM STREET (PARKING AREAS ADJACENT TO ROADWAYS) AN 8' VEGETATIVE BUFFER SHALL CONSIST OF AT LEAST ONE EVERGREEN OR DECIDUOUS SHRUB PLANTED FOR EVERY FIVE LINEAR FEET OF BUFFER JACK STREET -TOTAL LF OF FRONTAGE: 301' -TOTAL SHRUBS REQUIRED/PROPOSED: 28/28 FREEMAN STREET

TREE AND 2 SHRUBS REQUIRED FOR EVERY 1,500 SQ. FT. OF VEHICULAR


LANDSCAPING CALCULATION
PERIMETER AND INTERIOR PLANTINGS

-TOTAL LF OF FRONTAGE:

-TOTAL SHRUBS REQUIRED/PROPOSED:

LANDSCAPE CALCULATIONS

20/20

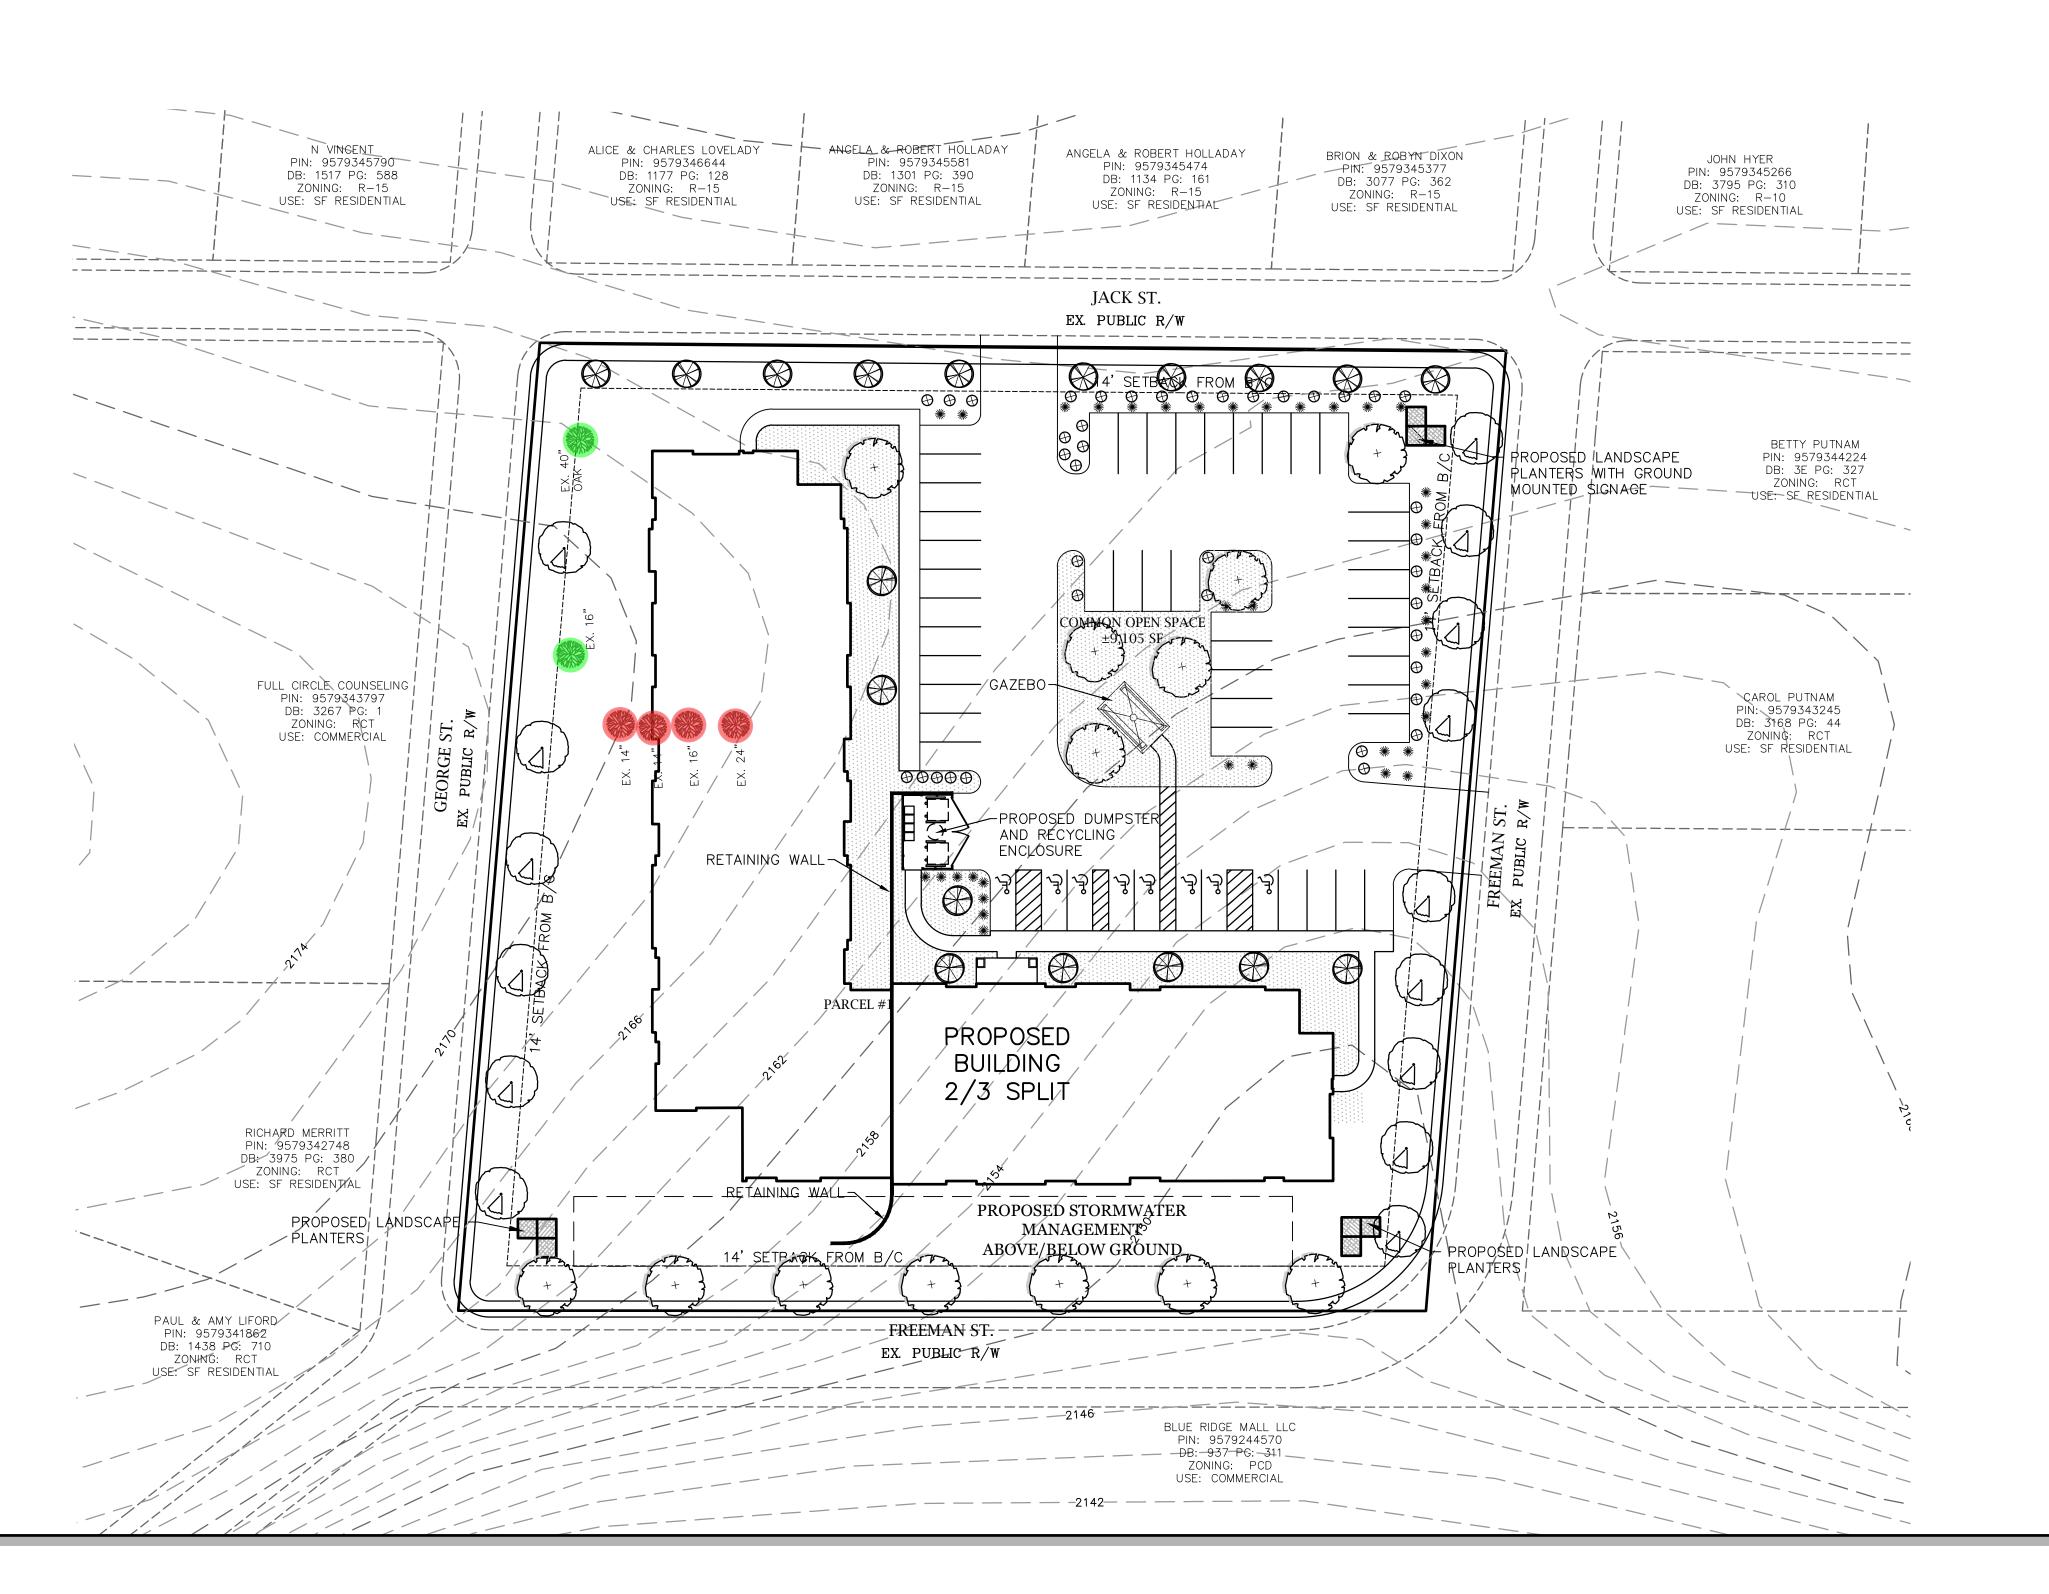



MC<sup>2</sup> ENGINEERING, INC. 2110 BEN CRAIG DR., STE. 400 CHARLOTTE, NC 28262 PHONE 704.510.9797

PROPOSED DEVELOPMENT:
BEARWALLOW LOFTS APTS.
FREEMAN ST.

HENDERSONVILLE, NC

DEVELOPED BY:

WODA COOPER DEVELOPMENT, INC

500 SOUTH FRONT STREET, 10th FLOOR COLUMBUS, OH 43215

## SCHEMATIC SITE PLAN

| REVISIONS |         |         |                     |
|-----------|---------|---------|---------------------|
| 1         | 2/21/23 | REVISED | GAZEBO/BLDG/PARKING |
|           |         |         |                     |
|           |         |         |                     |
|           |         |         |                     |
|           |         |         |                     |
|           |         |         |                     |
|           |         |         |                     |
|           |         |         |                     |
|           |         |         |                     |
|           |         |         |                     |
|           |         |         |                     |

CAD FILE:
PROJECT NO.:
DESIGNED BY:

DATE:

22-028 BASE.DWG 22-028 JDM DECEMBER 20, 2022

RZ1.0