

## LANDSCAPE PLAN GENERAL NOTES

PLANT MATERIAL SHOWN ON LANDSCAPE PLAN IS DEPICTED AT MATURE GROWTH.

- AT LEAST SEVENTY-TWO HOURS PRIOR TO ANY EXCAVATION, CONTRACTOR SHALL VERIFY UTILITY LOCATIONS AS GIVEN BY THE ELECTRIC, GAS, TELEPHONE, WATER, SEWER, AND CABLE TELEVISION COMPANIES, UTILITIES OR ENTITIES. REVIEW WITH OWNER'S REPRESENTATIVE SITE MECHANICAL, SITE ELECTRICAL, AND LIGHTING, SITE GRADING AND DRAINAGE, SITE IRRIGATION AND ALL OTHER DRAWINGS PERTAINING TO UNDERGROUND UTILITY LOCATIONS. RECORD SET OF INFORMATION THE SAME AS IN POSSESSION OF OWNER'S REPRESENTATIVE. ALSO REVIEW OWNER'S "MARK SETS" OF ALL OF THESE DRAWINGS IN POSSESSION OF THE CONTRACTOR OR OWNER. MARK ALL SUCH UTILITIES ON THE SITE PRIOR TO COMMENCING. COORDINATE WITH OWNER BEFORE AND DURING CONSTRUCTION. REPAIR ANY DAMAGE TO ANY SYSTEM THAT IS CAUSED BY LANDSCAPE CONTRACTOR AT NO COST TO OWNER.
- ALL PLANTINGS SPECIFIED FOR THE ALDI FOOD STORE #48 PROJECT PLANTING TABLES SHALL COMPLY WITH STANDARDS AS DESCRIBED IN AMERICAN STANDARD OF NURSERY STOCK ANSI Z60.1-2014 AND ANSI STANDARDS FOR PLANTING 2012.
- ALL DEVIATIONS FROM THE APPROVED ALDI FOOD STORE #48 PROJECT PLANS SHALL BE NOTED ON THE RECORD DRAWINGS BY THE CONTRACTOR AND MAY BE EXECUTED ONLY WITH FORMAL APPROVAL FROM THE LANDSCAPE ARCHITECT AND OWNER'S REPRESENTATIVE. VERBAL AGREEMENTS OR REVISIONS WITHOUT A CHANGE ORDER WILL NOT BE RECOGNIZED BY LANDSCAPE ARCHITECT AND OWNER.
- ALL PLANTS MUST BE 3/8" AND SELECTED FOR THE SPECIES SPECIFIED ON THE PLANS. ANY SPECIES SUBSTITUTIONS MUST BE APPROVED IN WRITING BY LANDSCAPE ARCHITECT. THE SIZES OF PLANT MATERIAL LISTED HEREIN IS A MINIMUM ACCEPTABLE SIZE. ADDITIONALLY, IF EXCESSIVE PRUNING REDUCES THE CROWN THE PLANT SHALL BE REPLACED.
- PROTECT PUBLIC FROM CONSTRUCTION WITH BARRIERS AND BARRICADES.
- ALL AREAS THAT WERE DISTURBED DURING CONSTRUCTION AND AREAS NOT COVERED WITH PAVEMENT, BUILDING, PLANTING BEDS, OR TREE PITS ARE TO BE TOPDRESSED 3" DEEP (MIN.) AND SHALL BE SOLOD/SEEDED WITH SPECIFIED LAWN GRASS. LANDSCAPE CONTRACTOR SHALL INCLUDE COST PER SQUARE YARD FOR ADDITIONAL SEED OPERATIONS AS MAY BE POSSIBLY REQUIRED TO REESTABLISH ADJACENT TURF GRASS AREAS WHICH MAY BECOME DAMAGED DURING THE CONSTRUCTION PROCESS OR TO REPAIR DAMAGE DONE BY OTHERS.
- CONTRACTOR IS RESPONSIBLE FOR FURNISHING ALL MATERIALS, TOOLS, EQUIPMENT, LABOR, AND PLANTS NECESSARY FOR PROPER PLANTING AND INSTALLATION OF ALL LANDSCAPE MATERIAL.
- QUANTITIES ON PLANT MATERIALS LIST ARE FOR CONVENIENCE OF BIDDING ONLY. CONTRACTOR IS RESPONSIBLE FOR ALL PLANTS SHOWN ON LANDSCAPE PLANS AND COVERAGE OF ALL AREAS DELINEATED. THE PLANTS ARE TO SUPERSEDE THE PLANT LIST IN ALL CASES.
- CONTRACTOR IS RESPONSIBLE FOR ALL ESTIMATING AND BIDDING, ALL AREAS, QUANTITIES MATERIALS SHOULD BE FIELD VERIFIED WITH SITE CONCITION.
- WHERE DISCREPANCIES OCCUR BETWEEN THE LANDSCAPE PLANS AND/OR ARCHITECTURAL AND/OR THE CIVIL DRAWINGS (AND ANY OTHER SITE DRAWINGS) THE DISCREPANCIES MUST BE BROUGHT TO THE LANDSCAPE ARCHITECT'S ATTENTION FOR COORDINATION AND RESOLUTION.
- ALL DISEASED, NOXIOUS OR INAPPROPRIATE MATERIALS SHALL BE REMOVED FROM THE PROPOSED SITE PRIOR TO THE START OF CONSTRUCTION AND DURING THE MAINTENANCE PERIOD.
- GENERAL CONTRACTOR SHALL LEAVE THE SITE FREE OF CONSTRUCTION DEBRIS.
- ALL LAWN AND PLANTING AREAS SHALL SLOPE TO DRAIN A MINIMUM OF 2% UNLESS NOTED OTHERWISE AND REVIEWED WITH OWNER'S REPRESENTATIVE FOR FINAL APPROVAL.
- FINISH GRADES FOR SHRUB AND GROUND COVER AREAS SHALL BE HELD 1" BELOW TOP OF ADJACENT PAVEMENTS AND CURBS, UNLESS NOTED OTHERWISE ON THE PLANS. REFER TO LSP1.2 FOR FURTHER INFORMATION.
- ALL PERENNIAL ANNUAL AND GROUND COVER AREAS TO RECEIVE A BLEND OF ORGANIC SOIL AMENDMENTS PRIOR TO PLANTING. TILL THE FOLLOWING MATERIALS INTO EXISTING TOPSOIL TO A DEPTH OF APPROXIMATELY 6", A DEPTH OF 12" IN TREE PITS. PROPORTIONS AND QUANTITIES MAY REQUIRE ADJUSTMENT DEPENDING ON THE CONDITION OF EXISTING SOIL. REFER TO LSP1.1 FOR FURTHER INFORMATION.  
PER EVERY 100 SQUARE FEET ADD: ONE (1) CUBIC FOOT BALE OF PEAT MOSS, 2 POUNDS OF 5-10-5 GARDEN FERTILIZER, 1/4 CUBIC YARD OF COMPOSTED MANURE OR OTHER COMPOSTED, ORGANIC MATERIAL.
- ALL S-RUBS TO BE POCKET PLANTED WITH A 50/50 MIX OF COMPOSTED, ORGANIC MATERIAL AND EXISTING SOIL. INSTALL TOPSOIL INTO ALL BEDS AS NEEDED TO ACHIEVE PROPER GRADE. REMOVE ALL EXCESSIVE GRAVEL, CLAY AND STONES. REFER TO LSP1.2 FOR FURTHER INFORMATION.
- PLANT ALL TREES SLIGHTLY HIGHER THAN FINISHED GRADE AT ROOT FLARE. BACK FILL HOLE WITH 2/3 EXISTING TOPSOIL AND ORGANIC SOIL AMENDMENTS SPECIFIED IN NOTE 15. AVOID ANY AIR POCKETS. DISCARD ANY GRAVEL CLAY OR STONES. REFER TO LSP1.2 FOR FURTHER INFORMATION.
- ALL TREES TO BE INSTALLED, STAKED AND GUDED ACCORDING TO DETAILS. REFER TO ANSI STANDARDS FOR PLANTING 2012 AND DETAILS ON LSP1.2 FOR FURTHER INFORMATION.
- PROVIDE A 4'-6" x 5'-0" DIAMETER MULCH RING AT THE ROOT BALL FLARE OF ALL LAWN TREES.

- ALL PLANTINGS TO BE WATERED AT THE TIME OF PLANTING, THROUGHOUT CONSTRUCTION AND UPON COMPLETION OF PROJECT AS REQUIRED.
- WHERE SPECIFIED, ALL PLANT BEDS, PITS AND TREE RINGS ARE TO RECEIVE A MINIMUM OF 2" x 3" DRESSING OF 3-BREDED HARDWOOD OAK BARK MULCH SHAVING FREE OF GROWTH, WEEDS, FOREIGN MATTER DETRIMENTAL TO PLANT LIFE OR GERMINATION INHIBITING INGREDIENTS. LANDSCAPE CONTRACTOR TO PROVIDE A SAMPLE TO OWNER FOR APPROVAL. CONTRACTOR TO TAKE CARE WITH INSTALLATION NOT TO DAMAGE OR COVER PLANTS. REFER TO LSP1.2 FOR FURTHER INFORMATION.
- PER ALDI SPECIFICATIONS, TWO LAYERS OF WEED BARRIER MADE FROM FIBERGLASS AND ULTRA-VIOLET LIGHT RESISTANT MATERIAL SHALL BE PLACED IN ALL PLANTING BEDS UNDERNEATH SHREDED BARK MULCH. MAKE PROPER OPENINGS FOR ALL PLANT MATERIAL TO ALLOW FOR GROWTH AND PLANT SURVIVABILITY.

- DELUXE 50 GRASS SEED MIX REINDER'S (800) 785-3301
  - 20% KENTUCKY BLUE GRASS
  - 15% NEWPORT KENTUCKY BLUE GRASS
  - 15% SR 2100 Kentucky Bluegrass
  - 25% Creeping Red Fescue
  - 15% Resilator Perennial Ryegrass
  - 10% Fiesta 4 Perennial Ryegrass
  - APPLY AT A RATE OF 200 POUNDS PER ACRE. REFER TO SUPPLIERS SPECIFICATIONS & INSTALLATION OUT SHEETS FOR FURTHER FORMATION

- DURING THE INITIAL 30 DAY MAINTENANCE PERIOD THE LANDSCAPE CONTRACTOR IS REQUIRED TO PROVIDE AND ON-GOING PLEASANT VISUAL ENVIRONMENT WHEREAS ANY PLANT WHICH IS NOT RESPONDING TO TRANSPLANTING OR THRIVING SHALL IMMEDIATELY BE REPLACED. NEW LAWNS SHALL BE WATERED AND REPAIRED AND WEEDS MUST CONSTANTLY BE REMOVED, NO EXCEPTIONS WILL BE GRANTED.  
MAINTENANCE NOTE:  
MAINTENANCE IS THE RESPONSIBILITY OF THE PROPERTY OWNER TO MAINTAIN REQUIRED LANDSCAPING IN ACCORDANCE WITH THE MUNICIPALITY'S PROPERTY MAINTENANCE CODE AND AN APPROVED MAINTENANCE PLAN. THE MAINTENANCE MUST INCLUDE, AT A MINIMUM, METHODS FOR PROVIDING THE FOLLOWING:
  - NECESSARY IRRIGATION (IF REQUIRED)
  - INTEGRATED PEST MANAGEMENT,
  - PROPER FERTILIZATION
  - TREE CARE AND PRUNING, SHRUB TIP CLIPPING AND SHAPING AS REQUIRED
  - REPLACEMENT OF LOST VEGETATION, AND ALL DISEASED, DAMAGED, OR DEAD MATERIAL WILL BE REPLACED BY THE END OF THE FOLLOWING PLANTING SEASON IN PERPETUITY.
  - WEED MANAGEMENT AND BED CARE.

- ALL NEWLY PLANTED TREES AND SHRUBS ARE TO RECEIVE AN APPLICATION OF AN ANTI-TRANSPIRANT SPRAY THAT WILL EFFECTIVELY REDUCE THE WATER LOSS OF TRANSPIRATION OF PLANT MATERIAL AND REDUCE THE STRESS OF TRANSPLANTATION. IT IS RECOMMENDED AS PART OF THE ONGOING MAINTENANCE THAT ANY BROADLEAF EVERGREEN AND CONIFEROUS TREE AND SHRUBS (EXCLUDING ABSORPTIVE) RECEIVE AN APPLICATION OF AN ANTI-DESICANT SPRAY TO REDUCE THE LOSS OF MOISTURE DUE TO WINTER DESICCATION.
- MAINTENANCE, THE OWNER SHALL TEND AND MAINTAIN ALL PLANT MATERIALS IN A HEALTHY GROWING CONDITION AS PER THE APPROVED PLAN. PLANTINGS SHALL BE REPLACED WHEN NECESSARY AND KEPT FREE FROM REFUSE & DEBRIS. ALL PLANTING MATERIAL WHICH IS DYING OR DAMAGED BEYOND RECOVERY SHALL BE REPLACED WITHIN SIX (6) MONTHS OR BY THE NEXT PLANTING SEASON, WHICHEVER COMES FIRST.
- LANDSCAPE / SITE DEMOLITION CONTRACTOR TO VERIFY LOCATIONS OF EXISTING TREES AND SHRUBS TO BE SALVAGED AND CLEARLY TAG THEM WITH MARKING TAPE AND CONSTRUCTION FENCE.

## SITE INFORMATION

USDA PLANT HARDINESS ZONE	5a (-20 to -15 Degrees F)	TOTAL IMPERVIOUS	85,619 SQ. FT. (1.97 Acres)
LOT ZONING	B-1 - General Business District	TOTAL GREENSPACE	35,103 SQ. FT. (0.81 Acres)
LOT AREA	120,722 SQ. FT. (2.77 Acres)	SITE LANDSCAPE PERCENTAGE	29.1%
SITE BUILDING AREA	20,664 SQ. FT.	TOTAL PARKING STALLS	95 STALLS

- DESIGN COMPLIANCE:** THIS LANDSCAPE PLAN IS ACCURATE AND IN COMPLIANCE WITH THE CITY OF WHITEWATER LANDSCAPING GUIDELINES RECOMMENDED LOCATIONS AND AMOUNT OF NEW LANDSCAPING
- STREET FRONTAGES, ONE DECIDUOUS TREE MUST BE PLANTED FOR EACH 35 FEET ALONG EACH SIDE OF A STREET RIGHT-OF-WAY. STREET TREES SHOULD BE PLANTED MIDWAY BETWEEN THE STREET CURB AND THE SIDEWALK, OR WITHIN 15 FEET OF THE PROPERTY LINE ADJOINING THE STREET.  
346.5 LINEAL FEET OF STREET FRONTAGE  
10 STREET TREES REQUIRED  
10 STREET TREES PROVIDED
  - PAVED AREAS, ONE LARGE DECIDUOUS TREE AND 60 POINTS OF ADDITIONAL LANDSCAPING SHOULD BE PLANTED FOR EACH 1,500 SQUARE FEET OF PAVED AREA. PLANTS SHOULD BE INSTALLED IN LANDSCAPED ISLANDS WITHIN THE PAVED AREA OR WITHIN 15 FEET OF THE EDGES OF THE PAVED AREA. LANDSCAPED ISLANDS OR PENINSULAS MUST BE PROVIDED AT THE END OF EVERY PARKING ROW, AND INTERIOR ISLANDS SHOULD BE PROVIDED FOR EVERY 20 PARKING SPACES IN PARKING STRIAL PROJECTS.  
64,955 SQUARE FEET OF PAVED AREA  
43 TREES AND 2596 LANDSCAPE POINTS ARE REQUIRED  
21 TREES AND 2561 LANDSCAPE POINTS ARE REQUIRED PROVIDED
  - BUILDING FOUNDATIONS, 160 POINTS OF LANDSCAPING SHOULD BE PLANTED FOR EACH 100 LINEAL FEET OF EXTERIOR BUILDING WALL THAT IS VISIBLE FROM PUBLIC RIGHTS-OF-WAY AND ADJOINING SITES. PLANTS REQUIRED BY THIS SECTION SHOULD BE INSTALLED WITHIN 20 FEET OF THE BUILDING FOUNDATION.  
665 LINEAL FEET OF FOUNDATION  
399 LANDSCAPE POINTS ARE REQUIRED  
366 LANDSCAPE POINTS ARE REQUIRED PROVIDED

- 19.51.100 - LANDSCAPED ISLANDS FOR PARKING BAYS. LANDSCAPED ISLANDS SHALL BE REQUIRED AT THE ENDS OF PARKING BAYS TO CLEARLY DEFINE LANE AND TURNING PATTERNS.
- 19.57.150 - OUTDOOR LIGHTING STANDARDS.  
0. MAXIMUM LUMINAIRE HEIGHT, THE MAXIMUM PERMITTED LUMINAIRE HEIGHT SHALL BE THIRTY-FIVE FEET IN ALL COMMERCIAL, INDUSTRIAL AND INSTITUTIONAL DISTRICTS, AND TWENTY-FIVE FEET IN ALL RESIDENTIAL DISTRICTS. THE HEIGHT OF BOTH THE POLE AND BASE SHALL BE CONSIDERED IN THE MEASUREMENT OF LUMINAIRE HEIGHT.  
0. MAXIMUM ILLUMINATION LEVELS, AVERAGE ILLUMINATION LEVELS WITHIN PARKING LOTS SHALL NOT EXCEED 1.0 FOOT-CANDLE WITHIN RESIDENTIAL DISTRICTS, AND 2.5 FOOT-CANDLES WITHIN ALL OTHER DISTRICTS. THE ILLUMINATION LEVEL, AT ANY PROPERTY LINE SHALL NOT EXCEED 0.5 FOOT-CANDLES ABOVE THE AMBIENT LIGHTING CONDITIONS ON A CLOUDLESS NIGHT WHERE THE PROPERTY ADJOINS LAND IN A RESIDENTIAL DISTRICT, AND 2.5 FOOT-CANDLES ABOVE THE AMBIENT LIGHTING CONDITIONS ON A CLOUDLESS NIGHT WHERE THE PROPERTY ADJOINS LAND IN ANY OTHER ZONING DISTRICT.  
FLUORESCENT LIGHT FIXTURES, ALL OUTDOOR LIGHTING FIXTURES SHALL BE SHIELDED AS REQUIRED IN SECTION 19.50.023.  
H. LOCATION, NO EXTERIOR LIGHT FIXTURE SHALL BE LOCATED WITHIN ANY REQUIRED LANDSCAPE BUFFER YARD OR WITHIN THREE FEET OF ANY PROPERTY LINE.

**CONTRACTOR NOTE:** THE LANDSCAPE CONTRACTOR/GENERAL CONTRACTOR ARE RESPONSIBLE TO INSTALL THE LANDSCAPE AS PER THE APPROVED PLAN. IF ANY CHANGES OR DEVIATIONS ARE MADE FROM THE THIS APPROVED PLAN, THE LANDSCAPE CONTRACTOR / GENERAL CONTRACTOR ARE RESPONSIBLE FOR UPDATING THE PLANS ACCORDINGLY AND SUBMITTING THOSE REVISED PLANS FOR APPROVAL AND SIGN OFF WITH THE CITY OF WHITEWATER. THE LANDSCAPE CONTRACTOR ARE ALSO RESPONSIBLE FOR VERIFYING THAT ANY PLANT MATERIAL SUBSTITUTIONS OR MODIFICATIONS THAT ARE MADE TO THE APPROVED LANDSCAPE DESIGN DOCUMENTS WILL NOT CHANGE OR ALTER ANY OF THE REQUIRED SUPPORTING LANDSCAPE REQUIREMENT CALCULATIONS. UPON COMPLETION OF THE CONSTRUCTION PROJECT AND FILE THAT AFFIDAVIT WITH THE CITY OF WHITEWATER

## EXISTING CONDITIONS GENERAL NOTES

- INFORMATION PERTAINING TO EXISTING CONDITIONS GIVEN ON THESE LANDSCAPE DRAWINGS REPRESENTS TO THE BEST OF OUR KNOWLEDGE THE ACTUAL EXISTING FIELD CONDITIONS. INSITE LANDSCAPE DESIGN, INC. MAKES NO WARRANTY AS TO THEIR ACCURACY. CONTRACTOR TO FIELD VERIFY EXISTING CONDITIONS IMPERATIVE TO THEIR NEW WORK. REPORT ANY DISCREPANCIES BETWEEN THE DRAWINGS AND FIELD CONDITIONS TO THE LANDSCAPE ARCHITECT FOR REVIEW. ANY WORK PERFORMED PRIOR TO RESOLUTION OF DISCREPANCIES BY THE LANDSCAPE ARCHITECT IS SUBJECT TO REMOVAL AND REPLACEMENT AT NO ADDITIONAL COST TO THE CONTRACT.
- THE LOCATIONS OF EXISTING UTILITY INSTALLATIONS AS SHOWN ON THIS PLAN ARE APPROXIMATE. THERE MAY BE UNDERGROUND UTILITY INSTALLATIONS WITHIN THE PROJECT AREA OF DISTURBANCE THAT ARE NOT SHOWN. THE CONTRACTOR SHALL BE RESPONSIBLE FOR VERIFYING THE EXISTENCE AND LOCATION OF ALL UNDERGROUND UTILITIES.
- VERIFY ALL EXISTING CONDITIONS, DIMENSIONS, AND ALIGNMENT OF WALLS. BRING ANY DISCREPANCIES TO THE LANDSCAPE ARCHITECTS ATTENTION PRIOR TO FABRICATION / CONSTRUCTION BEGINS.
- VERIFY LOCATION OF ACCESS PANELS w/ MECHANICAL AND ELECTRICAL EQUIPMENT FOR ACCESSIBILITY OF MECHANICAL & ELECTRICAL ITEMS. VERIFY LOCATIONS OF ALL BURIED UTILITIES AND STRUCTURES AND LOCATIONS OF ALL OVERHEAD WIRES.
- VERIFY LOCATION OF ALL EXISTING EASEMENTS.
- INSITE LANDSCAPE DESIGN, INC. ASSUMES NO RESPONSIBILITY FOR DAMAGES, LIABILITY OR COSTS RESULTING FROM CHANGES OR ALTERATIONS MADE TO THIS PLAN WITHOUT THE EXPRESSED WRITTEN CONSENT OF INSITE LANDSCAPE DESIGN, INC.

Proposed Plant Material Table

Quantity	Code Name	Symbol	Scientific Name	Common Name	Planting Size	Points	Mature Size	Comments
3	Acer		Acer gresum	Paperbark maple	2'-Cal - 8&B	150	25' x 20'	1
3	Betula		Betula papyrifera (var. 'White')	White Birch	1 1/2' Cal - 8&B	150	35' x 15'	1
3	Ginkgo		Ginkgo biloba 'Princeton Sentry'	Princeton Sentry Madonnar tree	2'-Cal - 8&B	150	40' x 25'	1, 6
2	Malus		Malus 'Adirondack'	Adirondack Flowering Crab	2'-Cal - 8&B	60	20' x 10'	1
3	Ostrya		Ostrya virginiana	American Hopbarnle (honeywood)	2'-Cal - 8&B	150	35' x 25'	1
4	Pyrus		Pyrus calleryana 'Chanticleer'	Chanticleer Pear	2'-Cal - 8&B	60	30' x 15'	1
3	Tilia		Tilia cordata 'Green Spire'	Green Spire Linden	2'-Cal - 8&B	150	50' x 30'	1
-	Entp		Existing to Remain	Existing to Remain	Existing	Existing	Existing	2

Quantity	Code Name	Symbol	Scientific Name	Common Name	Planting Size	Points	Mature Size	Comments
3	Picea		Picea canadica 'Branta'	Branta Serbian Spruce	4' - 5' - 8&B	40	25' x 9'	3
3	Pinus		Pinus strobus 'Pyramidal'	Pyramidal Pine	4' - 5' - 8&B	40	25' x 13'	3

Quantity	Code Name	Symbol	Scientific Name	Common Name	Planting Size	Points	Mature Size	Comments
18	Spiraea		Spiraea betulifolia 'Moulin Tor'	Tor Birchleaf Spiraea	18" - Cont	20	3.5' x 3.5'	4
23	Spiraea		Spiraea japonica 'Tracy'	Double Play Big Bang Spiraea	18" - Cont	20	2.5' x 2.5'	4

Quantity	Code Name	Symbol	Scientific Name	Common Name	Planting Size	Points	Mature Size	Comments
12	Jupifera		Jupifera x fastuosa 'Moulin Tor'	Sea of Gold Juniper	18" - 24" - 8&B	20	3' x 4'	4
18	Thuja		Thuja occidentalis 'Art Boe'	North Pole Arborvitae	4' - 5' - 8&B	20	16' x 4.5'	3

Quantity	Code Name	Symbol	Scientific Name	Common Name	Planting Size	Points	Mature Size	Comments
3	Parthenoc		Parthenoc virgatum 'Northwind'	Northwind Switch Grass	1'-Cal - Cont	2	2.5' x 5'	5
27	Sphagnum		Sphagnum heterophyllum 'Tara'	Tara Prairie Dropseed	1'-Cal - Cont	2	2.5' x 2.5'	5

Quantity	Code Name	Symbol	Scientific Name	Common Name	Planting Size	Points	Mature Size	Comments
45	Hebe		Hebe x exoniifolia 'Twining Water'	Twining Water Daylily	4 1/2" pot	1	1.5' x 1.5'	5

## Comments

- Straight central leader, full & even crown. Prune only after planting.
- Prune existing tree, remove any dead, diseased or hazardous limbs. Thin out as required and raise canopy for safety and viability for both pedestrians and motorists.
- Evenly shaped upright tree with full branching to the ground.
- Full, well rooted plant, evenly shaped.
- Full, well rooted plant.
- Male only

TO OBTAIN LOCATION OF PARTICIPANTS UNDERGROUND FACILITIES BEFORE YOU DIG IN WISCONSIN

# DIGGERS HOT LINE

WISCONSIN STATUTE 182.0175 (1974) REQUIRES A MINIMUM OF 3 DAYS NOTICE BEFORE YOU EXCAVATE (NOT INCLUDING SATURDAY, SUNDAY OR LEGAL HOLIDAYS)

UNDERGROUND SEWER AND UTILITY INFORMATION AS SHOWN IS OBTAINED FROM THE RECORDS OF MUNICIPALITY AND LOCAL UTILITY COMPANIES. THE ACCURACY OF WHICH CAN NOT BE GUARANTEED OR CERTIFIED TO. THE LOCATIONS OF EXISTING UTILITY INSTALLATIONS AS SHOWN ON THIS SURVEY ARE APPROXIMATE. THERE MAY BE OTHER UNDERGROUND UTILITY INSTALLATIONS WITHIN THE PROJECT AREA THAT ARE NOT SHOWN.

TO OBTAIN LOCATION OF PARTICIPANTS UNDERGROUND FACILITIES BEFORE YOU DIG IN WISCONSIN CALL THE MILWAUKEE UTILITY ALERT NETWORK  
www.DiggersHotline.com  
(800)-742-8811  
OR

Know what's below.  
Call before you dig.

LUMINAIRE SCHEDULE									
Symbol	Label	Qty	Catalog Number	Description	Lamp	Fila	Lumens	LLF	Watts
	A	8	CPV250-A-BMF-4-UL-C-S	Cree CPV250 Canopy / Soft Luminaire w/ Flat Lens, 122W, 5700K, Platinum Silver Factory Finish, Provide Canopy Mounting Plate	72 type XTE AWT LEDs on white square PCB, 5700K color temperature.	CPV250-xxxx-Fu-4UL-w-57K_RESTL-2013-0002.Jes	Absolute	1.00	43.4
	B	6	XSPW-A-0-3-M-4-UL-C-S	Cree XSPW Series Wallpack Luminaire, Type III Medium, 5700K, 0 Input Power Designator, Platinum Silver factory Finish, U.L. listed for Wet Locations	4 type MDA LEDs	XSPW-A-3FC-U_RESTL-2014-0018.JES	Absolute	1.00	42.7
	C	5	P5642-3030K9	P5642-3030K9 6" diameter updown wall mount LED cylinder with LEDs moved closer to opening.	40-Nichia LEDs 3000K	P5642-3030K_160002_0.JES	Absolute	1.00	58
	D	2	OSQ A NM 4ME K 57K-UL-C-S CL-SSP-4011-25 -D6-P-ABL	CONFIGURED FROM Cree OSQ Series Area Luminaire, Type IV Medium, K Input Power Designator, 5700K	CONFIGURED FROM Elght type MDA 5700K LEDs	OSQ A xx 4ME K w- OSQ 57K_CONFIGURED.JES	Absolute	1.00	520
	E	2	OSQ A NM 3ME T 57K-UL-C-S CL-SSP-4011-25 -D6-P-ABL	CONFIGURED FROM Cree OSQ Series Area Luminaire, Type III Medium w/ Backlight Shield, T Input Power Designator, 5700K	CONFIGURED FROM Elght type MDA 5700K LEDs	OSQ A xx 3ME T w- OSQ-BLSLF 57K_CONFIGURED.JES	Absolute	1.00	166
	F	1	OSQ A NM 4ME T 57K-UL-C-S CL-SSP-4011-25 -D6-P-ABL	CONFIGURED FROM Cree OSQ Series Area Luminaire, Type IV Medium, T Input Power Designator, 5700K	CONFIGURED FROM Elght type MDA 5700K LEDs	OSQ A xx 3ME U w- OSQ 57K_CONFIGURED.JES	Absolute	1.00	332
	G	2	OSQ A NM 2ME K 57K-UL-C-S CL-SSP-4011-25 -D6-P-ABL	CONFIGURED FROM Cree OSQ Series Area Luminaire, Type II Medium, K Input Power Designator, 5700K	CONFIGURED FROM Elght type MDA 5700K LEDs	OSQ A xx 2ME K w- OSQ 57K_CONFIGURED.JES	Absolute	1.00	130
STATISTICS									
Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min	UG	CV	Avg/Max
Calc Zone #6		1.6 fc	19.6 fc	0.0 fc	N/A	N/A	-1.0	2.2	0.0.1
LUMINAIRE NOTES									
1. "RITURE 'D' (D) IS A NEW POLE LOCATION w/ NEW POLE MOUNTED RITURES (HEAD AND TENON). RITURES ARE TO BE INSTALLED ON A NEW 2'-4" TALL REINFORCED POURED CONCRETE FOUNDATION AND NEW 2'-4" SQUARE SILVER POLE.									
2. "RITURE 'E' (E) IS A NEW POLE LOCATION w/ NEW POLE MOUNTED RITURES (SINGLE HEAD AND TENON) w/ BACKLIGHTHOUSE SIDE SHIELD). RITURES ARE TO BE INSTALLED ON A NEW 2'-4" TALL REINFORCED POURED CONCRETE FOUNDATION AND NEW 22'-4" SQUARE SILVER POLE.									
3. "RITURE 'F' (F) IS A NEW POLE LOCATION w/ NEW POLE MOUNTED RITURES (TWIN HEAD, TENON). RITURES ARE TO BE INSTALLED ON A NEW 2'-4" TALL REINFORCED POURED CONCRETE FOUNDATION AND NEW 22'-4" SQUARE SILVER POLE.									
4. "RITURE 'G' (G) IS A NEW POLE LOCATION w/ NEW POLE MOUNTED RITURES (SINGLE HEAD AND TENON) w/ BACKLIGHTHOUSE SIDE SHIELD). RITURES ARE TO BE INSTALLED ON A NEW 2'-4" TALL REINFORCED POURED CONCRETE FOUNDATION AND NEW 22'-4" SQUARE SILVER POLE.									
5. ALL PROPOSED RITURE HEADS ARE TO BE DARK KEY COMPLIANT AND HAVE HARDWARE WITH BENA FULL CUTOFF HOUSE SIDE SHIELDING WHERE REQUIRED. NEW PROPOSED POLE MOUNTED RITURES (HEADS AND TENONS) FINISH IS TO MATCH EXISTING w/ OPTIONAL PHOTOCCELL CONTROL.									
6. ALL NEW CONCRETE LIGHT POLE BASES ARE TO HAVE ALL EXPOSED FORM MARKS REMOVED, GROUND FLUSH AND THE SURFACE IS TO BE PROPERLY PREPARED TO RECEIVE A HAND TROWELED, MASONRY SKIN COAT OF APPROPRIATE THICKNESS TO ACHIEVE A DURABLE SURFACE AND LONG LASTING AESTHETIC.									
7. ALL NEW PROPOSED AREA LIGHT POLES SHALL BE LOCATED 34" FROM BACK OF CURB TO THE EDGE OR FACE OF THE REINFORCED LIGHT POLE BASE, UNLESS NOTED OTHERWISE.									
8. INSTALLATION CONTRACTOR TO REFER TO ELECTRICAL PLANS FOR CONDUIT ROUTING OF LIGHT POLES AND SIGNAGE LIGHTING CONTROL AND WIRING.									
9. CONTRACTOR TO REFER TO REINFORCED LIGHT POLE BASE SECTION AND DETAIL FOR FURTHER INFORMATION.									
10. PROPOSED POLE MOUNTED RITURES (HEADS AND TENONS) ARE TO HAVE A SILVER FINISH w/ OPTIONAL PHOTOCCELL CONTROL.									
11. ALL EXTERIOR RITURES BOTH BUILDING MOUNTED AND POLE RITURES SHALL BE DESIGNED AND INSTALLED SUCH THAT THE LIGHT EMITTED FROM THE LUMINAIRE AT AN ANGLE OF 75 DEGREES FROM VERTICAL (OR MORE) AND NO LIGHT SHALL TRESPASS ACROSS FENCE, BOUNDARIES INTO ADJACENT LOT, BUILDINGS OR STREETS IN EXCESS OF 1.0 FOOT CANOLE OR GREATER.									
12. ALL BUILDING MOUNTED LIGHT RITURES ARE TO BE COORDINATED WITH THE ARCHITECTURAL ELEVATIONS FOR EXACT MOUNTING HEIGHTS AND LOCATIONS. FOR PURPOSE OF CALCULATING THE PRE POLE LIGHTING AND PHOTOMETRIC OUTPUT LUMINAIRE WERE PLACED AT 22'-0" ABOVE FINISHED FLOOR ELEVATION AND ALL BUILDING MOUNTED FLOOD LIGHTS COORDINATED WITH THE ARCHITECTURAL ELEVATIONS AND PLACED AT HEIGHTS SPECIFIED ON THE BUILDING ELEVATIONS.									
THIS LIGHTING PLAN REPRESENTS ILLUMINATION LEVELS ARE CALCULATED VALUES INCLUDE DIRECT AND INTER-REFLECTED COMPONENT AND ILLUMINATION LEVELS CALCULATED FROM LABORATORY DATA TAKEN UNDER CONTROLLED CONDITIONS IN ACCORDANCE WITH THE ILLUMINATING ENGINEERING SOCIETY (IES) APPROVED METHODS. THE ACTUAL PERFORMANCE OF ANY MANUFACTURERS LUMINAIRES MAY VARY DUE TO CHANGES IN ELECTRICAL VOLTAGE, TOLERANCE IN LAMPS/LEDS AND OTHER MAY VARY DUE TO CHANGES IN ELECTRICAL VOLTAGE, TOLERANCE IN LAMPS/LEDS AND OTHER VARIABLE FIELD CONDITIONS. CALCULATIONS DO NOT INCLUDE OBSTRUCTIONS SUCH AS BUILDINGS CURBS, LANDSCAPING, OR ANY OTHER ARCHITECTURAL ELEMENTS UNLESS NOTED.									

## PHOTOMETRIC PLAN GENERAL NOTES

- BASED ON THE INFORMATION PROVIDED, ALL DIMENSIONS AND LUMINAIRE LOCATIONS SHOWN REPRESENT RECOMMENDED POLE PLACEMENTS AND LUMINAIRE ORIENTATION. THE ENGINEER AND/OR ARCHITECT MUST DETERMINE APPLICABILITY OF THE LAYOUT TO RELEVANT FIELD CONDITIONS.
- THE DEPICTED ILLUMINATION RESULTS ARE BASED UPON ILLUMINATION MEASUREMENTS AS CALCULATED BY AN INDEPENDENT LABORATORY. LUMINAIRE CHARACTERISTICAL DATA WAS MEASURED UNDER CONTROLLED CONDITIONS IN ACCORDANCE WITH APPROVED ILLUMINATING ENGINEERING SOCIETY METHODS. ACTUAL ON-SITE PERFORMANCE OF ANY MANUFACTURER'S LUMINAIRES MAY VARY FROM LABORATORY TEST RESULTS DUE TO VARIATIONS IN ELECTRICAL VOLTAGE, TOLERANCE IN LAMPS, AND OTHER VARIABLE FIELD CONDITIONS.
- IF EXISTING LUMINAIRES ARE INCLUDED IN THIS REPORT, THEIR ILLUMINATION CHARACTERISTICS ARE BASED UPON A COMBINATION OF CUSTOMER'S PROVIDED SPECIFICATIONS & OUR BEST ESTIMATION.
- ALL EXISTING AND NEW CONCRETE LIGHT POLE BASES ARE TO HAVE ALL FORM MARKS REMOVED, GROUND FLUSH AND THE SURFACE IS TO BE PROPERLY PREPARED TO RECEIVE A HAND TROWELED, MASONRY SKIN COAT OF APPROPRIATE THICKNESS TO ACHIEVE A DURABLE SURFACE AND LONG LASTING AESTHETIC.


## EXISTING CONDITIONS GENERAL NOTES

- INFORMATION PERTAINING TO EXISTING CONDITIONS GIVEN ON THESE ARCHITECTURAL DRAWINGS REPRESENTS TO THE BEST OF OUR KNOWLEDGE THE ACTUAL EXISTING FIELD CONDITIONS. INSITE LANDSCAPE DESIGN, INC. MAKES NO WARRANTY AS TO THEIR ACCURACY. CONTRACTOR TO FIELD VERIFY EXISTING CONDITIONS IMPERATIVE TO THEIR NEW WORK. REPORT ANY DISCREPANCIES BETWEEN THE DRAWINGS AND FIELD CONDITIONS TO THE LANDSCAPE ARCHITECT FOR REVIEW. ANY WORK PERFORMED PRIOR TO RESOLUTION OF DISCREPANCIES BY THE LANDSCAPE ARCHITECT IS SUBJECT TO REMOVAL AND REPLACEMENT AT NO ADDITIONAL COST TO THE CONTRACT.
- VERIFY LOCATION OF ALL EXISTING UNDERGROUND UTILITIES I.E. WATER, SEWER, ELECTRICAL, TELECOMMUNICATION AND ACCESS PANELS FOR ALL UTILITIES AND ALL ASSOCIATED EQUIPMENT FOR ACCESSIBILITY OF THOSE ITEMS.
- VERIFY ALL EXISTING CONDITIONS, DIMENSIONS, AND ALIGNMENT OF WALLS. BRING ANY DISCREPANCIES TO THE LANDSCAPE ARCHITECTS ATTENTION PRIOR TO FABRICATION / CONSTRUCTION BEGINS.


## InSITE LANDSCAPE DESIGN






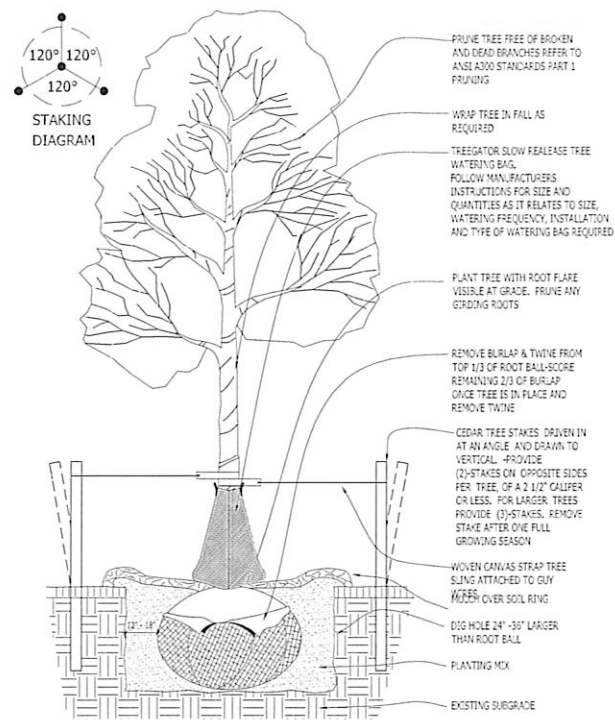


1 DECIDUOUS TREE PLANTING DETAIL SCALE: NONE

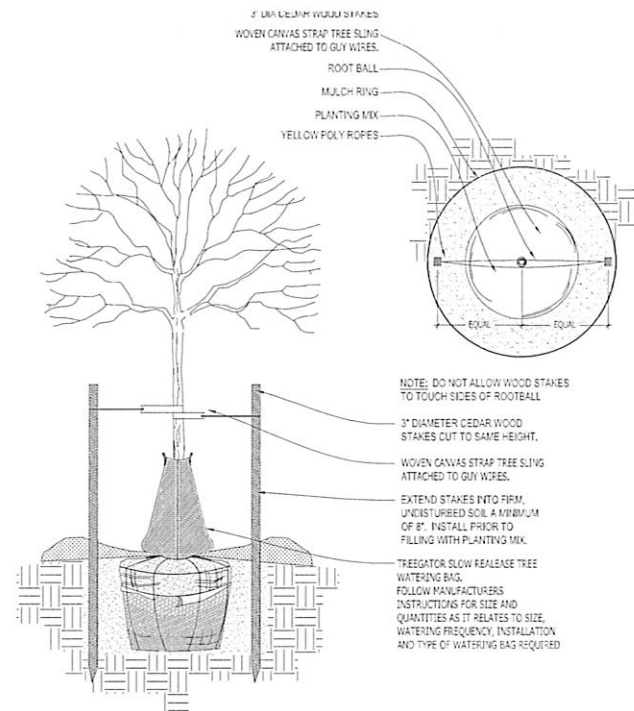


2 DECIDUOUS TREE STAKING PARKING ISLAND/RESTRICTED AREAS SCALE: NONE

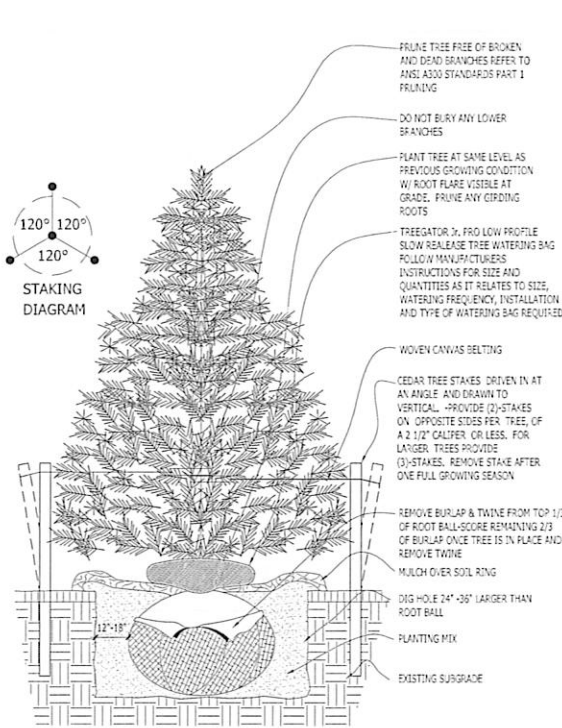


3 CONIFEROUS TREE PLANTING DETAIL SCALE: NONE

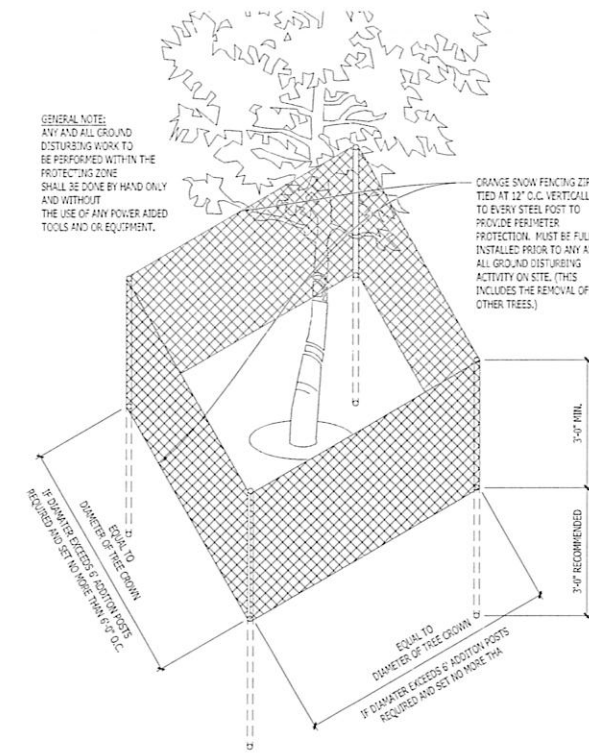


4 EXISTING TREE PROTECTION DETAIL SCALE: NONE

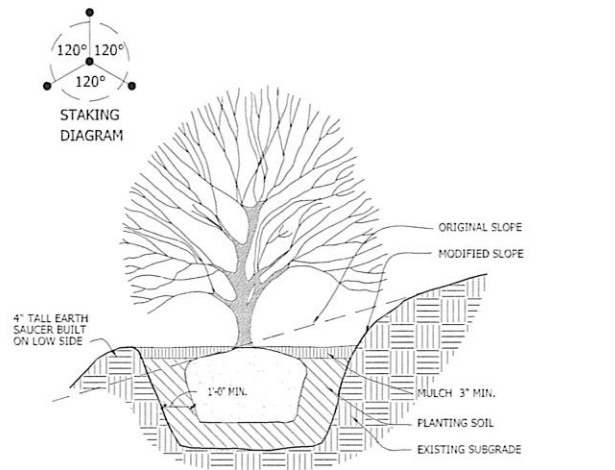


5 SLOPE PLANTING DETAIL SCALE: NONE

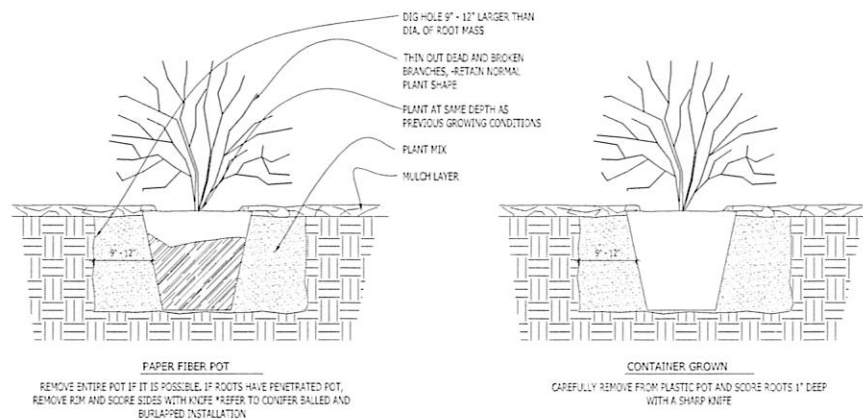


6 DECIDUOUS SHRUB PLANTING DETAIL SCALE: NONE

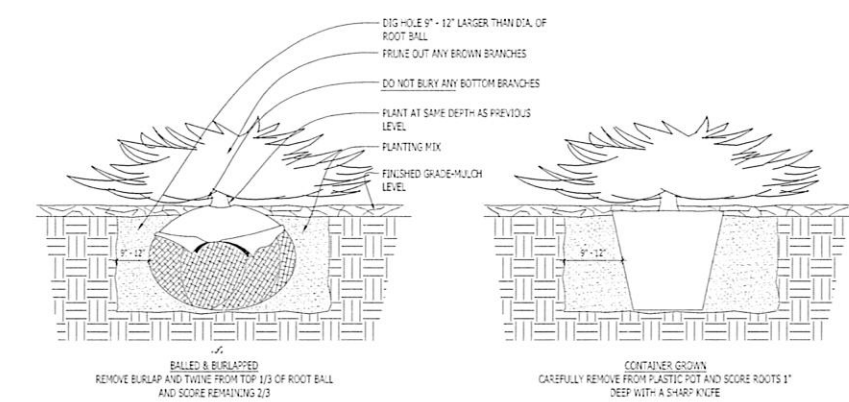


7 CONIFEROUS SHRUB PLANTING DETAIL SCALE: NONE

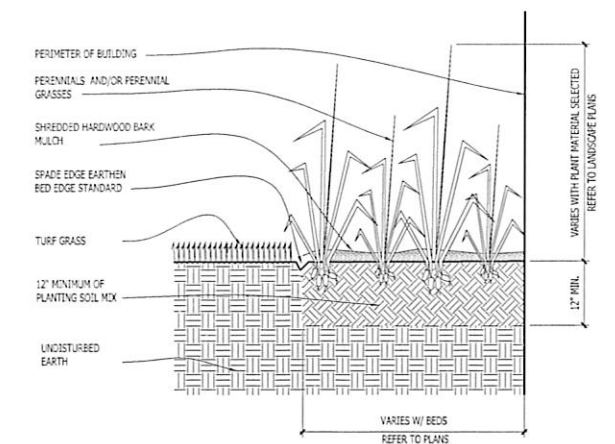


8 PERENNIAL BED PLANTING DETAIL SCALE: NONE

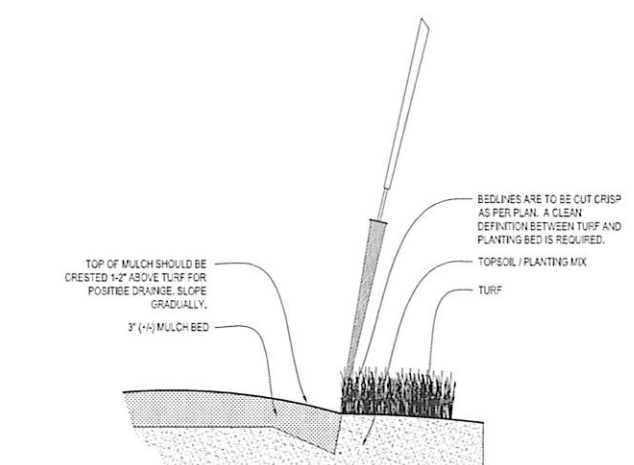

9 SPADE EDGE PLANT BED EDGE DETAIL SCALE: NONE

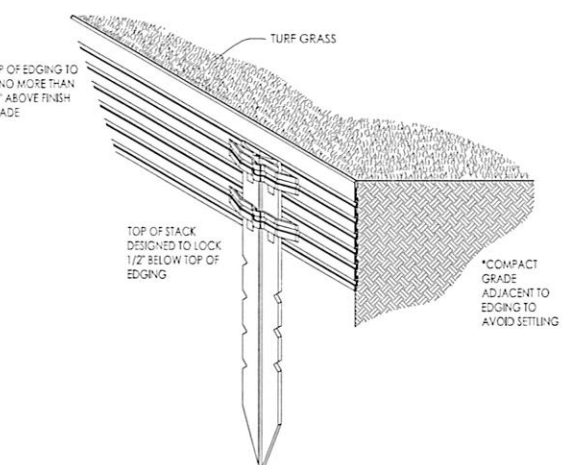

10 METAL LANDSCAPE EDGING DETAIL SCALE: 1/2\"/>

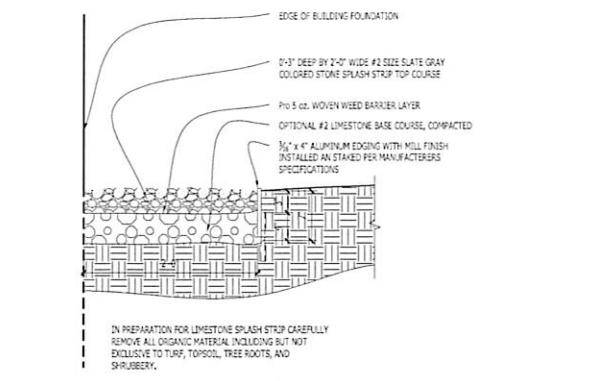

11 COMPACTED GRAVEL SPLASH STRIP SCALE: 1\"/>

**InSITE**  
LANDSCAPE DESIGN  
Landscape Consulting  
& Master Planning Design Services  
11525 W. North Avenue, Suite 1B  
Wauwatosa, WI 53226  
Tel (414) 476-1204  
www.insitedesigninc.com  
mdavis@insitedesigninc.com

Project:  
**ALDI FOOD STORE #XX**  
West Main Street (Hwy 12)  
Whitewater, WI 53190

Issuance and Revisions:		
Date	Number	Description
04/19/23		Plan Commission Submittal

COPYRIGHT InSite Landscape Design Inc. 2020  
ALL RIGHTS RESERVED  
THIS DRAWING IS NOT TO BE REPRODUCED, CHANGED, COPIED OR ASSIGNED TO ANY THIRD PARTY IN ANY FORM OR MANNER WITHOUT FIRST OBTAINING THE EXPRESSED WRITTEN PERMISSION OF InSite Landscape Design, Inc. THE CLIENT AGREES TO INDEMNIFY AND HOLD THE InSite Landscape Design Inc. HARMLESS FROM ANY DAMAGES, LIABILITY, OR COST, INCLUDING ATTORNEY'S FEES AND COSTS OF DEFENSE ARISING FROM ANY CHANGES OR ALTERATIONS MADE BY ANYONE OTHER THAN THE InSite Landscape Design, Inc. OR FROM ANY REUSE OF THE DRAWINGS OR DATA WITHOUT THE PRIOR WRITTEN CONSENT OF THE InSite Landscape Design Inc.

Sheet Title:  
**PROPOSED LANDSCAPE PLAN, PLANTING DETAILS**

Date of Drawing: 04/19/23  
Scale: As Noted  
Drawn By: MCD  
Job Number: L23-031  
Sheet Number:

**LSP1.2**

NOT FOR CONSTRUCTION - PRELIMINARY - FOR ESTIMATING AND REVIEW ONLY - DO NOT SCALE THESE DRAWINGS- These progress documents reflect progress & intent & may be subject to change, including additional notes and detail. These are not final construction documents and should not be used for final bidding or construction-related purposes.

Project: \_\_\_\_\_

ALDI FOOD  
STORE #XX

West Main Street (Hwy 12)  
Whitewater, WI 53190

Issuance and Revisions:		
Date	Number	Description
04/19/23		Client Review Submittal
04/20/23		Plan Commission Submittal
07/27/23		Revisions Based on Site Changes

COPYRIGHT © InSite Landscape Design, Inc. 2020  
 ALL RIGHTS RESERVED  
 THIS DRAWING IS NOT TO BE REPRODUCED,  
 CHANGED, COPIED OR ASSIGNED TO ANY THIRD  
 PARTY IN ANY FORM OR MANNER WITHOUT FIRST  
 OBTAINING THE EXPRESSED WRITTEN  
 PERMISSION OF InSite Landscape Design, Inc. THE  
 CLIENT AGREES TO INDEMNIFY AND HOLD THE  
 InSite Landscape Design, Inc. HARMLESS FROM ANY  
 DAMAGES, LIABILITY, OR COST, INCLUDING  
 A ATTORNEY'S FEES AND COSTS OF DEFENSE,  
 ARISING FROM ANY CHANGES OR ALTERATIONS  
 MADE BY ANYONE OTHER THAN THE InSite  
 Landscape Design, Inc. OR FROM ANY REUSE OF THE  
 DRAWINGS OR DATA WITHOUT THE PRIOR  
 WRITTEN CONSENT OF THE InSite Landscape Design  
 Inc.

Sheet Title:

PROPOSED PHOTOMETRIC LIGHT  
LEVEL CALCULATIONS PLAN  
AND LIGHT POLE BASE SECTIONS

Date of Drawing:	07/27/23
Scale:	1" = 20'-0"
Drawn By:	MCD
Job Number:	L23-031
Sheet Number:	

PHO1.1

