

VICINITY MAP NOT TO SCALE



**DESCRIPTION:** (As per Title Commitment File No. FLX1321 issued by First American Title Insurance Company bearing an effective date of July 20, 2021 at 8:00 am)

**PARCEL 1:**  
GOVERNMENT LOTS 2, 4, 5, 6, 7, 8 AND 9, LYING NORTH OF HIGHWAY 48 AND THE WESTERLY OF HIGHWAY 19, ALL LYING IN SECTION 23, TOWNSHIP 20 SOUTH, RANGE 25 EAST, LAKE COUNTY, FLORIDA, LESS THE FOLLOWING DESCRIBED PARCEL OF LAND: BEGIN AT SOUTHEAST CORNER OF THE NORTHWEST ¼ OF THE SOUTHEAST ¼ OF SECTION 23, TOWNSHIP 20 SOUTH, RANGE 25 EAST, LAKE COUNTY, FLORIDA, AND RUN NORTH 00°04'21" EAST 1314.20 FEET, MORE OR LESS, TO THE SOUTHERLY WATERS EDGE OF LAKE HARRIS AND A POINT HEREBY DESIGNATED AS POINT "A"; RETURN TO THE POINT OF BEGINNING AND RUN SOUTH 89°35'28" WEST ALONG THE SOUTH LINE OF THE NORTHWEST ¼ OF THE SOUTHEAST ¼ OF SECTION 23 A DISTANCE OF 1100.00 FEET; THENCE NORTH 00°27'54" EAST 1484.76 FEET, MORE OR LESS, TO THE SOUTHERLY WATERS EDGE OF LAKE HARRIS; THENCE EASTERLY ALONG SAID SOUTHERLY WATERS EDGE OF LAKE HARRIS TO POINT "A".

**PARCEL 2:**  
BEGIN AT THE NORTHEAST CORNER OF THE SOUTHEAST ¼ OF SECTION 22, TOWNSHIP 20 SOUTH, RANGE 25 EAST, LAKE COUNTY, FLORIDA, RUN SOUTH 89°09'42" WEST ALONG THE NORTH LINE OF THE SOUTHEAST ¼ A DISTANCE OF 330 FEET; THENCE SOUTH 81°15'42" WEST TO THE EAST LINE OF TRACT "1" OF DRAKE POINT PARK REPLAT, ACCORDING TO THE PLAT THEREOF RECORDED IN PLAT BOOK 101, PAGE 63, OF THE PUBLIC RECORDS OF LAKE COUNTY, FLORIDA; THENCE CONTINUE SOUTH 81°15'42" WEST TO THE NORTHEASTERLY RIGHT-OF-WAY LINE OF STATE ROAD 48; THENCE SOUTHEASTERLY ALONG SAID NORTHEASTERLY RIGHT-OF-WAY LINE OF STATE ROAD 48 TO THE EAST LINE OF THE SOUTHEAST ¼ OF SECTION 22; THENCE NORTH ALONG THE EAST LINE OF THE SOUTHEAST ¼ TO THE POINT OF BEGINNING.

**PARCEL 3:**  
FROM THE SOUTHEAST CORNER OF THE NORTHEAST ¼ OF SECTION 22, TOWNSHIP 20 SOUTH, RANGE 25 EAST, LAKE COUNTY, FLORIDA, RUN SOUTH 89°09'42" WEST ALONG THE SOUTH LINE OF THE NORTHEAST ¼ A DISTANCE OF 330 FEET; THENCE NORTH 00°15'45" WEST 210 FEET; THENCE NORTH 38°44'24" EAST 583.17 FEET FOR THE POINT OF BEGINNING; THENCE NORTH 89°10'02" EAST 1177 FEET TO THE WATERS OF LAKE HARRIS; THENCE SOUTHEASTERLY ALONG SAID WATERS OF LAKE HARRIS TO A POINT ON THE EAST LINE OF THE NORTHWEST ¼ OF SECTION 23, TOWNSHIP 20 SOUTH, RANGE 25 EAST, LAKE COUNTY, FLORIDA; THENCE SOUTH ALONG THE EAST LINE OF THE NORTHWEST ¼ TO THE SOUTHEAST CORNER OF THE NORTHWEST ¼ OF SECTION 23; THENCE WEST ALONG THE SOUTH LINE OF THE NORTHWEST ¼ TO THE SOUTHWEST CORNER OF THE NORTHWEST ¼ OF SECTION 23, SAID POINT HEREBY DESIGNATED AS POINT "A", RETURN TO THE POINT OF BEGINNING AND RUN SOUTH 38°44'24" WEST TO A POINT ON THE WEST LINE OF THE NORTHWEST ¼ OF SAID SECTION 23; THENCE SOUTH ALONG THE WEST LINE OF THE NORTHWEST ¼ TO POINT "A". LESS AND EXCEPT THAT PORTION DESCRIBED IN THAT CERTAIN CORRECTIVE WARRANTY DEED RECORDED IN BOOK 4103, PAGE 313, PUBLIC RECORDS OF LAKE COUNTY, FLORIDA.

**PARCEL 4:**  
THAT PART OF THE N.W. 1/4 OF THE S.E. 1/4 OF SECTION 23, TOWNSHIP 20 SOUTH, RANGE 25 EAST, IN LAKE COUNTY, FLORIDA, BOUNDED AND DESCRIBED AS FOLLOWS: BEGIN AT A CONCRETE MONUMENT (NO NUMBER) AT THE SOUTHEAST CORNER OF THE N.W. 1/4 OF THE S.E. 1/4 OF SAID SECTION 23, TOWNSHIP 20 SOUTH, RANGE 25 EAST, AND RUN N.00°04'21"E ALONG THE EAST LINE OF THE N.W. 1/4 OF THE S.E. 1/4 A DISTANCE OF 1202.20 FEET TO AN IRON PIN LABELED L.B. 707; THENCE CONTINUE N.00°04'21"E ALONG THE EAST LINE OF THE N.W. 1/4 OF THE S.E. 1/4 A DISTANCE OF 112 FEET, MORE OR LESS, TO A POINT ON THE SOUTHERLY WATERS EDGE OF LAKE HARRIS AND A POINT HEREBY DESIGNATED AS POINT "A", RETURN TO THE POINT OF BEGINNING AND RUN S.89°35'28"W ALONG THE SOUTH LINE OF THE N.W. 1/4 OF THE S.E. 1/4 OF SAID SECTION 23 A DISTANCE OF 1100.00 FEET TO AN IRON PIN LABELED L.B. 707; THENCE N.00°27'54"E, 1451.76 FEET TO AN IRON ROD PIN LABELED L.B. 707; THENCE CONTINUE N.00°27'54"E, 33 FEET, MORE OR LESS, TO A POINT ON THE SOUTHERLY WATERS EDGE OF LAKE HARRIS; THENCE EASTERLY ALONG AND WITH SAID SOUTHERLY WATERS EDGE OF LAKE HARRIS TO INTERSECT THE AFOREMENTIONED POINT "A".

**PARCEL 5:**  
SUBJECT TO AND TOGETHER WITH AN EASEMENT FOR INGRESS AND EGRESS LYING OVER, UPON AND THROUGH THE FOLLOWING DESCRIBED PARCEL OF LAND: THE NORTH 50 FEET OF THE S.E. 1/4 OF THE S.E. 1/4 OF SECTION 23, TOWNSHIP 20 SOUTH, RANGE 25 EAST, IN LAKE COUNTY, FLORIDA LYING WEST OF THE NORTHWESTERLY RIGHT-OF-WAY LINE OF STATE HIGHWAY NO. 19, AND AN EASEMENT FOR INGRESS AND EGRESS LYING OVER, UPON AND THROUGH THE FOLLOWING DESCRIBED PARCEL OF LAND: BEGIN AT THE SOUTHEAST CORNER OF THE N.W. 1/4 OF THE S.E. 1/4 OF SECTION 23, TOWNSHIP 20 SOUTH, RANGE 25 EAST, IN LAKE COUNTY, FLORIDA AND RUN S.00°04'21"W ALONG THE EAST LINE OF THE N.W. 1/4 OF THE S.E. 1/4 OF SAID SECTION 23 A DISTANCE OF 50.00 FEET TO A POINT AT THE BEGINNING OF A CURVE CONCAVE NORTHEASTERLY AND HAVING A RADIUS OF 100.00 FEET AND A RADIAL BEARING OF S.00°02'52"W.; THENCE WESTERLY AND NORTHWESTERLY ALONG THE ARC OF SAID CURVE THROUGH A CENTRAL ANGLE OF 28°35'47" AN ARC LENGTH OF 49.91 FEET TO THE END OF SAID CURVE AND THE BEGINNING OF A CURVE CONCAVE SOUTHWESTERLY AND HAVING A RADIUS OF 100.00 FEET; THENCE NORTHWESTERLY AND WESTERLY ALONG THE ARC OF SAID CURVE THROUGH A CENTRAL ANGLE OF 28°35'47" AN ARC LENGTH OF 49.91 FEET TO THE END OF SAID CURVE; THENCE S.89°35'28" W., PARALLEL WITH THE SOUTH LINE OF THE N.W. 1/4 OF THE S.E. 1/4 OF THE AFOREMENTIONED SECTION 23 A DISTANCE OF 1029.81 FEET; THENCE N.00°27'54"E., 1510 FEET, MORE OR LESS TO A POINT ON THE SOUTHERLY WATERS EDGE OF LAKE HARRIS AND A POINT HEREBY DESIGNATED AS POINT "A"; RETURN TO THE POINT OF BEGINNING AND RUN N.00°04'21"E LONG THE EAST LINE OF THE N.W. 1/4 OF THE S.E. 1/4 OF THE AFOREMENTIONED SECTION 23 A DISTANCE OF 25.00 FEET; THENCE S.89°35'28"W., PARALLEL WITH THE SOUTH LINE OF THE N.W. 1/4 OF THE S.E. 1/4 A DISTANCE OF 1074.82 FEET; THENCE N.00°27'54"E., 1459 FEET, MORE OR LESS, TO A POINT ON THE SOUTHERLY WATERS EDGE OF LAKE HARRIS; THENCE WESTERLY ALONG AND WITH SAID SOUTHERLY WATERS EDGE OF LAKE HARRIS TO INTERSECT THE AFOREMENTIONED POINT "A".

**PARCEL 6:**  
THAT PART OF SECTION 23, TOWNSHIP 20 SOUTH, RANGE 25 EAST, IN LAKE COUNTY, FLORIDA, BOUNDED AND DESCRIBED AS FOLLOWS: COMMENCE AT A CONCRETE MONUMENT (NO NUMBER) AT THE SOUTHEAST CORNER OF THE NORTHEAST 1/4 OF SECTION 22, TOWNSHIP 20 SOUTH, RANGE 25 EAST, IN LAKE COUNTY, FLORIDA, SAID POINT ALSO BEING THE SOUTHWEST CORNER OF THE NORTHWEST 1/4 OF SECTION 23, TOWNSHIP 20 SOUTH, RANGE 25 EAST, IN LAKE COUNTY, FLORIDA, RUN S.89°52'11" W. ALONG THE SOUTH LINE OF THE NORTHEAST 1/4 OF SECTION 22, A DISTANCE OF 330.00 FEET TO AN IRON PIPE LABELED LB707; THENCE N.00°09'33"E., 210.05 FEET TO A CONCRETE MONUMENT LABELED LS1916; THENCE N.39°31'51" E., 583.79 FEET TO AN IRON PIN LABELED LB7514; THENCE N.89°52'31"E., 468.45 FEET TO THE POINT OF BEGINNING OF THIS DESCRIPTION, FROM SAID POINT OF BEGINNING RUN N.70°57'18"E., 519 FEET MORE OR LESS TO A POINT ON THE SOUTHWESTERLY WATERS EDGE OF LAKE HARRIS AND A POINT HEREBY DESIGNATED AS POINT "A", RETURN TO THE POINT OF BEGINNING AND RUN N.89°52'31"E., 708.81 FEET TO AN IRON PIN LABELED LB7514; THENCE CONTINUE N.89°52'31"E., 30 FEET MORE OR LESS TO A POINT ON THE SOUTHWESTERLY WATERS EDGE OF LAKE HARRIS; THENCE NORTHWESTERLY ALONG AND WITH SAID SOUTHWESTERLY WATERS EDGE OF LAKE HARRIS TO INTERSECT THE AFOREMENTIONED POINT "A".

**NOTES REGARDING SCHEDULE B-II EXCEPTIONS:** (As per Title Commitment File No. FLX1321 issued by First American Title Insurance Company bearing an effective date of July 20, 2021 at 8:00 am)

- Distribution Easement in favor of Florida Power Corporation, a Florida corporation recorded September 13, 1988 in Book 980, Page 145. (as to Parcel 1) Shown on the survey.
- Grant of Restrictive Covenant in favor of Town of Howey-in-the-Hills recorded December 14, 1988 in Book 991, Page 1056. (as to Parcel 1) Shown on the survey.
- Ordinance No. 2013-29 recorded November 15, 2013 in Book 4404, Page 477. (as to all Parcels) The property falls within the Town of Howey-in-the-Hills as shown on Exhibit "A" and Exhibit "B-1" and would be blanket in nature. Did not find the Alternative Key Number for the property in the list provided.
- Lake Hills PUD Development Agreement recorded February 24, 2016 in Book 4744, Page 1032. (as to all Parcels) Affects the subject property and is blanket in nature.
- Riparian and/or littoral rights are not insured.
- This Policy does not insure title to any part of the land lying below the ordinary high water mark of any abutting body of water.
- The right, title or interest, if any, of the public to use as a public beach or recreation area any part of the Land lying between the water abutting the Land and the most inland of any of the following: (a) the natural line of vegetation; (b) the most extreme high water mark; (c) the bulkhead line, or (d) any other line which has been or which hereafter may be legally established as relating to such public use.
- Terms and conditions of any existing unrecorded lease(s), and all rights of lessee(s) and any parties claiming through the lessee(s) under the lease(s).

NOTES REGARDING OPTIONAL ALTA TABLE A

- MONUMENTS ARE SHOWN.
- THE ADDRESS OF THE SUBJECT PROPERTY IS AS SHOWN.
- THE FLOOD ZONE IS SHOWN.
- THE AREA OF THE PROPERTY IS SHOWN.
- SUBSTANTIAL FEATURES OBSERVED ARE SHOWN.
- (a). VISIBLE EVIDENCE OF ABOVE GROUND AND UNDERGROUND UTILITIES IS SHOWN.
- THE ADJACENT OWNERS ARE SHOWN ACCORDING TO THE HILLSBOROUGH COUNTY PROPERTY APPRAISER'S WEB SITE.
- THERE IS NO OBSERVABLE EVIDENCE OF EARTH MOVING WORK OR BUILDING CONSTRUCTION OR BUILDING ADDITIONS.

**Legend:** (AS APPLICABLE)

SCIR	SET CAPPED IRON ROD 1/2" LB #7013	ID	IDENTIFICATION	(D)	DESCRIPTION
FCR	FOUND CAPPED IRON ROD	LB	LICENSED BUSINESS	(C)	CALCULATED
FIR	FOUND IRON ROD	CONC	CONCRETE	(P)	PLAT
FPIP	FOUND CAPPED IRON PIPE	CLF	CHAIN LINK FENCE	(F)	FIELD
FIP	FOUND IRON PIPE	B/W	BARBED-WIRE		
FCM	FOUND CONCRETE MONUMENT	OUL	OVERHEAD UTILITY LINE		
SPKN&D	SET PK NAIL & DISK	UP	UTILITY POLE		
FPKN&D	FOUND PK NAIL & DISK	LP	LIGHT POLE		
FRS	FOUND RAILROAD SPIKE	GA	GUY ANCHOR		
WM	WATER METER	SGN	SIGN		
HYD	FIRE HYDRANT	RCP	REINFORCED CONCRETE PIPE		
WV	WATER VALVE	CMP	CORRUGATED METAL PIPE		
BFP	BACK FLOW PREVENTER	CP	CORRUGATED PLASTIC PIPE		
GI	GRATE INLET	X 99.99	EXISTING ELEVATION		
CI	CURB INLET	ORB	OFFICIAL RECORDS BOOK		

## ELEVATIONS SHOWN HEREON ARE NAVD 1988

### Surveyor's Notes: (AS APPLICABLE)

ACCORDING TO CURRENT FLOOD INSURANCE MAPS ISSUED BY THE FEDERAL EMERGENCY MANAGEMENT AGENCY, THE PROPERTY SHOWN APPEARS TO LIE WITHIN ZONES "X", "A" AND "AE" PANEL NO. 12069C0485E DATED DECEMBER 18, 2012. THE APPROXIMATE FLOOD ZONE TRANSITION, IF APPLICABLE, HAS BEEN OBTAINED AND PLOTTED FROM LARGE SCALE MAPS AND IS DEPICTED AS ACCURATELY AS POSSIBLE. THIS SURVEY BY NO MEANS REPRESENTS A DETERMINATION ON WHETHER PROPERTIES WILL OR WILL NOT FLOOD. LAND WITHIN THE BOUNDARIES OF THIS SURVEY MAY OR MAY NOT BE SUBJECT TO FLOODING; THE BUILDING DEPARTMENT OR OTHER CUSTODIAL AGENCY FOR FLOOD DETERMINATION WITHIN THIS MUNICIPALITY MAY HAVE ADDITIONAL INFORMATION REGARDING FLOODING AND RESTRICTIONS ON DEVELOPMENT.

- BEARINGS SHOWN HEREON ARE BASED ON THE NORTHERLY RIGHT OF WAY LINE OF HIGHWAY 48 AS SHOWN HAVING A BEARING OF N 75°35'20" W.
- THERE MAY BE ADDITIONAL EASEMENTS AND/OR RESTRICTIONS AFFECTING THIS PROPERTY THAT MAY NOT BE FOUND IN THE PUBLIC RECORDS OF THIS COUNTY.
- NO INFORMATION ON ADJACENT PROPERTY OWNERS OR ADJOINING PROPERTY RECORDING INFORMATION WAS PROVIDED TO THIS SURVEYOR.
- THE SURVEYOR HAS MADE NO INVESTIGATION OR INDEPENDENT SEARCH FOR EASEMENTS OF RECORD, ENCUMBRANCES, RESTRICTIVE COVENANTS, OWNERSHIP TITLE EVIDENCE, OR ANY OTHER FACTS.
- THE BOUNDARY CORNERS AND LINES DEPICTED BY THIS SURVEY WERE ESTABLISHED PER INFORMATION AS FURNISHED.
- UNLESS OTHERWISE SHOWN HEREON, NO JURISDICTIONAL WETLAND AREAS OR OTHER PHYSICAL TOPOGRAPHIC FEATURES HAVE BEEN LOCATED.
- UNDERGROUND ENCROACHMENTS, SUCH AS UTILITIES, STRUCTURES, INSTALLATIONS, IMPROVEMENTS AND FOUNDATIONS THAT MAY EXIST, HAVE NOT BEEN FIELD LOCATED EXCEPT AS SHOWN.
- THIS MAP DOES NOT DETERMINE OR REFLECT OWNERSHIP OF PROPERTY, BOUNDARY LINES AFFECTED BY ADVERSE USE, LINES OF CONFLICTING DEEDS, OR OTHER LINES THAT MAY OTHERWISE BE DETERMINED BY A COURT OF LAW.
- UNDERGROUND UTILITY LOCATIONS AND IDENTIFICATIONS SHOWN HEREON ARE BASED UPON VISIBLE ABOVE GROUND APPURTENANCES AND DO NOT NECESSARILY SHOW ALL UTILITY LOCATIONS. NO SUBTERRANEAN EXCAVATION HAS BEEN MADE TO DETERMINE UNDERGROUND UTILITY LOCATIONS.
- THE MEASURED MATHEMATICAL CLOSURE OF THE SURVEYED BOUNDARY EXCEEDS THE ACCURACY STANDARDS FOR AN URBAN CLASS SURVEY AS DEFINED BY THE AMERICAN CONGRESS ON SURVEYING AND MAPPING AND THE AMERICAN LAND TITLE ASSOCIATION.
- TIES FROM BUILDING CORNERS, FENCE CORNERS, SHED CORNERS, ETC., ARE NOT TO BE USED TO REESTABLISH PROPERTY BOUNDARIES.
- ADDITIONS OR DELETIONS TO SURVEY MAPS OR REPORTS MADE BY OTHER THAN THE SIGNING PARTY OR PARTIES IS PROHIBITED WITHOUT WRITTEN CONSENT OF THE SIGNING PARTY OR PARTIES.
- THIS SURVEY HAS BEEN PREPARED EXPRESSLY FOR THE NAMED ENTITIES AND IS NOT TRANSFERABLE. NO OTHER PERSON OR ENTITY IS ENTITLED TO RELY UPON AND/OR REUSE THIS SURVEY FOR ANY OTHER PURPOSE WHATSOEVER WITHOUT THE EXPRESS WRITTEN CONSENT OF HAMILTON ENGINEERING & SURVEYING AND THE CERTIFYING PROFESSIONAL SURVEYOR AND MAPPER.
- NOTHING HEREIN SHALL BE CONSTRUED TO GIVE ANY RIGHTS OR BENEFITS TO ANYONE OTHER THAN THOSE CERTIFIED TO ON THIS SURVEY.
- FENCE OWNERSHIP NOT DETERMINED.
- PRINTED DIMENSIONS SHOWN ON THE MAP OF SURVEY SUPERSEDE SCALED DIMENSIONS. THERE MAY BE ITEMS DRAWN OUT OF SCALE TO GRAPHICALLY SHOW THEIR LOCATION.
- REPRODUCTION OF THIS SURVEY IS EXPRESSLY FORBIDDEN WITHOUT THE WRITTEN PERMISSION FROM THE SIGNING SURVEYOR.
- THE WORD "CERTIFIED" IS UNDERSTOOD TO BE AN EXPRESSION OF THE PROFESSIONAL SURVEYOR'S OPINION BASED ON HIS BEST KNOWLEDGE, INFORMATION AND BELIEF, AND THAT IT THUS CONSTITUTES NEITHER A GUARANTEE NOR A WARRANTY, EITHER EXPRESSED OR IMPLIED.
- THIS SURVEY IS A REPRESENTATION OF EXISTING FIELD CONDITIONS AT THE TIME OF THE FIELD SURVEY DATE AND IS BASED ON FOUND EXISTING MONUMENTATION IN THE FIELD.
- THE SIGNATURE DATE DOES NOT UPDATE OR SUPERSEDE THE DATE OF SURVEY.
- ELEVATIONS SHOWN HEREON ARE BASED ON NATIONAL GEODETIC SURVEY MARK "C-431" HAVING A PUBLISHED ELEVATION OF 132.59 NAVD88 AND NATIONAL GEODETIC SURVEY MARK "LC-06" HAVING A PUBLISHED ELEVATION OF 82.32 NAVD88.

COPYRIGHT 2021 - HAMILTON ENGINEERING & SURVEYING, INC.

To Madden, Moorhead & Stokes, LLC; First American Title Insurance Company; K. Hovnanian? Four Seasons at Lake Harris, LLC; Hovnanian Developments of Florida, Inc.; Eastern National Title Agency Florida, LLC:

This is to certify that this map or plat and the survey on which it is based were made in accordance with the 2021 Minimum Standard Detail Requirements for ALTA/NSPS Land Title Surveys, jointly established and adopted by ALTA and NSPS, and includes Items 1, 2, 3, 4, 8, 11(a), 13, and 16, of Table A thereof. The field work was completed on September 27, 2021

Aaron J. Murphy, PLS Date of Signature

FLORIDA LICENSE NO. PLS#6768  
CERTIFICATE OF AUTHORIZATION LB #7013  
Not valid without the signature and the original raised seal of a Florida Licensed Surveyor and Mapper



**SHEET TITLE: MAP OF TOPOGRAPHIC & TREE SURVEY**  
**4 SEASONS HOWEY IN THE HILLS COUNTY ROAD 48, HOWEY IN THE HILLS FLORIDA, LAKE COUNTY**

PREPARED FOR:	MADDEN, MOORHEAD & STOKES, LLC
CERTIFIED TO:	
FIELD BOOK/PAGE:	
QUALITY CONTROL FIELD:	VINCE
QUALITY CONTROL OFFICE:	AJM
DRAWN BY:	RHF
PARTY CHECK:	VINCE
JOB #:	03913.0006
SEC TWP RING:	22 & 23-20-25
SURVEY DATE:	10-14-2021
NOT VALID WITHOUT ALL SHEETS	



L:\3501 to 3999\03913 Madden Eng\0006 4 SEASONS HOWEY IN THE HILLS\SURV\1 DWS\03913.0006 4 SEASONS ALTA BTRV.dwg (Madden) rch Oct 15, 2021 4:32:07am





Tree Legend			
SYMBOL	NAME	SYMBOL	NAME
□	OAK	○	PINE
○	PALM	⊗	OTHER
△	DEAD		

NOTE: TREE SIZES IN INCHES

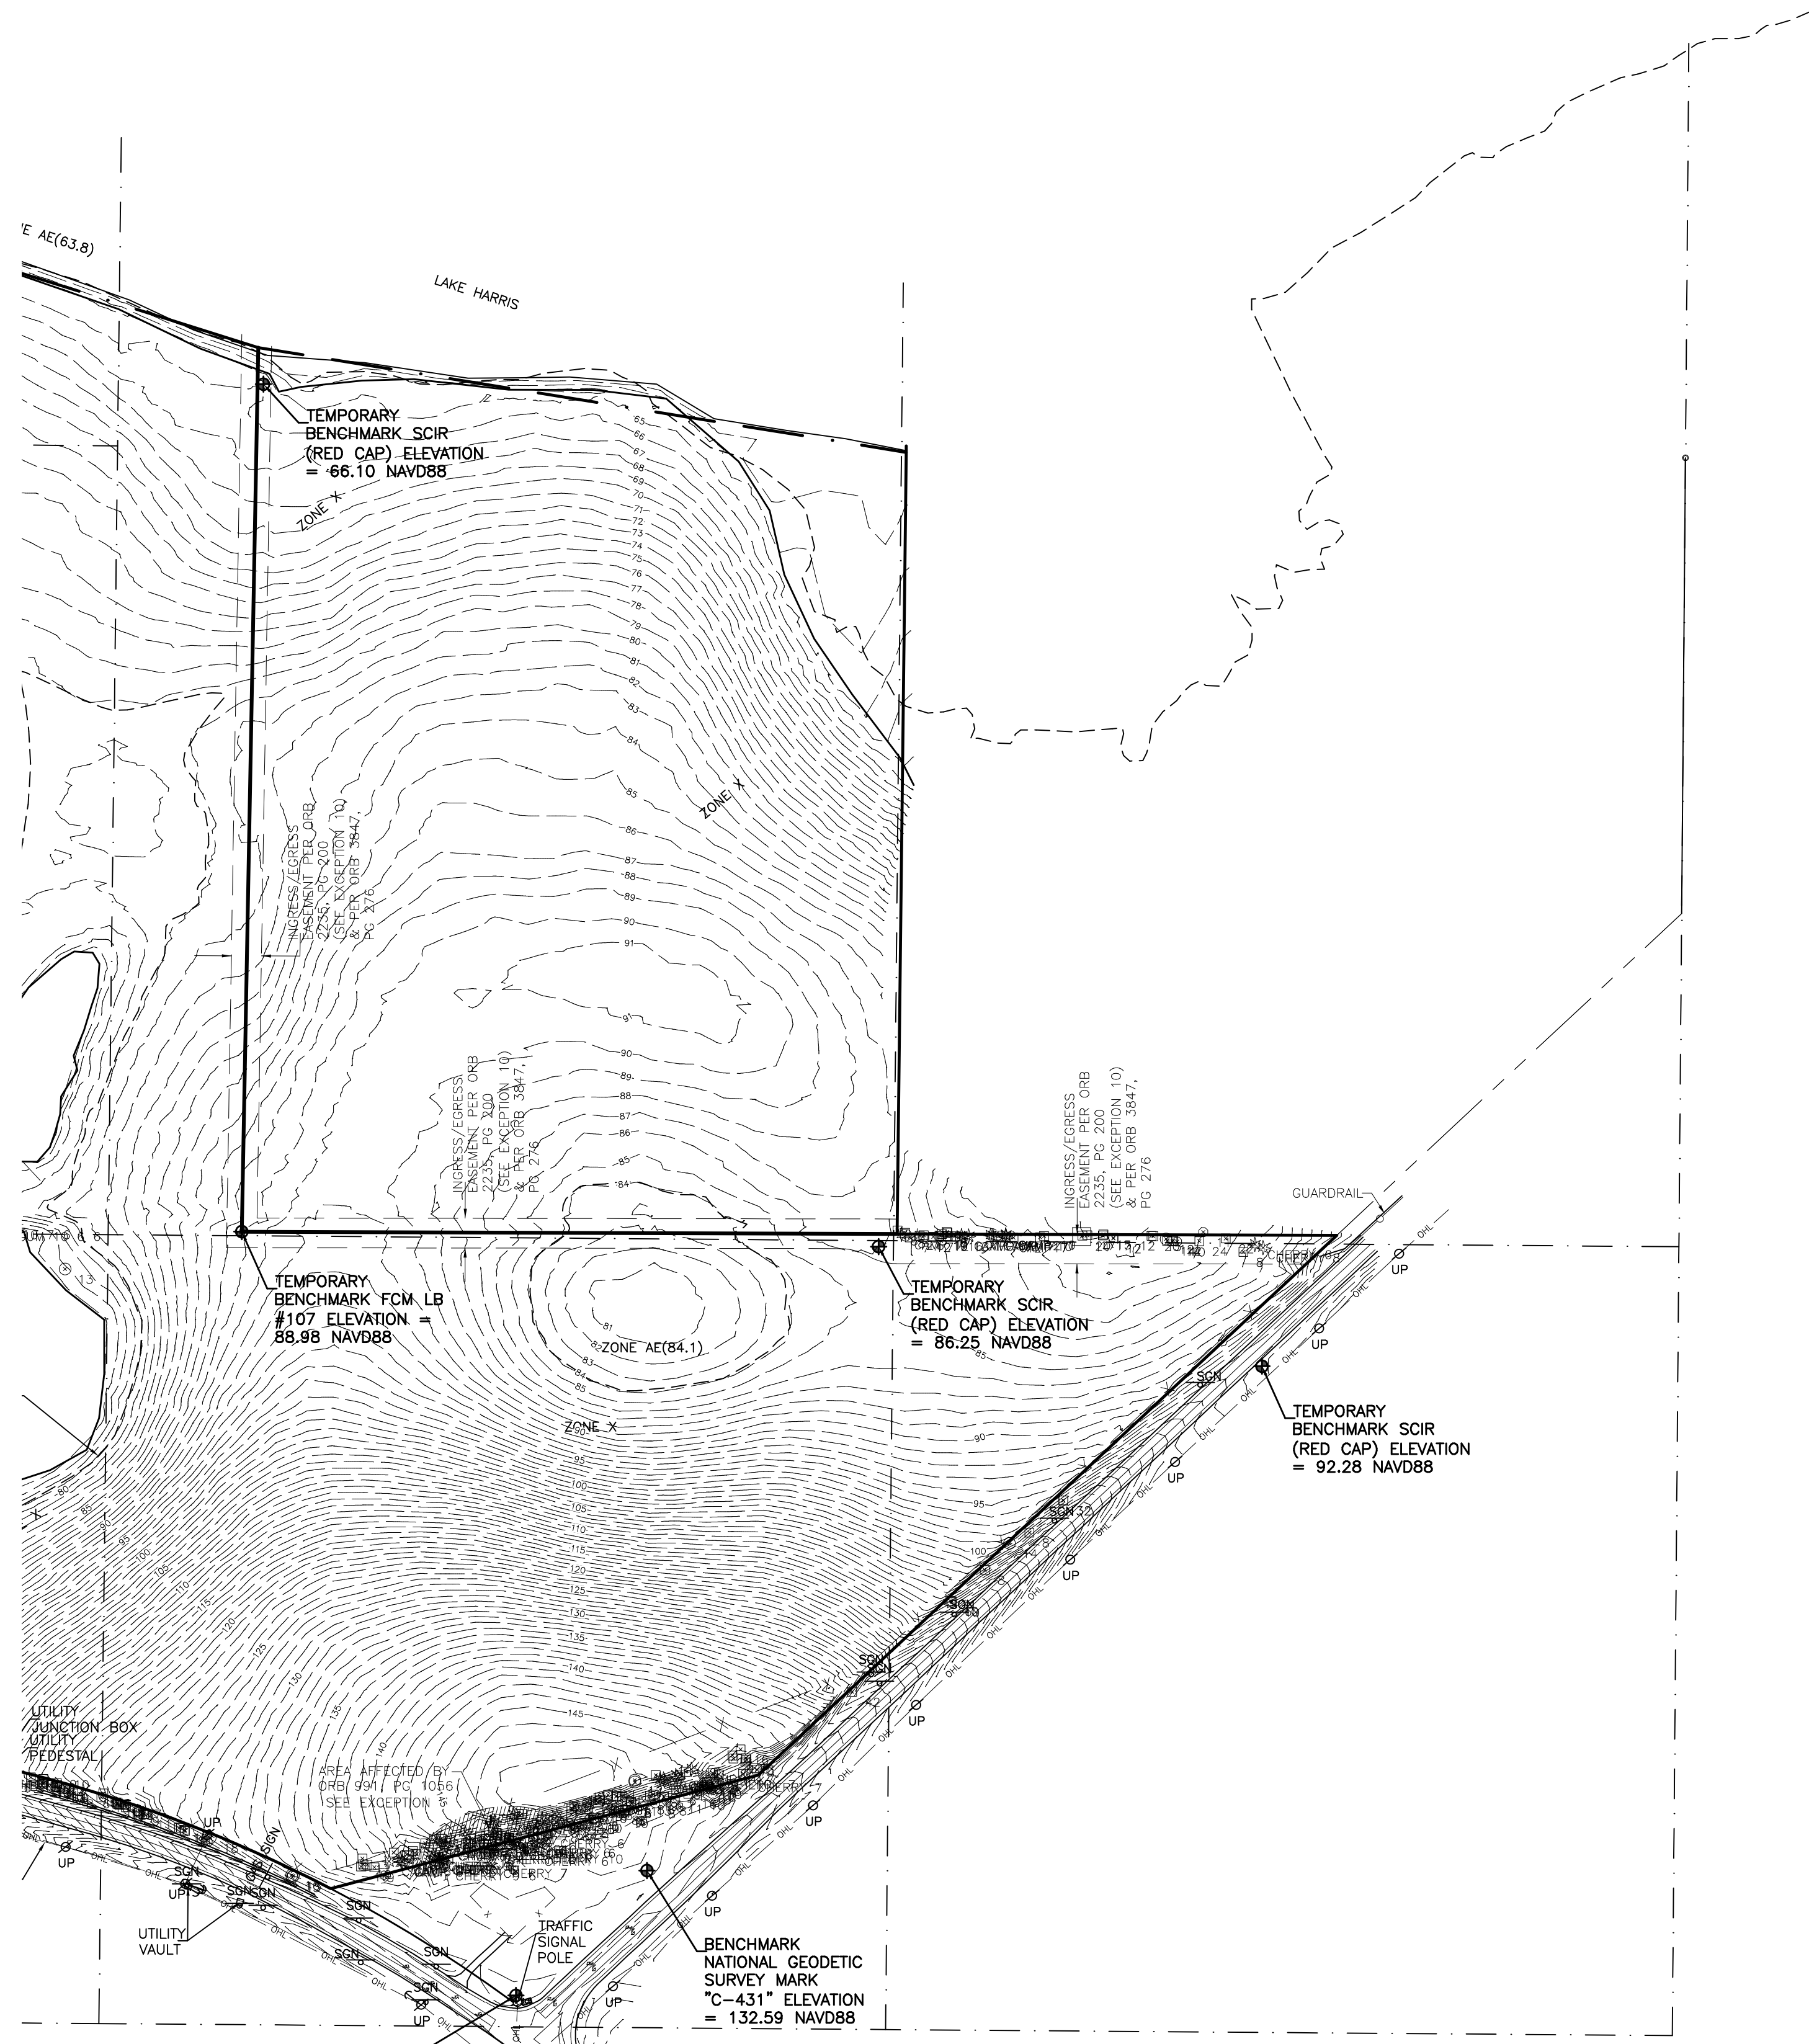

Legend: (AS APPLICABLE)

SCIR	SET CAPPED IRON ROD 1/2" LB #7013	ID	IDENTIFICATION	(D)	DESCRIPTION
FCR	FOUND CAPPED IRON ROD	LB	LICENSED BUSINESS	(C)	CALCULATED
FIR	FOUND IRON ROD	CONC	CONCRETE	(P)	PLAT
FCIP	FOUND CAPPED IRON PIPE	CLF	CHAIN LINK FENCE	(F)	FIELD
FIP	FOUND IRON PIPE	B/W	BARBED-WIRE		
FCM	FOUND CONCRETE MONUMENT	OUL	OVERHEAD UTILITY LINE		
SPKN&D	SET PK NAIL & DISK	UP	UTILITY POLE		
FPKN&D	FOUND PK NAIL & DISK	LP	LIGHT POLE		
FRS	FOUND RAILROAD SPIKE	GA	GUY ANCHOR		
WM	WATER METER	SN	SIGN		
HYD	FIRE HYDRANT	RCP	REINFORCED CONCRETE PIPE		
WV	WATER VALVE	CMP	CORRUGATED METAL PIPE		
BFP	BACK FLOW PREVENTER	CP	CORRUGATED PLASTIC PIPE		
GI	GRATE INLET	X 99.99	EXISTING ELEVATION		
CI	CURB INLET	A/C	AIR CONDITIONING		

**ELEVATIONS SHOWN HEREON ARE NAVD 1988**

**HAMILTON**  
ENGINEERING & SURVEYING, INC.  
3609 W. LEMON STREET  
DADE COUNTY, FL 33133  
TEL: (813) 256-1541  
FAX: (813) 256-9536  
LIC #7013

**MAP OF TOPOGRAPHIC & TREE SURVEY**  
**4 SEASONS HOWEY IN THE HILLS**  
**COUNTY ROAD 48, HOWEY IN THE HILLS**  
**FLORIDA, LAKE COUNTY**

PREPARED FOR:	MADDEN, MOORHEAD & STOKES, LLC
CERTIFIED TO:	
FIELD BOOK/PAGE:	
QUALITY CONTROL FIELD:	VINCE
QUALITY CONTROL OFFICE:	AJM
DRAWN BY:	RHF
PARTY CHIEF:	VINCE
JOB #:	03913.0006
SEC TWP RING:	22 & 23-20-25
SURVEY DATE:	10-14-2021
NOT VALID WITHOUT ALL SHEETS	
<b>3 OF 3</b>	